



Apr. 2015 Ver.2.0
TDK Corporation

Multilayer Antenna

For 2.4GHz W-LAN & Bluetooth


ANT Series

1608 TYPE

P/N: **ANT016008LCS2442MA1**

ANT016008LCS2442MA1

■ SHAPES AND DIMENSIONS

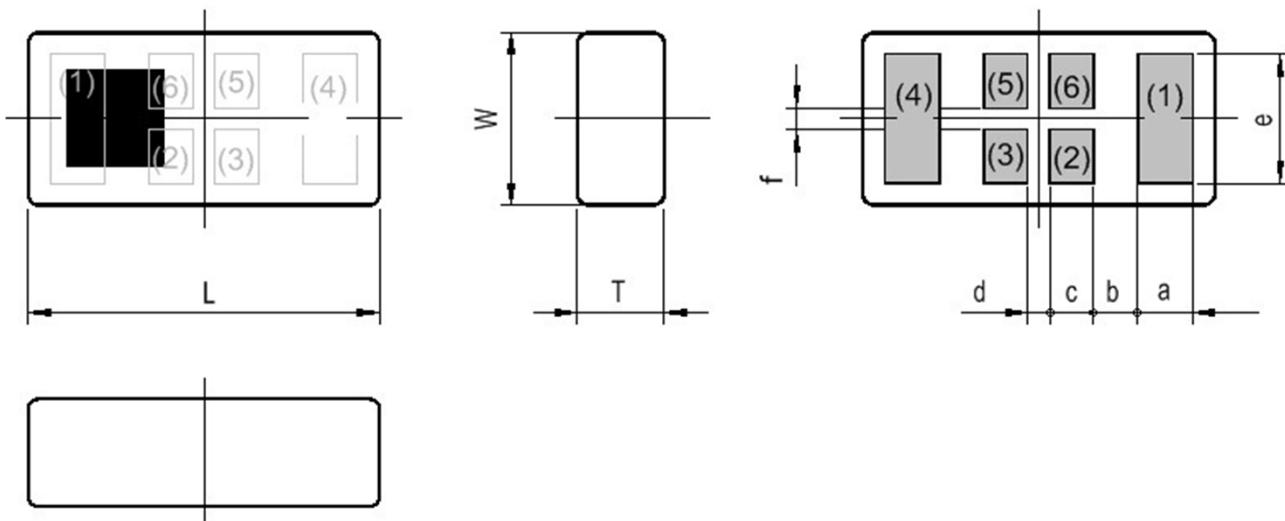

Dimensions (mm)

L	W	T	a	b	c	d	e	f
1.60 +/-0.10	0.80 +/-0.10	0.40 Max	0.215 +/-0.10	0.25 +/-0.10	0.20 +/-0.10	(0.10)	0.63 +/-0.10	(0.10)

Terminal functions

(1)	Radiator electrode	(6)	Dummy pad
(2)	Dummy pad		
(3)	Dummy pad		
(4)	Feed point		
(5)	Dummy pad		

Note:

These samples are marked with trial sample identification.

In mass production, this sample marking will be changed to show in the TDK full specification.

■ TEMPERATURE RANGE

Operating temperature	Storage temperature
-40 to +85 °C	-40 to +85 °C

ANT016008LCS2442MA1

■ ELECTRICAL CHARACTERISTICS

(Measurement)


Parameter	Frequency (MHz)	TDK Spec		
		Min.	Typ.	Max.
VSWR	2400 to 2484	-	1.60	3.0
Polarization			Linear	
PCB Size (mm)			50 x 20	
Antenna keep-out Area (mm)			5 x 3	
Characteristic Impedance (ohm)			50 (Nominal)	

* This is typical antenna performance with the standard PCB.

■ FREQUENCY CHARACTERISTICS


Note: Tested antenna has been soldered. Evaluation board size is 50x20x1 mm.

Efficiency and VSWR

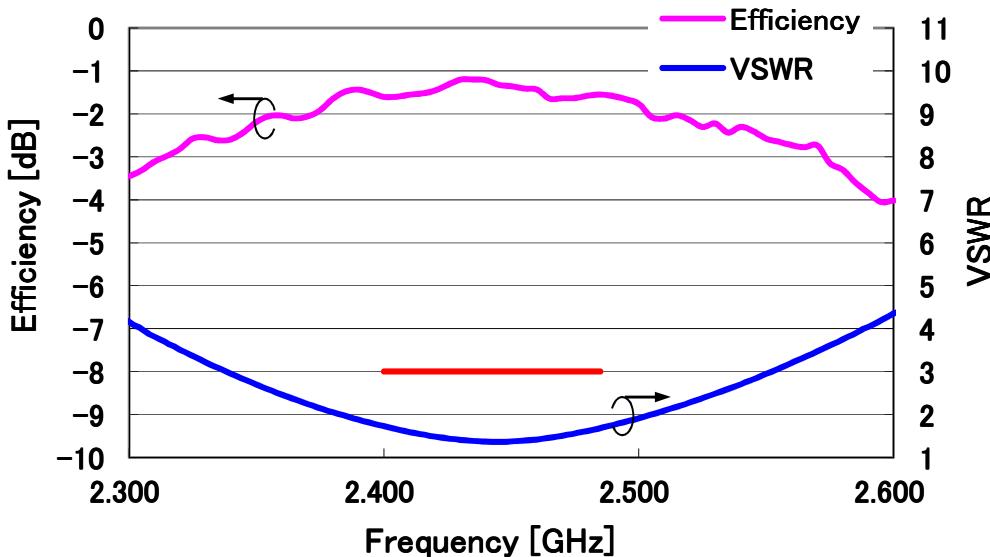


ANT016008LCS2442MA1

■ EVALUATION BOARD

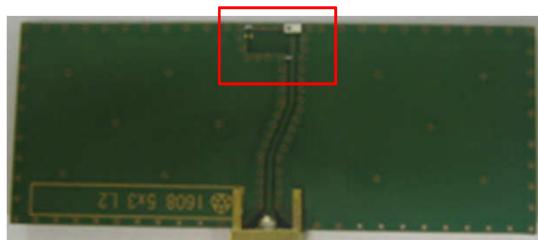


PCB size : 50mm x 20mm x 1mm

Antenna area : 5 x 3 mm

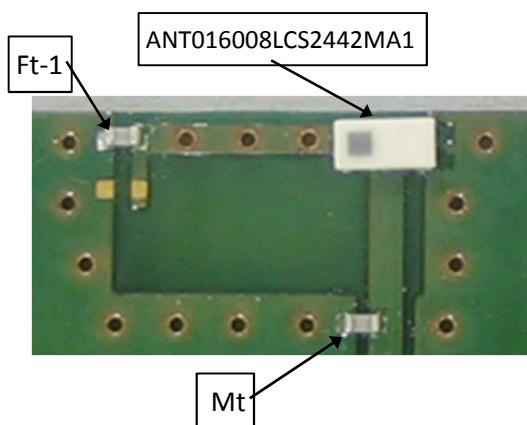


	Component P/N
Ft-1	6.2pF(C0603CH1E6R2C:TDK)
Mt	0.8pF(C0603CH1E0R8B:TDK)

Measurement condition for Radiation pattern

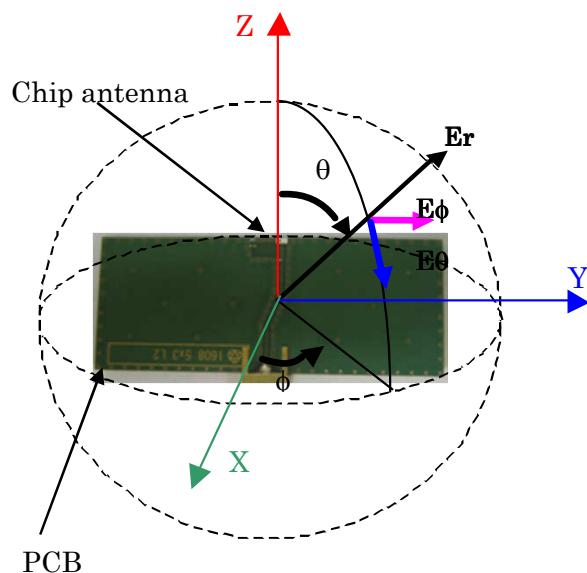

ANT016008LCS2442MA1**■ Radiation Pattern**


Note: Tested antenna has been soldered. Evaluation board size is 50x20x1 mm.
2.4GHz band

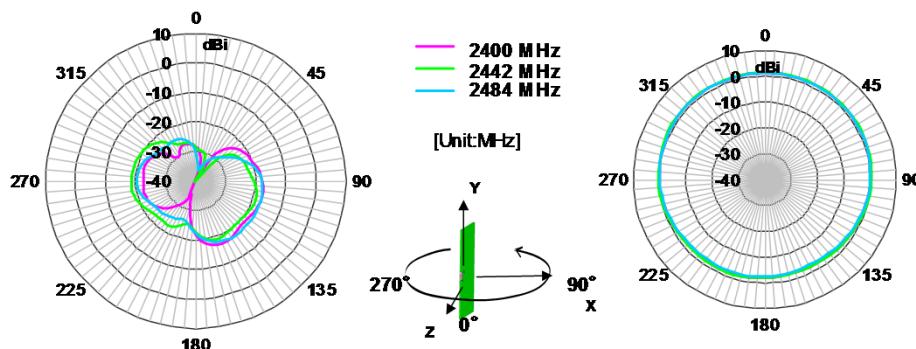**Horizontal Polarization**

Frequency [MHz]	2400	2442	2484
Average[dBi]	-21.5	-21.5	-21.3
Maximum[dBi]	-16.9	-18.5	-17.2
Minimum[dBi]	-46.0	-40.8	-36.4

Vertical Polarization


Frequency [MHz]	2400	2442	2484
Average[dBi]	0.0	0.3	-0.2
Maximum[dBi]	1.3	1.6	1.2
Minimum[dBi]	-2.4	-2.2	-3.0

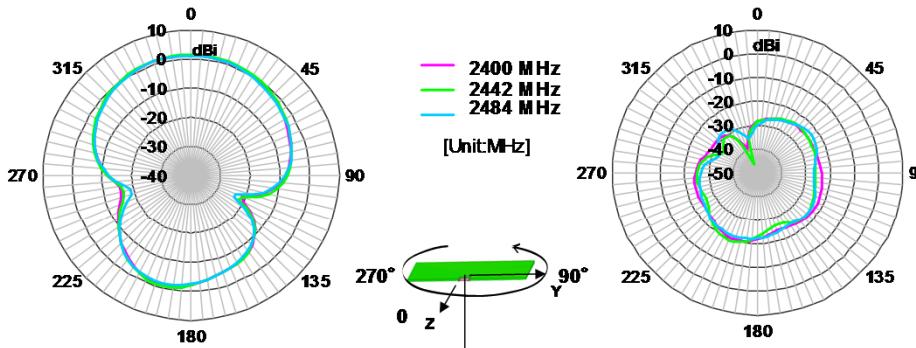**Horizontal Polarization**

Frequency [MHz]	2400	2442	2484
Average[dBi]	-2.9	-2.6	-3.1
Maximum[dBi]	1.3	1.6	1.2
Minimum[dBi]	-21.5	-21.9	-23.6

Vertical Polarization

Frequency [MHz]	2400	2442	2484
Average[dBi]	-24.1	-24.7	-24.8
Maximum[dBi]	-20.2	-19.1	-21.5
Minimum[dBi]	-39.2	-46.1	-34.9

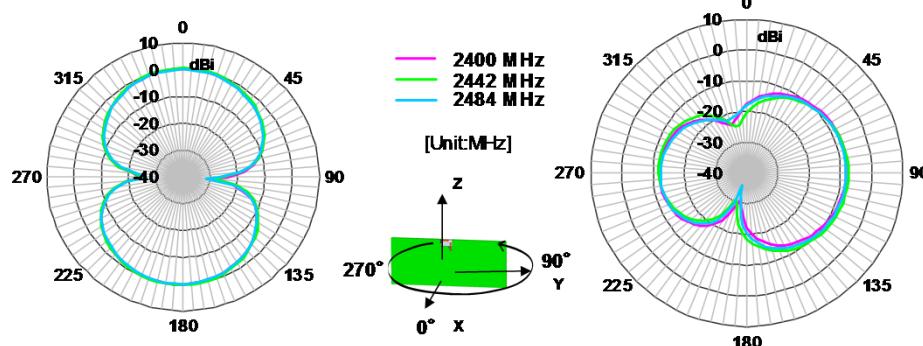**Horizontal Polarization**

Frequency [MHz]	2400	2442	2484
Average[dBi]	-3.1	-2.7	-3.2
Maximum[dBi]	0.2	0.6	0.1
Minimum[dBi]	-29.8	-28.5	-31.3

Vertical Polarization


Frequency [MHz]	2400	2442	2484
Average[dBi]	-12.2	-11.8	-12.3
Maximum[dBi]	-8.0	-7.5	-8.2
Minimum[dBi]	-31.2	-30.5	-35.8

ANT016008LCS2442MA1


■ RECOMMENDED LAND PATTERN

Recommend land pattern and solder resist pattern


< Land pattern >

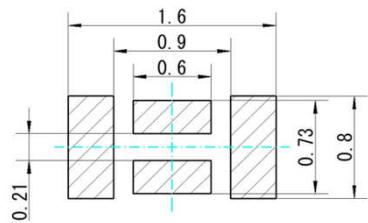

< Solder resist pattern >

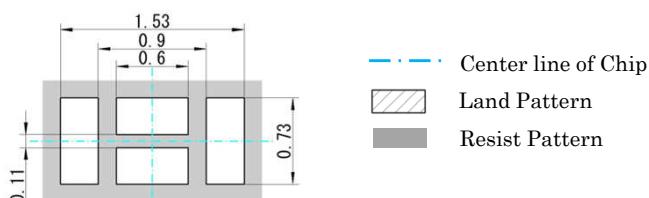


Recommend aperture size of metal mask for solder

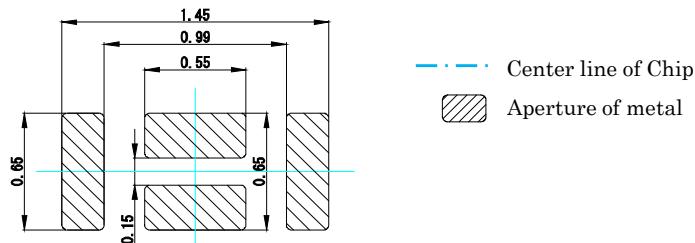


Example of Antenna pattern layout (TDK Standard PCB)


<Top Layer (Parts mounted side) >

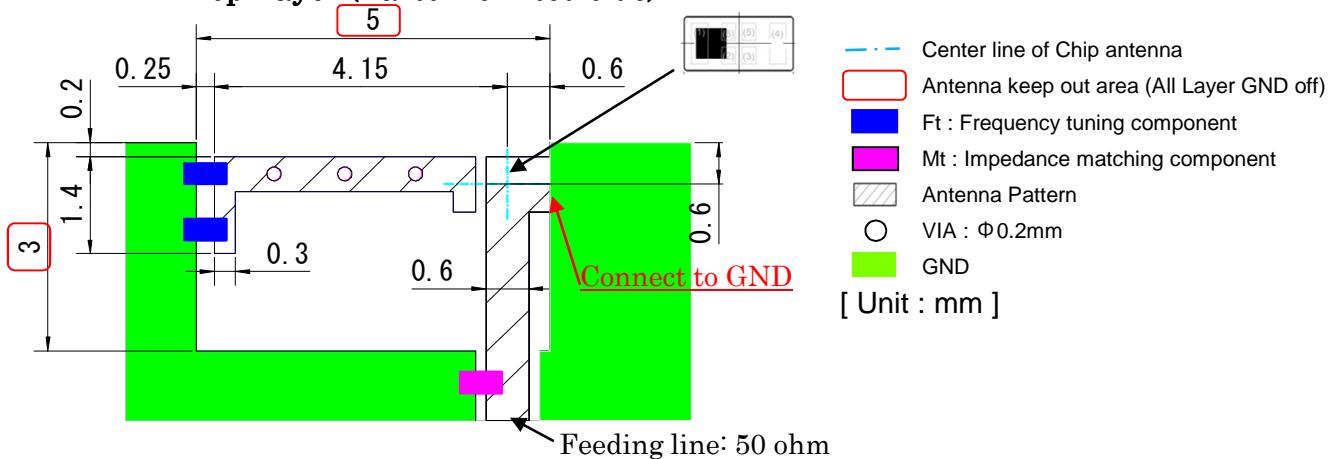

<Inner Layer >

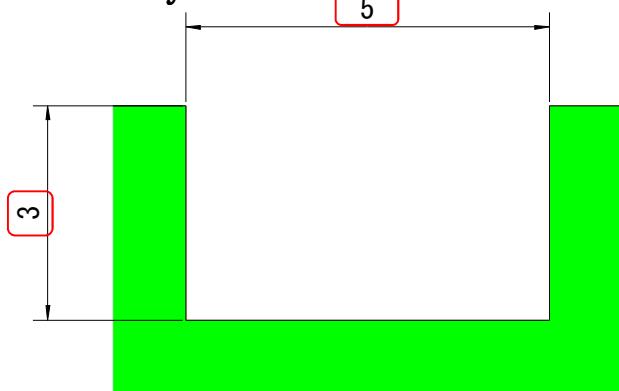

<Bottom Layer >

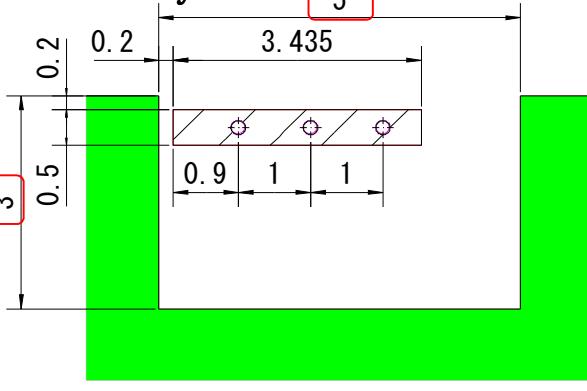

Apr. 2015 Ver.2.0
TDK Corporation

ANT016008LCS2442MA1


■ ENVIRONMENT INFORMATION

RoHS Statement
RoHS Compliance

ANT016008LCS2442MA1

■ RECOMMENDED REFLOW PROFILE

Pb free solder

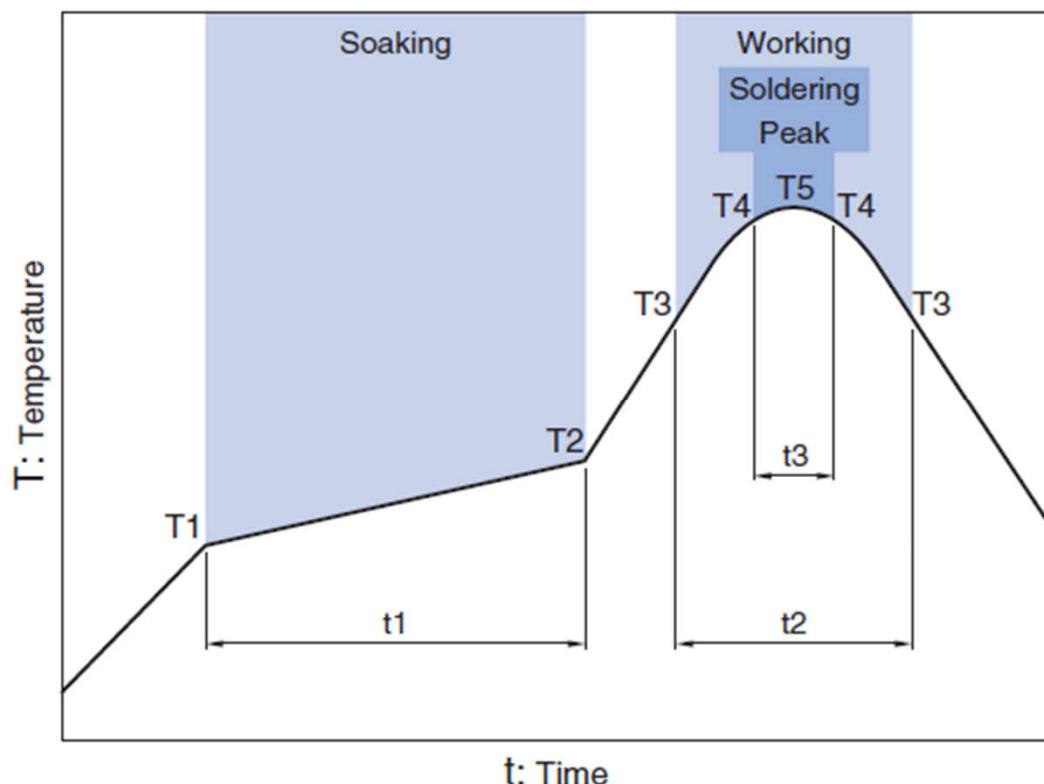


Soaking		Working		Soldering		Peak
Temp.	Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120sec	230°C	30 to 60sec	247 to 253°C	within 10sec
						260°C Max.


ANT016008LCS2442MA1

■ PACKAGING STYLE

Reel Dimensions

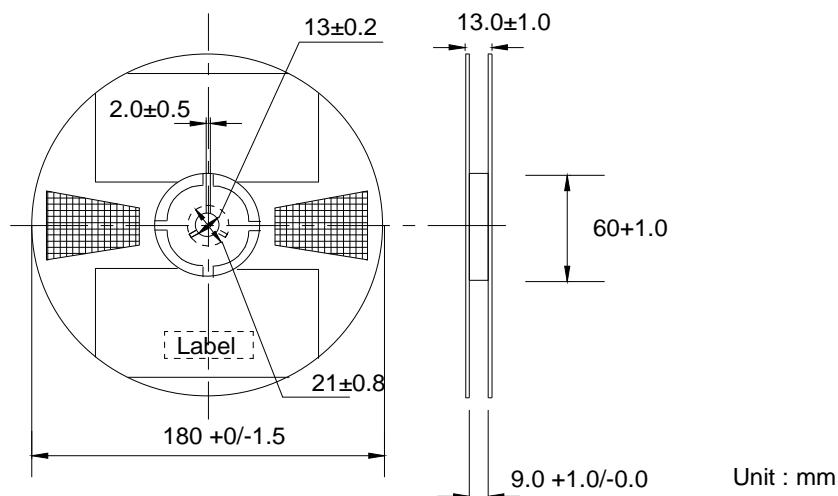

Carrier Tape

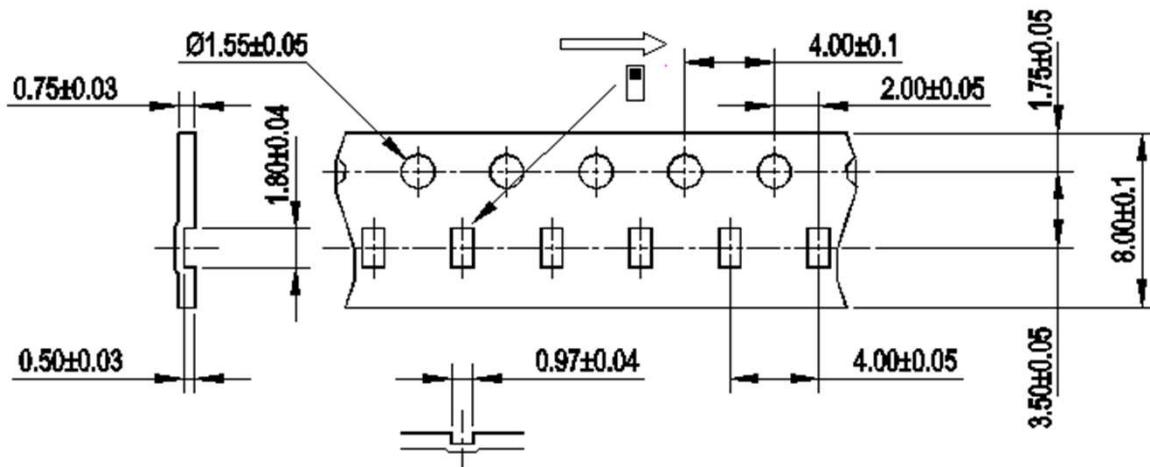

STANDARD PACKAGE QUANTITY (pieces/reel)
4,000

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

REMINDERS

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

1. Aerospace/Aviation equipment
2. Transportation equipment (cars, electric trains, ships, etc.)
3. Medical equipment
4. Power-generation control equipment
5. Atomic energy-related equipment
6. Seabed equipment
7. Transportation control equipment
8. Public information-processing equipment
9. Military equipment
10. Electric heating apparatus, burning equipment
11. Disaster prevention/crime prevention equipment
12. Safety equipment
13. Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.