



RF Test Report

FCC ID: 2BQN8-FTT

Test Report No.: RF250703002-01-005

Product(s) Name.: Touchscreen Computer

Model(s).: FTT100, FTT200, FTT300, FTT400, FTT500, FTT600, FTT700, FTT800, FTT900, FTB311S, FTB311D, FTB-311U, FTB311YUM

Trade Mark.: N/A

Applicant.: SHANGHAI SUGARCUBE TECHNOLOGY CO.,LTD.

Address.: 201-224 No.1, No.899, Dangui Road, Shanghai China

Receipt Date.: 2025.07.07

Test Date.: 2025.07.08~2025.08.24

Issued Date.: 2025.08.26

Standards.: 47 CFR FCC Part 15, Subpart C(Section 15.247)
ANSI C63.10:2013

Testing Laboratory.: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
Jason Huang	Black Ding	Tim Zhang	

Table of Contents

REPORT ISSUED HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 PARAMETERS OF TEST SOFTWARE	9
2.4 SUPPORT UNITS	9
3 . AC POWER LINE CONDUCTED EMISSIONS	10
3.1 LIMIT	10
3.2 TEST PROCEDURE	10
3.3 DEVIATION FROM TEST STANDARD	10
3.4 TEST SETUP	11
3.5 EUT OPERATING CONDITIONS	11
3.6 TEST RESULTS	11
4 . RADIATED EMISSIONS	12
4.1 LIMIT	12
4.2 TEST PROCEDURE	13
4.3 DEVIATION FROM TEST STANDARD	14
4.4 TEST SETUP	14
4.5 EUT OPERATING CONDITIONS	15
4.6 TEST RESULT - 9 KHZ TO 30 MHZ	15
4.7 TEST RESULT - 30 MHZ TO 1000 MHZ	15
4.8 TEST RESULT - ABOVE 1000 MHZ	15
5 . BANDWIDTH	16
5.1 LIMIT	16
5.2 TEST PROCEDURE	16
5.3 DEVIATION FROM STANDARD	16
5.4 TEST SETUP	16
5.5 EUT OPERATION CONDITIONS	16
5.6 TEST RESULTS	16

6 . MAXIMUM OUTPUT POWER	17
6.1 LIMIT	17
6.2 TEST PROCEDURE	17
6.3 DEVIATION FROM STANDARD	17
6.4 TEST SETUP	17
6.5 EUT OPERATION CONDITIONS	17
6.6 TEST RESULTS	17
7 . CONDUCTED SPURIOUS EMISSION	18
7.1 LIMIT	18
7.2 TEST PROCEDURE	18
7.3 DEVIATION FROM STANDARD	18
7.4 TEST SETUP	18
7.5 EUT OPERATION CONDITIONS	18
7.6 TEST RESULTS	18
8 . POWER SPECTRAL DENSITY	19
8.1 LIMIT	19
8.2 TEST PROCEDURE	19
8.3 DEVIATION FROM STANDARD	19
8.4 TEST SETUP	19
8.5 EUT OPERATION CONDITIONS	19
8.6 TEST RESULTS	19
9 . MEASUREMENT INSTRUMENTS LIST	20
10 . ANTENNA REQUIREMENT	21
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	22
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	27
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	28
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	33
APPENDIX E - BANDWIDTH	44
APPENDIX F - MAXIMUM OUTPUT POWER	52
APPENDIX G - CONDUCTED SPURIOUS EMISSION	56
APPENDIX H - POWER SPECTRAL DENSITY	68

REPORT ISSUED HISTORY

Original Report Issue Date: 2025.08.26

- No additional attachment
- Additional attachments were issued following record

Attachment No.	Issue Date	Description



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

Company:	Shenzhen Haiyun Standard Technical CO., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier	CN0145
FCC Test Firm Registration Number	457288
A2LA Certificate Number	6823.01
Telephone:	0755-26024411

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Parameter	Uncertainty
Occupied Channel Bandwidth	±102kHz
RF power conducted	±0.243dB
Power Spectral Density	±0.743dB
Conducted Spurious Emission	±1.328dB
Conducted emission(9kHz~30MHz) AC main	±2.68dB
Radiated emission(9kHz~30MHz)	±3.50dB
Radiated emission (30MHz~1GHz)	±4.20dB
Radiated emission (1GHz~18GHz)	±5.10dB
Radiated emission (18GHz~40GHz)	±5.26dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	23.8°C	52%	AC 120V/60Hz	Keith Huang
Radiated Emissions-9 kHz to 30 MHz	23.9°C	53%	AC 120V/60Hz	Lemon He
Radiated Emissions-30 MHz to 1000 MHz	23.9°C	53%	AC 120V/60Hz	Lemon He
Radiated Emissions-Above 1000 MHz	23.9°C	53%	AC 120V/60Hz	Lemon He
Bandwidth	23.4°C	53%	DC 12V	Freedom Zhuo
Maximum Output Power	23.4°C	53%	DC 12V	Freedom Zhuo
Conducted Spurious Emission	23.4°C	53%	DC 12V	Freedom Zhuo
Power Spectral Density	23.4°C	53%	DC 12V	Freedom Zhuo

Note: Adapter supply voltage AC 120V/60Hz.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Test sample no.	POC250703002-S001
Model Name	FTT100, FTT200, FTT300, FTT400, FTT500, FTT600, FTT700, FTT800, FTT900, FTB311S, FTB311D, FTB-311U, FTB311YUM
Test Model	FTT100
Model difference	Only the model name is different
Trade Mark	N/A
Power supply	DC 12V from adapter or POE 48V
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps
Max. Output Power	0.89 dBm (0.0012W)
Antenna gain	1.09dBi
Antenna type	External Antenna

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480



2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_2Mbps Channel 39

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 3	TX Mode_2Mbps Channel 39

Radiated emissions test – Below 1GHz	
Final Test Mode	Description
Mode 3	TX Mode_2Mbps Channel 39

Radiated emissions test – Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Note:

- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~18GHz and 18GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the TX Mode_2Mbps Channel 39 is found to be the worst case and recorded.



2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	cmd.exe		
Frequency (MHz)	2402	2440	2480
1Mbps	default	default	default
2Mbps	default	default	default

2.4 SUPPORT UNITS

No.	Equipment	Model	Manufacturer	Series No
1	POE	G0545-530-060-PSE1000	GOSPE DIGITAL	/
2	SWITCHING ADAPTER	GQ48-120500-E1	GangQi	/

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:


Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.



3.4 TEST SETUP

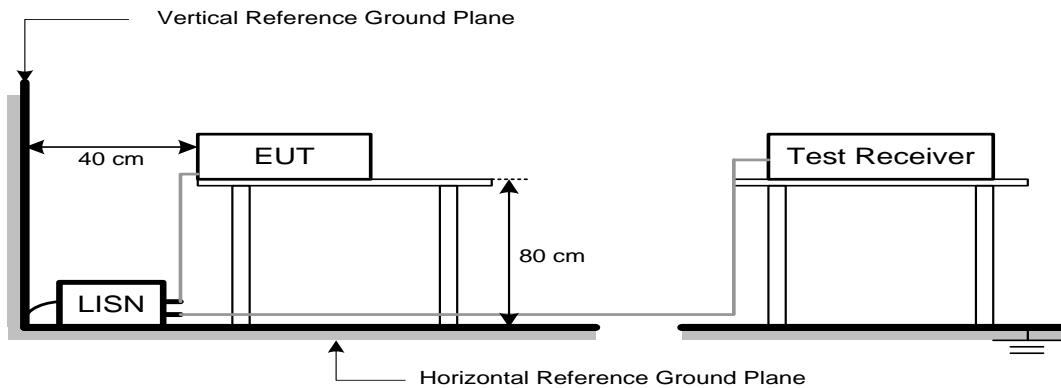

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector




4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP

9 kHz to 30 MHz

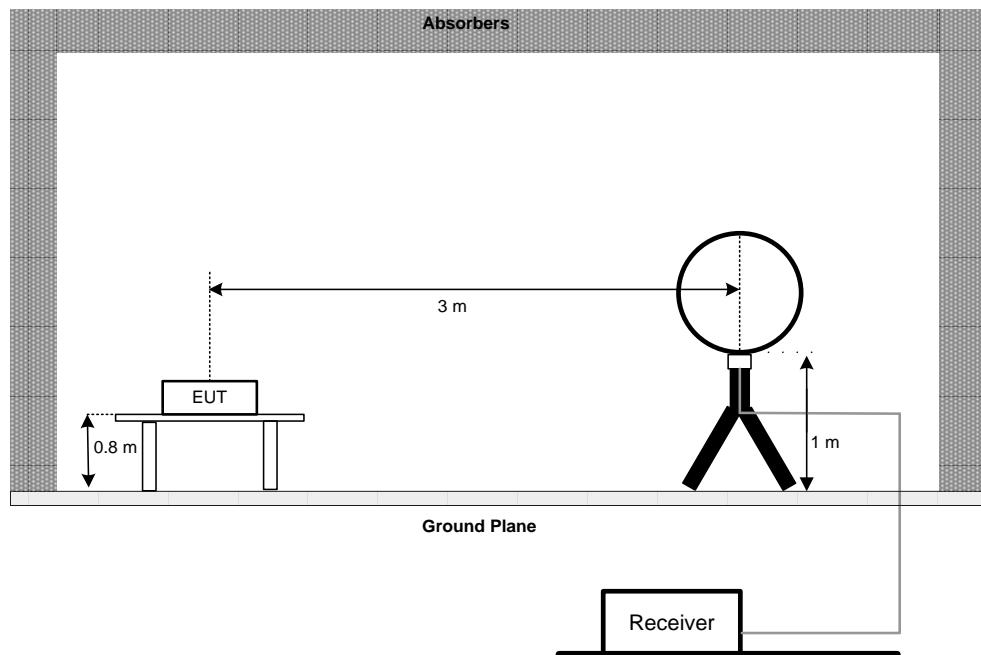


30 MHz to 1 GHz

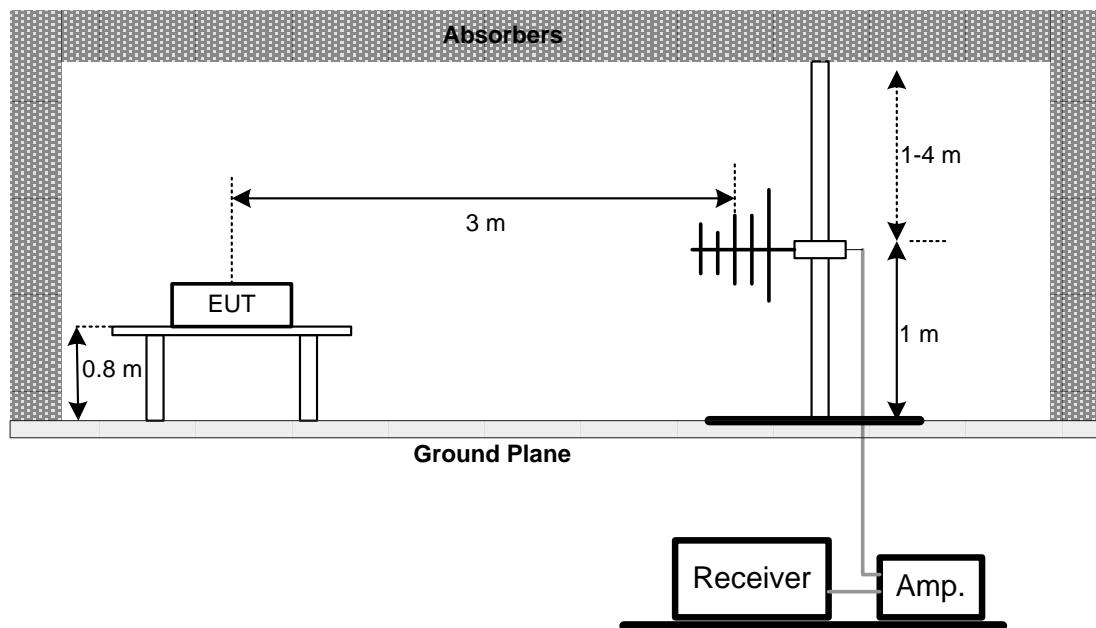



Above 1 GHz

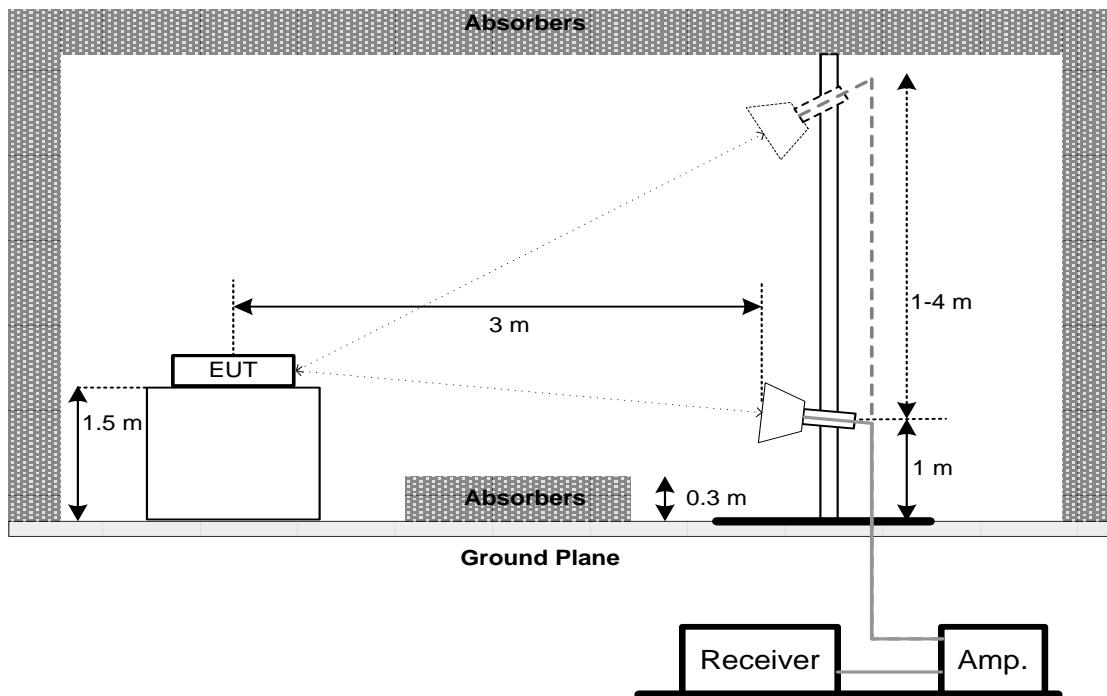

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dB_{UV}) + distance extrapolation factor.

4.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	>= 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	1% to 5% of the OBW
VBW	approximately three times RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

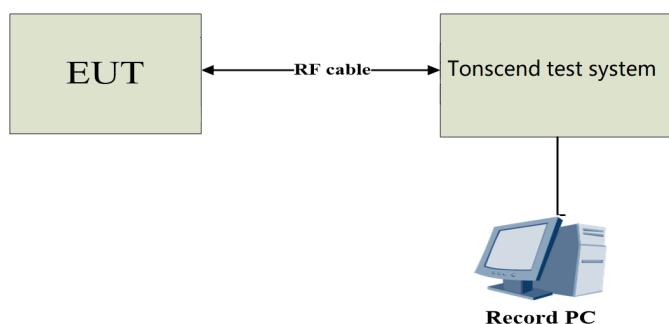

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

6.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	$\geq \text{DTS BW}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

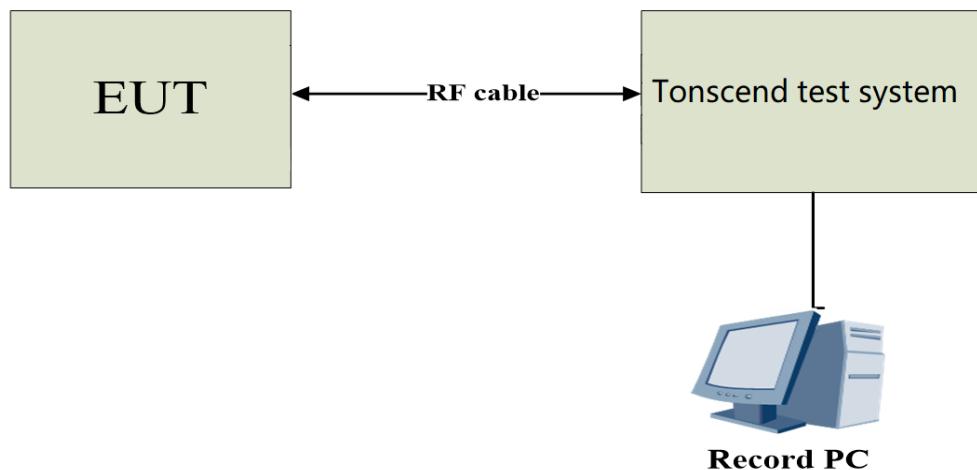

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSION

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE


- The EUT was directly connected to the tonsend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

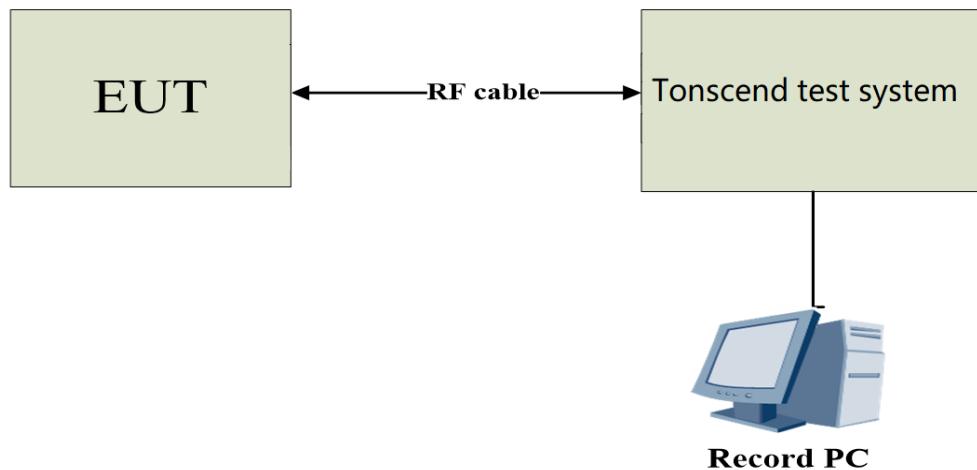

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE


- The EUT was directly connected to the tonscend test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	1.5*DTS BW
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

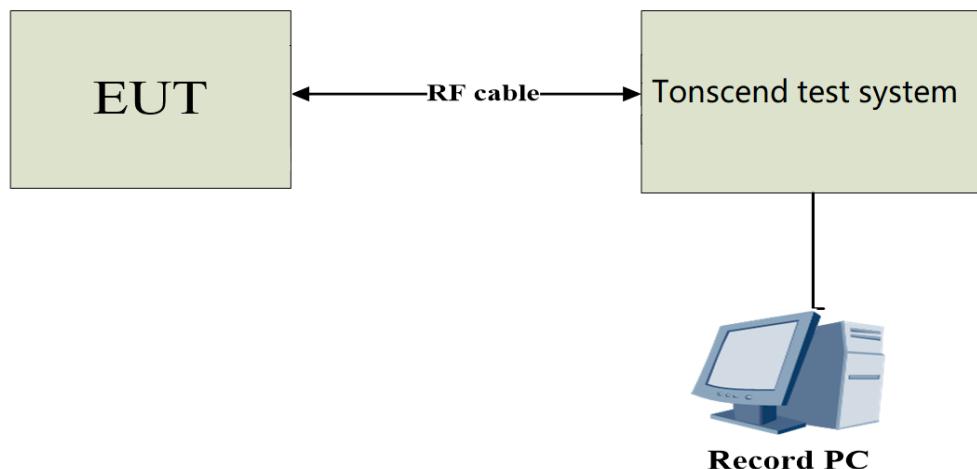

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.



9. MEASUREMENT INSTRUMENTS LIST

No.	Name of Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
Radiated Emission							
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2025/3/1	2026/2/28
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2026/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2025/3/1	2026/2/28
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2025/3/1	2026/2/28
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2025/4/12	2026/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2025/4/15	2026/4/14
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBECK	FMZB1519B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2025/3/1	2026/2/28
10	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2025/3/1	2026/2/28
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2025/2/21	2026/2/20
3	ISN	Schwarzbeck	CAT 3 8158	00187	JLE032	2025/2/21	2026/2/20
4	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2025/3/1	2026/2/28
5	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2025/3/1	2026/2/28
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2025/4/15	2026/4/14
7	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emissions							
1	MXA Signal Analyzer	Keysight	N9021B	MY6008016 9	JLE050	2025/3/1	2026/2/28
2	RF Control Unit	dsusoft	JS0806-2	21G8060449	JLE053	2025/3/1	2026/2/28
3	power supply unit	dsusoft	JS0806-4ADC	N/A	JLE055	2025/3/1	2026/2/28
4	VXG Signal Generator	Keysight	M9384B	MY6127078 7	JLE051	2024/6/11	2025/6/10
5	EXG Analog Signal Generator	Keysight	N5173B	MY5910128 2		2025/6/10	2026/6/09
6	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002K 50-116064-D t	JLE054	2025/3/1	2026/2/28
7	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				



10. ANTENNA REQUIREMENT

Test standard: FCC part 15.203

According to the manufacturer declared, the EUT has two PCB antenna, The antenna gain is Ant1: 3.67dBi, Ant2: 3.81dBi, and the antenna connector is designed for permanent connection without considering replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.



海蕴
HAIYUN


APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS



POE power supply

Test Mode	TX Mode_2Mbps Channel 39	Phase	Line
-----------	--------------------------	-------	------

Conducted Emission Measurement

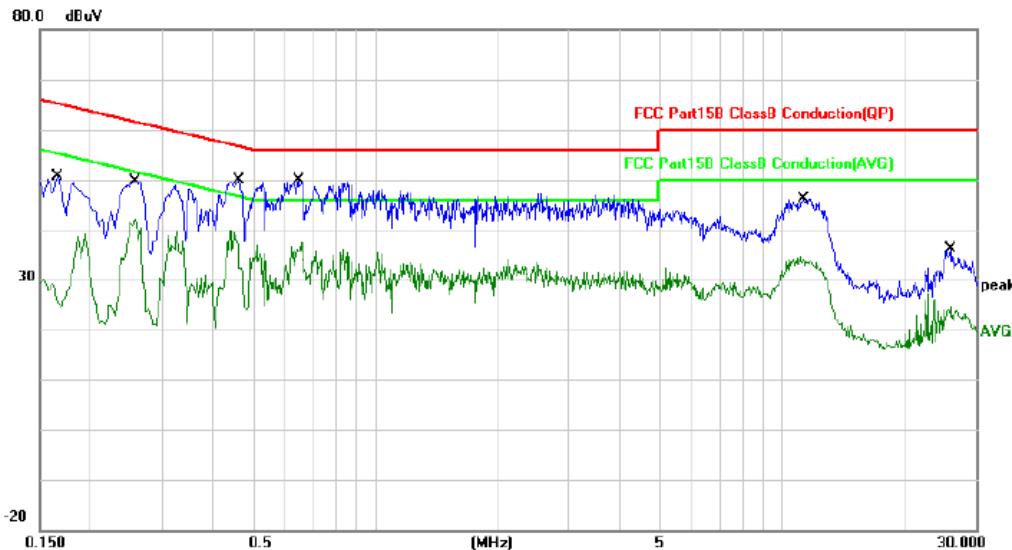


No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			dBuV	dB	dBuV	dB			
1		0.1660	19.99	20.14	40.13	65.16	-25.03	QP	
2		0.1660	3.69	20.14	23.83	55.16	-31.33	AVG	
3		0.2580	28.81	20.02	48.83	61.50	-12.67	QP	
4		0.2580	21.05	20.02	41.07	51.50	-10.43	AVG	
5		0.4660	27.41	20.25	47.66	56.58	-8.92	QP	
6		0.4660	12.53	20.25	32.78	46.58	-13.80	AVG	
7 *		0.6500	27.48	20.03	47.51	56.00	-8.49	QP	
8		0.6500	15.05	20.03	35.08	46.00	-10.92	AVG	
9		11.2940	21.83	20.24	42.07	60.00	-17.93	QP	
10		11.2940	12.68	20.24	32.92	50.00	-17.08	AVG	
11		25.9060	10.33	20.23	30.56	60.00	-29.44	QP	
12		25.9060	4.45	20.23	24.68	50.00	-25.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	TX Mode_2Mbps Channel 39	Phase	Neutral
-----------	--------------------------	-------	---------

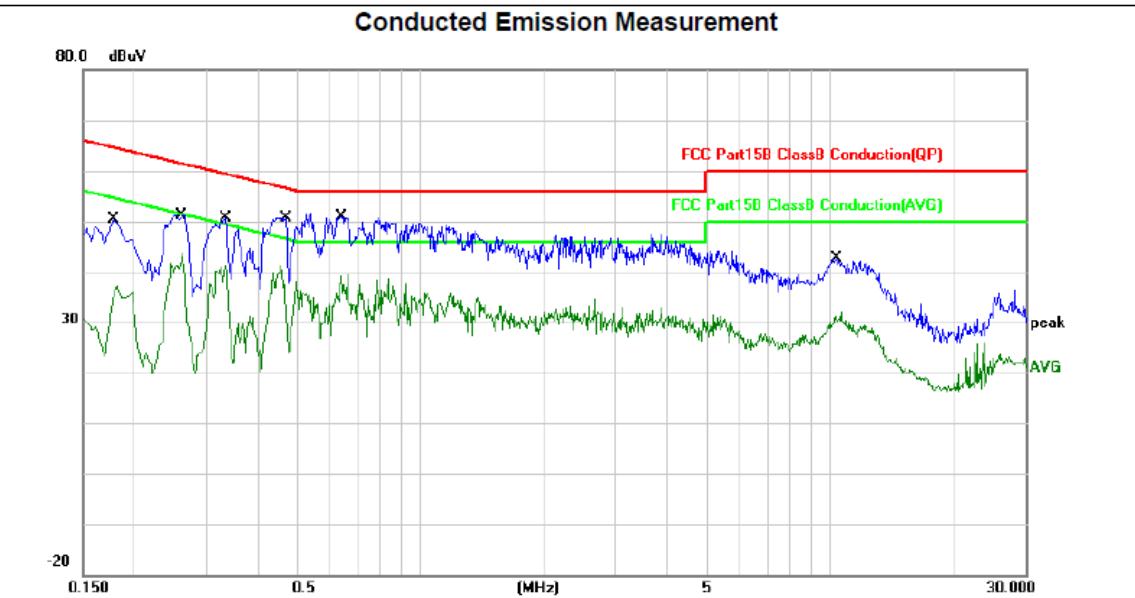

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			dBuV	dB	dBuV	dB			
1		0.1780	26.70	20.30	47.00	64.58	-17.58	QP	
2		0.1780	10.77	20.30	31.07	54.58	-23.51	AVG	
3		0.2620	29.58	20.10	49.68	61.37	-11.69	QP	
4		0.2620	21.03	20.10	41.13	51.37	-10.24	AVG	
5		0.3340	26.39	20.09	46.48	59.35	-12.87	QP	
6		0.3340	17.72	20.09	37.81	49.35	-11.54	AVG	
7		0.4700	27.68	20.08	47.76	56.51	-8.75	QP	
8		0.4700	10.00	20.08	30.08	46.51	-16.43	AVG	
9 *		0.6420	28.42	20.20	48.62	56.00	-7.38	QP	
10		0.6420	16.33	20.20	36.53	46.00	-9.47	AVG	
11		10.3900	18.78	20.13	38.91	60.00	-21.09	QP	
12		10.3900	10.18	20.13	30.31	50.00	-19.69	AVG	




海蕴
HAIYUN

Adapter power supply

Test Mode	TX Mode_1Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

Conducted Emission Measurement

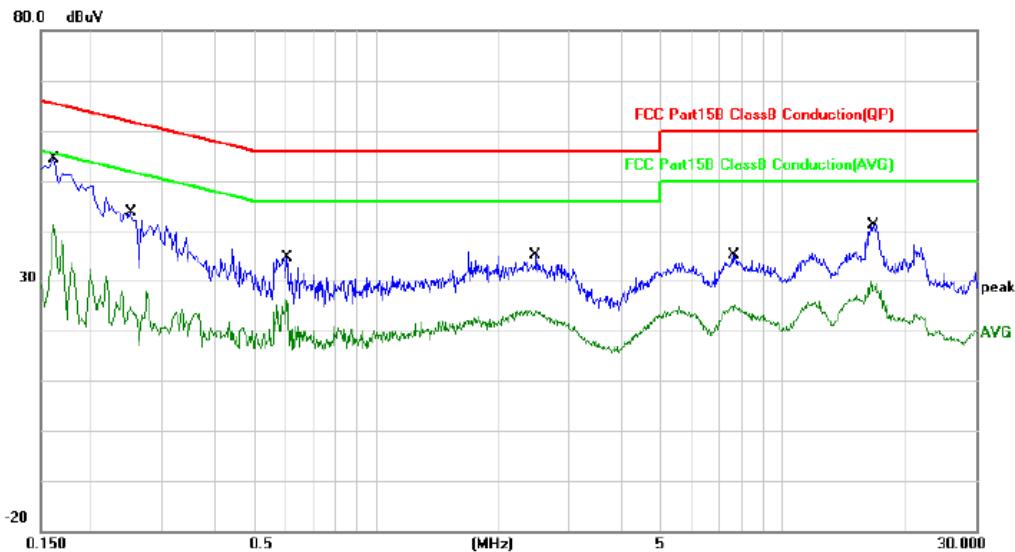

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1620	29.89	20.13	50.02	65.36	-15.34	QP	
2		0.1620	13.93	20.13	34.06	55.36	-21.30	AVG	
3		0.2500	16.52	20.00	36.52	61.76	-25.24	QP	
4		0.2500	1.68	20.00	21.68	51.76	-30.08	AVG	
5		0.6060	10.74	20.04	30.78	56.00	-25.22	QP	
6		0.6060	1.75	20.04	21.79	46.00	-24.21	AVG	
7		2.4740	9.01	20.04	29.05	56.00	-26.95	QP	
8		2.4740	3.37	20.04	23.41	46.00	-22.59	AVG	
9		7.5940	9.20	20.02	29.22	60.00	-30.78	QP	
10		7.5940	4.00	20.02	24.02	50.00	-25.98	AVG	
11		16.8340	13.26	20.16	33.42	60.00	-26.58	QP	
12		16.8340	5.00	20.16	25.16	50.00	-24.84	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	TX Mode_1Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

Conducted Emission Measurement

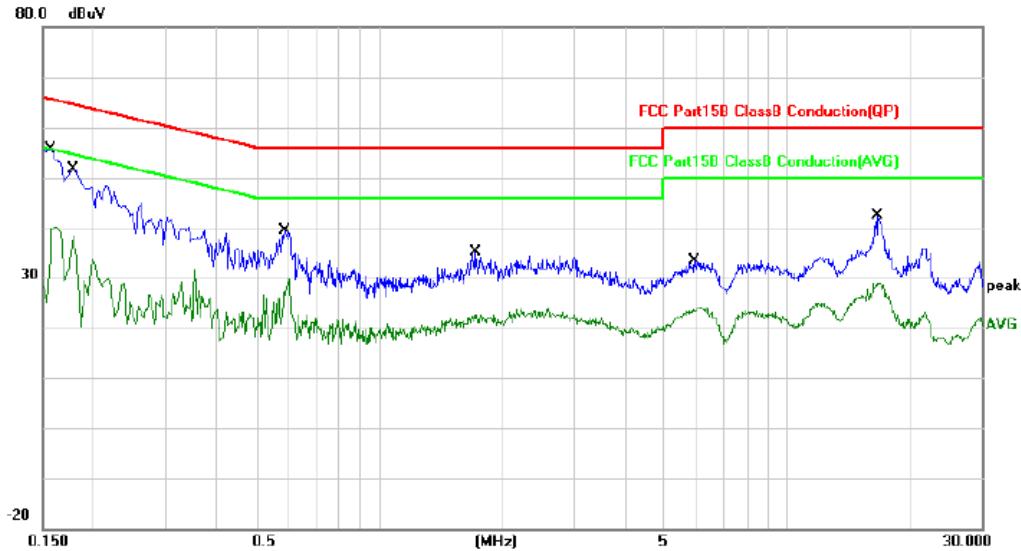

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1	*	0.1580	31.66	20.22	51.88	65.57	-13.69	QP	
2		0.1580	13.70	20.22	33.92	55.57	-21.65	AVG	
3		0.1780	27.60	20.17	47.77	64.58	-16.81	QP	
4		0.1780	10.30	20.17	30.47	54.58	-24.11	AVG	
5		0.5900	16.39	19.98	36.37	56.00	-19.63	QP	
6		0.5900	6.80	19.98	26.78	46.00	-19.22	AVG	
7		1.7220	9.22	20.21	29.43	56.00	-26.57	QP	
8		1.7220	1.85	20.21	22.06	46.00	-23.94	AVG	
9		5.9500	7.86	20.06	27.92	60.00	-32.08	QP	
10		5.9500	2.87	20.06	22.93	50.00	-27.07	AVG	
11		16.6820	15.11	20.30	35.41	60.00	-24.59	QP	
12		16.6820	7.34	20.30	27.64	50.00	-22.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Radiated emission: 9KHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.



海蕴
HAIYUN


APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ



海蕴
HAIYUN

POE power supply

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

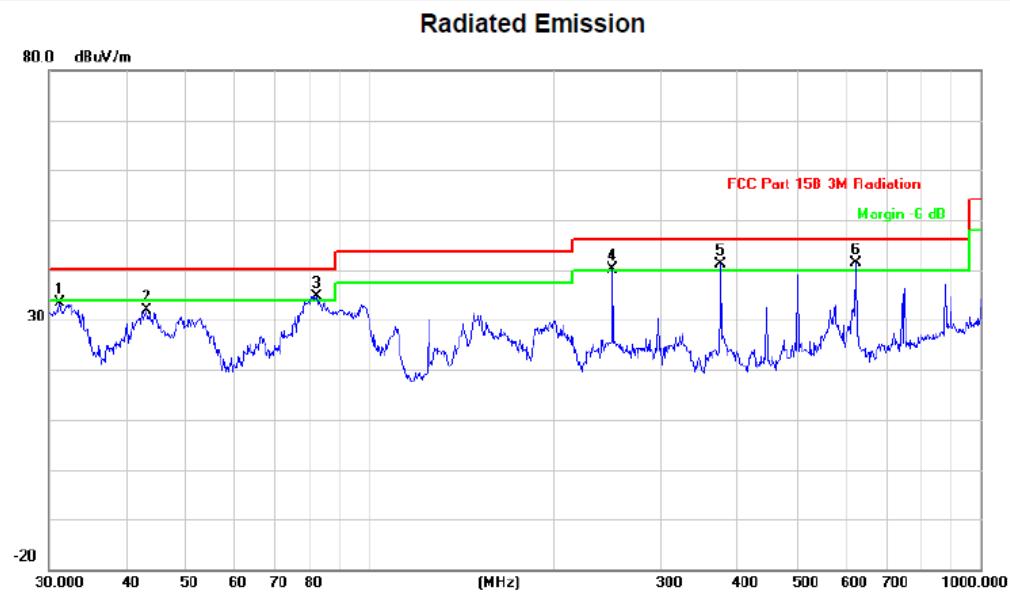


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		31.1797	44.35	-10.97	33.38	40.00	-6.62	peak			
2		43.3534	41.58	-9.65	31.93	40.00	-8.07	peak			
3 !		82.0704	48.34	-13.61	34.73	40.00	-5.27	peak			
4 !		250.3010	51.92	-11.78	40.14	46.00	-5.86	peak			
5 !		375.9384	49.28	-8.20	41.08	46.00	-4.92	peak			
6 *		625.0780	44.30	-2.93	41.37	46.00	-4.63	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	TX Mode_2Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

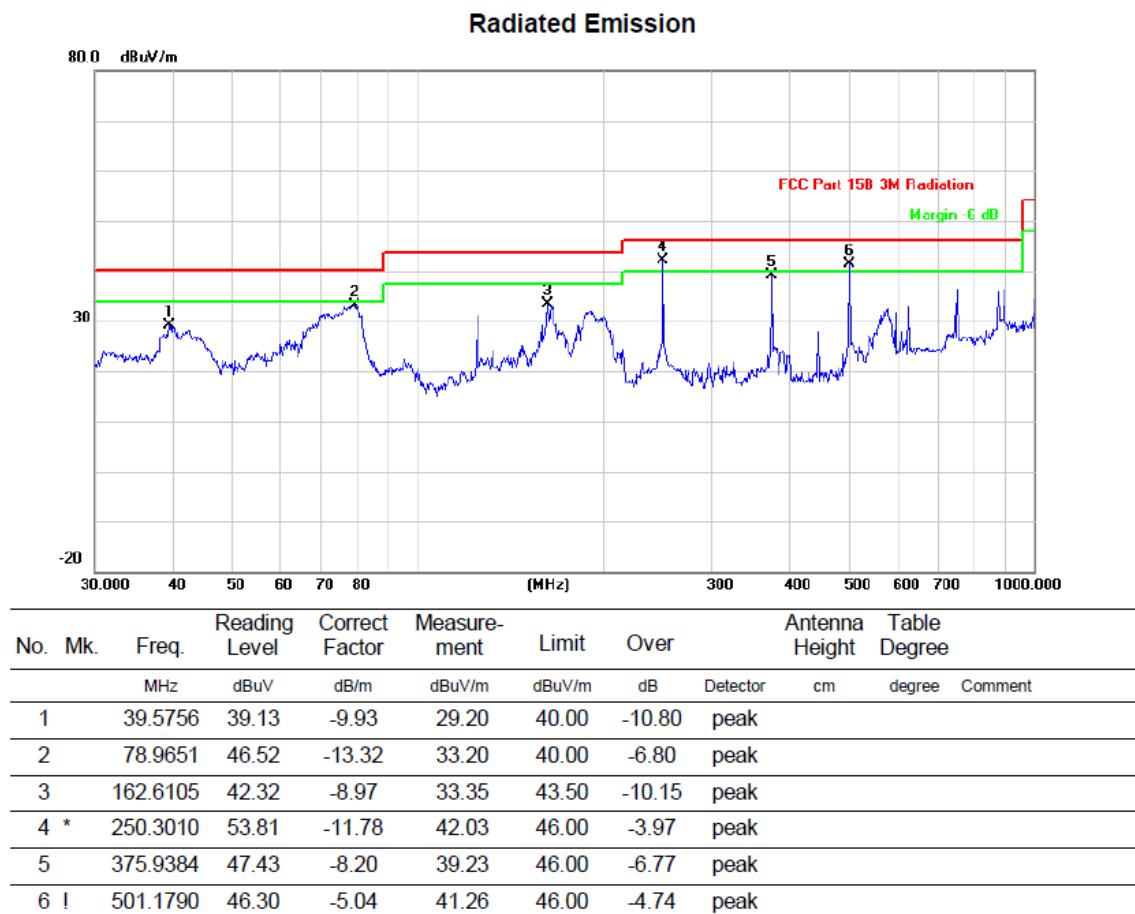




海蕴
HAIYUN

Adapter power supply

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

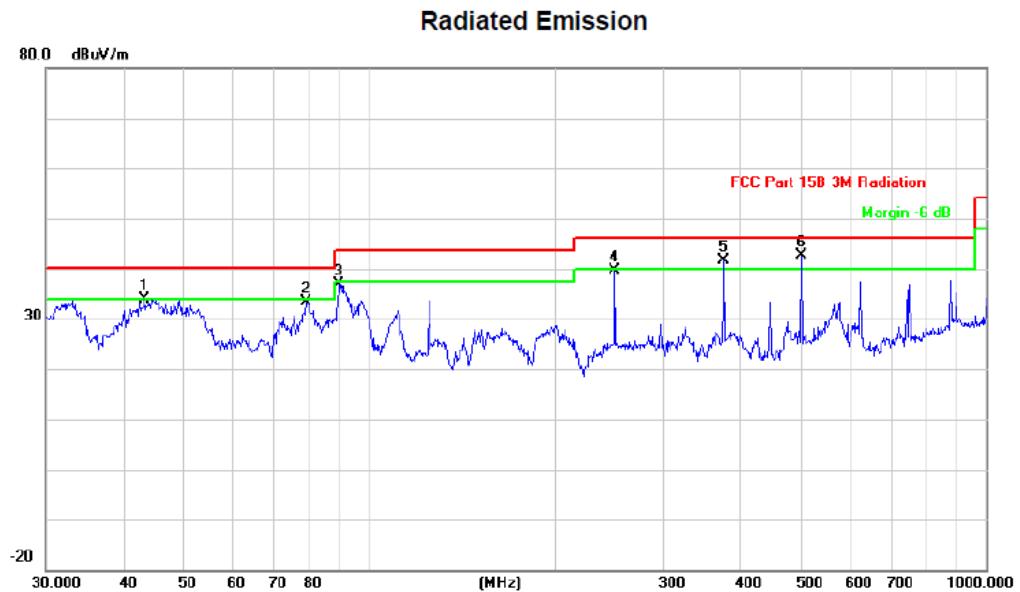

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		43.3534	43.58	-9.65	33.93	40.00	-6.07	peak		
2		78.9651	46.77	-13.32	33.45	40.00	-6.55	peak		
3		89.2762	50.83	-13.86	36.97	43.50	-6.53	peak		
4		250.3010	51.42	-11.78	39.64	46.00	-6.36	peak		
5	!	375.9384	49.78	-8.20	41.58	46.00	-4.42	peak		
6	*	501.1790	47.72	-5.04	42.68	46.00	-3.32	peak		


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



海蕴
HAIYUN

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

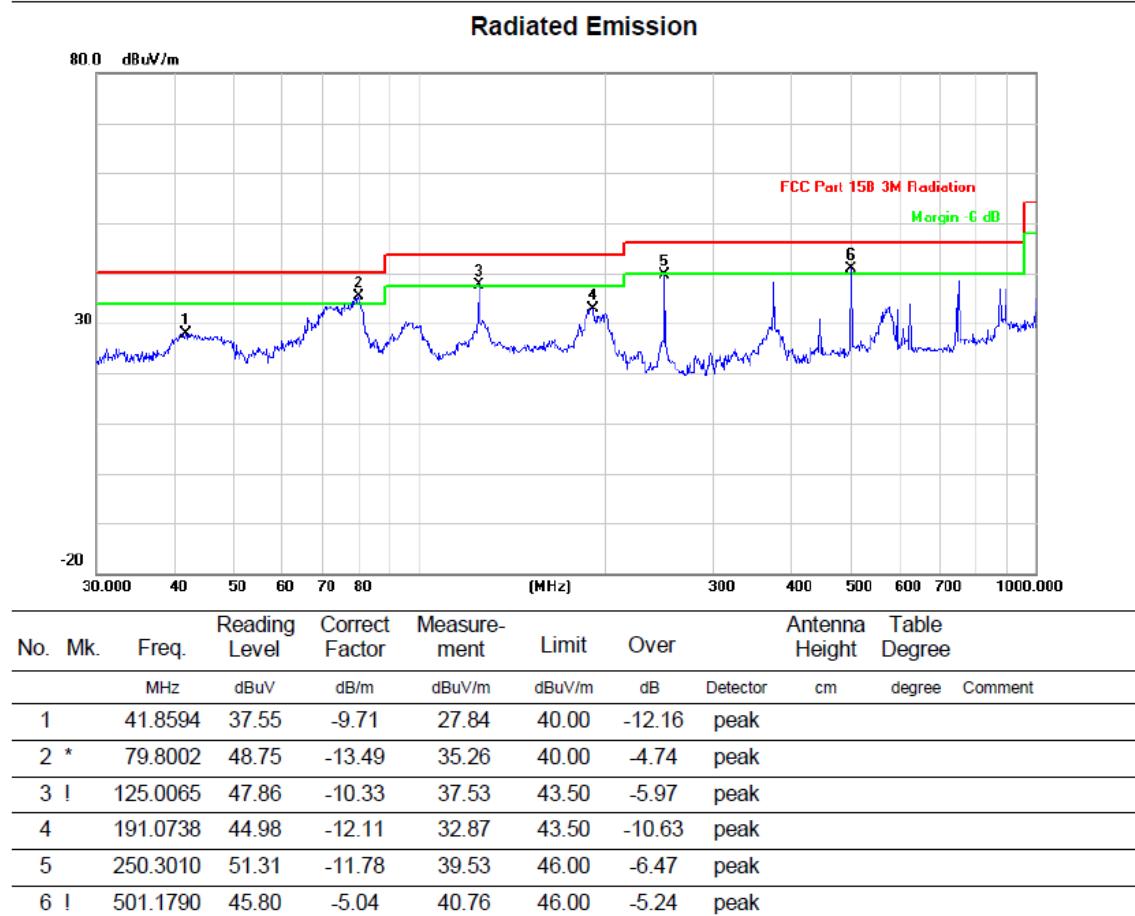

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



海蕴
HAIYUN


APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ



海蕴
HAIYUN


Test Mode	TX 2402 MHz_1Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

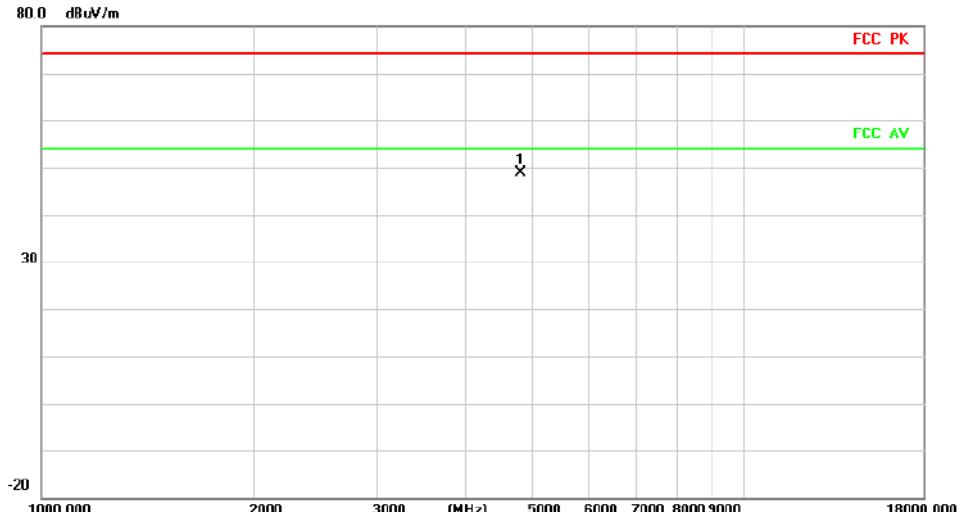

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm degree
1	*	4804.000	32.85	16.01	48.86	74.00	-25.14	peak	

Radiated Emission

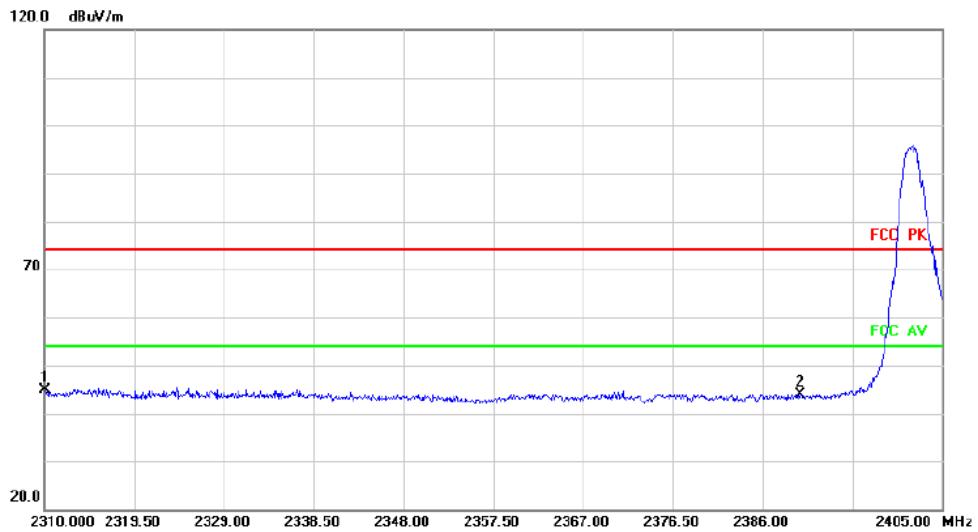


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm degree
1	*	2310.000	46.61	-1.78	44.83	74.00	-29.17	peak	
2		2390.000	45.39	-1.54	43.85	74.00	-30.15	peak	



海蕴
HAIYUN


Test Mode	TX 2402 MHz_1Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

Radiated Emission

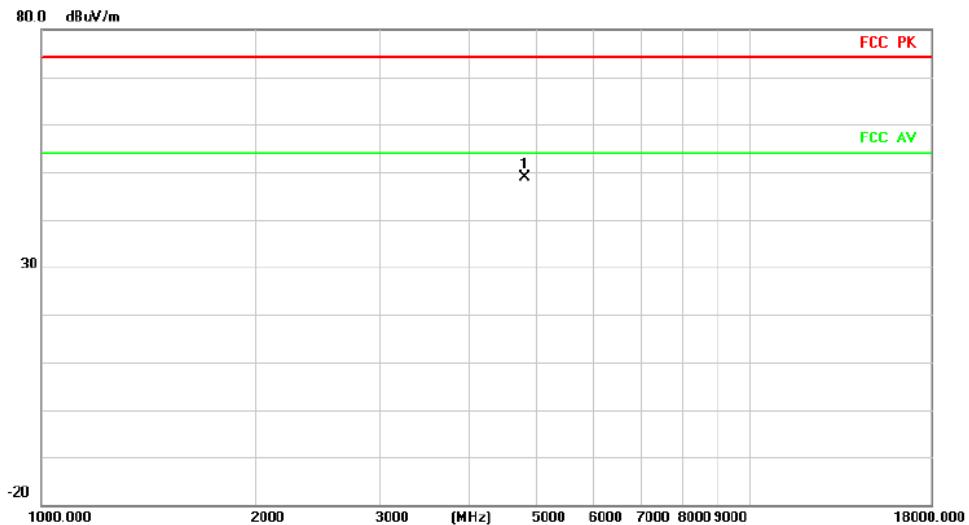

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4804.000	32.98	16.01	48.99	74.00	-25.01	peak		

Radiated Emission

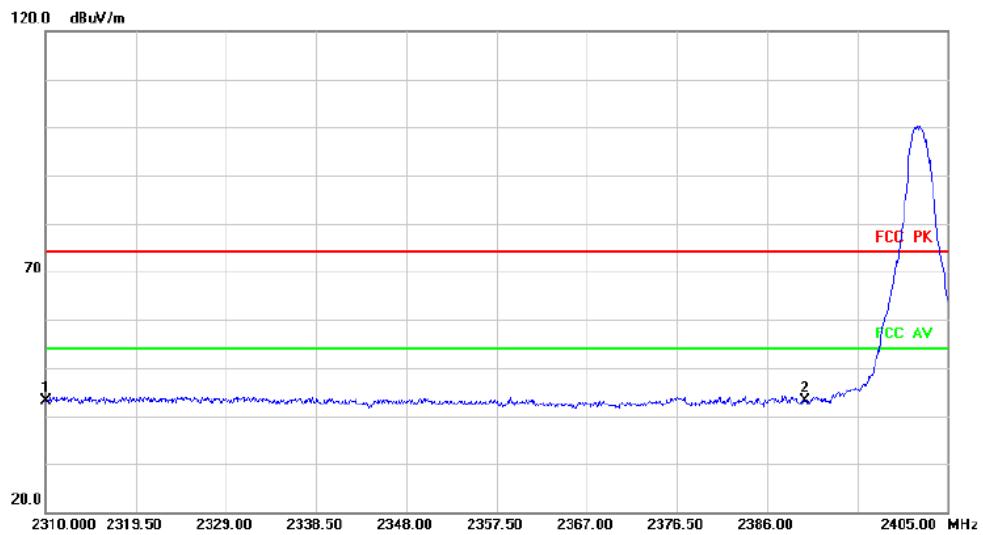


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	44.87	-1.78	43.09	74.00	-30.91	peak		
2	*	2390.000	44.70	-1.54	43.16	74.00	-30.84	peak		



海蕴
HAIYUN

Test Mode	TX 2440 MHz_1Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------


Radiated Emission

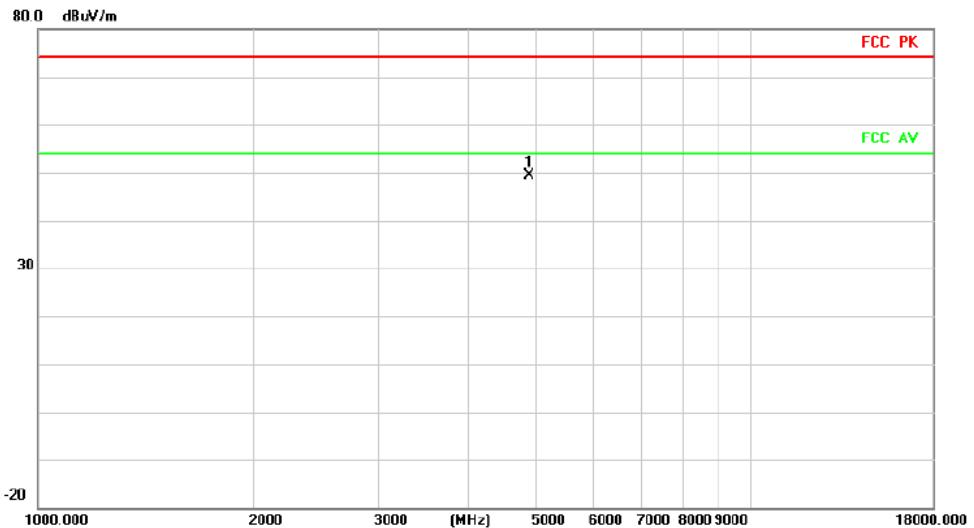

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4880.000	34.07	15.40	49.47	74.00	-24.53	peak			

Test Mode	TX 2440 MHz_1Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

Radiated Emission

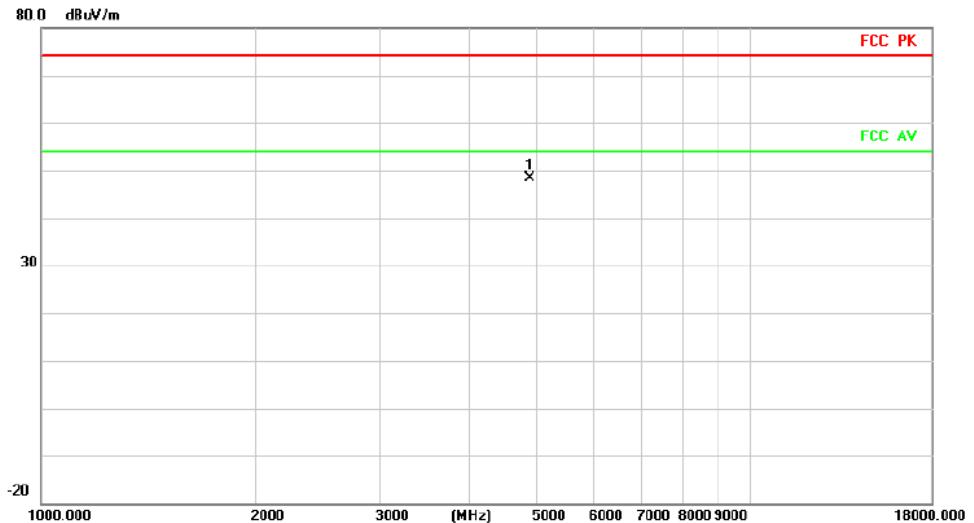


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4880.000	33.01	15.40	48.41	74.00	-25.59	peak			



海蕴
HAIYUN


Test Mode	TX 2480 MHz_1Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

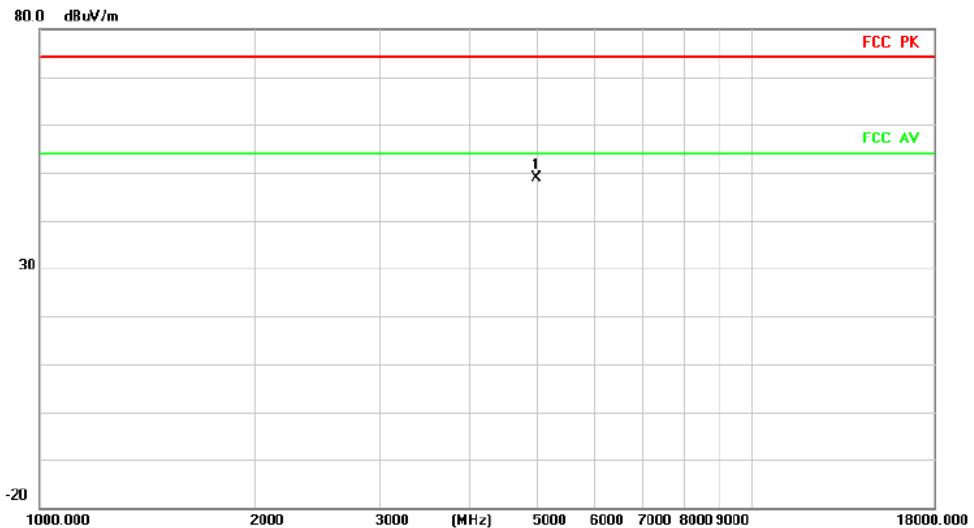

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4960.000	34.02	14.93	48.95	74.00	-25.05	peak			

Radiated Emission

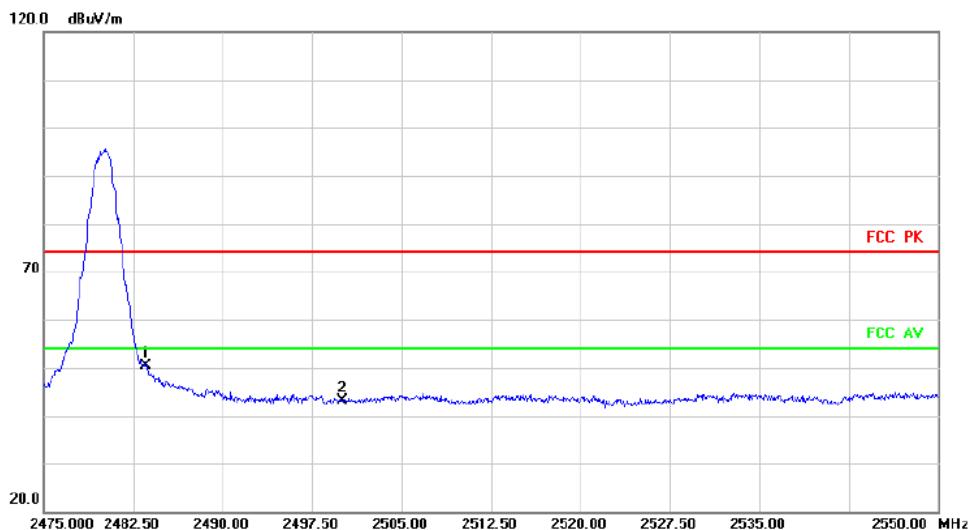


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	51.24	-0.90	50.34	74.00	-23.66	peak			
2		2500.000	43.82	-0.74	43.08	74.00	-30.92	peak			



海蕴
HAIYUN


Test Mode	TX 2480 MHz_1Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

Radiated Emission

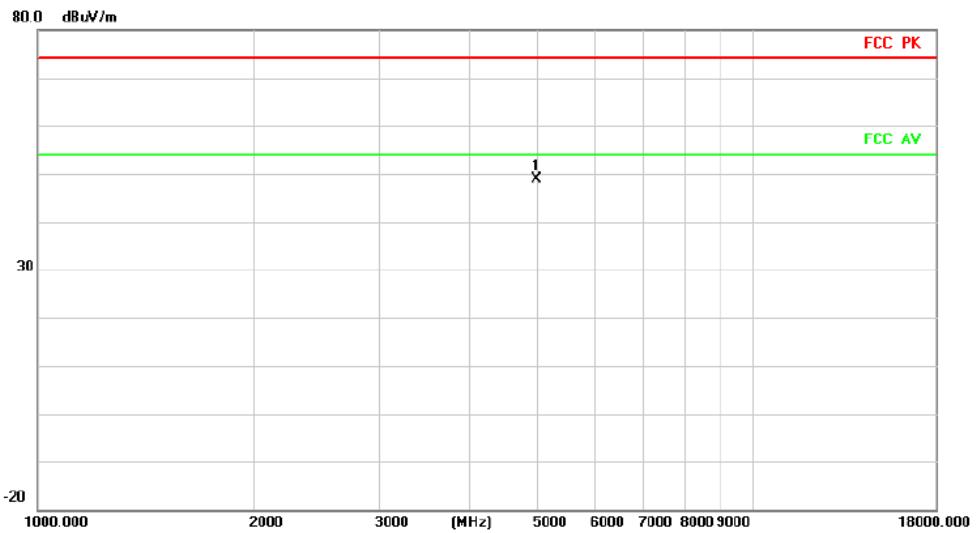

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	4960.000	34.01	14.93	48.94	74.00	-25.06	peak			

Radiated Emission

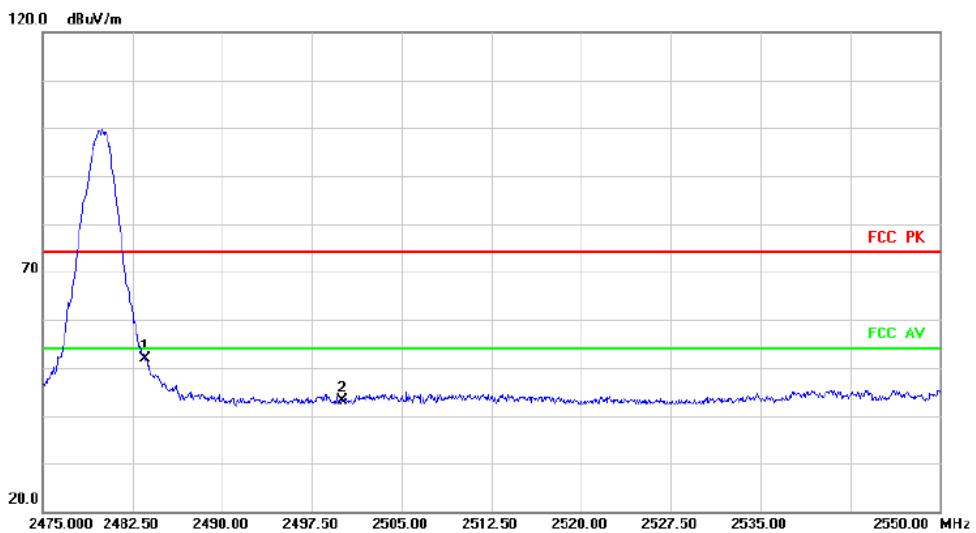


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	
1	*	2483.500	52.71	-0.90	51.81	74.00	-22.19	peak			
2		2500.000	43.79	-0.74	43.05	74.00	-30.95	peak			




海蕴
HAIYUN

Test Mode	TX 2402 MHz_2Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

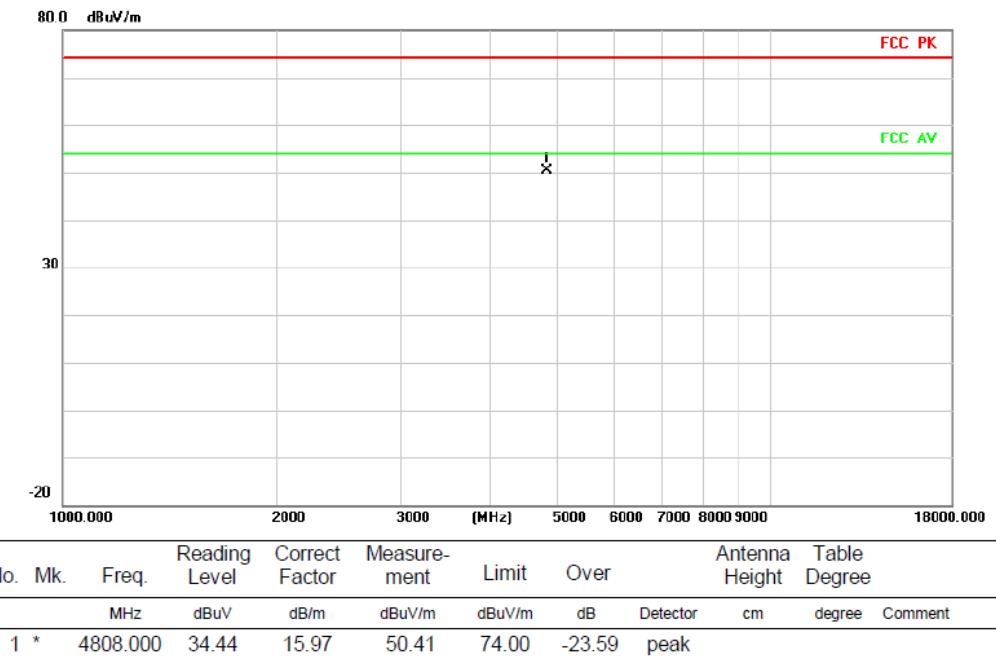



Radiated Emission

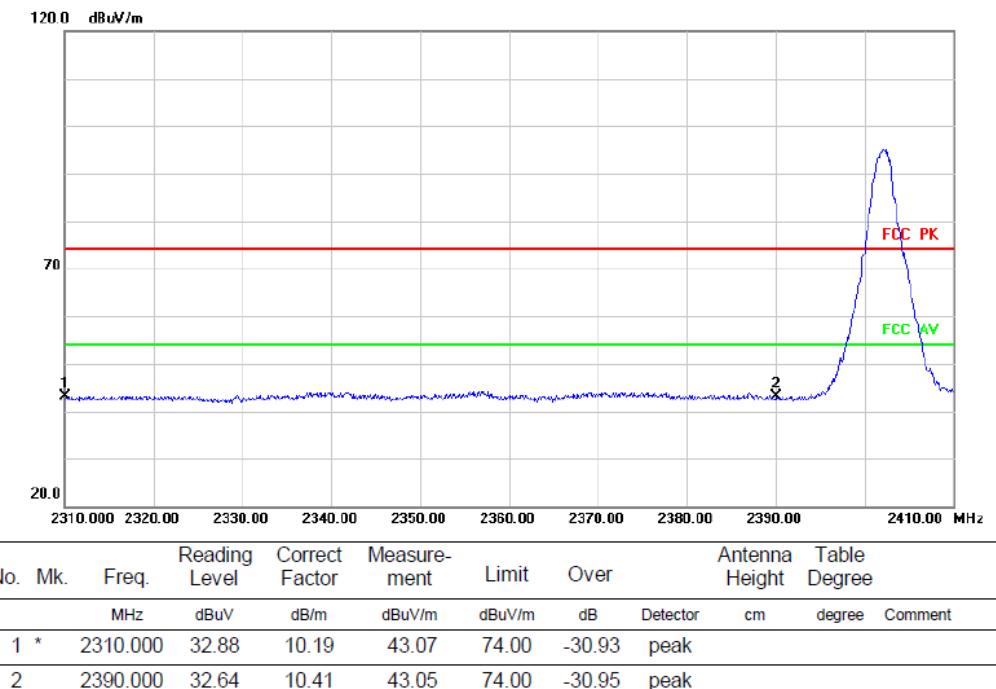



海蕴
HAIYUN

Test Mode	TX 2402 MHz_2Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

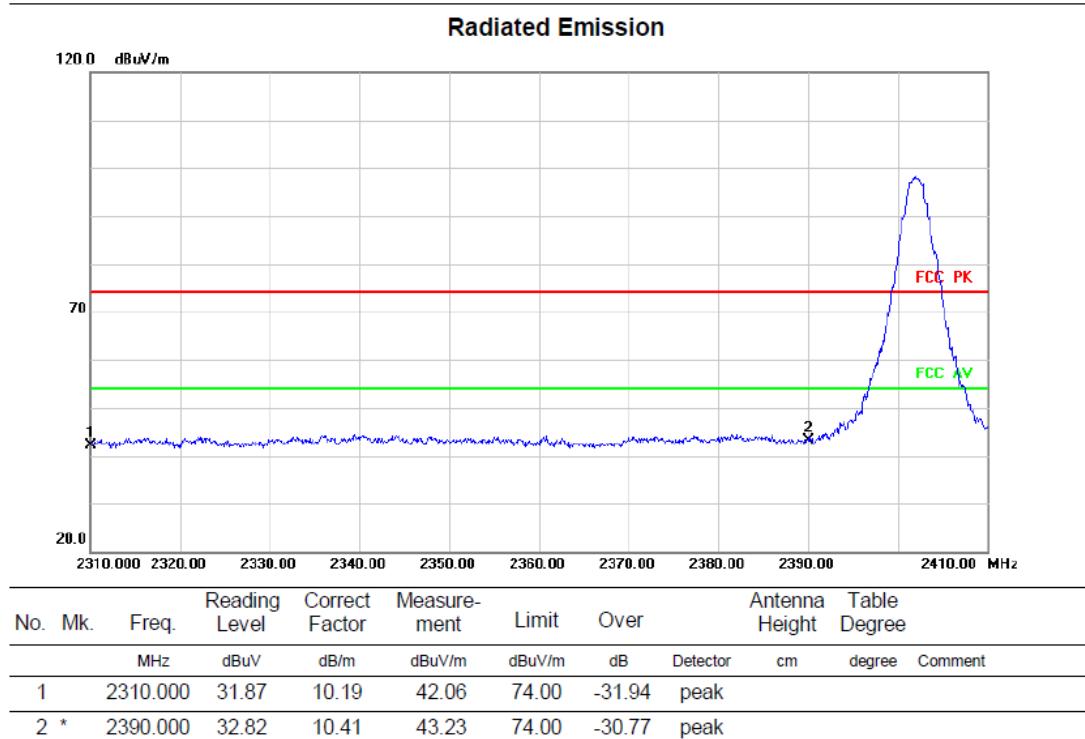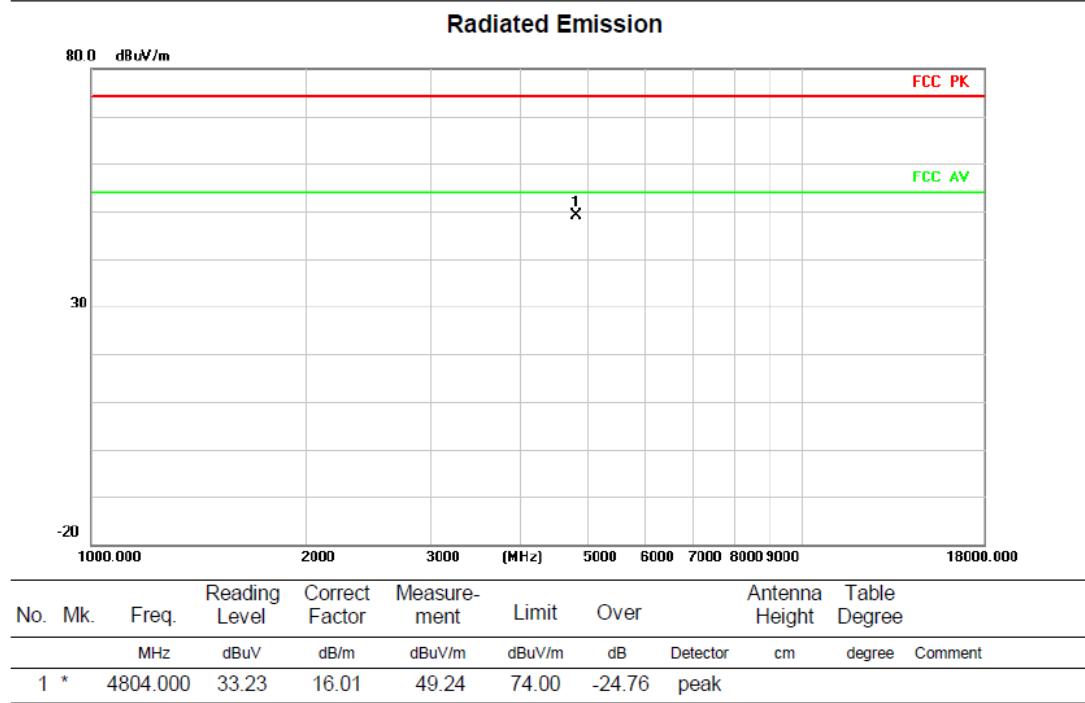




海蕴
HAIYUN

Test Mode	TX 2440 MHz_2Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------


Radiated Emission

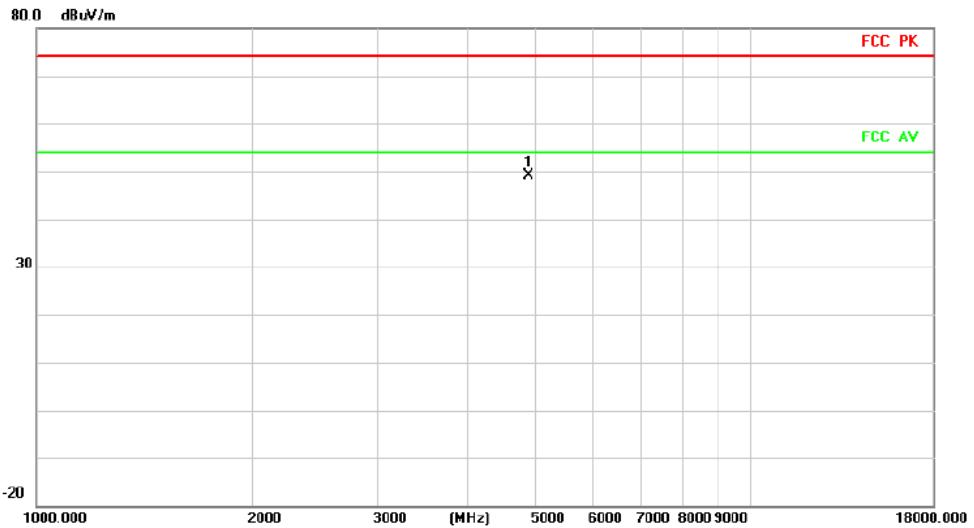

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4880.000	33.77	15.40	49.17	74.00	-24.83	peak			

Test Mode	TX 2440 MHz_2Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

Radiated Emission

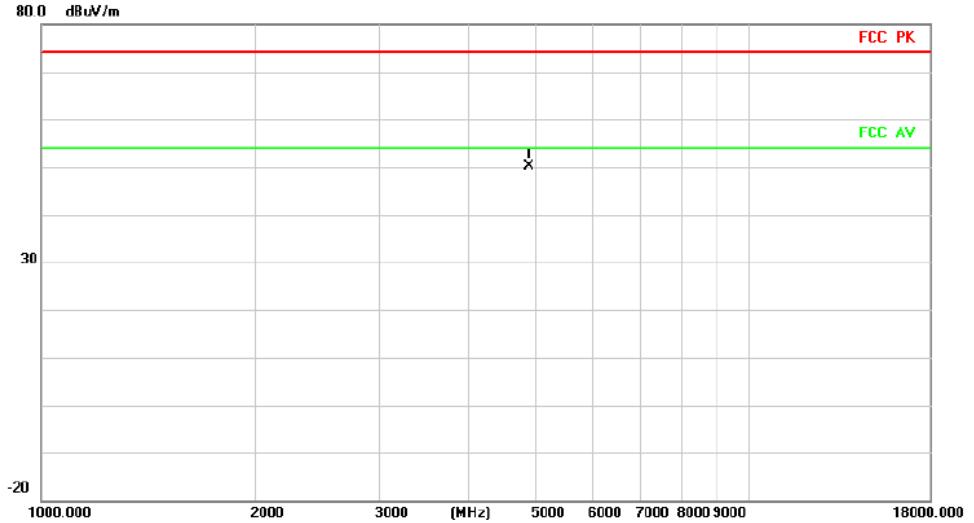


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4880.000	34.78	15.40	50.18	74.00	-23.82	peak			



海蕴
HAIYUN


Test Mode	TX 2480 MHz_2Mbps	Polarization	Vertical
-----------	-------------------	--------------	----------

Radiated Emission

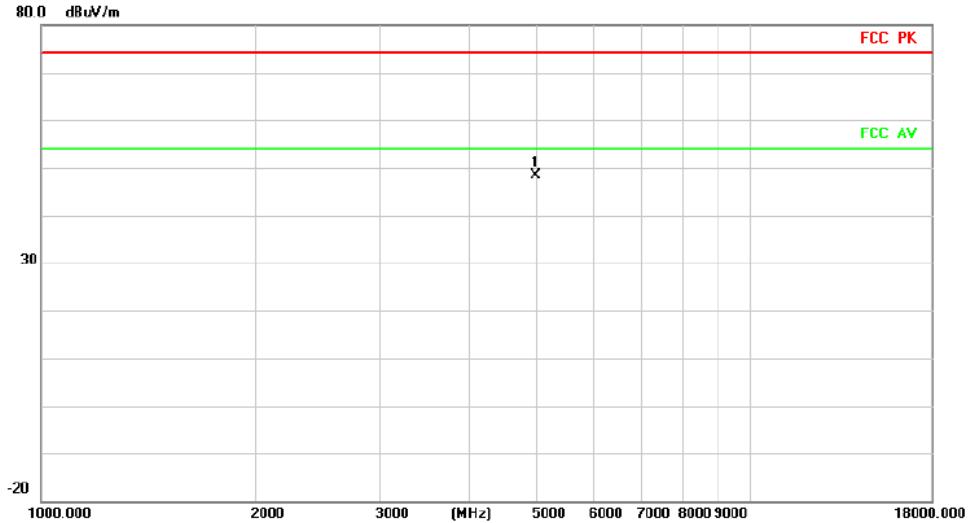

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	4960.000	33.47	14.93	48.40	74.00	-25.60	peak			

Radiated Emission


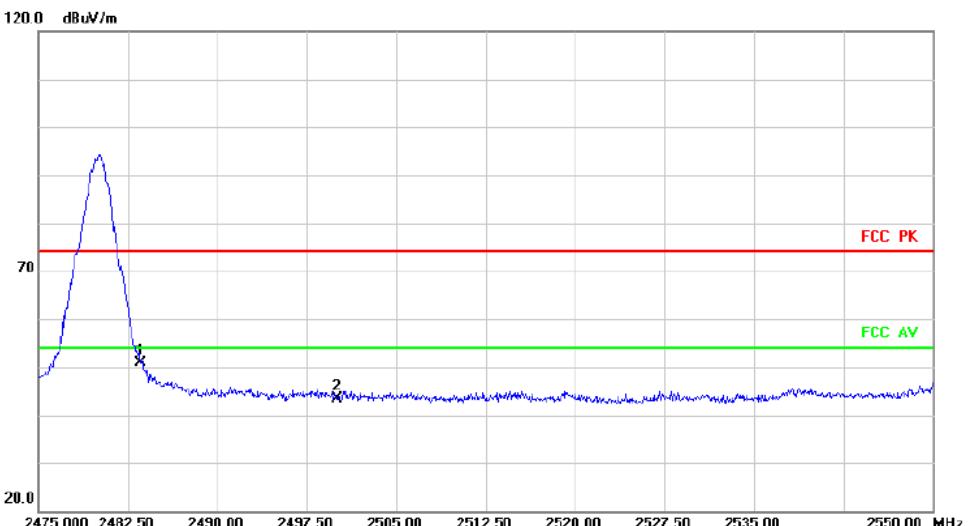


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	39.66	11.09	50.75	74.00	-23.25	peak			
2		2500.000	32.35	11.22	43.57	74.00	-30.43	peak			



海蕴
HAIYUN

Test Mode	TX 2480 MHz_2Mbps	Polarization	Horizontal
-----------	-------------------	--------------	------------

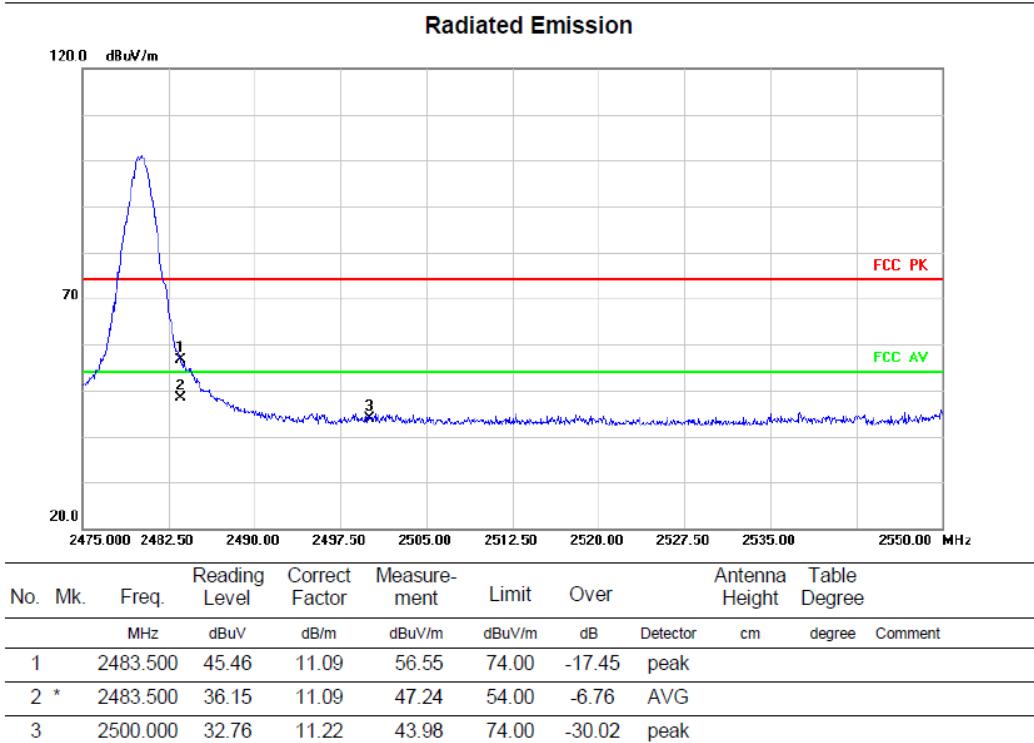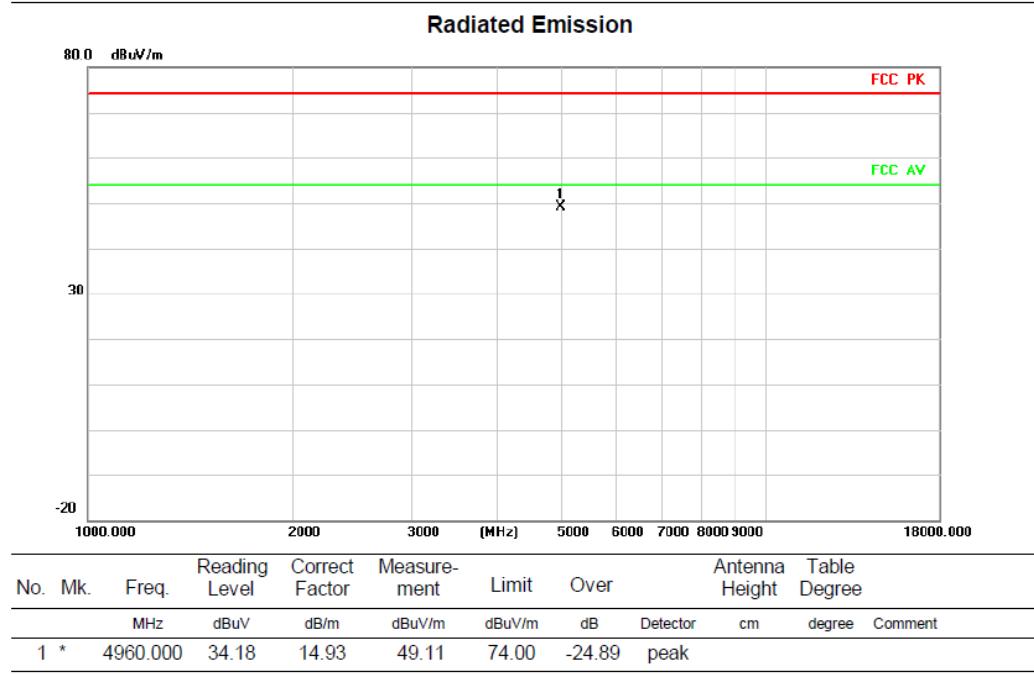

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

The high frequency, which started from 18GHz to 25GHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

APPENDIX E - BANDWIDTH

DTS Bandwidth

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.700	2401.636	2402.336	0.5	PASS
BLE_1M	Ant1	2440	0.716	2439.636	2440.352	0.5	PASS
BLE_1M	Ant1	2480	0.720	2479.636	2480.356	0.5	PASS
BLE_2M	Ant1	2402	1.104	2401.444	2402.548	0.5	PASS
BLE_2M	Ant1	2440	1.100	2439.452	2440.552	0.5	PASS
BLE_2M	Ant1	2480	1.100	2479.456	2480.556	0.5	PASS

Test Graphs









Occupied Channel Bandwidth


TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0558	2401.4712	2402.5270	---	---
BLE_1M	Ant1	2440	1.0564	2439.4751	2440.5315	---	---
BLE_1M	Ant1	2480	1.0582	2479.4781	2480.5363	---	---
BLE_2M	Ant1	2402	2.0659	2400.9754	2403.0413	---	---
BLE_2M	Ant1	2440	2.0653	2438.9793	2441.0446	---	---
BLE_2M	Ant1	2480	2.0644	2478.9838	2481.0482	---	---



Test Graphs

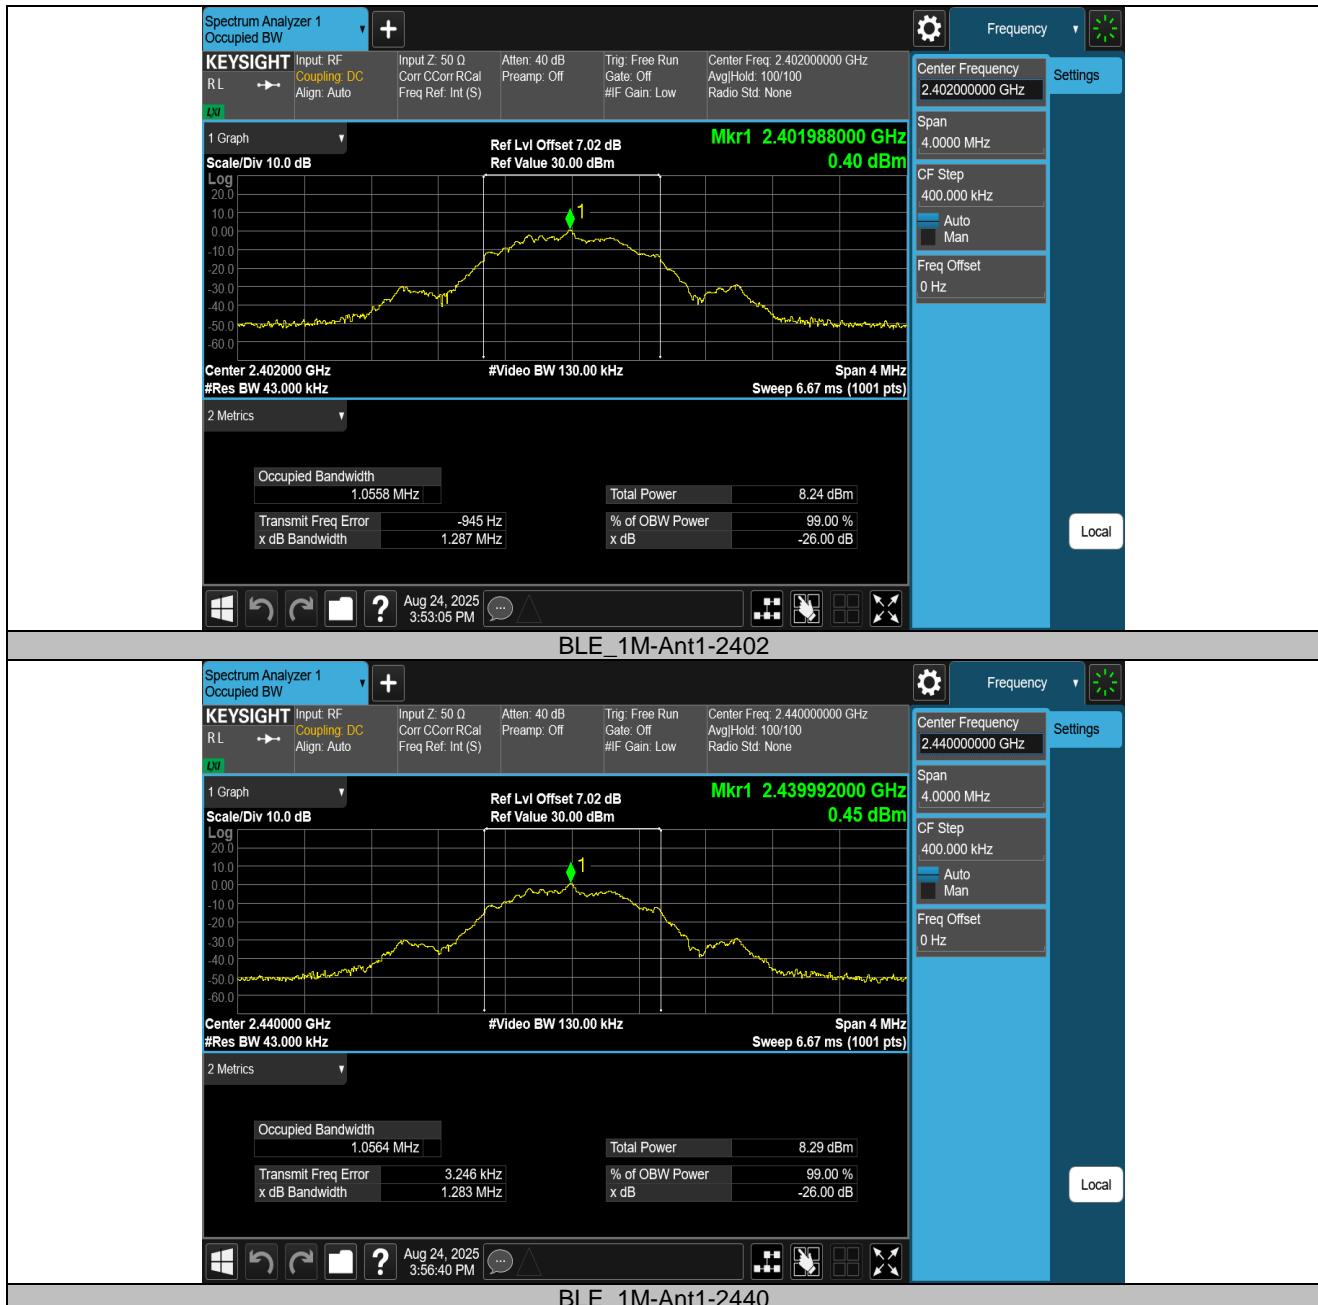

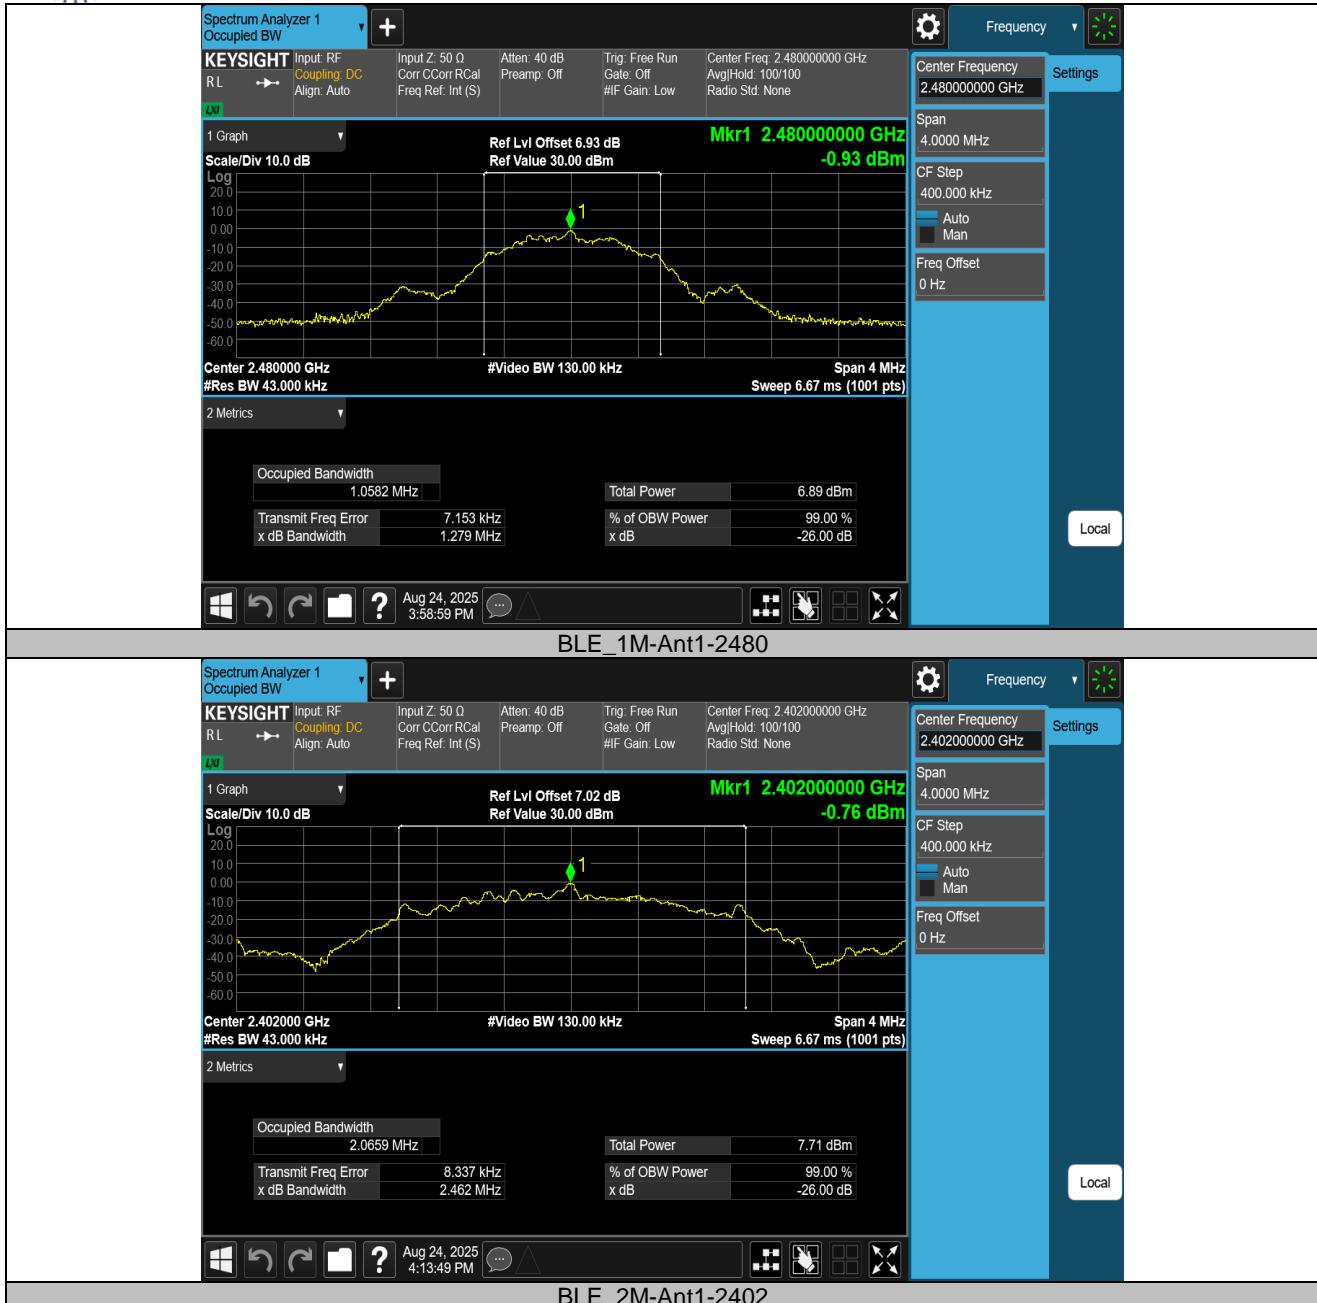

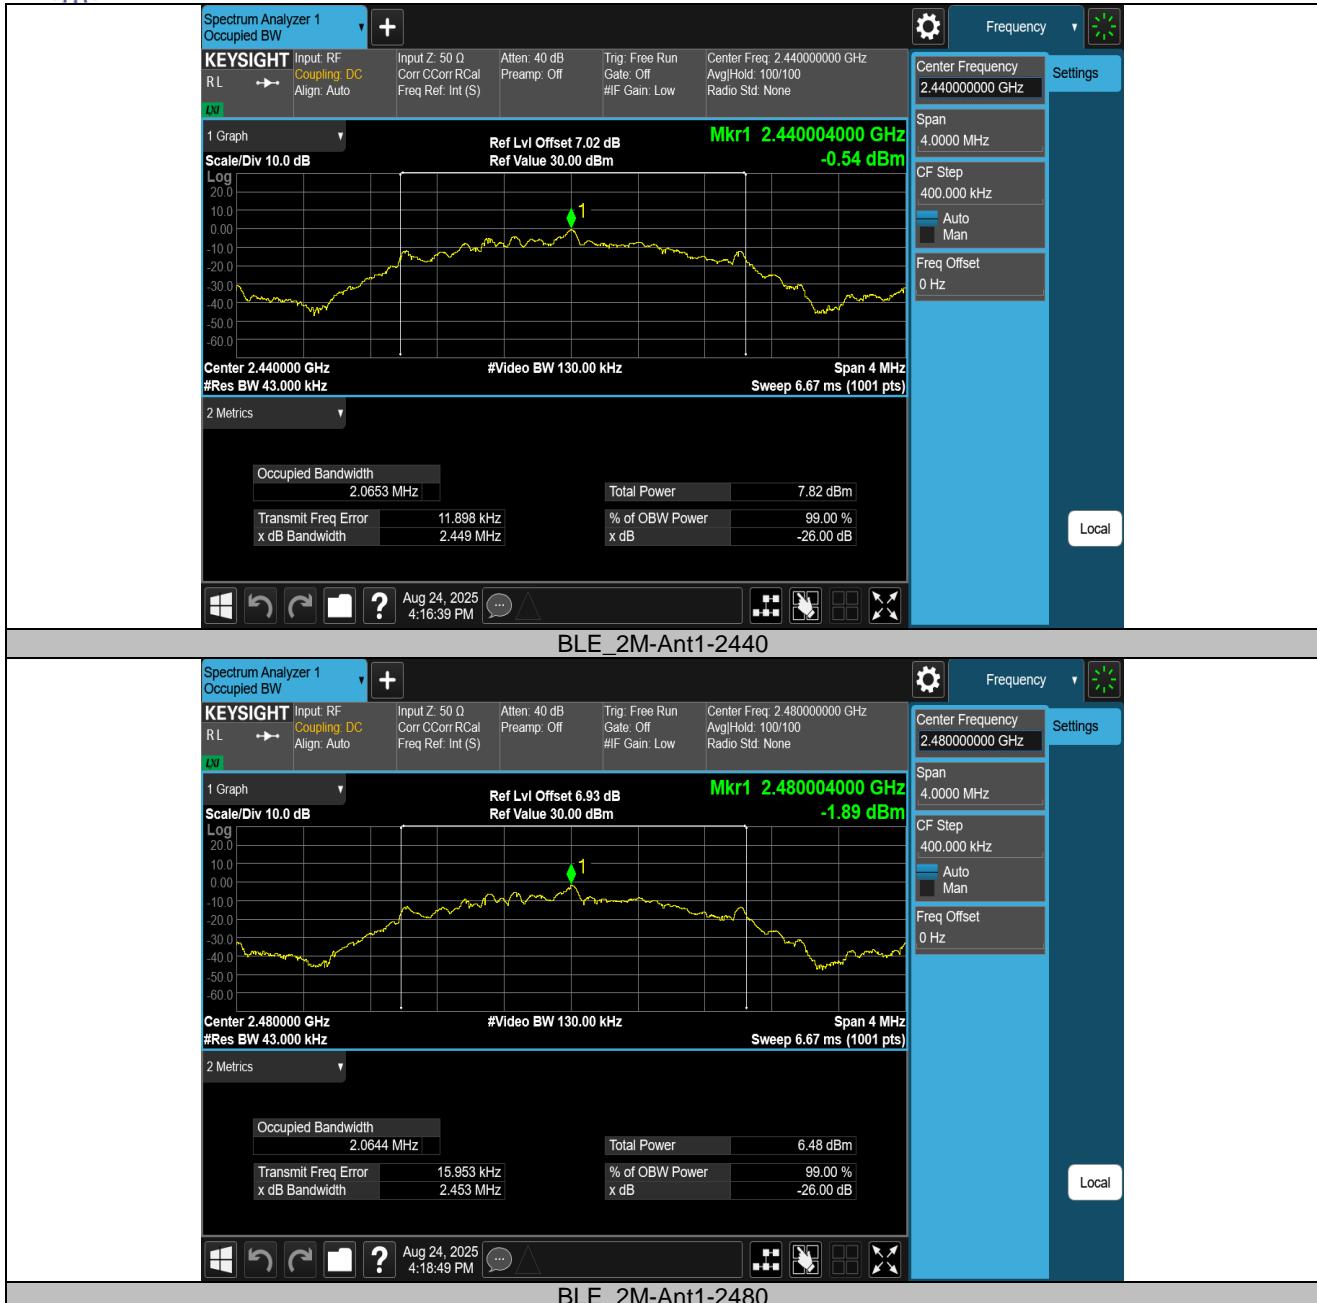




APPENDIX F - MAXIMUM OUTPUT POWER


TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	1.74	≤30	PASS
BLE_1M	Ant1	2440	1.79	≤30	PASS
BLE_1M	Ant1	2480	0.41	≤30	PASS
BLE_2M	Ant1	2402	1.78	≤30	PASS
BLE_2M	Ant1	2440	1.85	≤30	PASS
BLE_2M	Ant1	2480	0.53	≤30	PASS


Test Graphs Peak

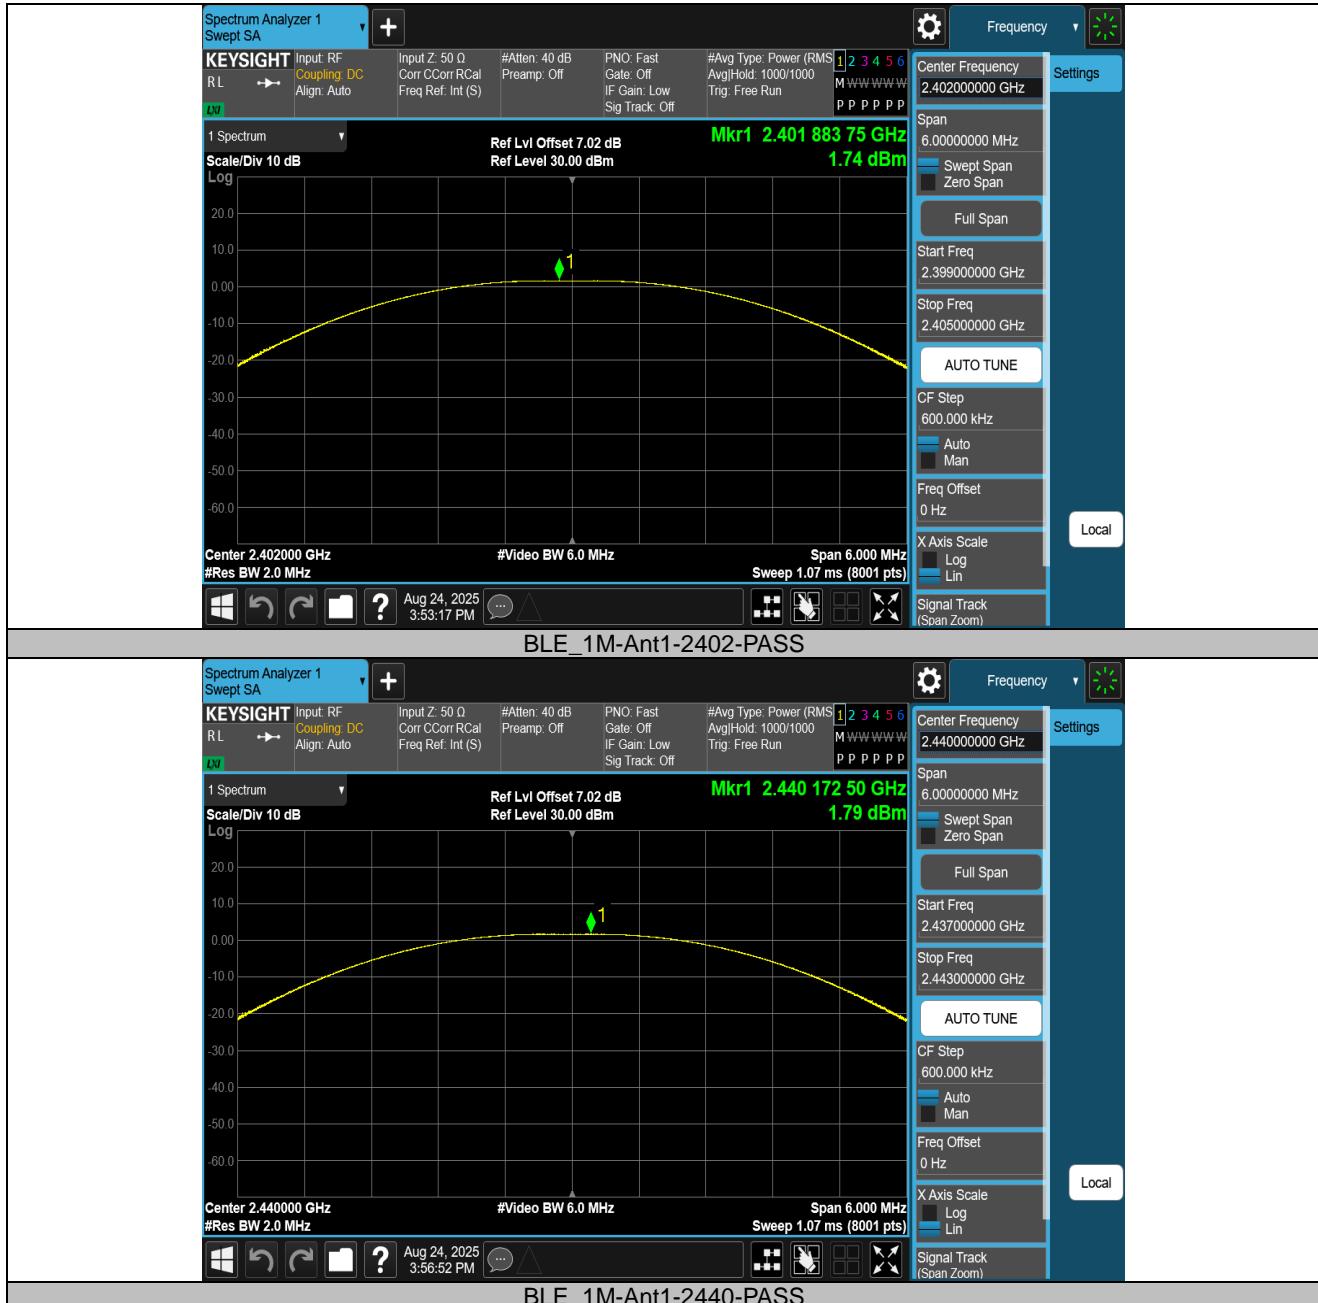



海蕴
HAIYUN

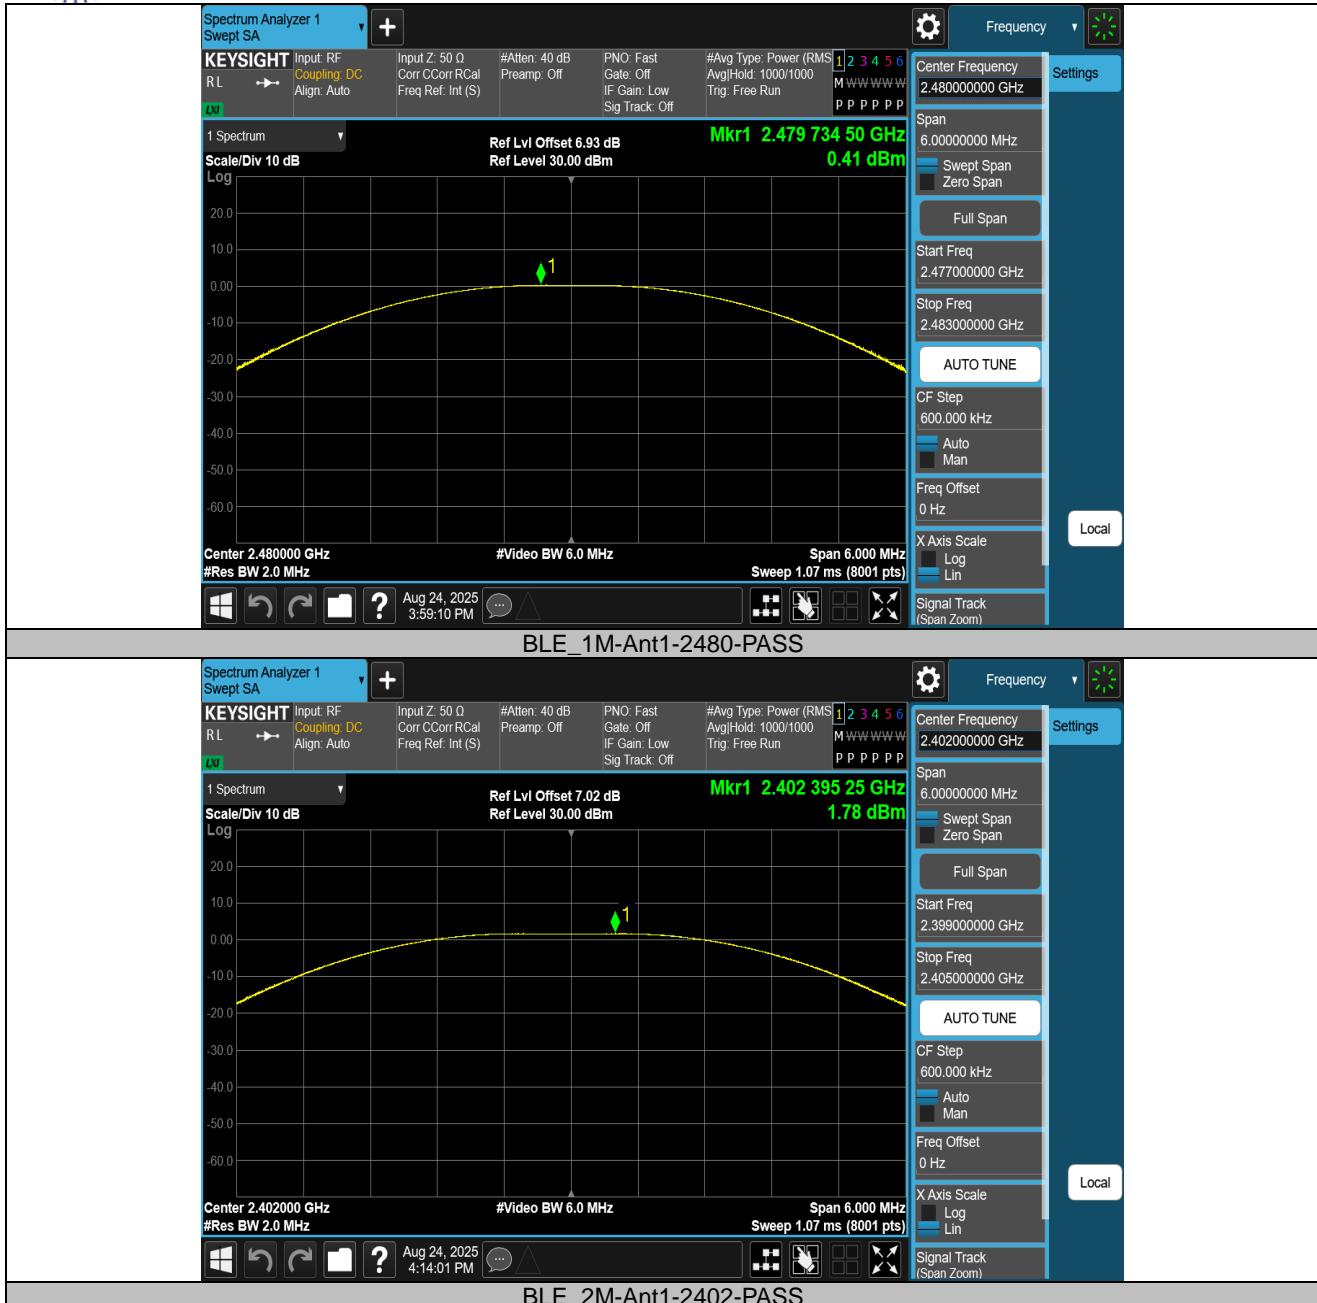

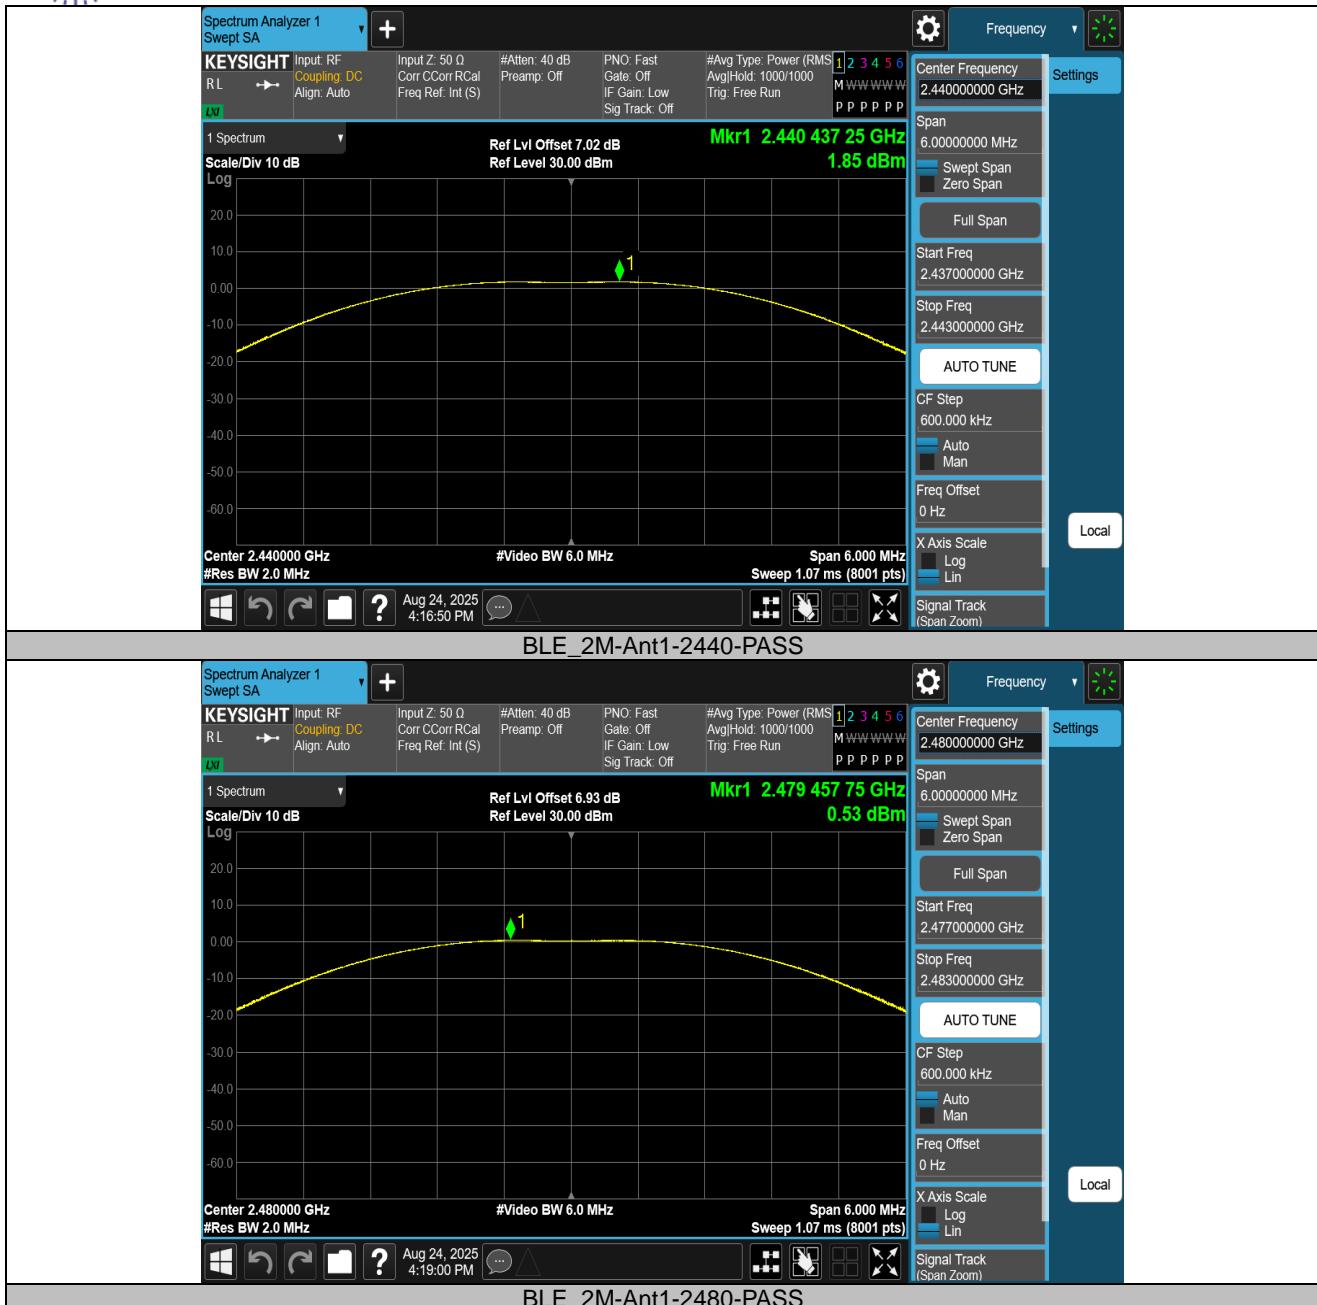




海蕴
HAIYUN


APPENDIX G - CONDUCTED SPURIOUS EMISSION


Conducted Spurious Emission

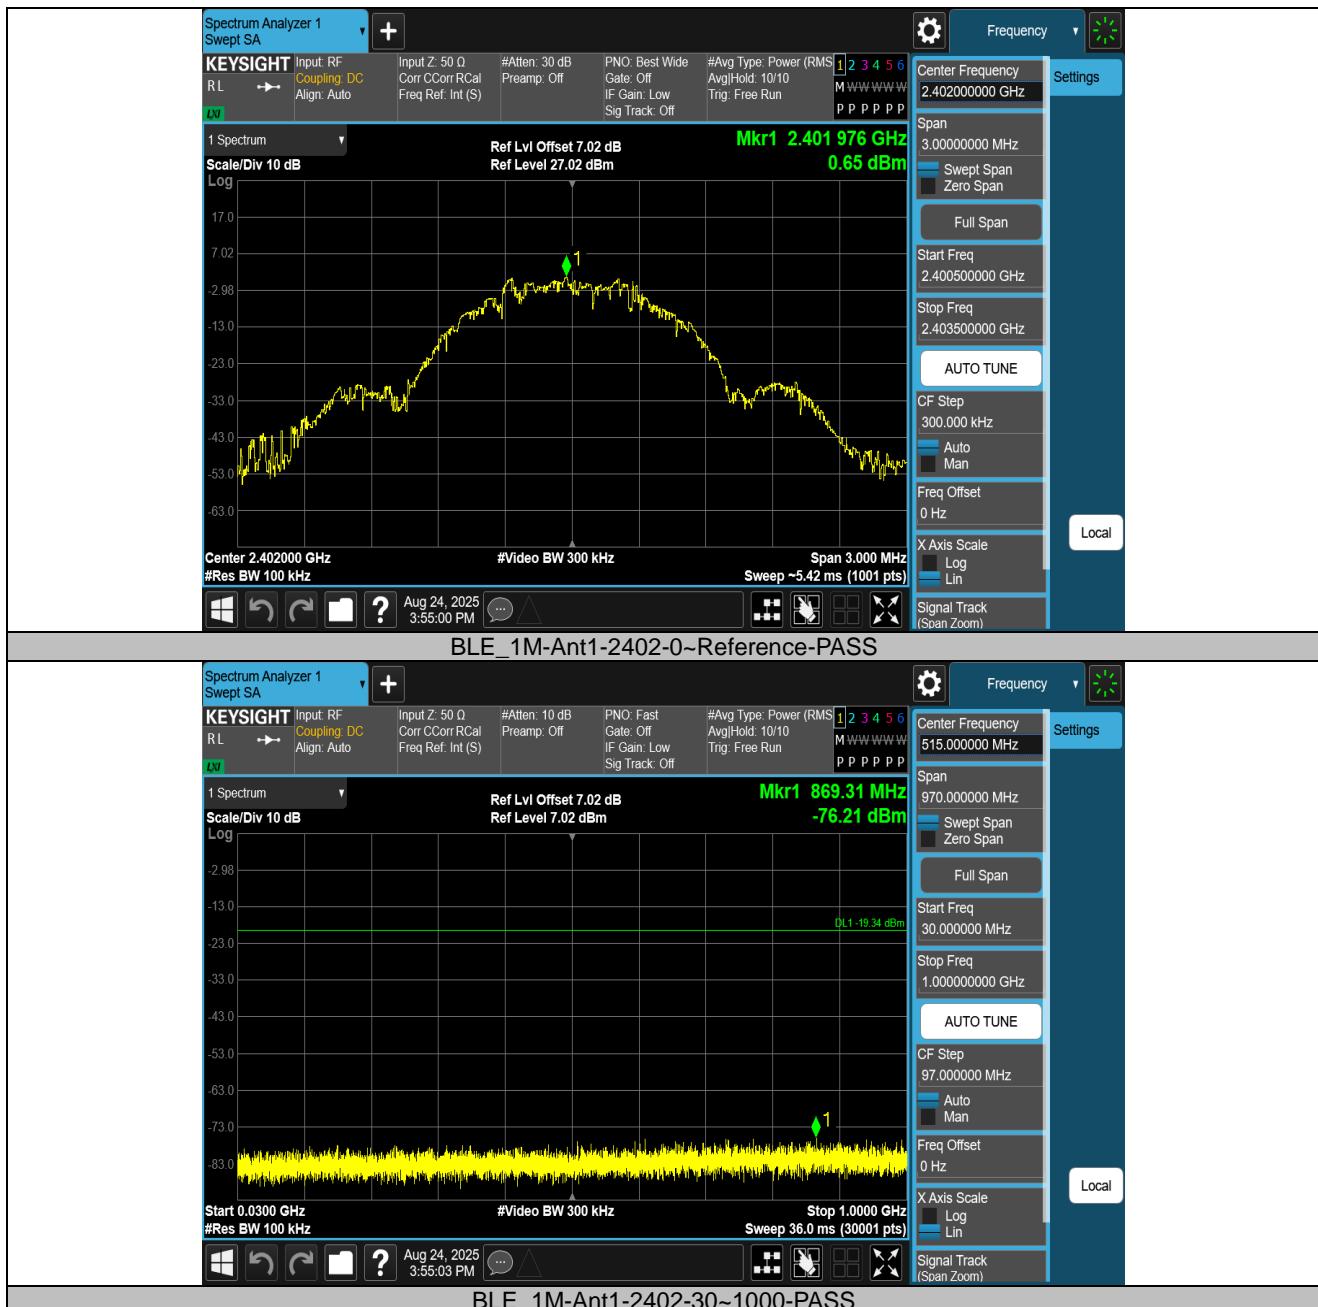




海蕴
HAIYUN

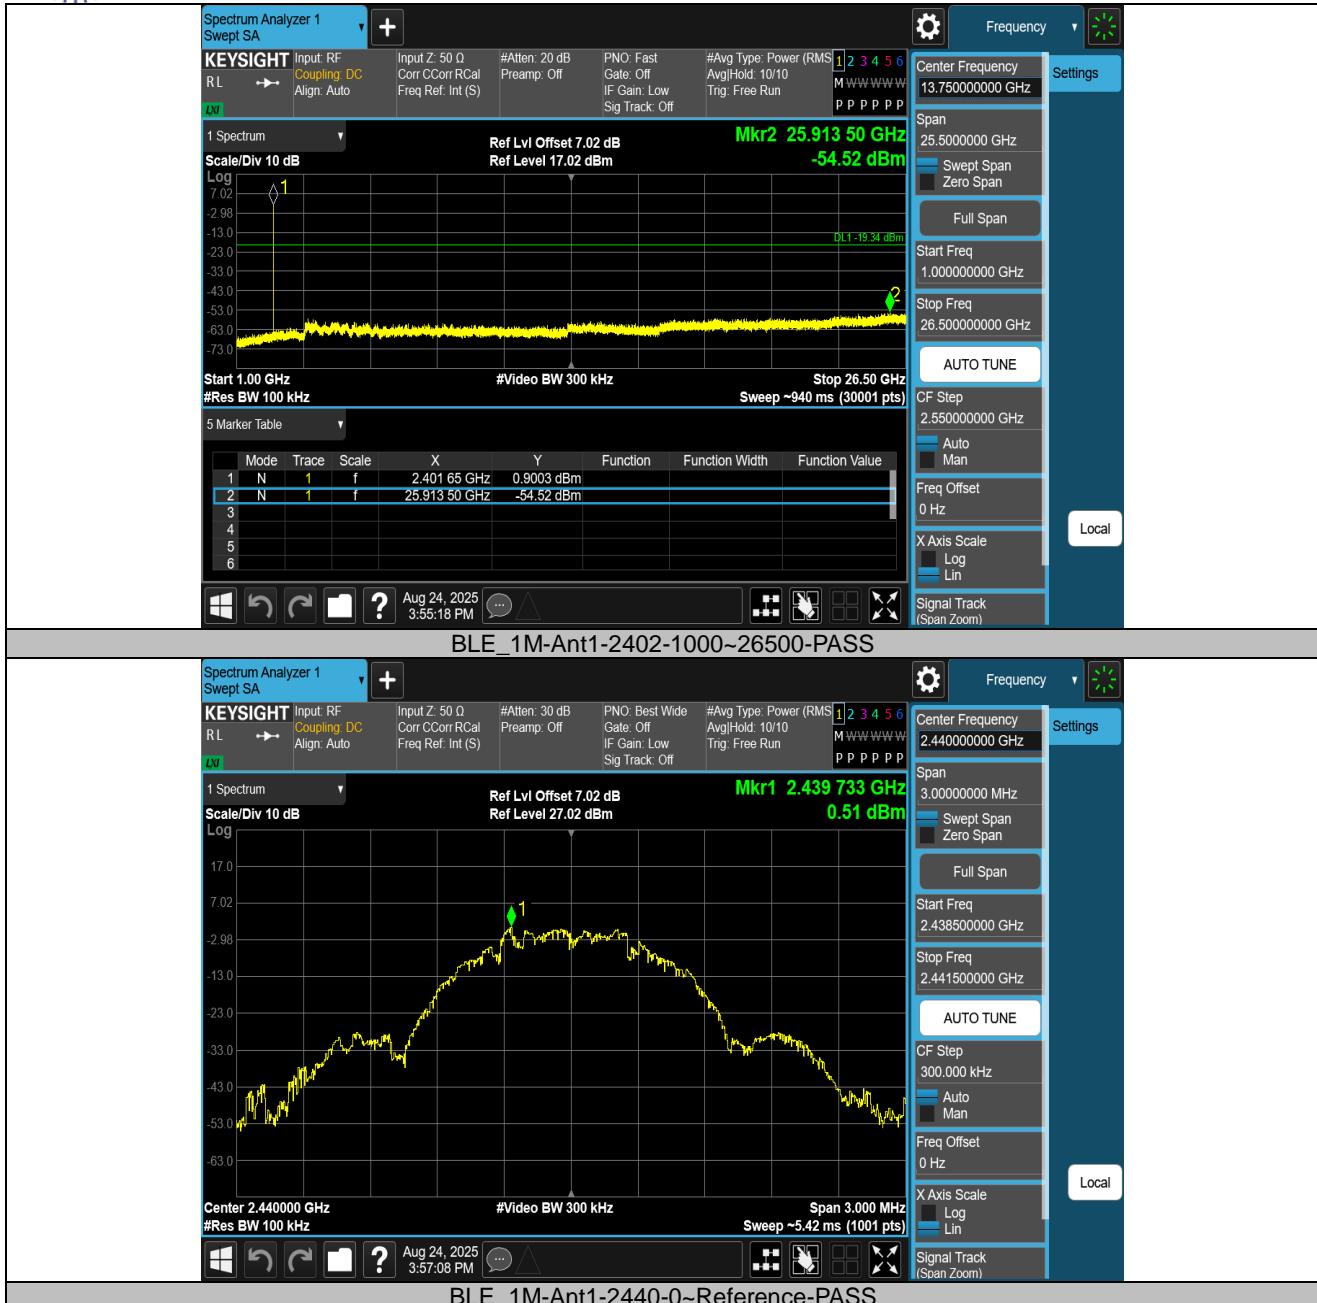

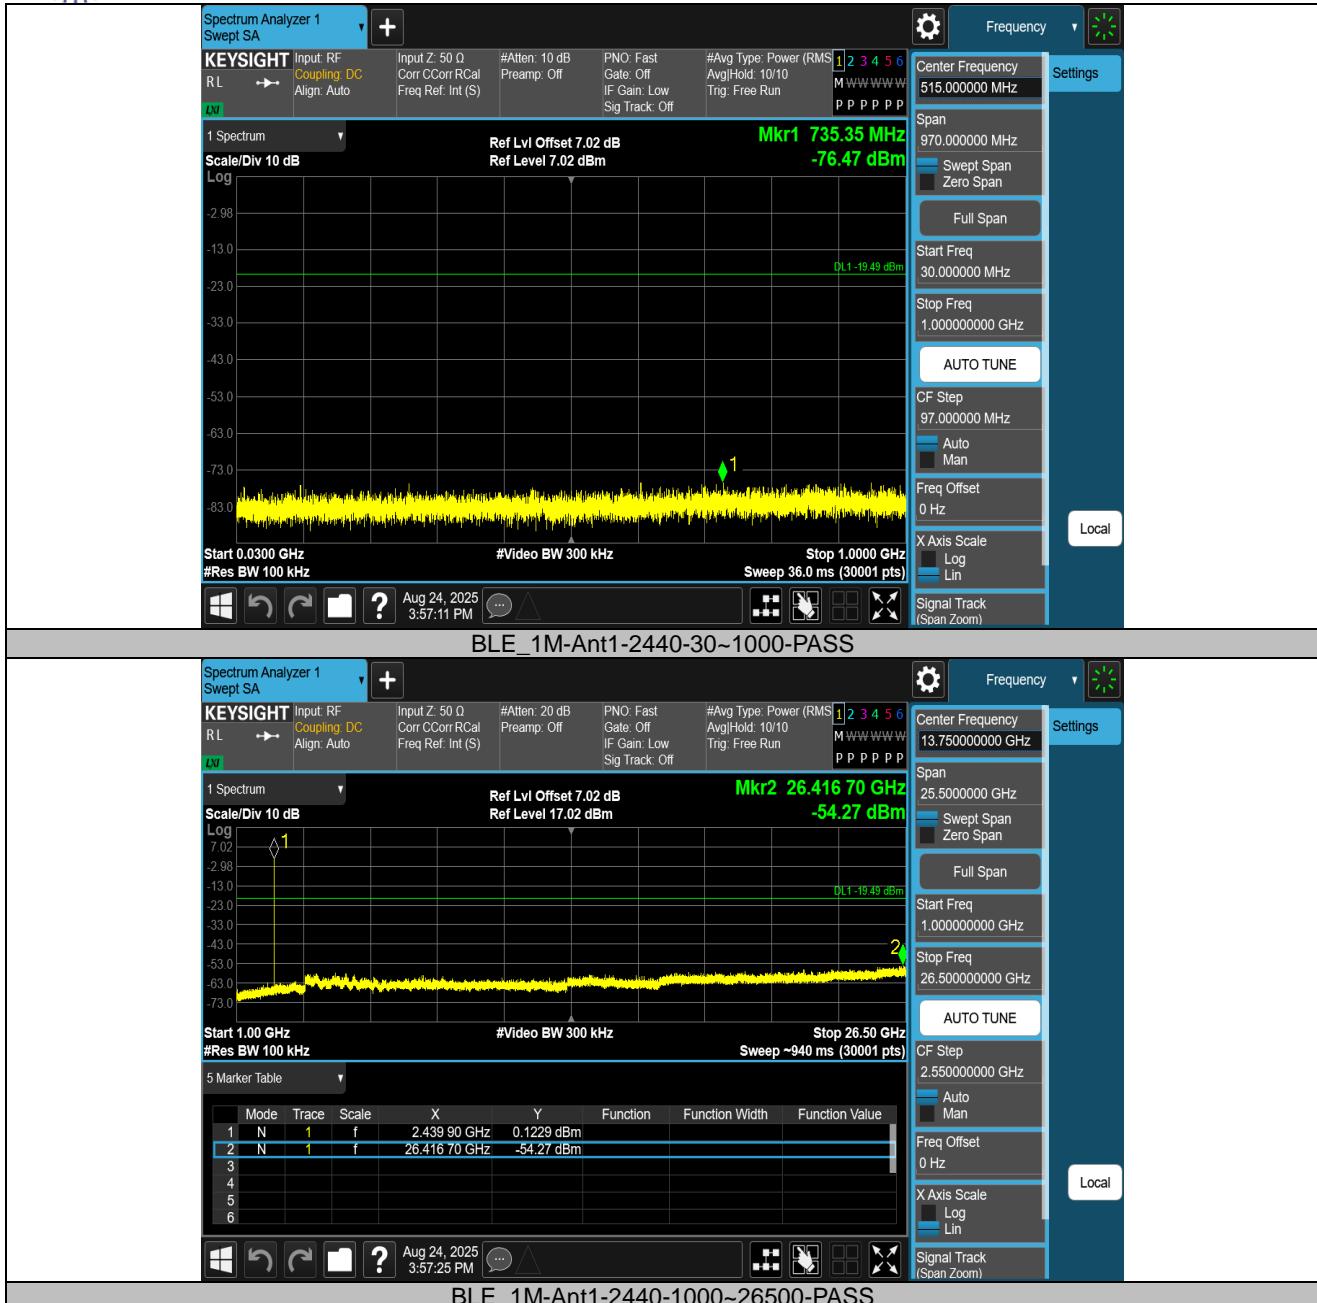

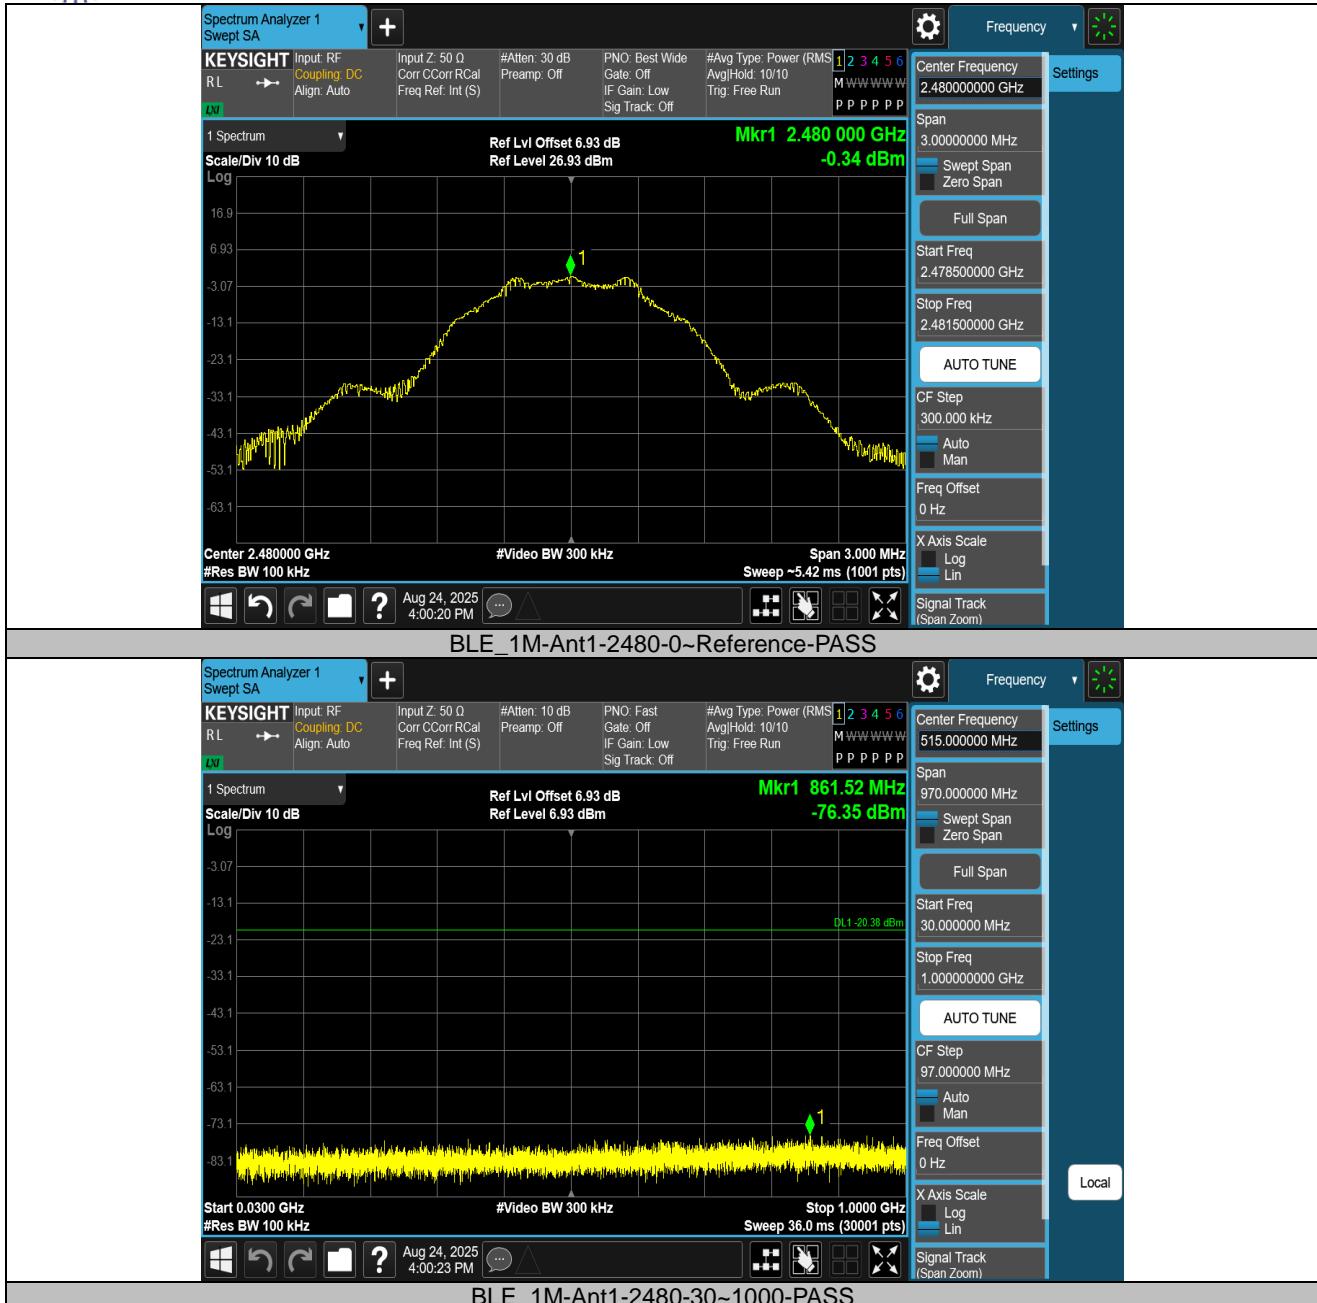



海蕴
HAIYUN






海蕴
HAIYUN





海蕴
HAIYUN

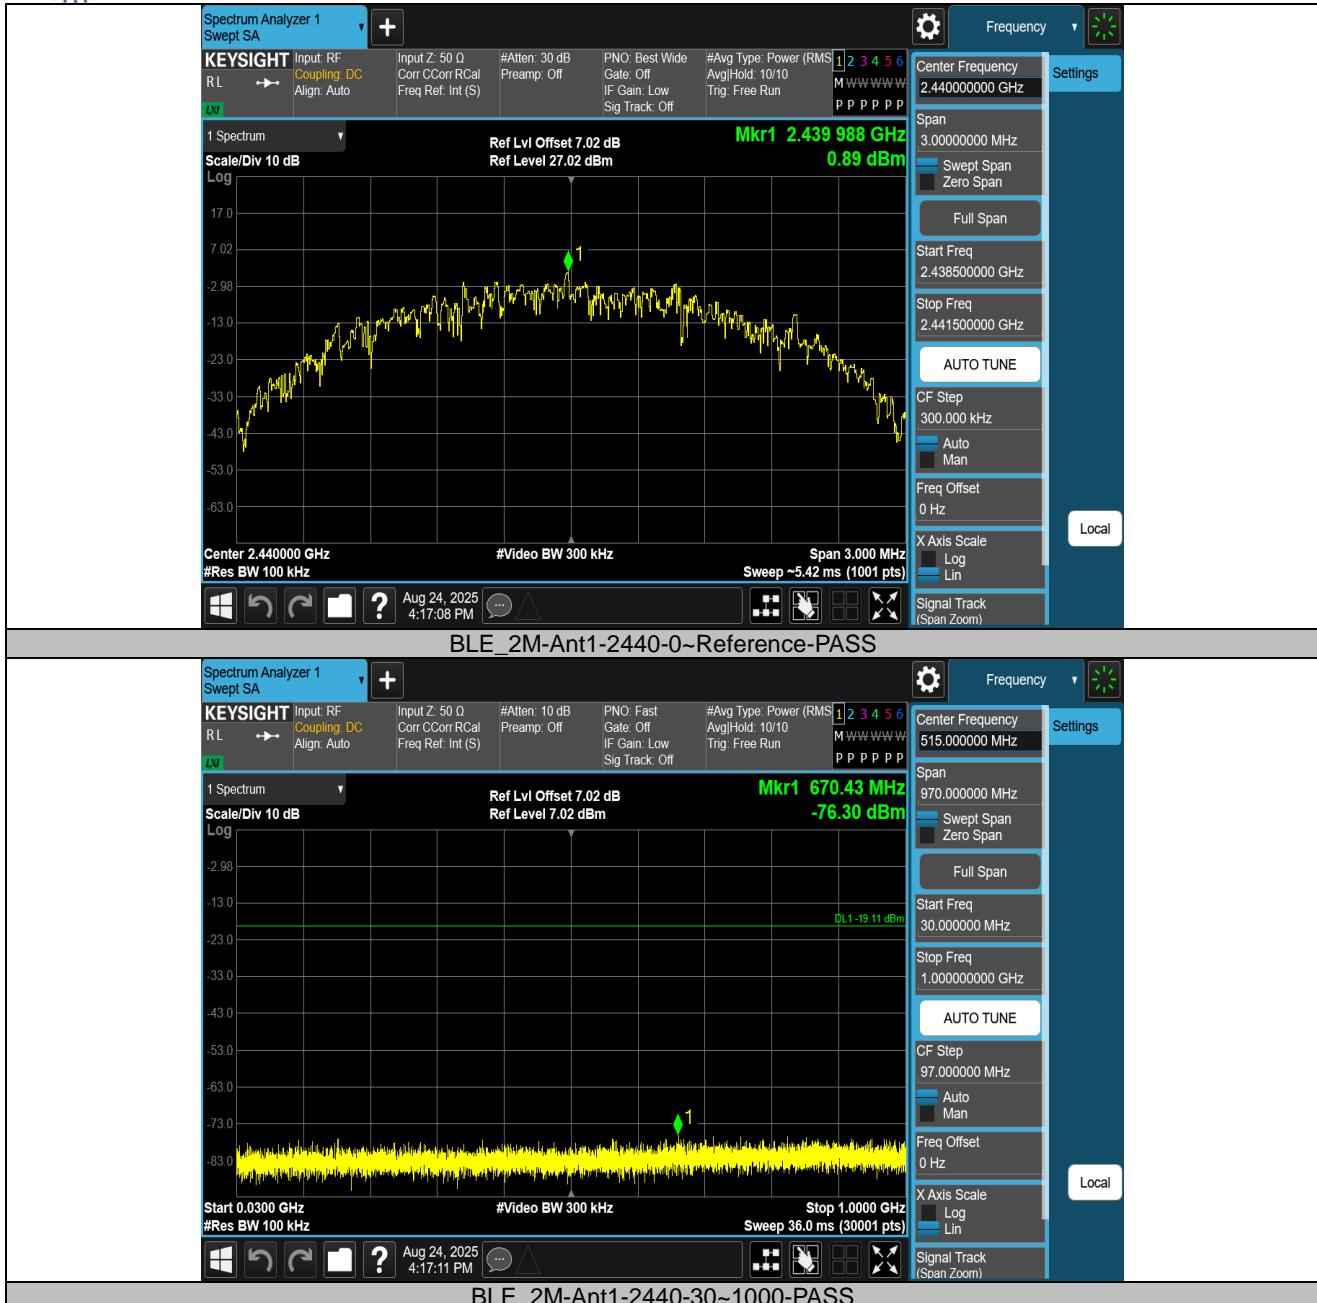




海蕴
HAIYUN







海蕴
HAIYUN

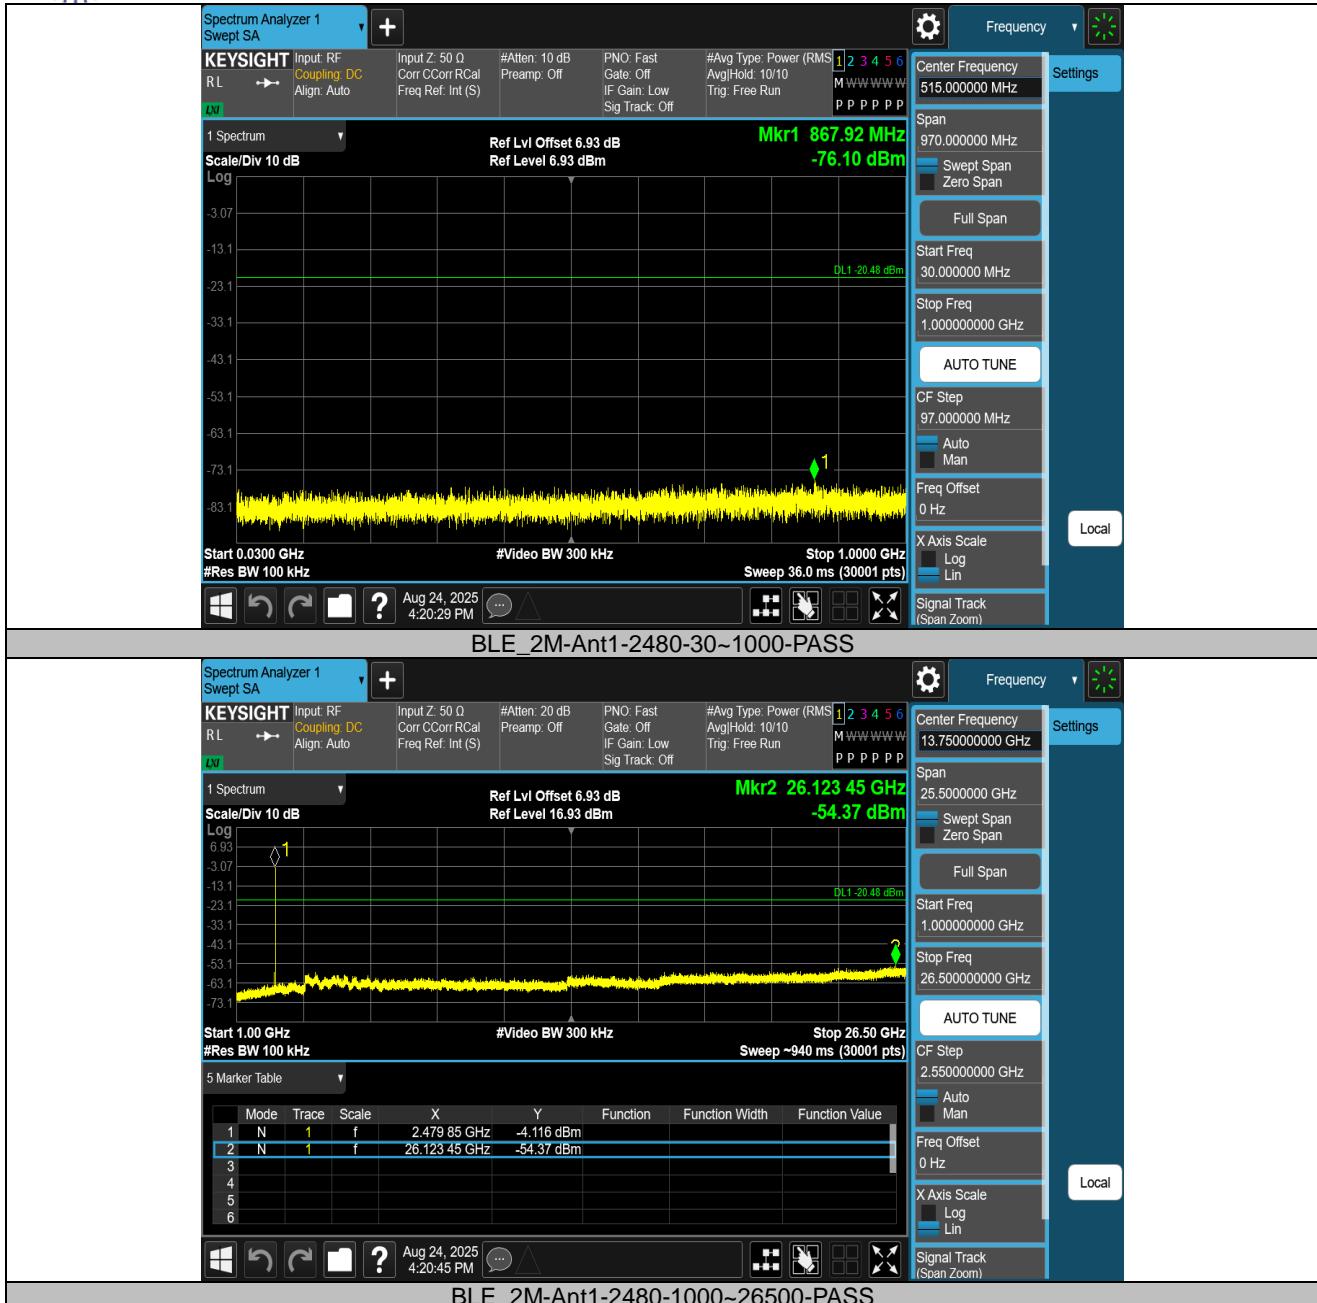



Band edge measurements

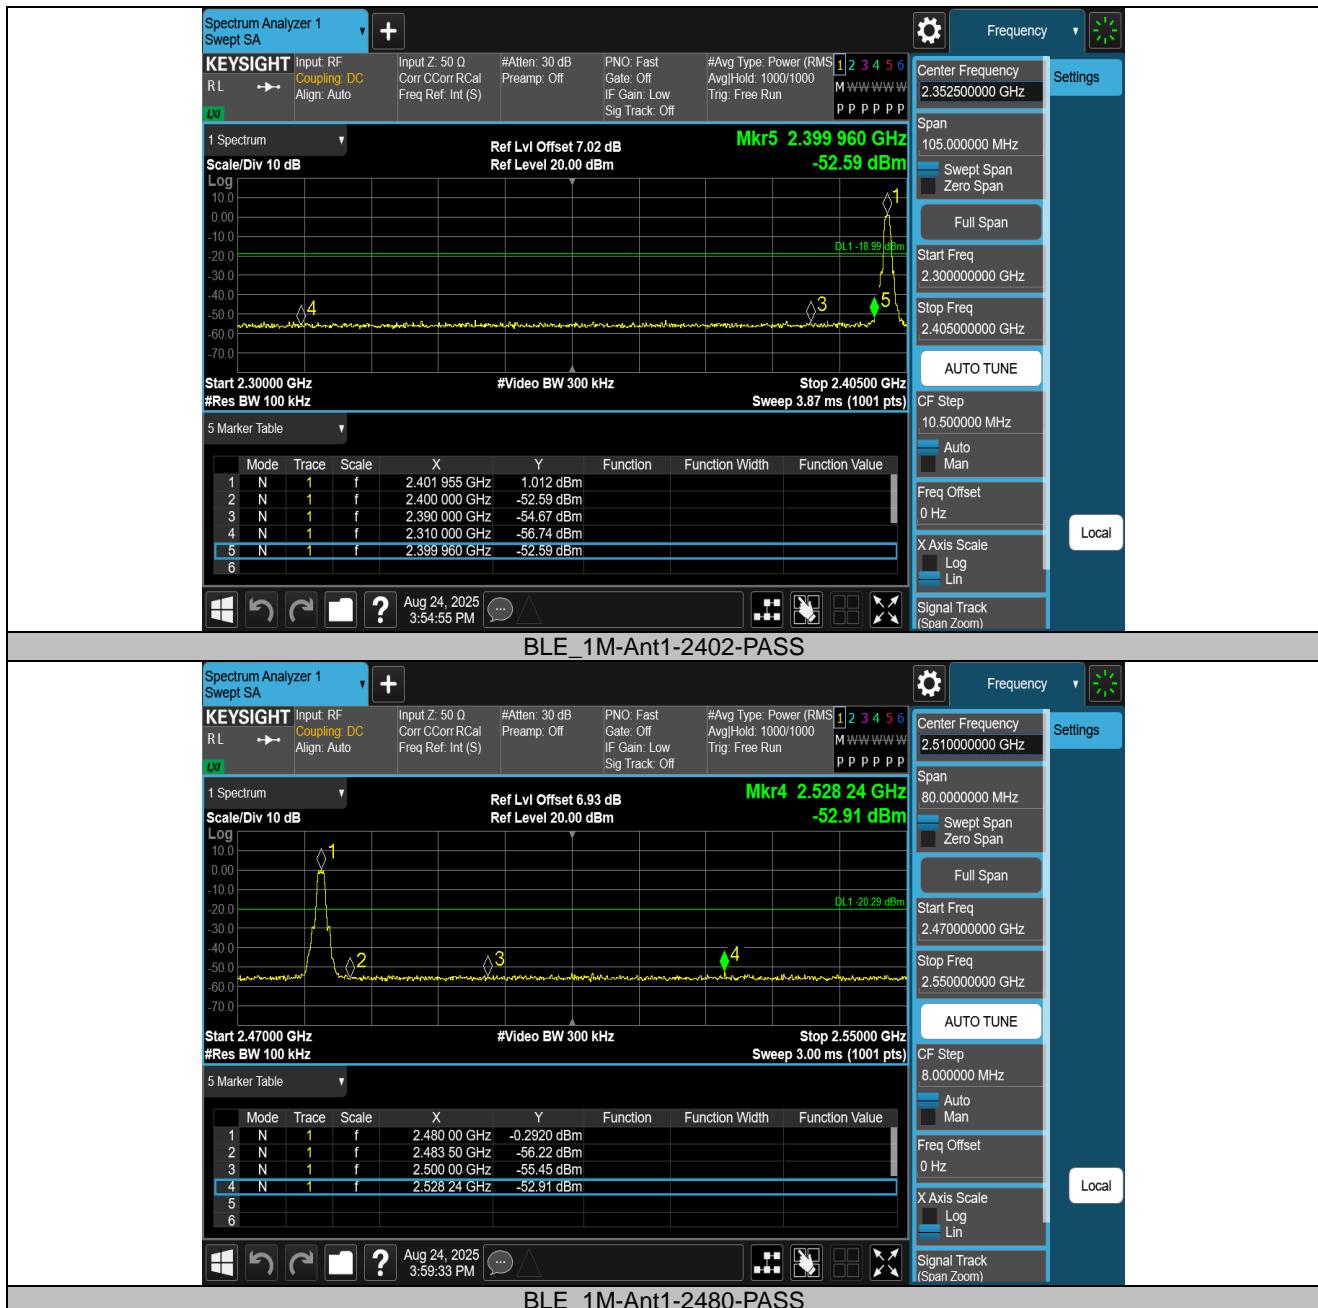

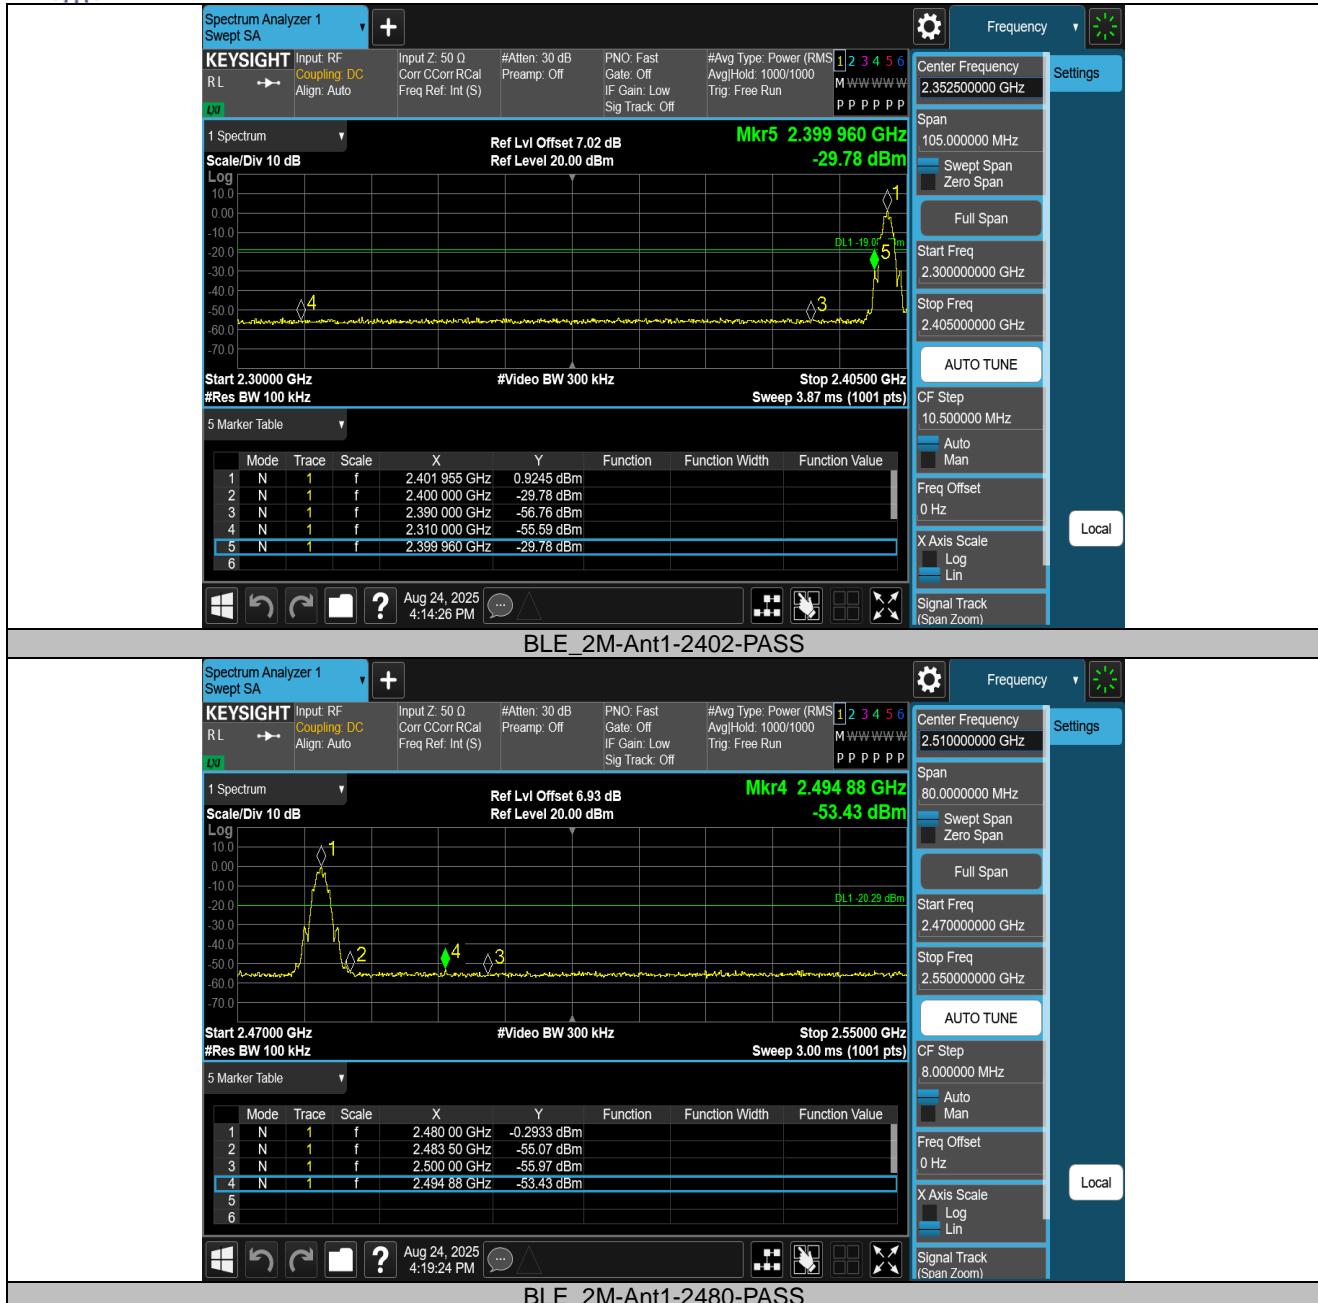



APPENDIX H - POWER SPECTRAL DENSITY

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-12.77	≤8.00	PASS
BLE_1M	Ant1	2440	-12.61	≤8.00	PASS
BLE_1M	Ant1	2480	-14.12	≤8.00	PASS
BLE_2M	Ant1	2402	-15.83	≤8.00	PASS
BLE_2M	Ant1	2440	-15.62	≤8.00	PASS
BLE_2M	Ant1	2480	-16.91	≤8.00	PASS



Test Graphs





海蕴
HAIYUN





海蕴
HAIYUN



Statement

1. The report is invalid without the official seal or special seal of Shenzhen Haiyun Standard Technical Co., Ltd. (hereinafter referred to as the unit).
2. The report is invalid without the signature of the approver.
3. The report is invalid if altered arbitrarily.
4. The report shall not be partially copied without the written approval of the unit.
5. The reported test results are only valid for the tested samples.
6. If there is any objection to the test report, it shall be submitted to the test unit within 15 days from the date of receiving the report, and the overdue shall not be accepted.

Shenzhen Haiyun Standard Technical Co., Ltd.

Address: Room 110, 111, 112, 113, 115, 116, Block B, Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China

Tel: 0755-26024411

Email: service@hy-lab.cn

End of Test Report