

深圳市利信辉电子有限公司

天线规格承认书

Antenna Specification for Approval

客户名称

Customer Name:

产品名称:

Product Name: 2.4G天线全长35mm白色

客户型号:

Product Name:

产品料号:

Part NO.: C10-35-2.5

制表:

Write By: 周敏

日期:

Issued Date: 2019-3-20

客户:

工程R&D Dept	采购Business Dept	承认 Approved By

利信辉


研发R&D Dept	工程 Engineer Dept	审核 Approval

梓 暮 揭 杆

截 刺 刺

脚 脚

脚 脚

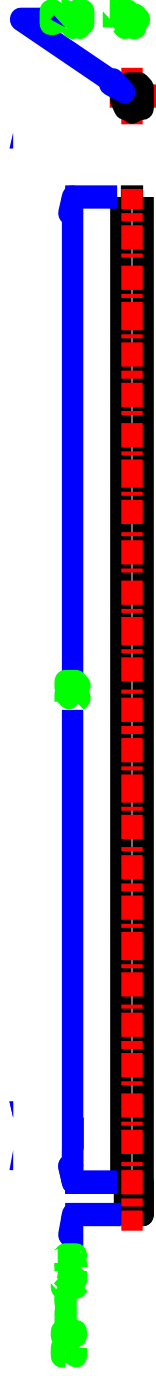

利 兴 耀 中 了 公 司 有 限 公 司

PART TITLE
锚 固 摩 擦 带

MATERIAL
锚 固

UNIT IN
等 号

SCALE
放 大 率

VER
吸 入 口



锚 固 摩 擦 带

锚 固 摩 擦 带

等 号

放 大 率

吸 入 口

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain:0.17DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.0 19P 白色

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 ℃ ~ + 80 ℃

Storage Temperature - 30 ℃ ~ + 85 ℃

Test Equipment & Conditions

1. Network Analyzers :


Agilent 8753D 5071B

2. Communications Test Set:


Agilent E5515C

3. 3D Chamber Test System


Efficiency&Gain

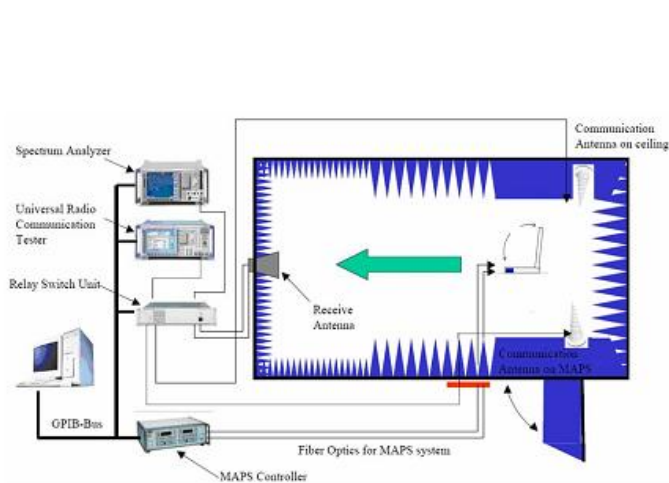

(Testing by 3D anechoic chamber)

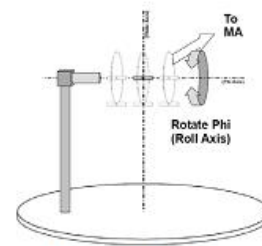

Phi axis test



Theta axis test


Efficiency&Gain

2.40 -0.00


2.440 -0.11

2.48 -0.13

Radiation Pattern:

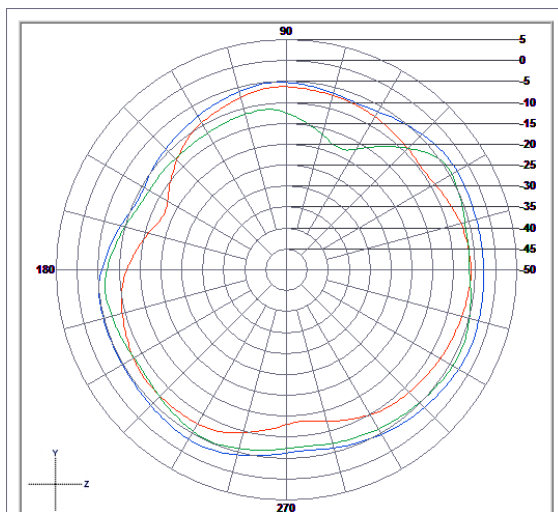

	Vertical	Horizontal	Total
Avg. Gain	-8.4	-6.99	-4.63
Peak Gain	-5.48	-3.77	-2.17

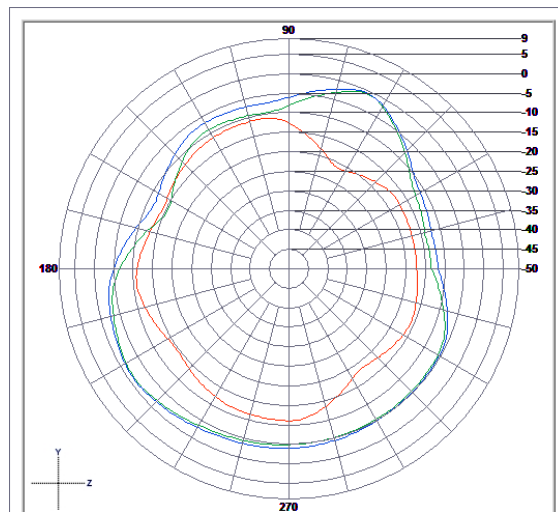

	Vertical	Horizontal	Total
Avg. Gain	-13.34	-5.06	-4.46
Peak Gain	-10.3	0.09	0.12

