



FCC Test Report

Report No: FCS202507178H01

Issued for

Applicant:	Shanghai Mengquan Trading Co., Ltd
Address:	Room 207B, On Air Space, 174 East Xietu Lu, Huangpu District, Shanghai, China
Product Name:	PLAT Max
Brand Name:	Fine Lumens
Model Name:	V01
Series Model:	VXX (X Stands for 0-9)
FCC ID:	2BQRX-V01
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name: Shanghai Mengquan Trading Co., Ltd

Address.....: Room 207B, On Air Space, 174 East Xietu Lu, Huangpu District, Shanghai, China

Manufacture's Name: Guangdong Paijing Intelligent Technology Co.,Ltd

Address.....: 3nd Floor, Building C, No.5 Yongyi Fourth Road, Henglan, Zhongshan, Guangdong, China

Product Description

Product Name: PLAT Max

Brand Name: Fine Lumens

Model Name: V01

Series Model: VXX (X Stands for 0-9)

Test Standards: FCC CFR 47 PART 1, § 1.1310
KDB 680106 D01 Wireless Power Transfer v04

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test :

Date (s) of performance of tests : June 27, 2025 ~ July 8, 2025

Date of Issue: July 8, 2025

Test Result.....: Pass

Tested by

:

Scott Shen

(Scott Shen)

Reviewed by

:

Duke Qian

(Duke Qian)

Approved by

:

Jack Wang

(Jack Wang)



Table of Contents	Page
1. TEST FACTORY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF THE EUT	6
3 TEST METHODOLOGY	7
3.1 MEASURING STANDARD	7
3.2 REQUIREMENTS	7
3.3 LIMITS	7
3.1 TEST SETUP	8
3.2 TEST PROCEDURE	8
4 EQUIPMENT APPROVAL CONSIDERATIONS	9
4.1 DESCRIPTION OF THE TEST MODE	10
4.2 PERIPHERAL LIST	10
4.3 TEST INSTRUMENTS LIST	10
4.4 TEST RESULT	11
4.5 TEST SETUP PHOTO	12

Revision History

Rev.	Issue Date	Effect Page	Contents
00	July 8, 2025	ALL	Initial Issue

1. TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01 CNAS: L15566	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	PLAT Max
Trade Name	Fine Lumens
Model Name	V01
Series Model	VXX (X Stands for 0-9)
Model Difference	Only different of model name.
Operation frequency	113kHz-205kHz
Modulation Technology	ASK
Antenna Type	Loop coil antenna
Antenna gain	0dBi
Power Supply	Input: DC5V-2A Wireless Output: 10W/7.5W/5W
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

3 TEST METHODOLOGY

3.1 Measuring Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.

3.2 Requirements

According to the item 3 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Mobile Device and Portable Device Configurations
- (2) Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz
- (3) The aggregate H-field strengths anywhere at 20 cm away from the all surface.

3.3 Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3.1 Test Setup

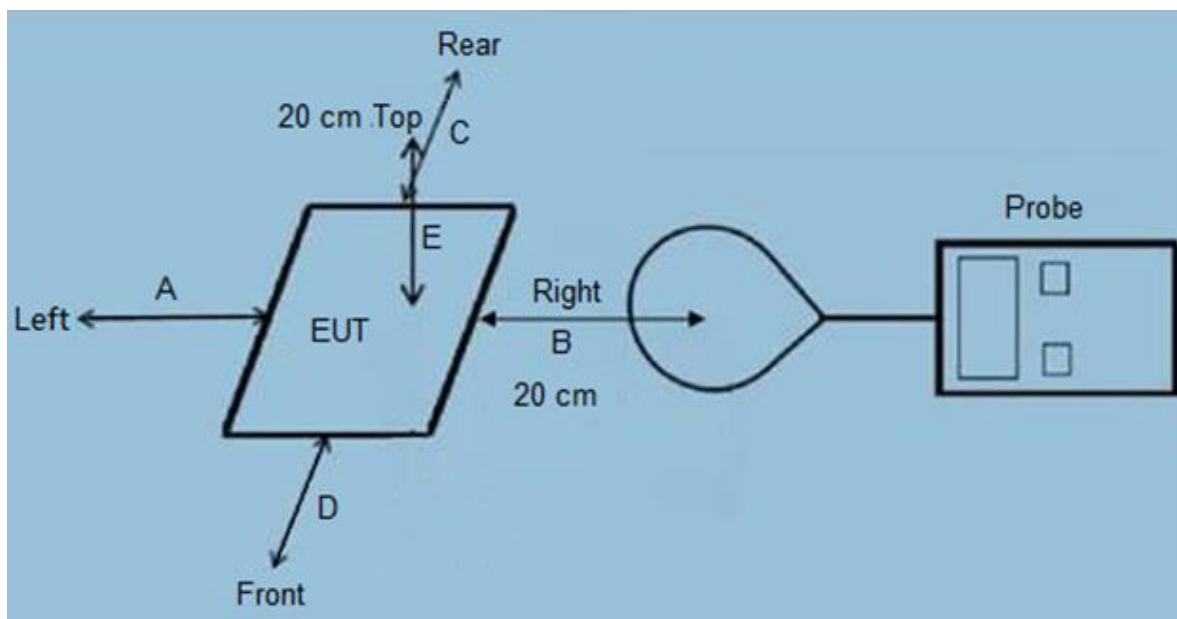

3.2 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from all sides between the edge of the charger and the geometric center of probe).
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

Remark: The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.

4 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 v04 follow table.

Requirements of section 5 of KDB 680106 D01	Yes / No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 113kHz-205kHz
RF Exposure compliance may be ensured only for a minimum separation distance that is greater than 20 cm, while use conditions at smaller distances can still be considered unlikely.	Yes	The EUT H-field strengths at 20 cm to all side

4.1 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

Test Mode	Description	
Mode 1	AC Adapter + EUT + phone (10W)	Record
Mode 2	AC Adapter + EUT + phone (7.5W)	Pre-tested
Mode 3	AC Adapter + EUT + phone (5W)	Pre-tested
Mode 4	Test the EUT in idle mode.	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

4.2 Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	Phone	OSCAL	PILOT2	N/A	N/A	N/A
2	Adapter	HNT	HNT-QC530	N/A	N/A	N/A

4.3 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Electric and Magnetic Field Analyzer	Narda	EHP-200A	180ZX10 505	20.06.2024	21.06.2026

4.4 Test Result

Coil 1_Phone_10W

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 1%	Top	11.36	0.57
20cm	< 1%	Left	11.74	0.60
20cm	< 1%	Right	11.58	0.59
20cm	< 1%	Front	11.12	0.72
20cm	< 1%	Rear	10.93	0.59
Limit			614	1.63
Margin Limit (%)			1.91%	44.03%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 50%	Top	10.61	0.62
20cm	< 50%	Left	10.15	0.59
20cm	< 50%	Right	10.37	0.45
20cm	< 50%	Front	10.41	0.53
20cm	< 50%	Rear	10.45	0.58
Limit			614	1.63
Margin Limit (%)			1.73%	38.16%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 99%	Top	10.08	0.48
20cm	< 99%	Left	9.63	0.54
20cm	< 99%	Right	9.65	0.53
20cm	< 99%	Front	9.85	0.47
20cm	< 99%	Rear	9.45	0.49
Limit			614	1.63
Margin Limit (%)			1.64%	32.95%

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

4.5 Test Setup photo

Top – 20cm



End of report