





Test Report Number:	LCZE25060110	Total Page(s): 38
Applicant Name:	Shuangpai JC Intelligent Technology Co., Ltd.	
Applicant Address:	Suite 5F Building 2, Shuangpai Industry Park at Longpo Town Shuangpai, Hunan, China	
Product Name:	Heater	
Model / Type Reference:	JC-1801LB, JC-2301LB, JC-3001LB, JC-2302LA, JC-2331LA, JC-2631LA, JC-2332LA, JC-2632LA	
FCC ID:	2BQS6-JC-2332LA	
Date of Issue:	2025-07-16	
Testing Laboratory:	LCTECH Guangdong Testing Services Co., Ltd. 2/F., Technology and Enterprise Development Center, Guangyuan Road, Xiaolan, Zhongshan, Guangdong, China	
Test Specification:	FCC 47 CFR Part 15 Subpart C: Section 15.247	
Test Result:	Passed	
Compiled by:	Reviewed by:	
2025-07-16 Rex He 	2025-07-16 Tension Li 	
<i>Date</i>	<i>Name</i>	<i>Signature</i>
<i>Date</i>	<i>Name</i>	<i>Signature</i>
Remark: N/A		
The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore.		

Contents

1	SUMMARY OF TEST RESULTS.....	3
2	GENERAL TEST INFORMATION	4
2.1	DESCRIPTION OF EUT	4
2.2	OPERATION CHANNEL LIST	5
2.3	TEST CHANNEL LIST	5
2.4	TESTING	5
2.5	TEST ENVIRONMENT CONDITIONS.....	6
2.6	TEST LABORATORY	6
2.7	MEASUREMENT UNCERTAINTY	6
3	EQUIPMENT LIST.....	7
4	TEST RESULTS.....	8
4.1	ANTENNA REQUIREMENT	8
4.2	AC POWER LINE CONDUCTED EMISSION	9
4.3	CONDUCTED PEAK OUTPUT POWER.....	12
4.4	6 DB BANDWIDTH	14
4.5	POWER SPECTRAL DENSITY	16
4.6	BAND EDGE	18
4.7	SPURIOUS RF CONDUCTED EMISSIONS	20
4.8	SPURIOUS RADIATED EMISSION	24
5	TEST SETUP PHOTO	38

1 Summary of Test Results

Description of Test Item	Standard	Result
Antenna Requirement	FCC Part 15 Subpart C:15.203/247(c)	PASS
AC Power Line Conducted Emission	FCC Part 15 Subpart C:15.207	PASS
Conducted Peak Output Power	FCC Part 15 Subpart C:15.247(b)	PASS
6 dB Bandwidth	FCC Part 15 Subpart C:15.247(a)(2)(iii)	PASS
Power Spectral Density	FCC Part 15 Subpart C:15.247(e)	PASS
Band Edge	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Spurious Emission	FCC Part 15: 15.247(d)	PASS
Note: N/A is an abbreviation for Not Applicable,		

Test Standard Used:47 CFR Part 15 Subpart C: Section 15.247

Test procedure used: ANSI C63.10:2020

2 General test information

2.1 Description of EUT

Product Name	: Heater
Model Number	: JC-1801LB, JC-2301LB, JC-3001LB, JC-2302LA, JC-2331LA, JC-2631LA, JC-2332LA, JC-2632LA
EUT function description	: Please reference user manual of this device
Power supply	: 120Vac, 60Hz
FCC ID	: 2BQS6-JC-2332LA
Radio Specification	: Bluetooth V5.0
Operation frequency	: 2402MHz -2480MHz
Modulation	: BLE: GFSK
Data rate	: 1Mbps, 2Mbps
Antenna Type	: PCB antenna
Antenna Gain	: 2.0dBi

Remark:The device meets the requirements stated within Parts 15.247(g)&(h) in that they were Developed under the Bluetooth protocol and operate as a true frequency hopping system. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

According to the declaration from the applicant, this report covers the model as below: JC-1801LB, JC-2301LB, JC-3001LB, JC-2302LA, JC-2331LA, JC-2631LA, JC-2332LA, JC-2632LA. Above models are identical in schematic models were same sample, the difference of these models were appearance, size and model name. Therefore model JC-2332LA was fully tested in the report. Spurious radiated emission testing for others models JC-1801LB, JC-2301LB, JC-3001LB, JC-2302LA, JC-2331LA, JC-2631LA, JC-2632LA.

2.2 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.3 Test channel list

Channel	Frequency (MHz)
0	2402
19	2440
39	2480

2.4 Testing

Date of receipt of test item : 2025-07-05

Date (s) of performance of tests : 2025-07-10 to 2025-07-16

2.5 Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	15-35°C
Humidity range:	20-75%
Pressure range:	98-101kPa

2.6 Test laboratory

LCTECH Guangdong Testing Services Co.,Ltd.

Add: 2/F.,Technology and Enterprise Development Center, Guangyuan Road, Xiaolan, Zhongshan,
Guangdong, China

Test Sites: 1/F., Building I, Technology and Enterprise Development Center, Guangyuan Road, Xiaolan,
Zhongshan, Guangdong, China

2.7 Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	3.74dB
Uncertainty for Radiation Emission test(30MHZ-1GHZ)	4.92dB
Uncertainty for Radiation Emission test (Above 1GHz)	4.23dB

Note□ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Equipment list

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
Radiated Emission (30 MHz–1000 MHz)						☒
1	EMI Test Receiver	R&S	ESCI 7	100965	2025-06-13	2026-06-12
2	Log-periodic Dipole Antenna	Schwarzbeck	VULB 9162	058	2025-06-14	2028-06-13
3	3m Semi-anechoic	Zhongshuo Electronics	9mx6mx6m	N/A	2024-12-17	2027-12-16
4	RF Cable	R&S	R01	10403	2024-12-09	2025-12-08
5	EMI Test Software	AUDIX	E3	Version No: 6.111221a	N/A	N/A
Disturbance Voltage						☒
6	EMI Test Receiver	Rohde&Schwarz	ESCI	100939	2024-12-09	2025-12-08
7	Artificial Mains Network	Rohde&Schwarz	ENV216	3560655012	2024-12-09	2025-12-08
8	Shield Room	Rongxiang	8X5X3.5	992276296	2022-07-01	2027-06-30
9	Conducted Emission Test Software	FALA	EZ-EMC	Version No: LCTECH-03A	N/A	N/A
Radiated Emission (Above 1 GHz)						☒
10	EMI Test Receiver	R&S	ESCI 7	100965	2025-06-13	2026-06-12
11	Log-periodic Dipole Antenna	Schwarzbeck	VULB 9162	058	2025-06-14	2028-06-13
12	3m Semi-anechoic	Zhongshuo Electronics	9mx6mx6m	N/A	2024-12-17	2027-12-16
13	RF Cable	R&S	R01	10403	2024-12-09	2025-12-08
14	CDNE	KeHuan	KH3663E	36630822	2025-06-13	2026-06-12
15	Doppelsteg Breitband Hornantenne Double Ridge Broadband Horn	Schwarzbeck	BBHA 9120 D	N/A	2024-12-11	2025-12-10
16	Signal Analyzer	Keysight	N9020A	SER MY52220373	2024-12-09	2025-12-08
17	Pre-amplifier	sinancidian	COP-01G18G-45dB	N/A	2024-12-09	2025-12-08

4 Test Results

4.1 Antenna requirement

Standard requirement:

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is PCB antenna. It comply with the standard requirement.

4.2 AC Power Line Conducted Emission

Results:


Pass

Date of testing : July 12, 2025
 Test procedure : ANSI C63.10 Clause 6.2
 Frequency range : 0.15- 30MHz
 Kind of test site : shielded room
 Limits : CFR Title 47 Part 15 Subpart C:Section 15.207

Test setup

Artificial Hand : Not applied
 Earthing : Applied
 Temperature : 25°C
 Humidity : 57%
 Air pressure : 101KPA

Test Connection Diagram

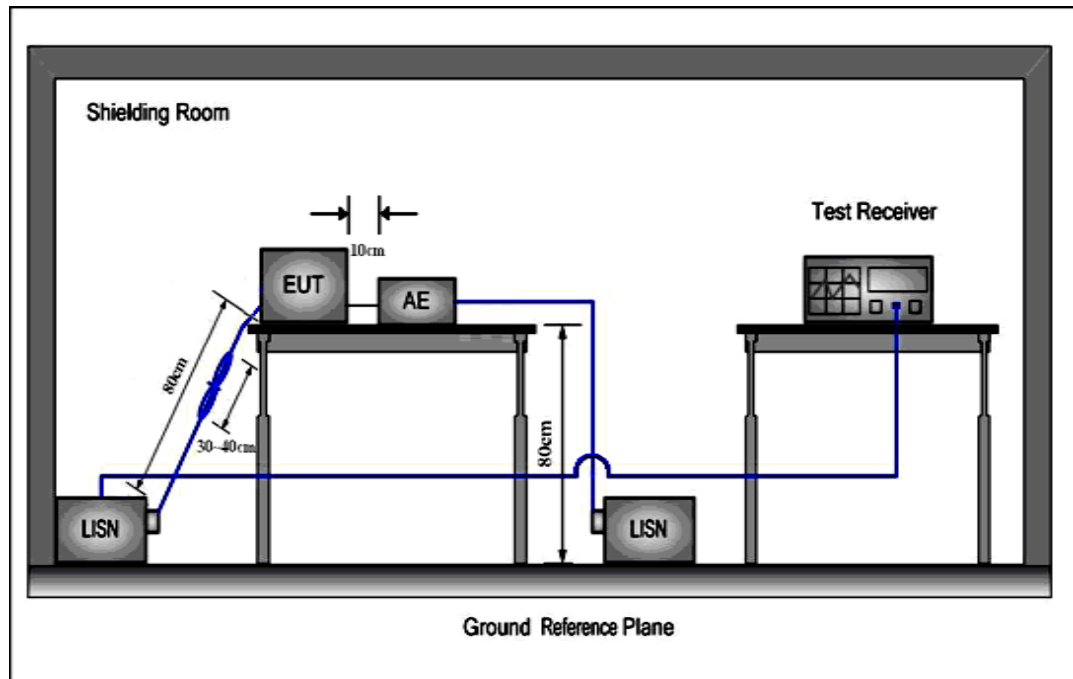


Test Data for model JC-2332LA

Power Source :120Vac, 60Hz

Terminal under Test: Live Line

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz,

Peak and Average Scan:

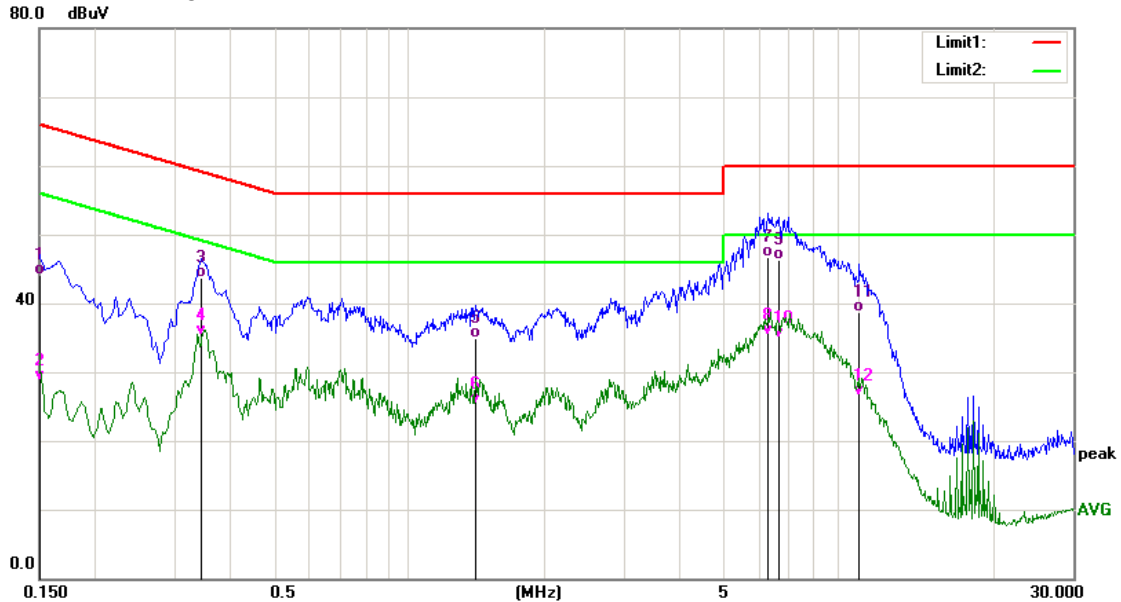


Quasi-peak and Average measurement:

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	34.36	9.73	44.09	66.00	-21.91	QP
2	0.1500	18.92	9.73	28.65	56.00	-27.35	AVG
3	0.3465	33.72	9.98	43.70	59.05	-15.35	QP
4	0.3465	25.25	9.98	35.23	49.05	-13.82	AVG
5	1.4060	24.78	10.14	34.92	56.00	-21.08	QP
6	1.4060	15.15	10.14	25.29	46.00	-20.71	AVG
7	6.3140	36.26	10.50	46.76	60.00	-13.24	QP
8	6.3140	24.84	10.50	35.34	50.00	-14.66	AVG
9	6.6300	35.84	10.50	46.34	60.00	-13.66	QP
10	6.6300	24.44	10.50	34.94	50.00	-15.06	AVG
11	10.0380	28.32	10.48	38.80	60.00	-21.20	QP
12	10.0380	16.08	10.48	26.56	50.00	-23.44	AVG

Terminal under Test: Neutral Line

Peak and Average Scan:

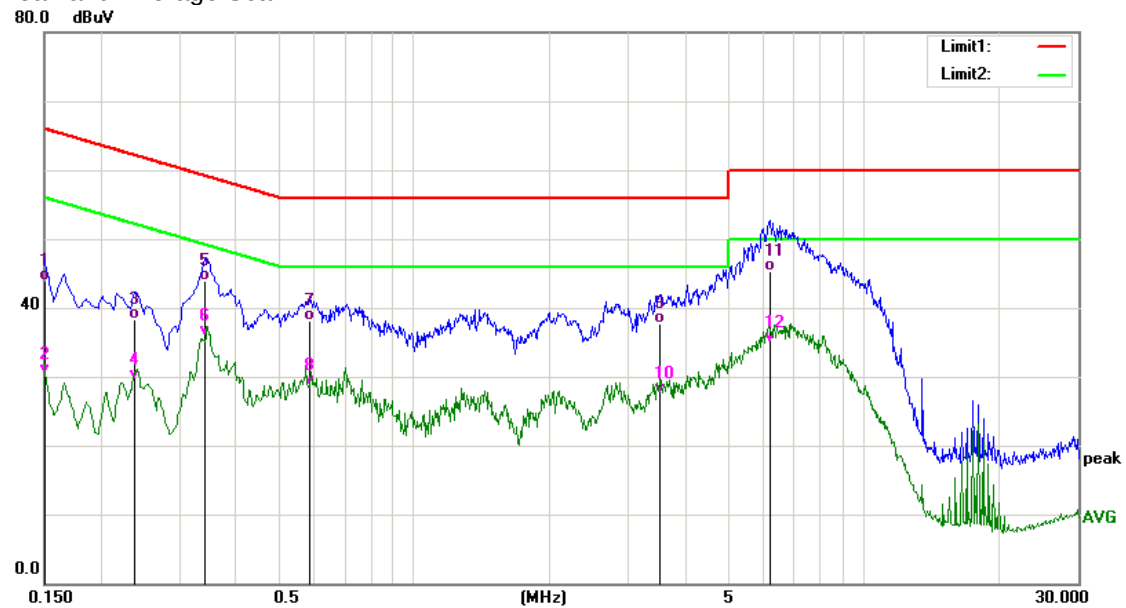


Quasi-peak and Average measurement:

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	34.20	9.73	43.93	66.00	-22.07	QP
2	0.1500	20.59	9.73	30.32	56.00	-25.68	AVG
3	0.2380	28.51	9.82	38.33	62.17	-23.84	QP
4	0.2380	19.59	9.82	29.41	52.17	-22.76	AVG
5	0.3420	33.93	9.97	43.90	59.15	-15.25	QP
6	0.3420	26.00	9.97	35.97	49.15	-13.18	AVG
7	0.5860	27.93	10.14	38.07	56.00	-17.93	QP
8	0.5860	18.63	10.14	28.77	46.00	-17.23	AVG
9	3.5220	27.25	10.39	37.64	56.00	-18.36	QP
10	3.5220	17.10	10.39	27.49	46.00	-18.51	AVG
11	6.2140	34.74	10.50	45.24	60.00	-14.76	QP
12	6.2140	24.40	10.50	34.90	50.00	-15.10	AVG

4.3 Conducted Peak Output Power

Test Connection Diagram

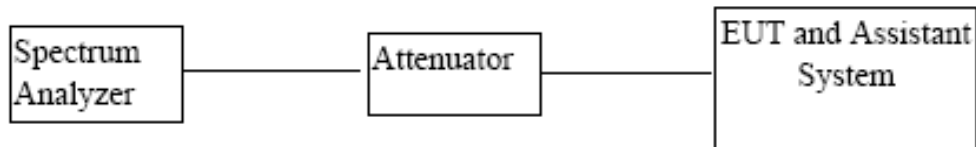


Test Procedure

- (1) Configure EUT and assistant system according clause 2.3 and 3.2
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (3) Configure EUT work in test mode as stated in clause 2.3.
- (4) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=2MHz(above 20dB bandwidth of measured signal), VBW=3MHz

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.


Test Result:

Test Mode	Data rate	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Limit (dBm)	Verdict
BLE_1M	1Mbps	2402	-5.929	≤30	PASS
BLE_1M	1Mbps	2440	-5.325	≤30	PASS
BLE_1M	1Mbps	2480	-4.746	≤30	PASS
BLE_2M	2Mbps	2402	-5.929	≤30	PASS
BLE_2M	2Mbps	2440	-5.327	≤30	PASS
BLE_2M	2Mbps	2480	-4.781	≤30	PASS

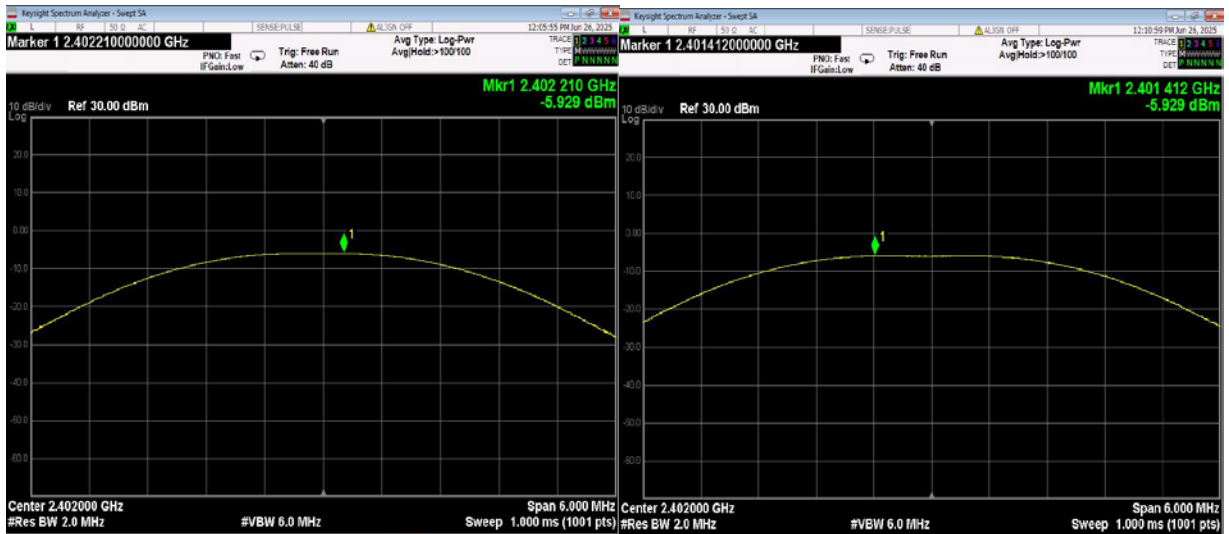

2402MHz(1Mbps)

2402MHz(2Mbps)

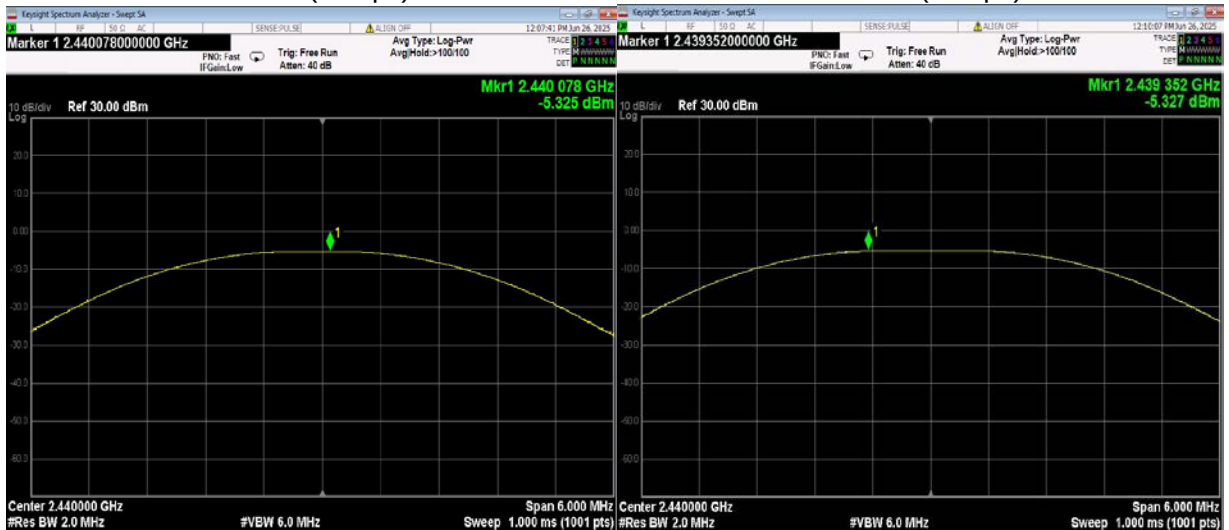

2440MHz(1Mbps)

2440MHz(2Mbps)



2480MHz(1Mbps)


2480MHz(2Mbps)

4.4 6 dB Bandwidth

Limit:

Frequency range (MHz)	Standard requirement	Limit
2402-2480	FCC Part 15 Subpart C: 15.247(a)(2)(iii)	$\geq 500\text{kHz}$

Test setup:

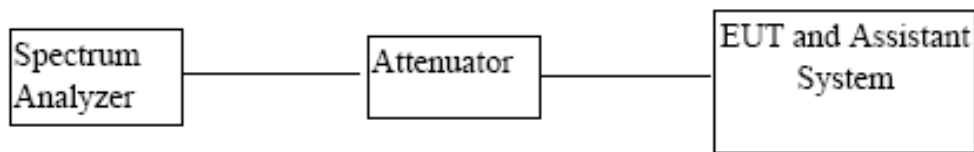

Test procedure:

Set the spectrum analyzer:

- Set RBW = 100 kHz
- Set the VBW $\geq [3 \times \text{RBW}]$
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Span = $2 \times \text{BW} \sim 5 \times \text{BW}$

Test results:

Frequency (MHz)	Data rate	Measured 6dB bandwidth (kHz)	Limit	Result
2402	1Mbps	675.3	$\geq 500\text{kHz}$	Pass
2440	1Mbps	670.9	$\geq 500\text{kHz}$	Pass
2480	1Mbps	684.3	$\geq 500\text{kHz}$	Pass
2402	2Mbps	1334	$\geq 500\text{kHz}$	Pass
2440	2Mbps	1305	$\geq 500\text{kHz}$	Pass
2480	2Mbps	1410	$\geq 500\text{kHz}$	Pass




4.5 Power Spectral Density

Limit:

Frequency range (MHz)	Standard requirement	Limit
2402-2480	FCC Part 15 Subpart C: 15.247(e)	8 dbm (in any 3kHz)

Test setup:

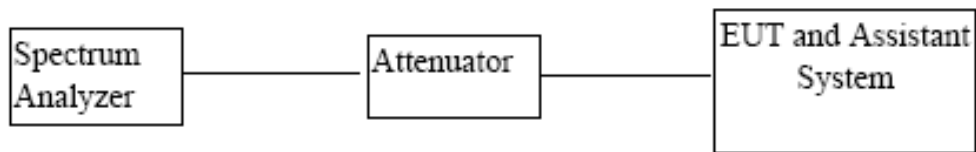


Test procedure:

Set the spectrum analyzer:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span= $1.5 \times$ DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Test results:

Frequency (MHz)	Data rate	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402	1Mbps	-15.992	8	Pass
2440	1Mbps	-15.709	8	Pass
2480	1Mbps	-14.726	8	Pass
2402	2Mbps	-17.528	8	Pass
2440	2Mbps	-18.730	8	Pass
2480	2Mbps	-17.400	8	Pass

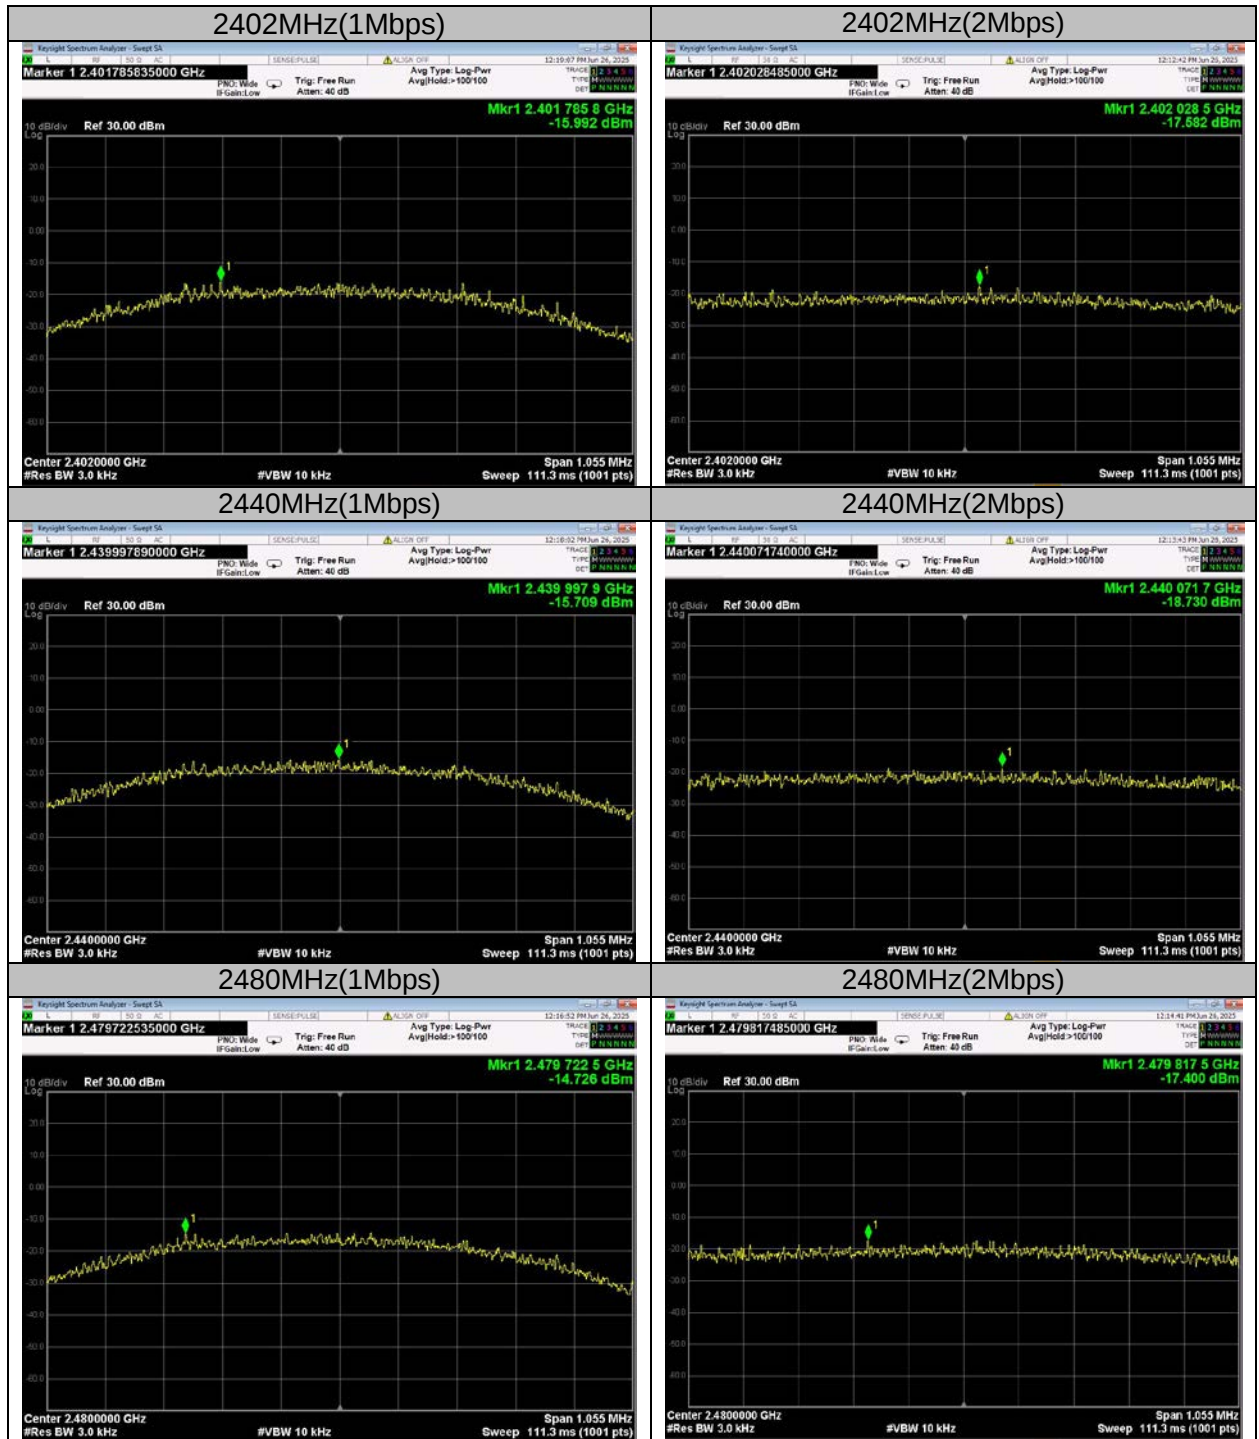


4.6 Band Edge

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test setup:

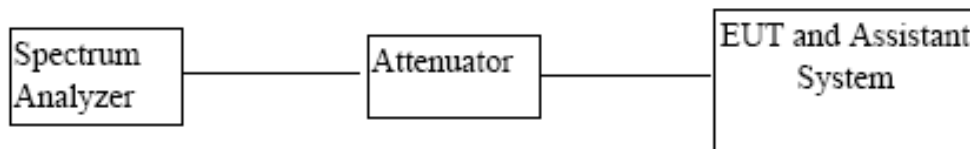


Test procedure:

Set the spectrum analyzer:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span= $1.5 \times$ DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times$ RBW].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


Test results:

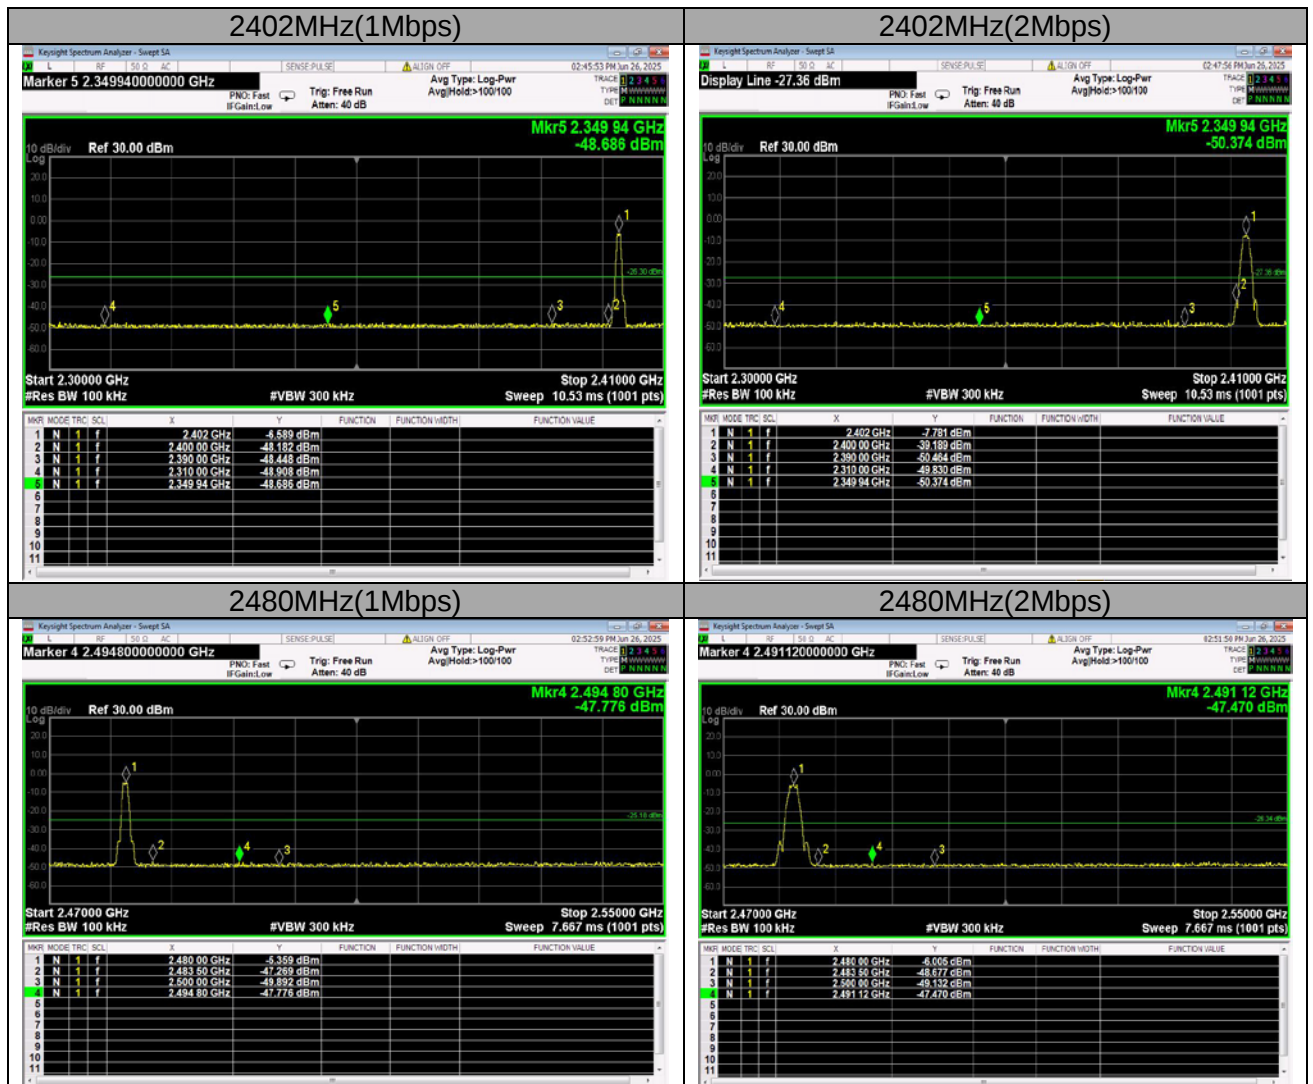

4.7 Spurious RF conducted emissions

Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

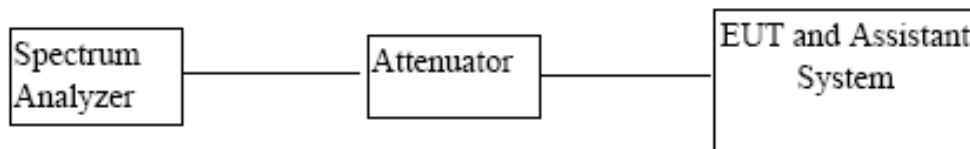
Test setup:**Test procedure:**


Set the spectrum analyzer:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span= $1.5 \times$ DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times$ RBW].
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Test results:

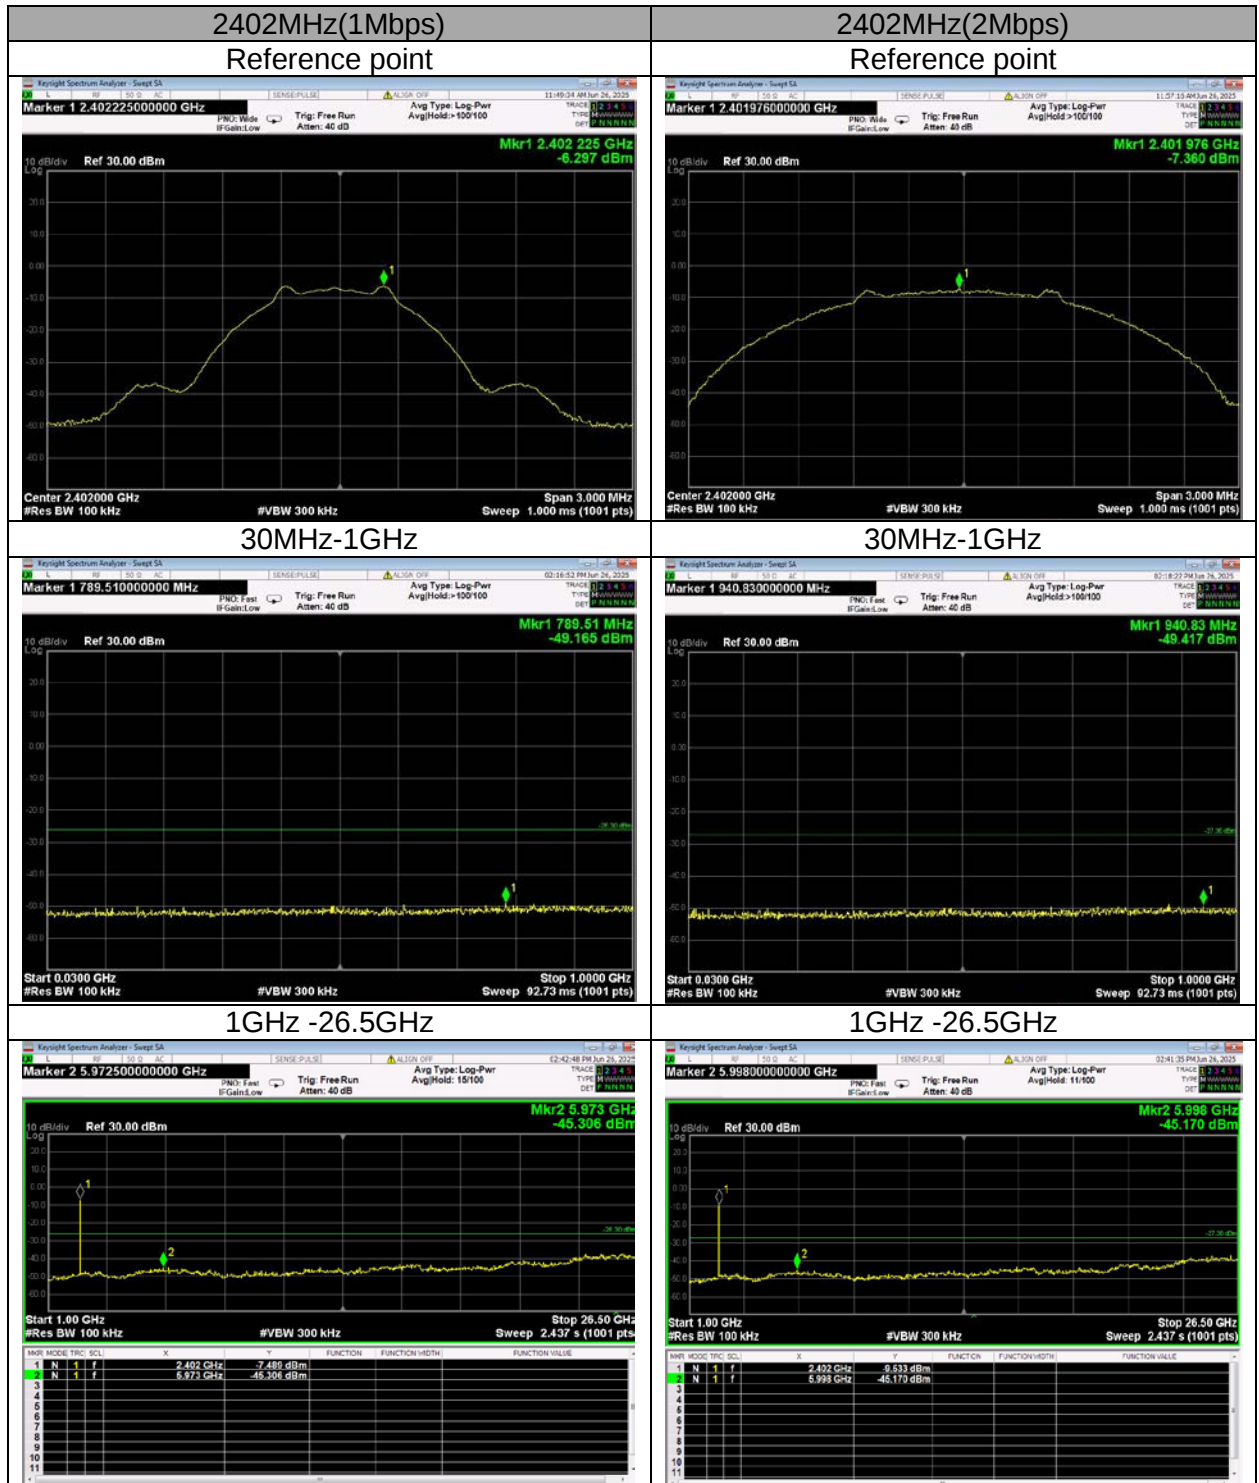

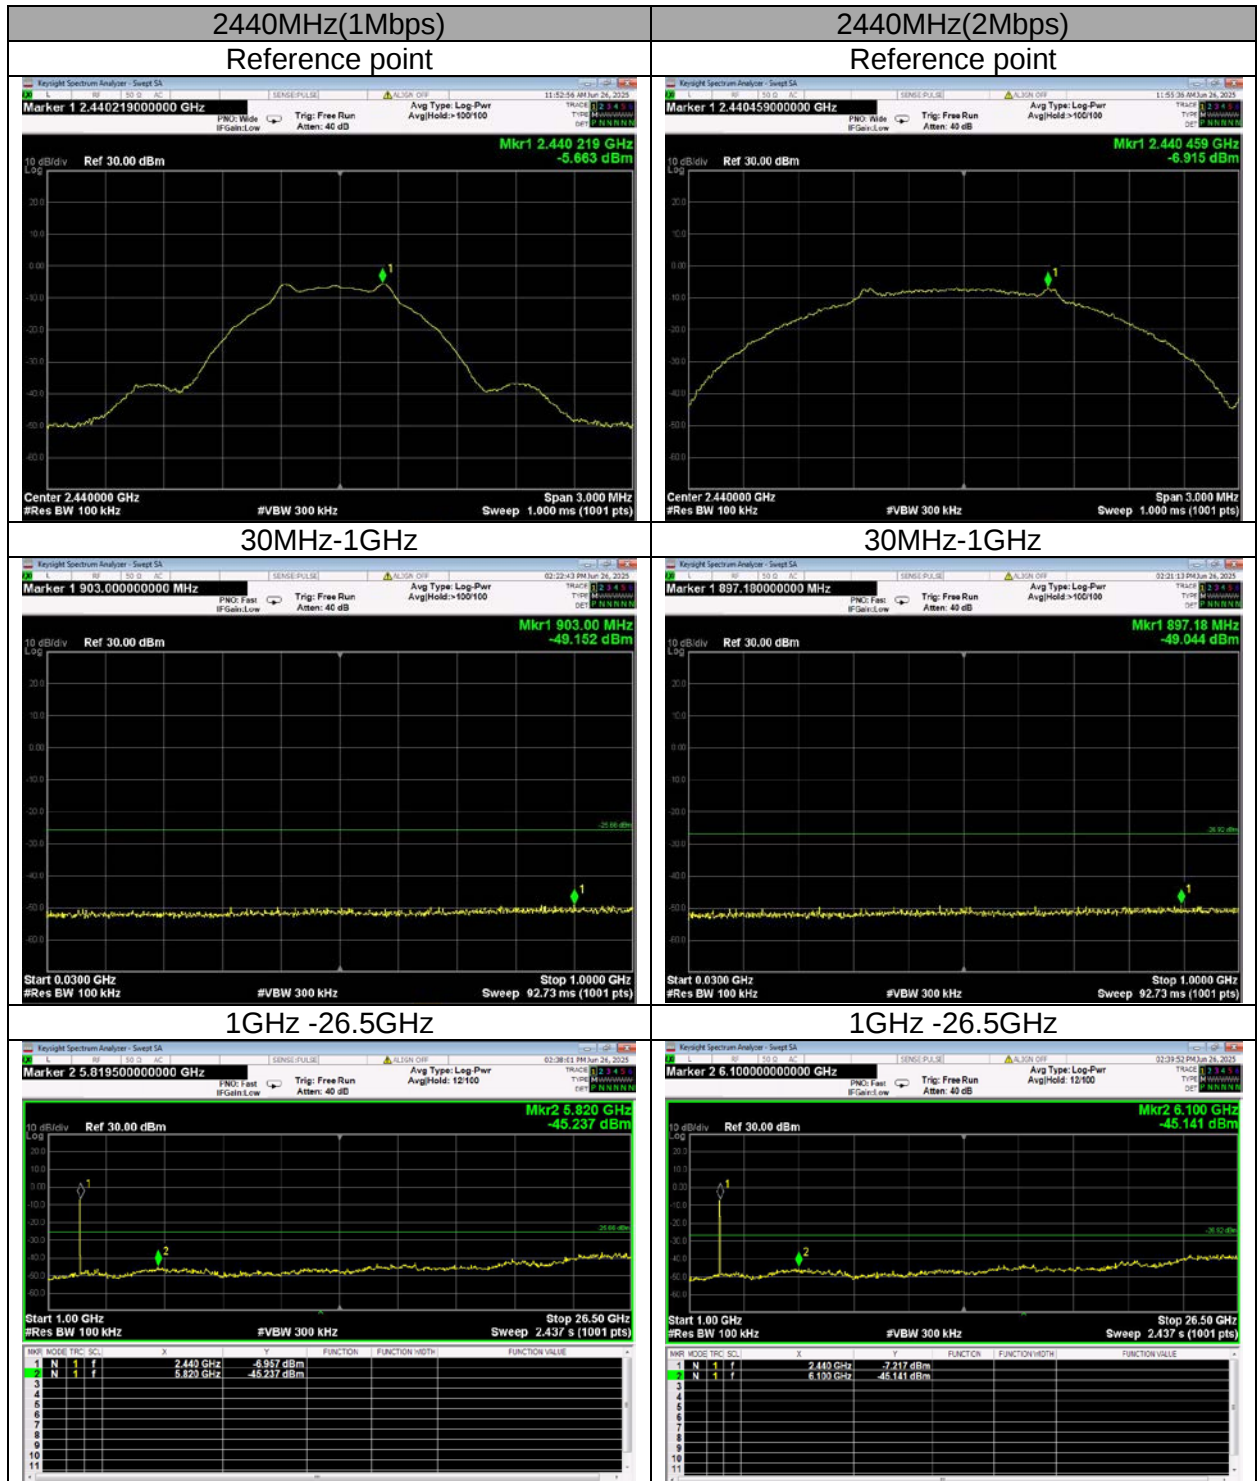


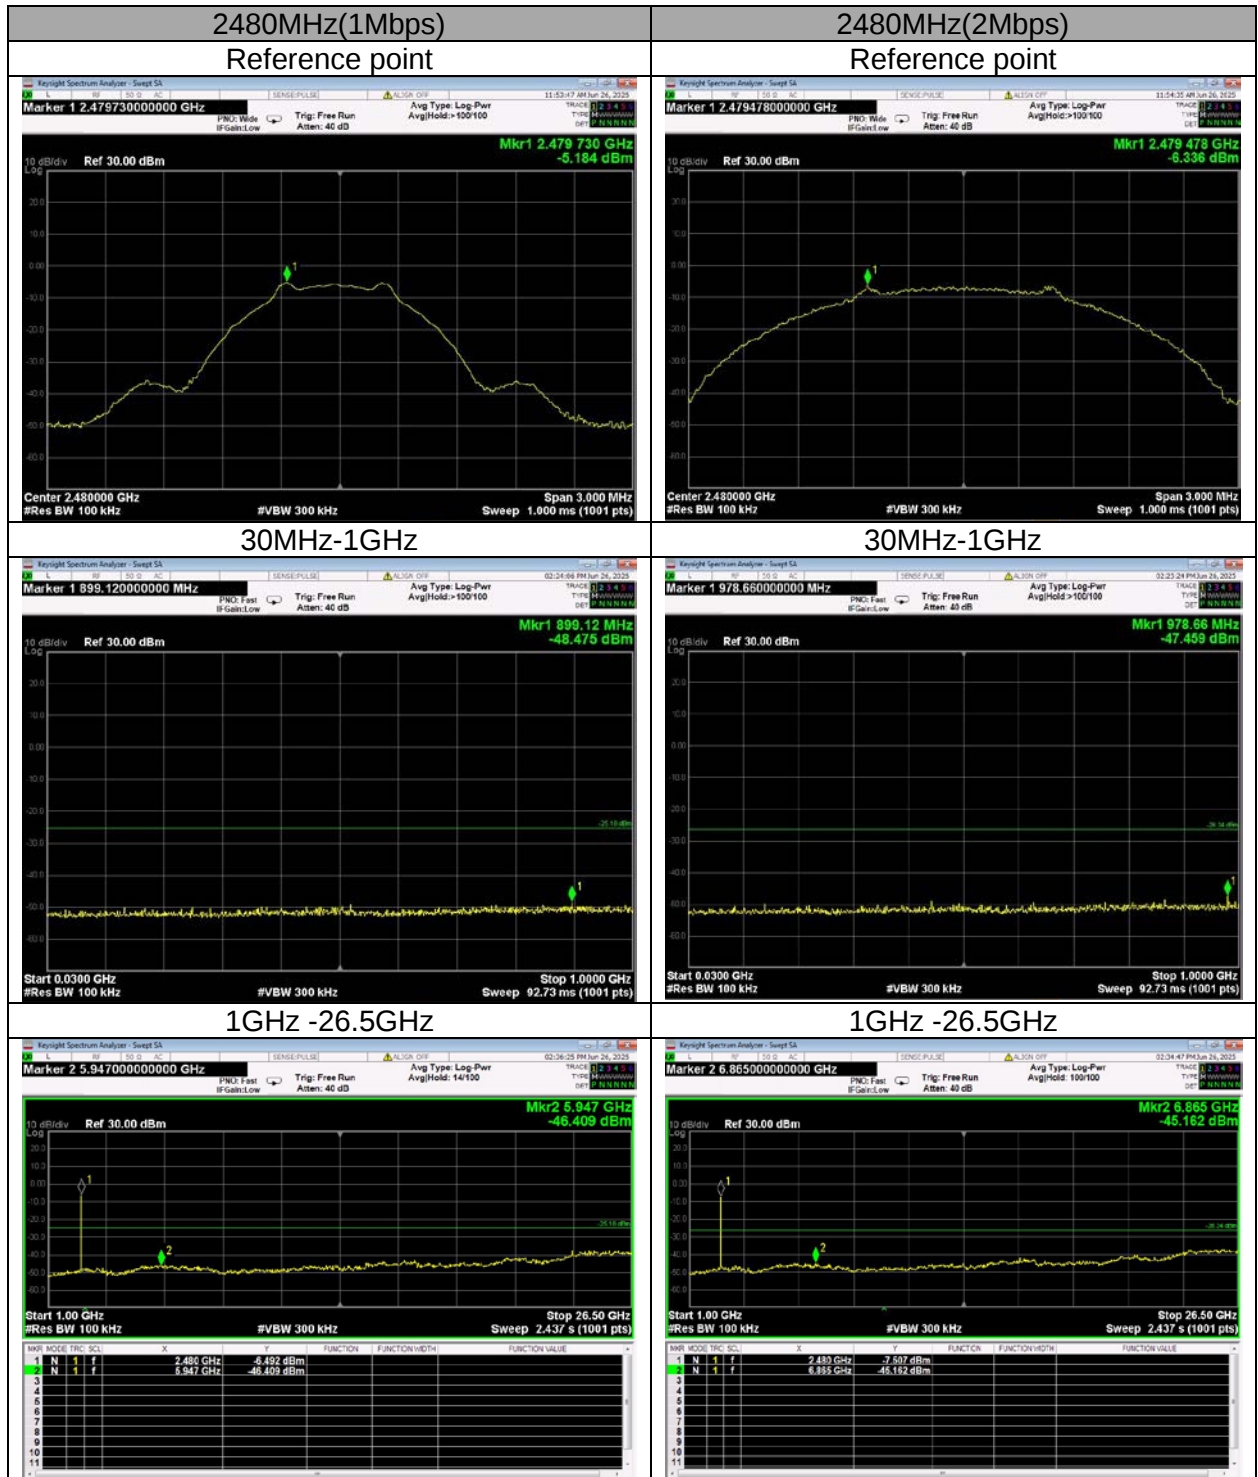


4.8 Spurious Radiated emission

Test setup:


In 3m Anechoic Chamber Test Setup Diagram for 9KHz-30MHz

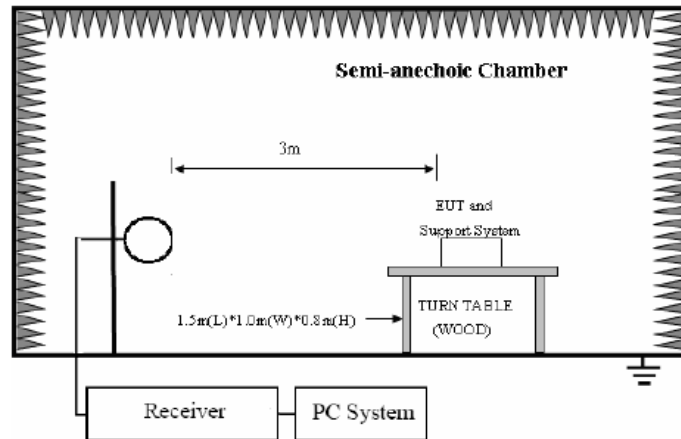

In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

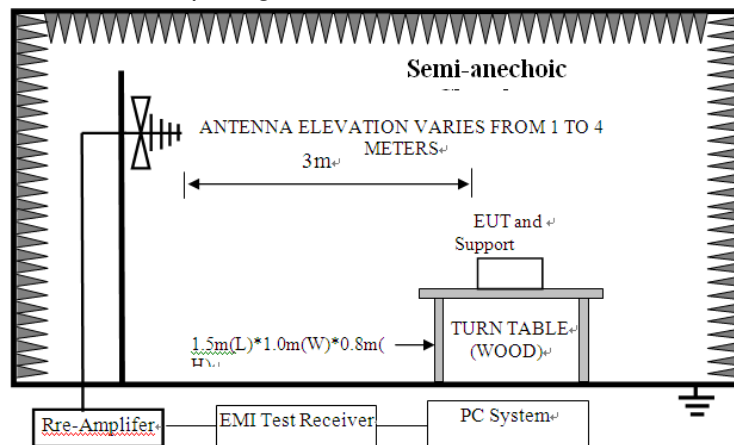

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

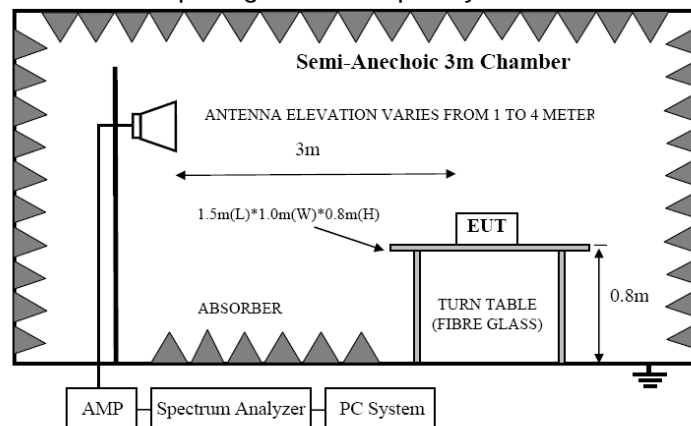

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

Limit

FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

FCC 15.209 Limit.

Frequency (MHz)	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dB(uV)/m
0.009 ~ 0.490	300	2400/F(KHz) 67.6	20log(F)
0.490 ~ 1.705	30	24000/F(KHz) 87.6	20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPRQP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and assistant system according clause 2.3 and 8.2
- (3) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used
9KHz-30MHz	Active Loop antenna
30MHz-1GHz	Trilog Broadband Antenna
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)
18GHz-40GHz	Horn Antenna(18GHz-40GHz)

According ANSI C63.10:2020 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9KHz to 25GHz:
 - (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m (Except loop antenna, it's fixed 1m above ground.)
 - (b) Change work frequency or channel of device if practicable.
 - (c) Change modulation type of device if practicable.
 - (d) Change power supply range from 85% to 115% of the rated supply voltage
 - (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions. Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9KHz to 18GHz.

(5) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2020 on Radiated Emission test.

(6) The emissions from 9KHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz, for emissions from 9KHz-90KHz, 110KHz-490KHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

(7) The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW


Frequency Band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

(8) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure (according to ANSI C63.10:2020 clause 4.2.3.2.3 procedure for average measure). Both PK and AV level test, PK detector is used.

Test result for model JC-2331LA:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

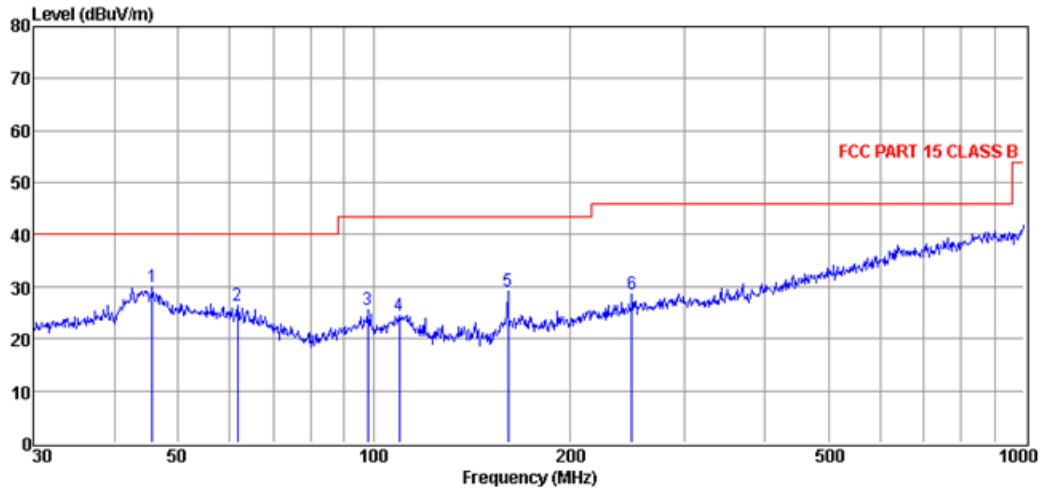

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	45.70	13.14	16.13	0.00	0.65	29.92	40.00	-10.08	Peak	HORIZONTAL
2	61.78	13.58	12.27	0.00	0.64	26.49	40.00	-13.51	Peak	HORIZONTAL
3	97.80	13.37	11.28	0.00	0.82	25.47	43.50	-18.03	Peak	HORIZONTAL
4	109.41	11.00	12.31	0.00	1.10	24.41	43.50	-19.09	Peak	HORIZONTAL
5	160.91	17.65	10.27	0.00	1.27	29.19	43.50	-14.31	Peak	HORIZONTAL
6	249.43	14.02	12.58	0.00	1.98	28.58	46.00	-17.42	Peak	HORIZONTAL

Vertical:

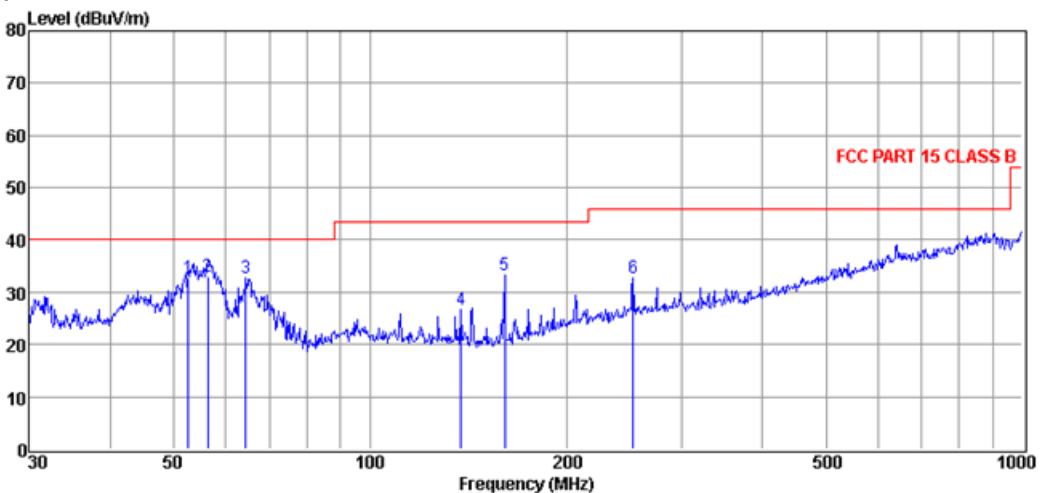

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	52.58	17.88	14.12	0.00	0.70	32.70	40.00	-7.30	QP	VERTICAL
2	56.40	17.98	14.26	0.00	0.71	32.95	40.00	-7.05	QP	VERTICAL
3	64.43	20.26	11.64	0.00	0.68	32.58	40.00	-7.42	Peak	VERTICAL
4	137.90	17.43	8.08	0.00	1.19	26.70	43.50	-16.80	Peak	VERTICAL
5	160.91	23.90	8.05	0.00	1.27	33.22	43.50	-10.28	Peak	VERTICAL
6	252.95	18.12	12.72	0.00	1.99	32.83	46.00	-13.17	Peak	VERTICAL

LCTECH Guangdong Testing Services Co.,Ltd.

Add:2/F.,Technology and Enterprise Development Center,
Guangyuan Road,Xiaolan, Zhongshan, Guangdong, China

Tel:+86-760-22833366

Fax:+86-760-22833399


E-mail:Service@lccert.com

<http://www.lccert.com>

Test result for model JC-1801LB:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

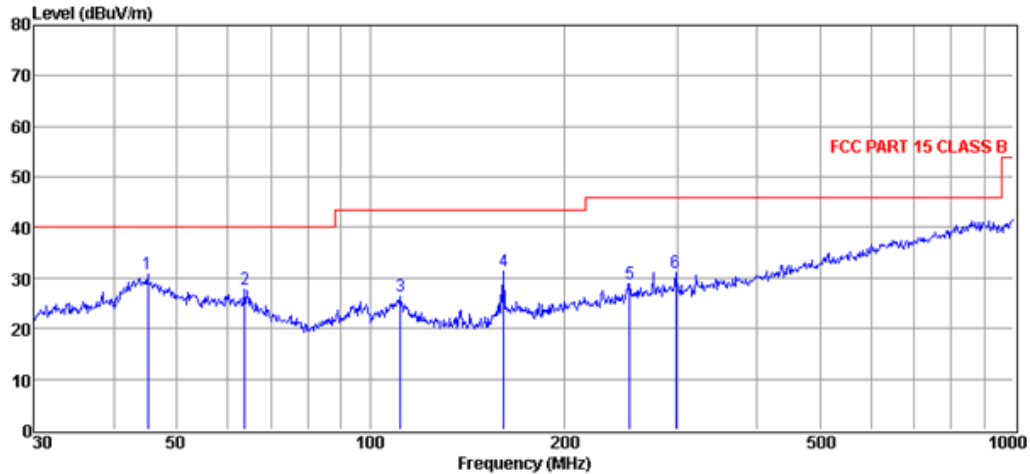

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	45.06	13.62	16.41	0.00	0.66	30.69	40.00	-9.31	Peak	HORIZONTAL
2	63.76	15.27	11.80	0.00	0.67	27.74	40.00	-12.26	Peak	HORIZONTAL
3	111.35	13.17	12.00	0.00	1.09	26.26	43.50	-17.24	Peak	HORIZONTAL
4	161.47	19.77	10.32	0.00	1.28	31.37	43.50	-12.13	Peak	HORIZONTAL
5	252.95	14.26	12.72	0.00	1.99	28.97	46.00	-17.03	Peak	HORIZONTAL
6	298.27	15.02	14.01	0.00	2.09	31.12	46.00	-14.88	Peak	HORIZONTAL

Vertical:

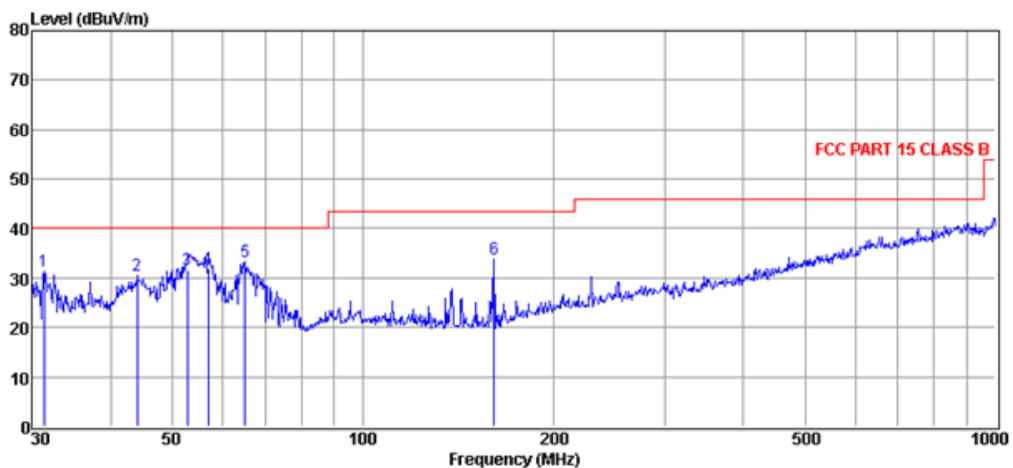


Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	31.29	20.01	10.82	0.00	0.48	31.31	40.00	-8.69	Peak	VERTICAL
2	43.97	12.87	16.88	0.00	0.68	30.43	40.00	-9.57	Peak	VERTICAL
3	52.76	16.80	14.15	0.00	0.70	31.65	40.00	-8.35	QP	VERTICAL
4	56.99	16.96	14.20	0.00	0.76	31.92	40.00	-8.08	QP	VERTICAL
5	65.11	21.22	11.46	0.00	0.69	33.37	40.00	-6.63	Peak	VERTICAL
6	161.47	24.38	8.09	0.00	1.28	33.75	43.50	-9.75	Peak	VERTICAL

Test result for model JC-2301LB:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

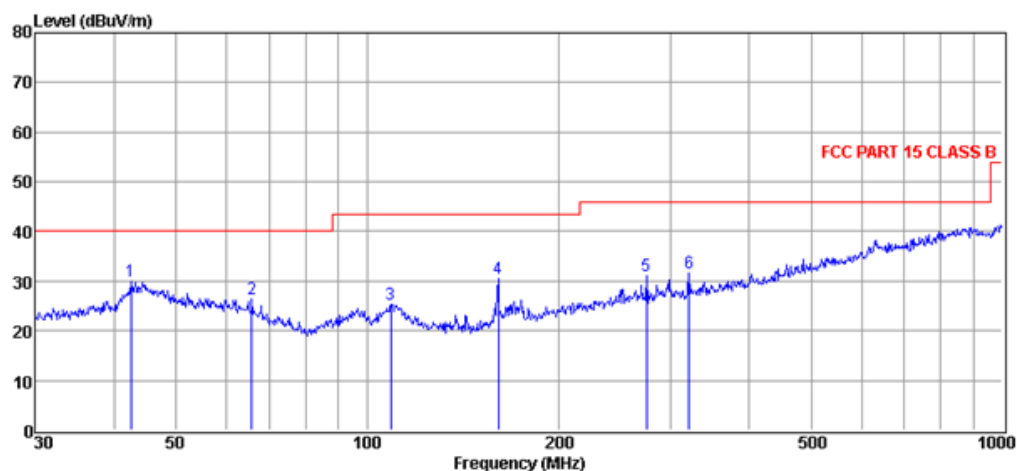

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	42.45	13.31	15.90	0.00	0.64	29.85	40.00	-10.15	Peak	HORIZONTAL
2	65.80	14.50	11.19	0.00	0.68	26.37	40.00	-13.63	Peak	HORIZONTAL
3	109.03	12.02	12.18	0.00	1.08	25.28	43.50	-18.22	Peak	HORIZONTAL
4	160.91	19.03	10.27	0.00	1.27	30.57	43.50	-12.93	Peak	HORIZONTAL
5	275.16	15.83	13.30	0.00	2.00	31.13	46.00	-14.87	Peak	HORIZONTAL
6	321.06	15.22	14.22	0.00	2.27	31.71	46.00	-14.29	Peak	HORIZONTAL

Vertical:

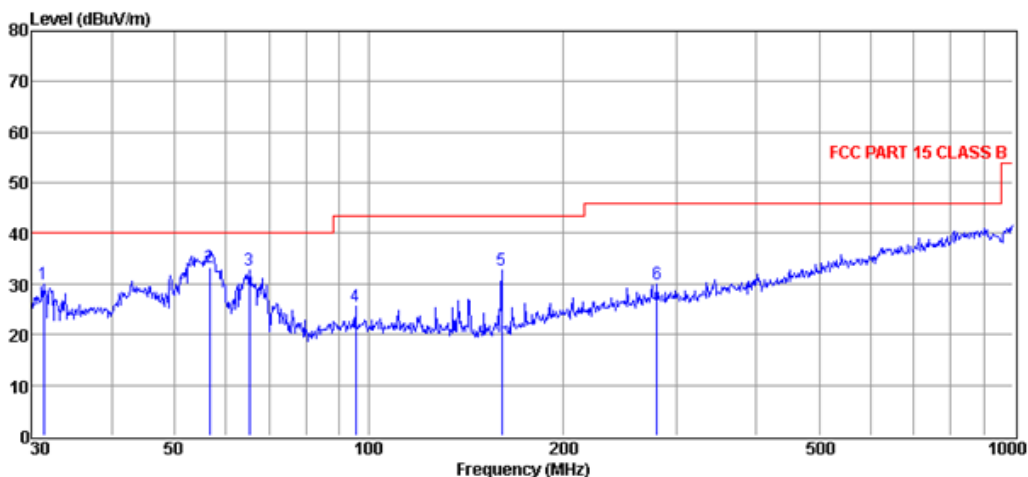


Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	31.29	18.66	10.82	0.00	0.48	29.96	40.00	-10.04	Peak	VERTICAL
2	56.59	18.31	14.24	0.00	0.72	33.27	40.00	-6.73	QP	VERTICAL
3	65.34	20.58	11.37	0.00	0.69	32.64	40.00	-7.36	Peak	VERTICAL
4	95.43	15.23	9.57	0.00	0.80	25.60	43.50	-17.90	Peak	VERTICAL
5	160.91	23.50	8.05	0.00	1.27	32.82	43.50	-10.68	Peak	VERTICAL
6	280.02	14.53	13.40	0.00	2.02	29.95	46.00	-16.05	Peak	VERTICAL

Test result for model JC-2302LA:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

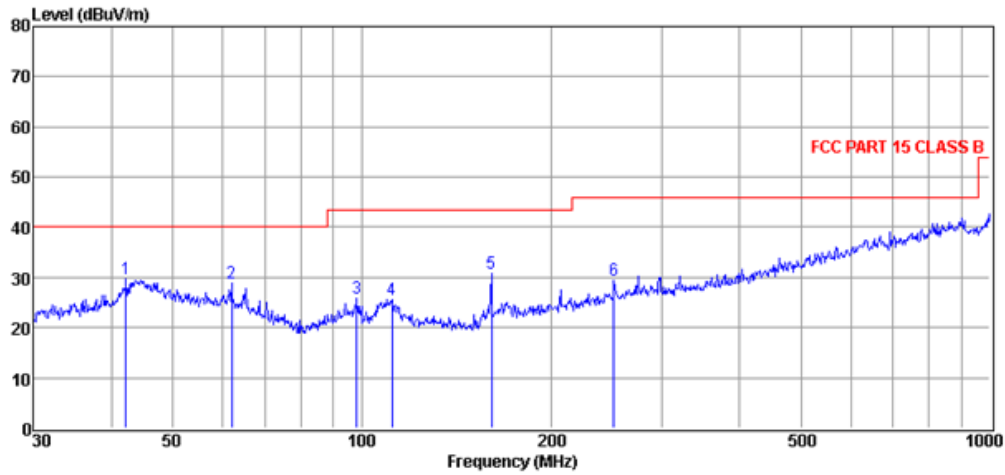

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	42.15	13.40	15.70	0.00	0.63	29.73	40.00	-10.27	Peak	HORIZONTAL
2	62.00	15.90	12.22	0.00	0.64	28.76	40.00	-11.24	Peak	HORIZONTAL
3	98.14	13.78	11.31	0.00	0.83	25.92	43.50	-17.58	Peak	HORIZONTAL
4	111.74	12.67	11.86	0.00	1.08	25.61	43.50	-17.89	Peak	HORIZONTAL
5	160.91	19.27	10.27	0.00	1.27	30.81	43.50	-12.69	Peak	HORIZONTAL
6	252.06	14.79	12.68	0.00	1.99	29.46	46.00	-16.54	Peak	HORIZONTAL

Vertical:

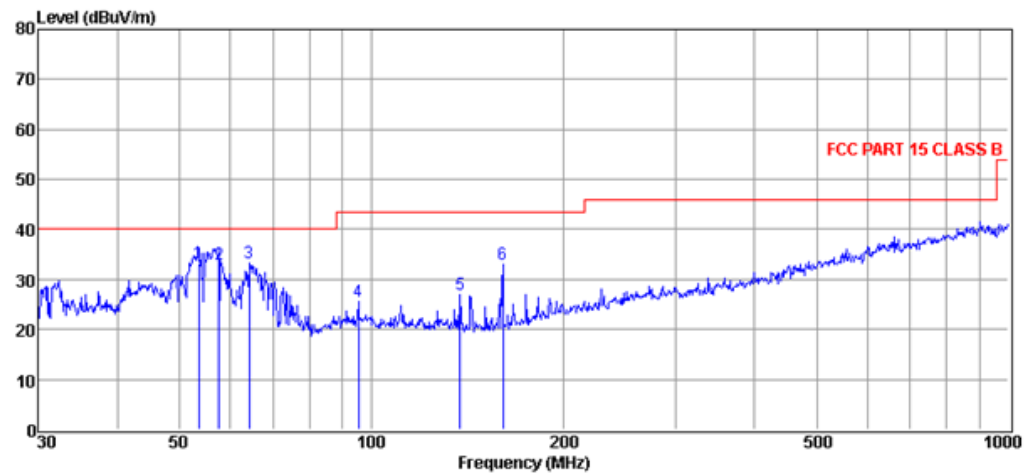


Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	53.51	18.38	14.25	0.00	0.71	33.34	40.00	-6.66	QP	VERTICAL
2	57.59	18.13	14.08	0.00	0.81	33.02	40.00	-6.98	QP	VERTICAL
3	64.21	20.98	11.69	0.00	0.68	33.35	40.00	-6.65	Peak	VERTICAL
4	95.43	15.24	9.57	0.00	0.80	25.61	43.50	-17.89	Peak	VERTICAL
5	137.90	17.80	8.08	0.00	1.19	27.07	43.50	-16.43	Peak	VERTICAL
6	160.91	23.78	8.05	0.00	1.27	33.10	43.50	-10.40	Peak	VERTICAL

Test result for model JC-2332LA:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

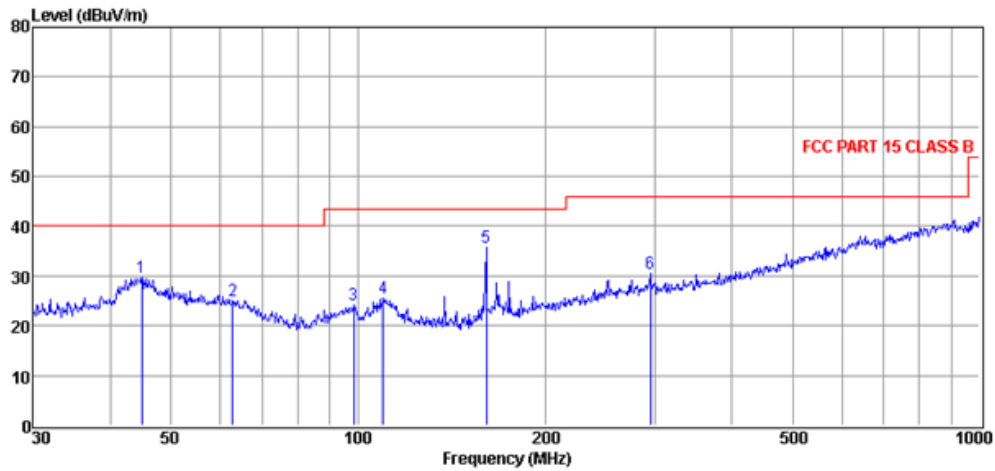

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	44.90	12.48	16.49	0.00	0.67	29.64	40.00	-10.36	Peak	HORIZONTAL
2	62.87	12.48	12.01	0.00	0.66	25.15	40.00	-14.85	Peak	HORIZONTAL
3	98.49	12.11	11.35	0.00	0.83	24.29	43.50	-19.21	Peak	HORIZONTAL
4	109.80	11.99	12.43	0.00	1.13	25.55	43.50	-17.95	Peak	HORIZONTAL
5	160.91	24.31	10.27	0.00	1.27	35.85	43.50	-7.65	Peak	HORIZONTAL
6	295.15	14.46	13.86	0.00	2.08	30.40	46.00	-15.60	Peak	HORIZONTAL

Vertical:

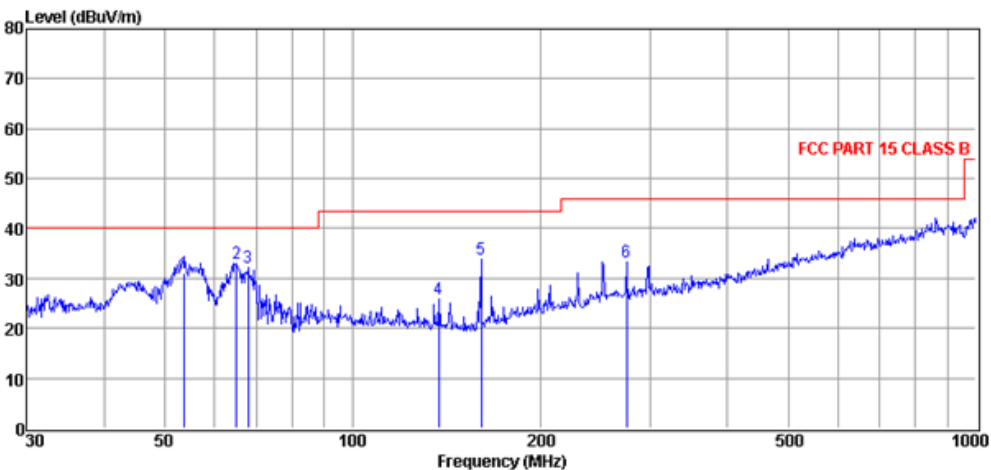


Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	53.69	16.16	14.27	0.00	0.71	31.14	40.00	-8.86	QP	VERTICAL
2	65.11	20.92	11.46	0.00	0.69	33.07	40.00	-6.93	Peak	VERTICAL
3	67.91	21.03	10.39	0.00	0.67	32.09	40.00	-7.91	Peak	VERTICAL
4	137.42	16.67	8.10	0.00	1.18	25.95	43.50	-17.55	Peak	VERTICAL
5	160.91	24.51	8.05	0.00	1.27	33.83	43.50	-9.67	Peak	VERTICAL
6	275.16	17.96	13.30	0.00	2.00	33.26	46.00	-12.74	Peak	VERTICAL

Test result for model JC-2631LA:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

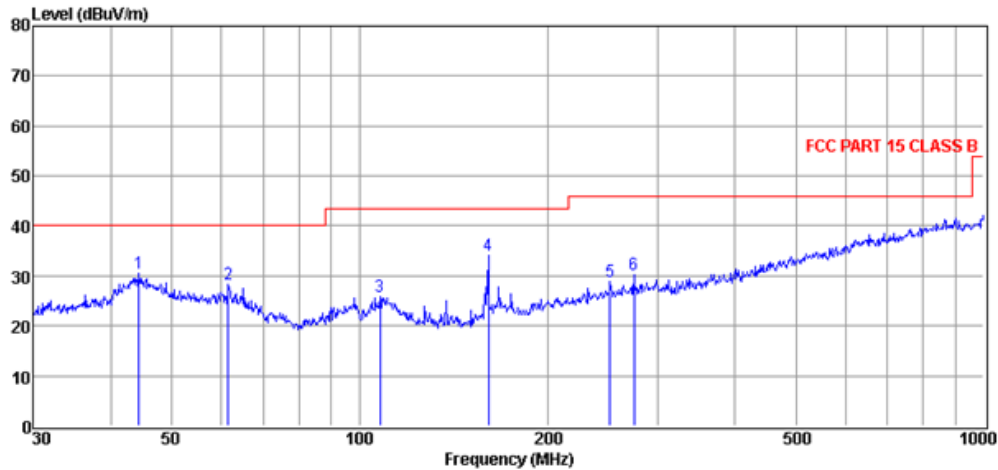

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	44.28	13.00	16.77	0.00	0.68	30.45	40.00	-9.55	Peak	HORIZONTAL
2	61.56	15.25	12.33	0.00	0.63	28.21	40.00	-11.79	Peak	HORIZONTAL
3	107.89	13.10	11.80	0.00	1.00	25.90	43.50	-17.60	Peak	HORIZONTAL
4	160.91	22.61	10.27	0.00	1.27	34.15	43.50	-9.35	Peak	HORIZONTAL
5	252.06	14.29	12.68	0.00	1.99	28.96	46.00	-17.04	Peak	HORIZONTAL
6	275.16	15.07	13.30	0.00	2.00	30.37	46.00	-15.63	Peak	HORIZONTAL

Vertical:

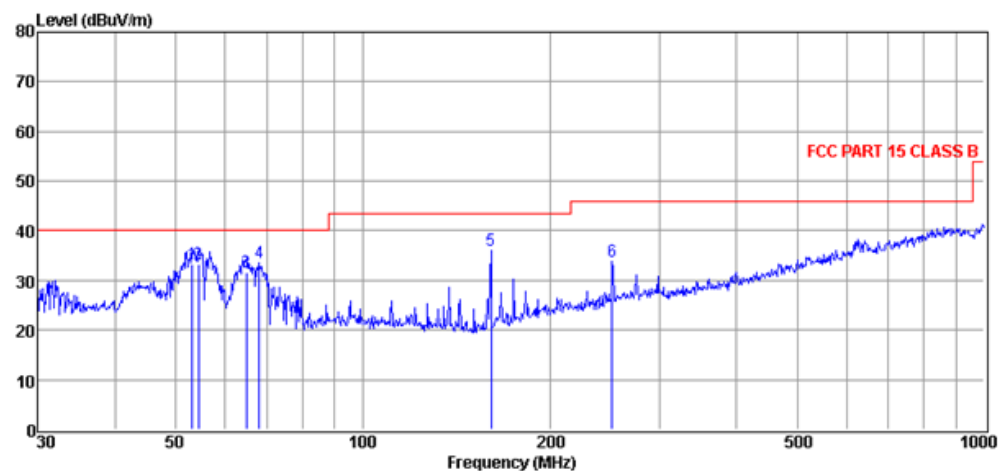


Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	53.13	18.42	14.21	0.00	0.70	33.33	40.00	-6.67	QP	VERTICAL
2	54.45	18.24	14.35	0.00	0.70	33.29	40.00	-6.71	QP	VERTICAL
3	64.89	19.40	11.53	0.00	0.69	31.62	40.00	-8.38	QP	VERTICAL
4	68.15	22.47	10.30	0.00	0.66	33.43	40.00	-6.57	Peak	VERTICAL
5	160.91	26.69	8.05	0.00	1.27	36.01	43.50	-7.49	Peak	VERTICAL
6	252.06	19.25	12.68	0.00	1.99	33.92	46.00	-12.08	Peak	VERTICAL

Test result for model JC-2632LA:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

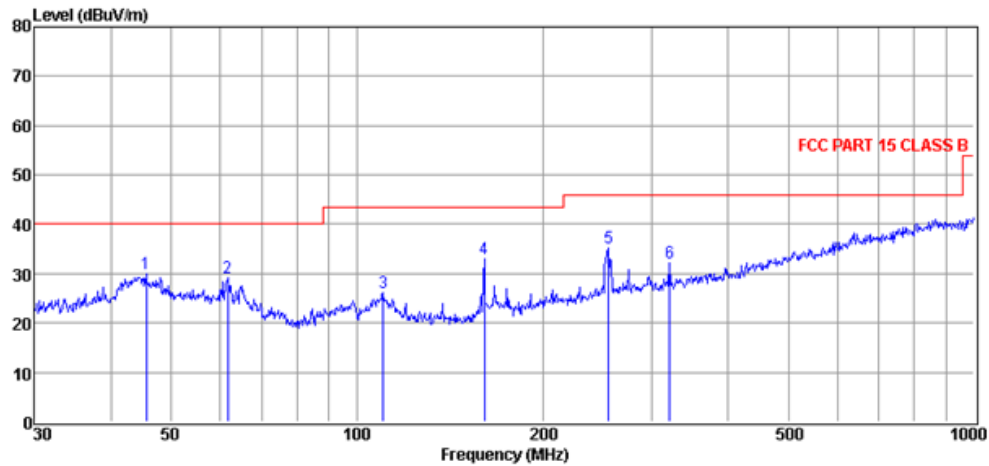

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	45.54	13.03	16.20	0.00	0.66	29.89	40.00	-10.11	Peak	HORIZONTAL
2	61.78	16.25	12.27	0.00	0.64	29.16	40.00	-10.84	Peak	HORIZONTAL
3	110.18	12.51	12.43	0.00	1.13	26.07	43.50	-17.43	Peak	HORIZONTAL
4	160.91	21.41	10.27	0.00	1.27	32.95	43.50	-10.55	Peak	HORIZONTAL
5	255.62	20.34	12.82	0.00	1.98	35.14	46.00	-10.86	Peak	HORIZONTAL
6	321.06	15.59	14.22	0.00	2.27	32.08	46.00	-13.92	Peak	HORIZONTAL

Vertical:

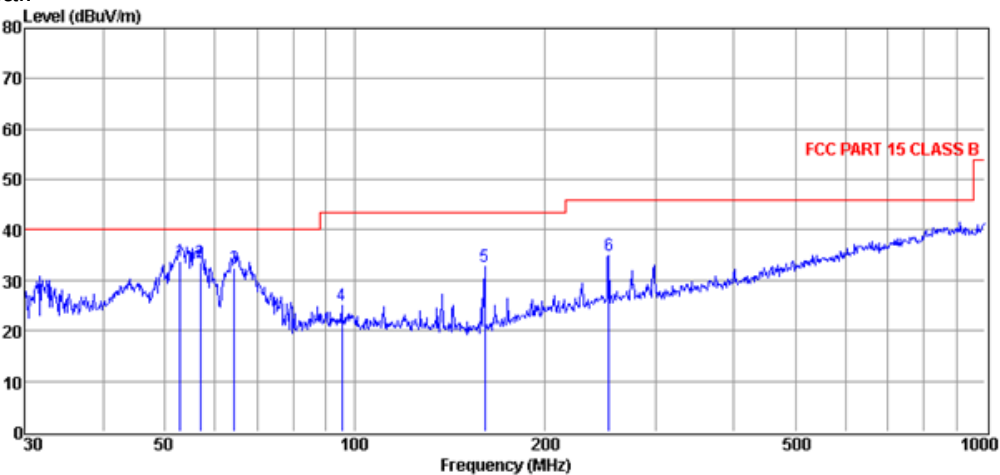


Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	52.95	18.79	14.19	0.00	0.70	33.68	40.00	-6.32	QP	VERTICAL
2	56.99	18.50	14.20	0.00	0.76	33.46	40.00	-6.54	QP	VERTICAL
3	64.43	20.05	11.64	0.00	0.68	32.37	40.00	-7.63	QP	VERTICAL
4	95.43	14.57	9.57	0.00	0.80	24.94	43.50	-18.56	Peak	VERTICAL
5	160.91	23.30	8.05	0.00	1.27	32.62	43.50	-10.88	Peak	VERTICAL
6	252.95	20.17	12.72	0.00	1.99	34.88	46.00	-11.12	Peak	VERTICAL

Test result for model JC-3001LB:


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz,
Below 1G:

Horizontal:

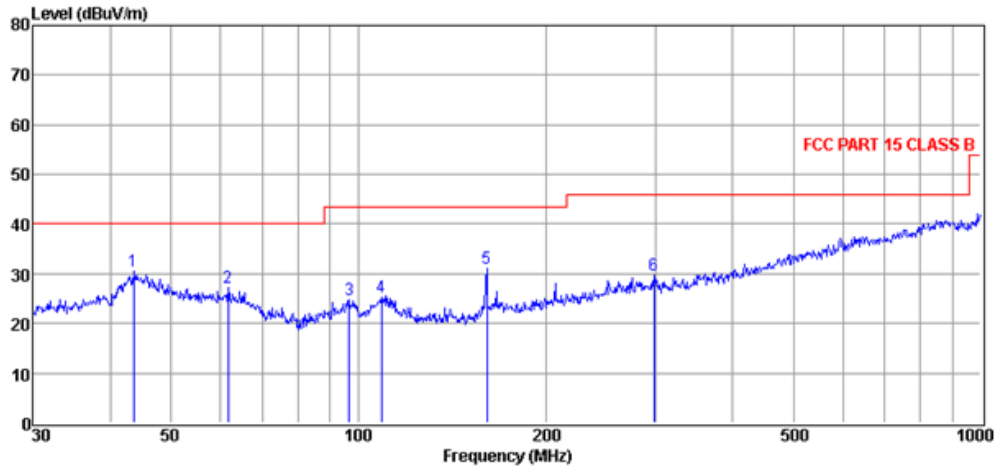

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	43.51	13.25	16.58	0.00	0.67	30.50	40.00	-9.50	Peak	HORIZONTAL
2	61.78	14.23	12.27	0.00	0.64	27.14	40.00	-12.86	Peak	HORIZONTAL
3	96.78	12.73	11.18	0.00	0.81	24.72	43.50	-18.78	Peak	HORIZONTAL
4	109.03	11.91	12.18	0.00	1.08	25.17	43.50	-18.33	Peak	HORIZONTAL
5	160.91	19.55	10.27	0.00	1.27	31.09	43.50	-12.41	Peak	HORIZONTAL
6	298.27	13.60	14.01	0.00	2.09	29.70	46.00	-16.30	Peak	HORIZONTAL

Vertical:

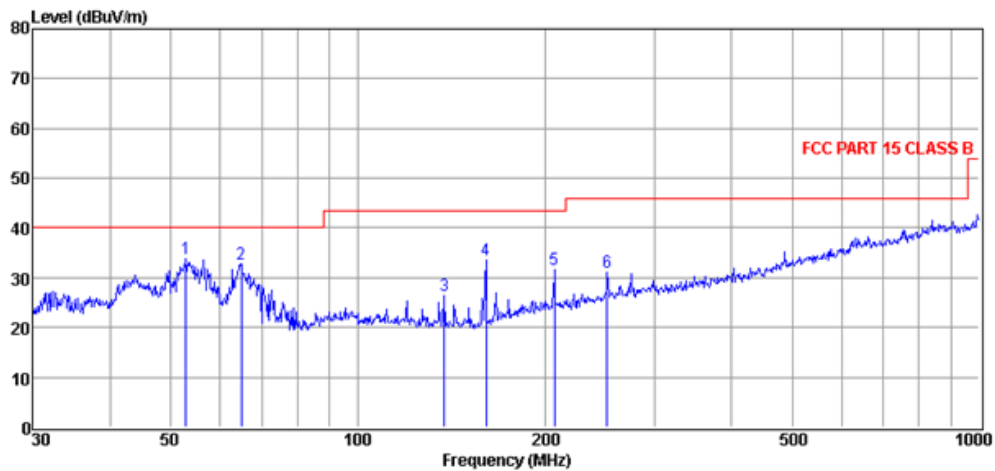

Item (Mark)	Freq (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	52.95	19.00	14.19	0.00	0.70	33.89	40.00	-6.11	Peak	VERTICAL
2	64.89	20.45	11.53	0.00	0.69	32.67	40.00	-7.33	Peak	VERTICAL
3	137.90	17.00	8.08	0.00	1.19	26.27	43.50	-17.23	Peak	VERTICAL
4	160.91	24.14	8.05	0.00	1.27	33.46	43.50	-10.04	Peak	VERTICAL
5	207.12	19.04	10.91	0.00	1.65	31.60	43.50	-11.90	Peak	VERTICAL
6	252.06	16.51	12.68	0.00	1.99	31.18	46.00	-14.82	Peak	VERTICAL

Test result for model JC-2331LA:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polari zation
1	4196.	49.42	31.11	53.61	5.00	31.92	54.00	-22.08	Average	H
2	4196.	59.72	31.11	53.61	5.00	42.22	74.00	-31.78	Peak	H
3	5216.	46.53	32.85	53.22	5.23	31.39	54.00	-22.61	Average	V
4	5216.	56.83	32.85	53.22	5.23	41.69	74.00	-32.31	Peak	V

Test result for model JC-1801LB:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polari zation
1	4808.	48.28	32.38	53.31	5.00	32.35	54.00	-21.65	Average	H
2	4808.	58.48	32.38	53.31	5.00	42.55	74.00	-31.45	Peak	H
3	3907.	48.43	30.55	53.72	5.00	30.26	54.00	-23.74	Average	V
4	3907.	58.73	30.55	53.72	5.00	40.56	74.00	-33.44	Peak	V

Test result for model JC-2301LB:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polari zation
1	3788.	49.54	30.23	53.74	5.00	31.03	54.00	-22.97	Average	H
2	3788.	59.94	30.23	53.74	5.00	41.43	74.00	-32.57	Peak	H
3	4383.	48.47	31.41	53.52	5.00	31.36	54.00	-22.64	Average	V
4	4383.	57.67	31.41	53.52	5.00	40.56	74.00	-33.44	Peak	V

Test result for model JC-2302LA:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polari zation
1	5216.	47.05	32.85	53.22	5.23	31.91	54.00	-22.09	Average	H
2	5216.	57.05	32.85	53.22	5.23	41.91	74.00	-32.09	Peak	H
3	4910.	48.12	32.65	53.26	5.00	32.51	54.00	-21.49	Average	V
4	4910.	58.22	32.65	53.26	5.00	42.61	74.00	-31.39	Peak	V

Test result for model JC-2332LA:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4774.	48.10	32.30	53.33	5.00	32.07	54.00	-21.93	Average	H
2	4774.	58.10	32.30	53.33	5.00	42.07	74.00	-31.93	Peak	H
3	4706.	48.38	32.12	53.36	5.00	32.14	54.00	-21.86	Average	V
4	4706.	58.38	32.12	53.36	5.00	42.14	74.00	-31.86	Peak	V

Test result for model JC-2631LA:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4995.	48.33	32.87	53.22	5.00	32.98	54.00	-21.02	Average	H
2	4995.	58.63	32.87	53.22	5.00	43.28	74.00	-30.72	Peak	H
3	4740.	49.07	32.21	53.34	5.00	32.94	54.00	-21.06	Average	V
4	4740.	58.07	32.21	53.34	5.00	41.94	74.00	-32.06	Peak	V

Test result for model JC-2632LA:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4434.	47.14	31.49	53.49	5.00	30.14	54.00	-23.86	Average	H
2	4434.	57.34	31.49	53.49	5.00	40.34	74.00	-33.66	Peak	H
3	4791.	48.07	32.34	53.32	5.00	32.09	54.00	-21.91	Average	V
4	4791.	58.07	32.34	53.32	5.00	42.09	74.00	-31.91	Peak	V

Test result for model JC-3001LB:

Above 1G:

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Item (Mark)	Freq (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5012.	49.37	32.88	53.22	5.01	34.04	54.00	-19.96	Average	H
2	5012.	59.57	32.88	53.22	5.01	44.24	74.00	-29.76	Peak	H
3	4961.	47.53	32.78	53.24	5.00	32.07	54.00	-21.93	Average	V
4	4961.	57.83	32.78	53.24	5.00	42.37	74.00	-31.63	Peak	V

5 Test Setup Photo

Refer to <Setup Photos>

-----End of test report-----