



FCC Radio Test Report

FCC ID: 2BQS9-PX101T

This report concerns: Original Grant

Project No. : 2506C237
Equipment : pexar Digital Picture Frame
Brand Name : **pexar**
Model Name : PX-101T
Applicant : Lexar Co., Limited
Address : Room B, 7/F, Ever Gain Centre, 28 On Muk Street, Shatin, New Territories, Hong Kong
Manufacturer : Lexar Co., Limited
Address : Room B, 7/F, Ever Gain Centre, 28 On Muk Street, Shatin, New Territories, Hong Kong
Date of Receipt : Jul. 09, 2025
Date of Test : Jul. 11, 2025 ~ Jul. 28, 2025
Issued Date : Aug. 20, 2025
Test Sample : Engineering Sample No.: DG2025070925 for Power, DG2025070924 for others
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Chella Zheng
 Chella Zheng

Approved by : Chay Cai
 Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 PARAMETERS OF TEST SOFTWARE	12
3.4 DUTY CYCLE	13
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
3.6 SUPPORT UNITS	16
3.7 CUSTOMER INFORMATION DESCRIPTION	16
4 . AC POWER LINE CONDUCTED EMISSIONS	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	18
4.5 EUT OPERATION CONDITIONS	18
4.6 TEST RESULTS	18
5 . RADIATED EMISSIONS	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM TEST STANDARD	21
5.4 TEST SETUP	21
5.5 EUT OPERATION CONDITIONS	23
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	23
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	23
5.8 TEST RESULTS - ABOVE 1000 MHZ	23
6 . BANDWIDTH	24
6.1 LIMIT	24

Table of Contents	Page
6.2 TEST PROCEDURE	24
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULTS	24
7 . MAXIMUM OUTPUT POWER	25
7.1 LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 TEST RESULTS	25
8 . CONDUCTED SPURIOUS EMISSIONS	26
8.1 LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	27
8.4 TEST SETUP	27
8.5 EUT OPERATION CONDITIONS	27
8.6 TEST RESULTS	27
9 . POWER SPECTRAL DENSITY	28
9.1 LIMIT	28
9.2 TEST PROCEDURE	28
9.3 DEVIATION FROM STANDARD	28
9.4 TEST SETUP	28
9.5 EUT OPERATION CONDITIONS	28
9.6 TEST RESULTS	28
10 . MEASUREMENT INSTRUMENTS LIST	29
11 . EUT TEST PHOTO	31
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	37
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	40
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	45
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	48

Table of Contents

Page

APPENDIX E - BANDWIDTH	75
FAPPENDIX F - MAXIMUM OUTPUT POWER	80
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	82
APPENDIX H - POWER SPECTRAL DENSITY	87

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2506C237	R00	Original Report.	Aug. 20, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	54%	AC 120V/60Hz	Hayden Chen	Jul. 23, 2025
Radiated Emissions -9kHz to 30 MHz	22°C	48%	AC 120V/60Hz	Hayden Chen	Jul. 18, 2025
Radiated Emissions -30MHz to 1000MHz	23°C	55%	AC 120V/60Hz	Jensen Zhou	Jul. 18, 2025
Radiated Emissions -Above 1000MHz	22°C	50%	AC 120V/60Hz	Jensen Zhou	Jul. 20, 2025 Jul. 22, 2025
Bandwidth	25°C	50%	AC 120V/60Hz	Arvin Tong	Jul. 28, 2025
Maximum Output Power	23-25°C	56-60%	AC 120V/60Hz	Alex Yin	Jul. 17, 2025 Jul. 27, 2025
Conducted Spurious Emissions	25°C	50%	AC 120V/60Hz	Arvin Tong	Jul. 28, 2025
Power Spectral Density	25°C	50%	AC 120V/60Hz	Arvin Tong	Jul. 28, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	pexar Digital Picture Frame
Brand Name	pexar
Test Model	PX-101T
Model Name	PX-101T
Model Difference(s)	N/A
Hardware Version	DPF1086_MK_32
Firmware Version	Android 8.1
Power Source	DC Voltage supplied from AC adapter. Model: TEKA-TB120100XX
Power Rating	I/P: 100-240V~ 50/60Hz 0.35A Max O/P: 12.0V $\equiv$ 1.0A 12.0W
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g/n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 150 Mbps
Maximum Output Power	IEEE 802.11b: 16.83 dBm (0.0482 W)

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20) CH03 - CH09 for IEEE 802.11n(HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	SWARD	DPF1086	FPC	N/A	4.73

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09
Mode 5	TX B Mode Channel 01

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 5	TX B Mode Channel 01

Radiated emissions test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 5	TX B Mode Channel 01

Radiated emissions test - 1 GHz - 18 GHz	
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09

Conducted test	
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N(HT20) Mode Channel 01/06/11
Mode 4	TX N(HT40) Mode Channel 03/06/09

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11b Mode Channel 01 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (5) For radiated emission above 1GHz test, both Vertical and Horizontal are evaluated, only the worst polarization is recorded.

3.3 PARAMETERS OF TEST SOFTWARE


Test Software Version	IPOP V4.0		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	17.5	17	17
IEEE 802.11g	14.5	16.5	14
IEEE 802.11n(HT20)	13.5	16.5	13.5
Frequency (MHz)	2422	2437	2452
IEEE 802.11n(HT40)	11	14.5	12

3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.


If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

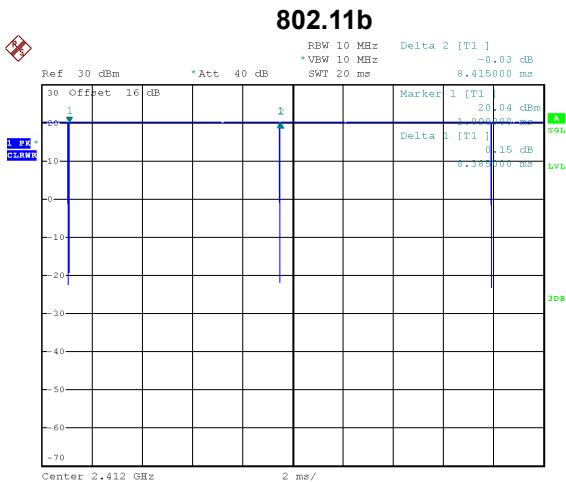


Date: 28.JUL.2025 16:12:20

Duty cycle = 8.385 ms / 8.415 ms = 99.64%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$

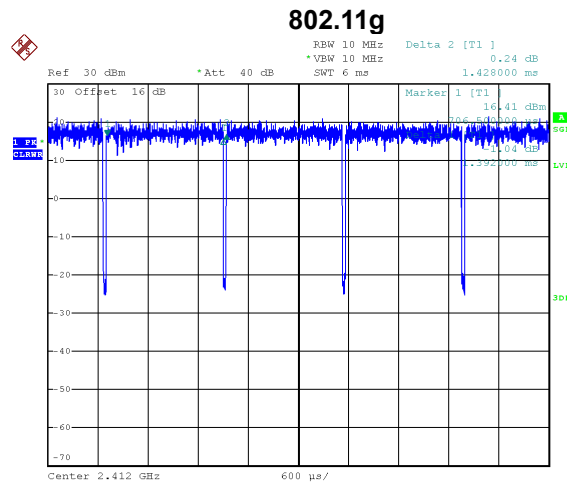


Date: 28.JUL.2025 16:16:59

Duty cycle = 1.392 ms / 1.428 ms = 97.48%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.11 \text{ dB}$

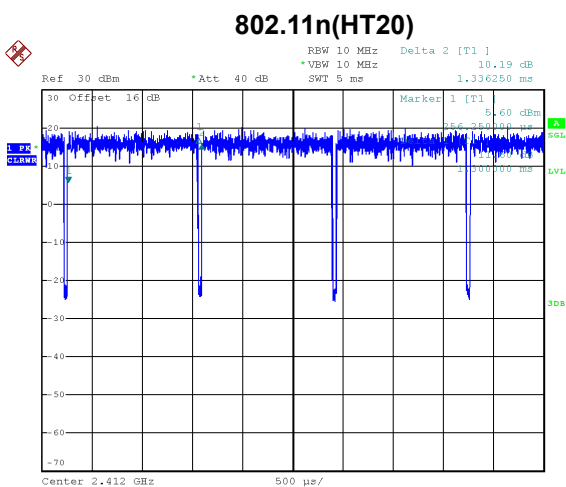

Date: 28.JUL.2025 16:22:18

Duty cycle = 1.300 ms / 1.336 ms = 97.31%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.12 \text{ dB}$

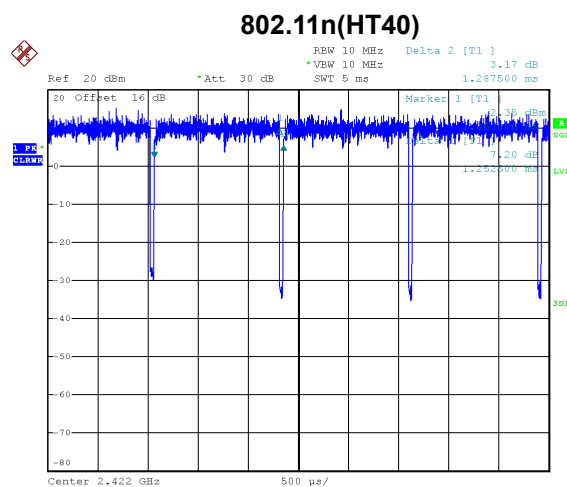

Date: 28.JUL.2025 16:35:21

Duty cycle = 1.253 ms / 1.288 ms = 97.28%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.12 \text{ dB}$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 718 Hz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 769 Hz.


For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 798 Hz.


(Remark: The video bandwidth of the spectrum analyzer was set to 1kHz during the test.)

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

For AC power line conducted&Radiated 9kHz~1GHz&Radiated 18GHz~26.5GHz

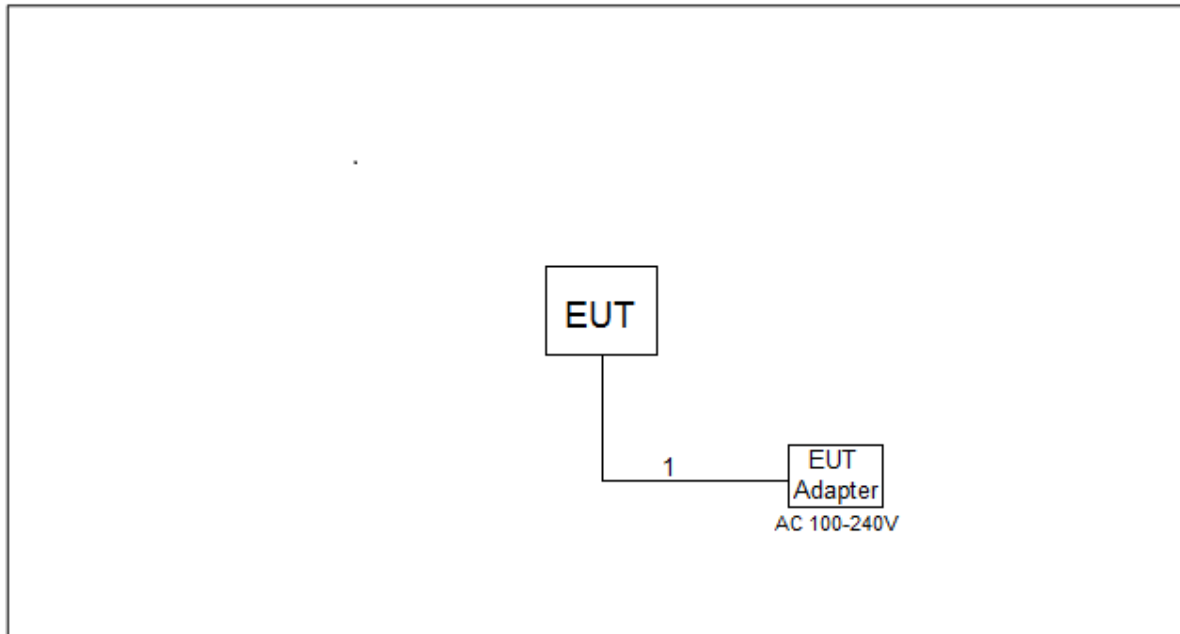

For Radiated 1GHz~18GHz

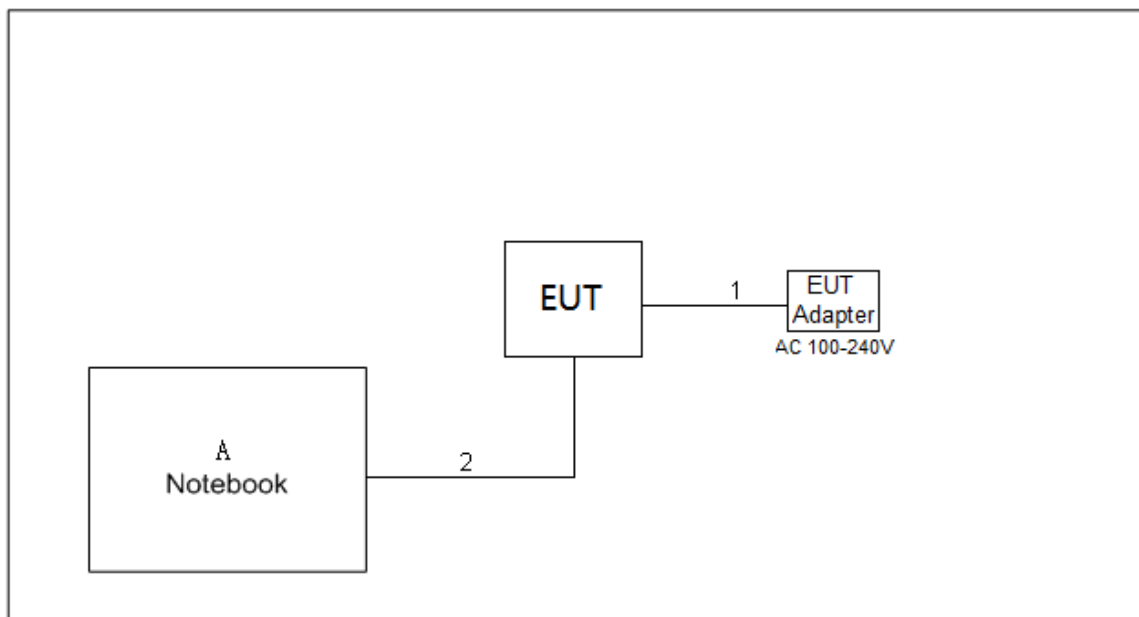

3.6 SUPPORT UNITS

For AC power line conducted &Radiated 9kHz~1GHz&Radiated 1GHz~26.5GHz

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

For Radiated 1GHz~18GHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	HUAWEI	KLVG-16	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m
2	USB Cable	NO	NO	0.8m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value - Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

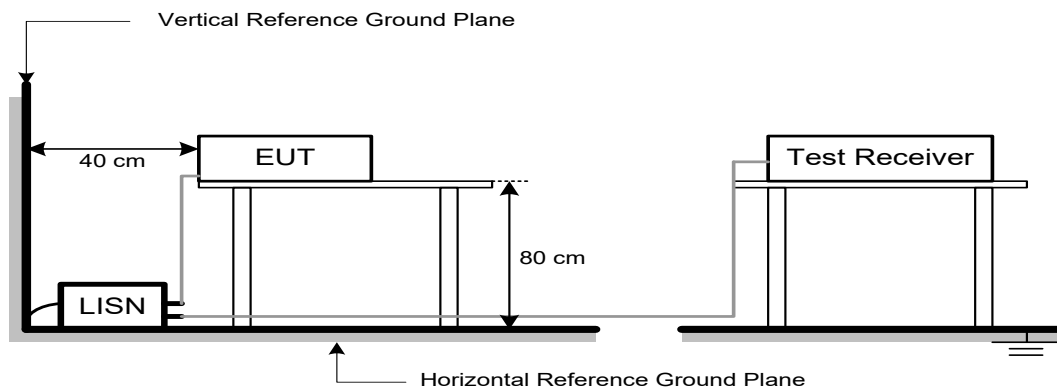

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) , then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

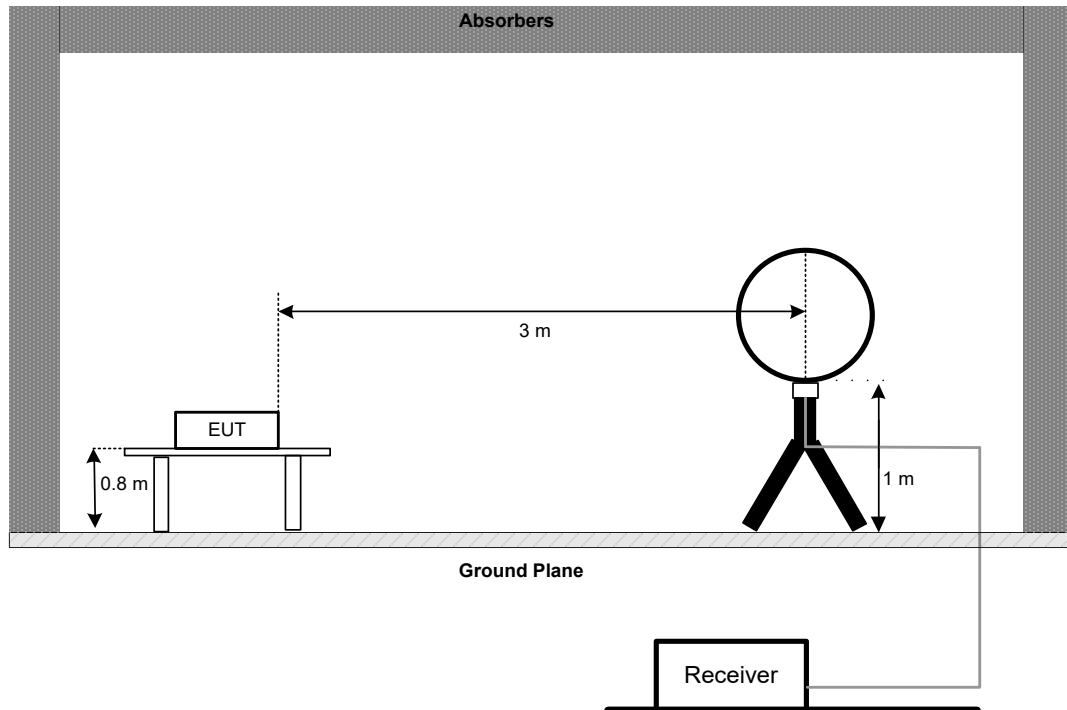


30 MHz to 1 GHz

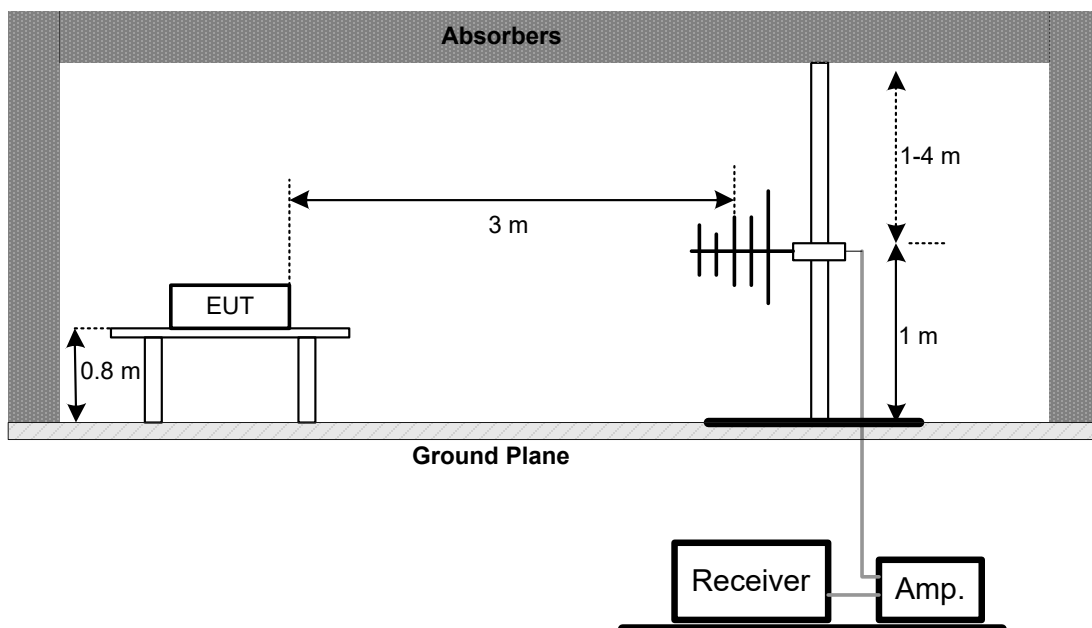

Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

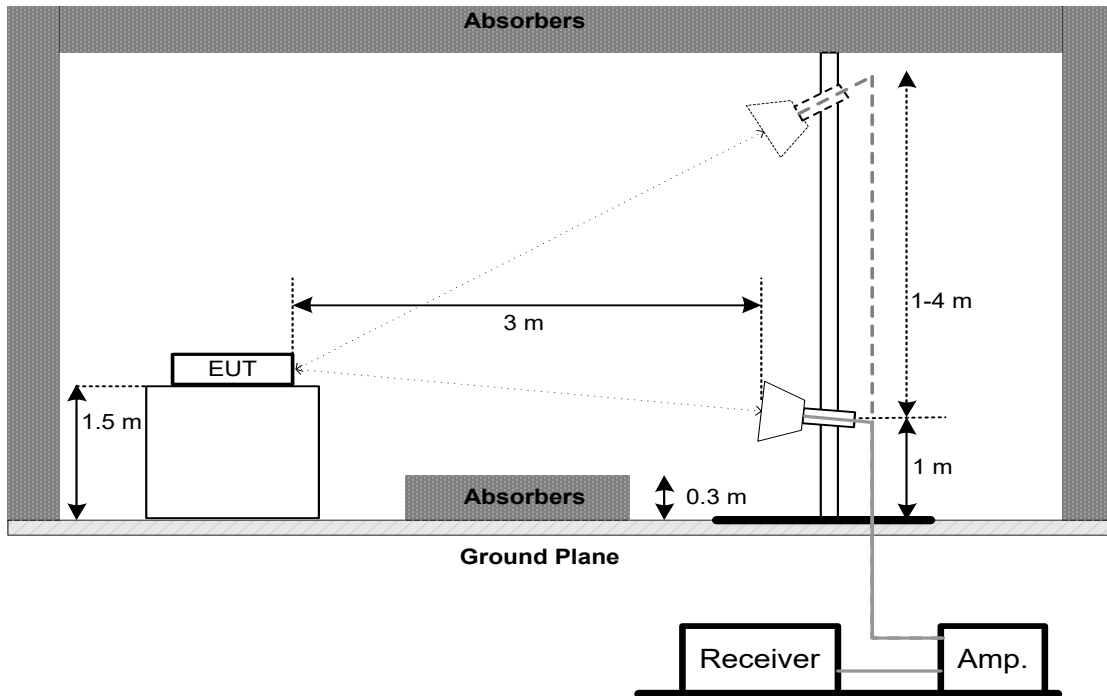

Harmonic(18 GHz to 26.5 GHz)

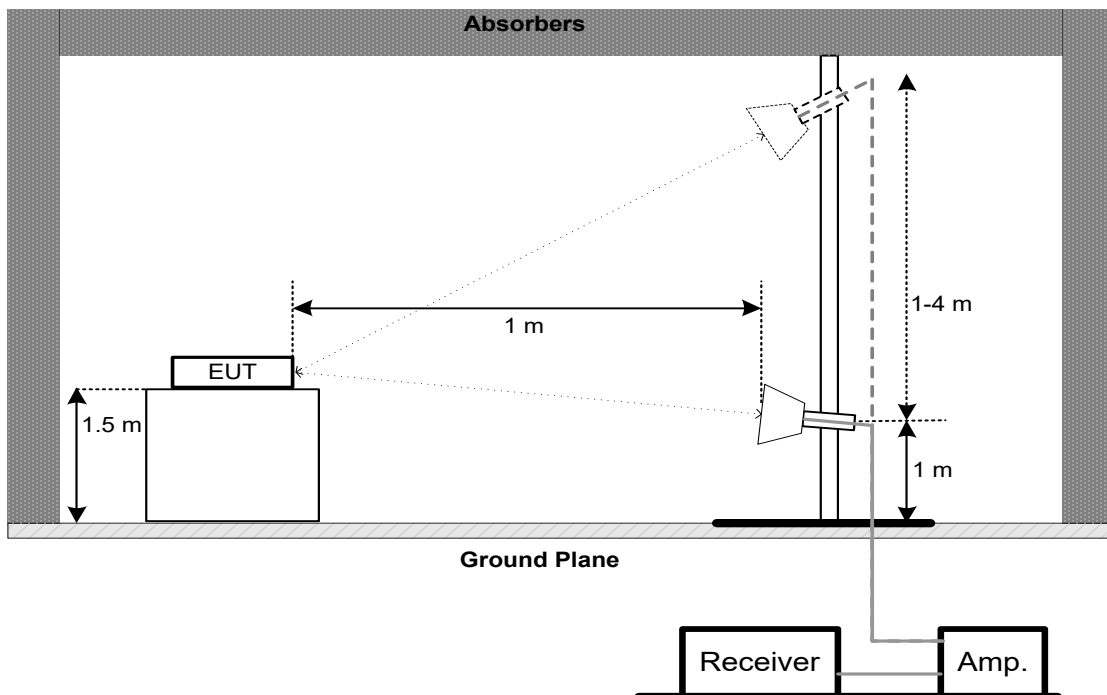

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013 .

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

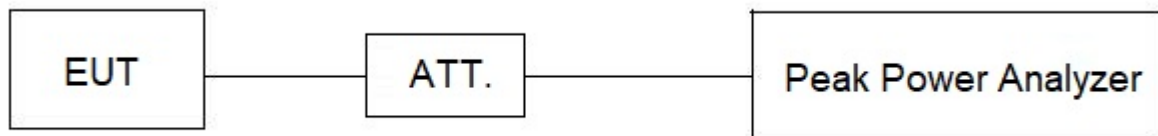

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For Reference Level:

Spectrum Parameters	Setting
Span	≥ 1.5 times the bandwidth.
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Band edge:


Spectrum Parameters	Setting
Start Frequency	2300 MHz
Stop Frequency	2690 MHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Harmonic:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

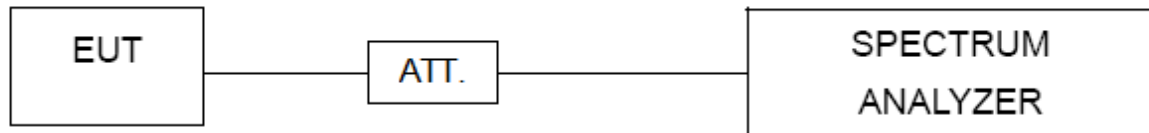8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	1.5 times the DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan.10, 2026
3	Cable	RegalWay	LMR400-NMNM-6 m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM -3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jan.10, 2026
2	Positioning Controller	MF	MF-7802	N/A	N/A
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	966 Chamber room	CM	9*6*6	N/A	May 15, 2026
5	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec.14, 2025
6	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec.14, 2025
7	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
8	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 04, 2026
9	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 04, 2026
10	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 04, 2026

Radiated Emissions - 1 GHz - 18 GHz

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jan.10, 2026
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct.29, 2025
3	Double Ridged Guide Antenna	ETS	3115	75846	Mar 02, 2026
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jun. 29, 2026
5	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jun. 29, 2026
6	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jun. 29, 2026
7	966 Chamber room	CM	9*6*6	N/A	May 18, 2026
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Filter	STI	STI15-9912	N/A	May 27, 2026
10	Positioning Controller	MF	MF-7802	N/A	N/A
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
2	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
3	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
4	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
5	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
6	966 Chamber room	CM	9*6*6	N/A	May 09, 2026
7	Positioning Controller	MF	MF-7802	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth & Conducted Spurious Emissions & Power Spectral Density

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 27, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

11. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos

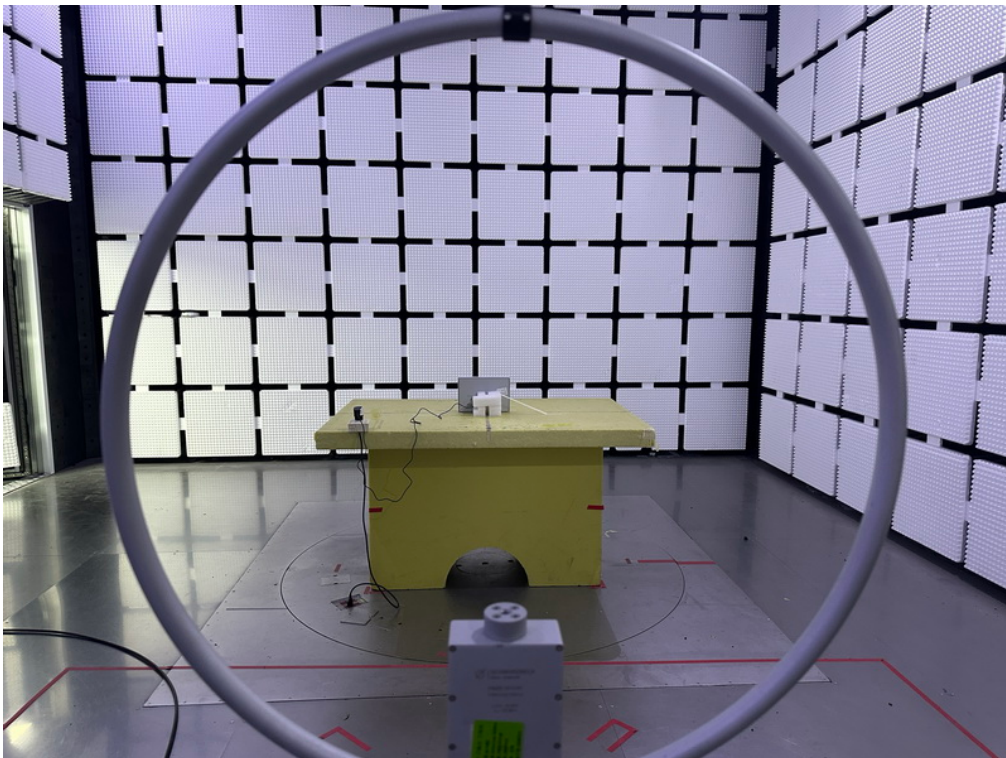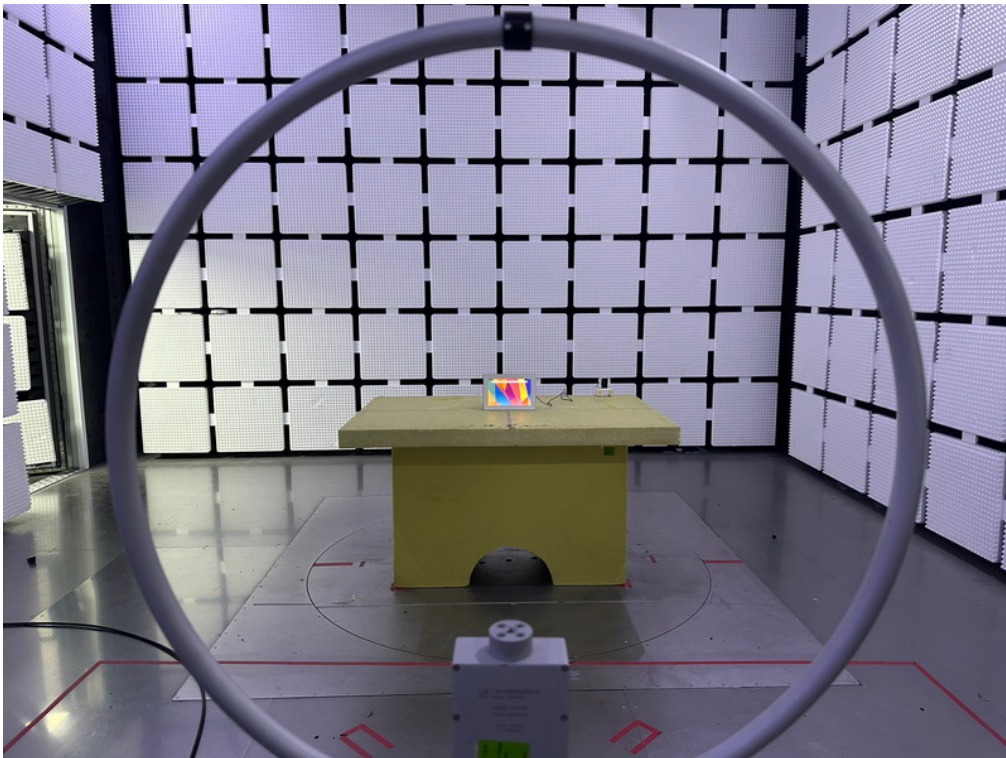


Radiated Emissions Test Photos**9 kHz to 30 MHz**

Radiated Emissions Test Photos**30 MHz to 1 GHz**



Radiated Emissions Test Photos

Band edge & Harmonic(1 GHz to 18 GHz)

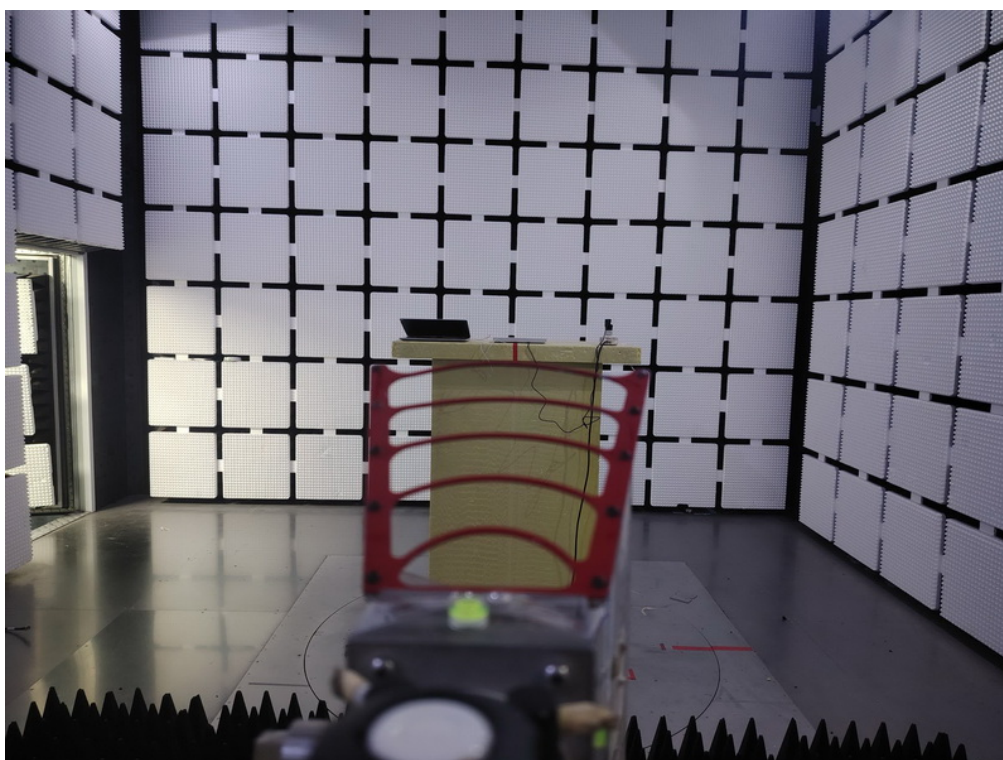


Radiated Emissions Test Photos

Harmonic(18 GHz to 26.5 GHz)

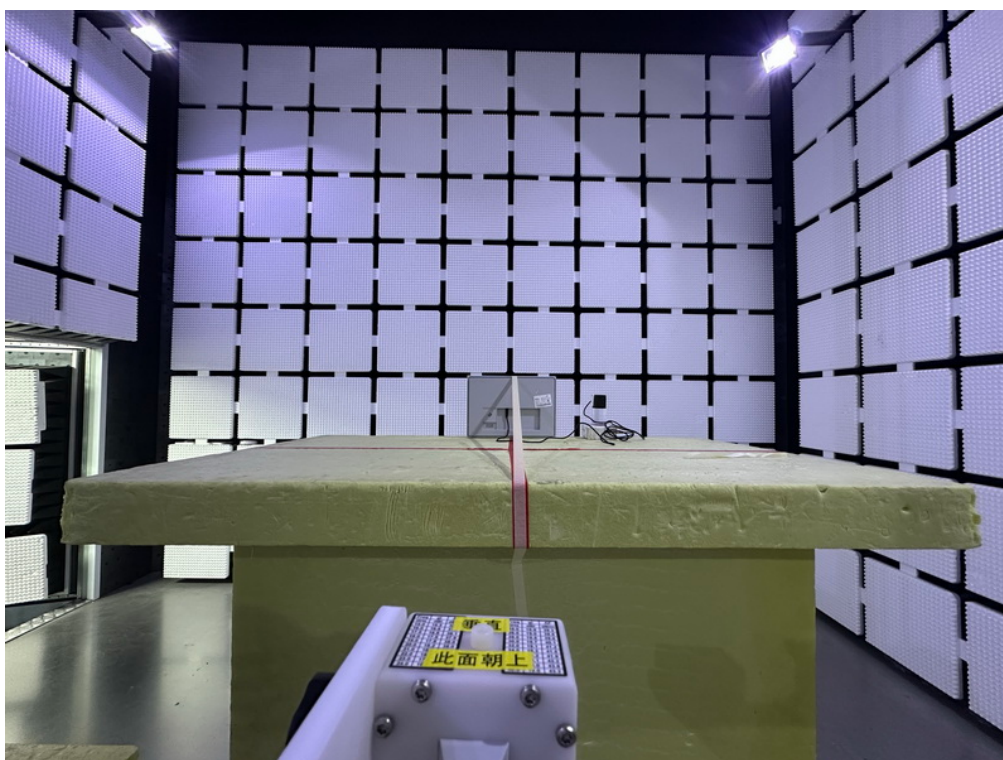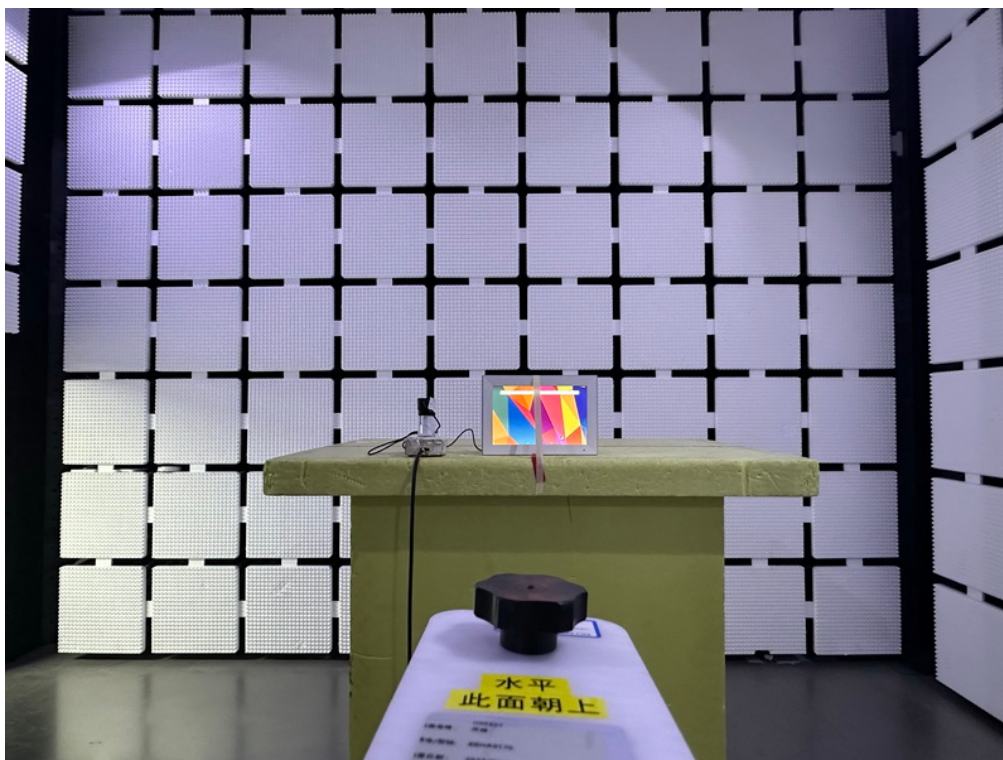


Conducted Test Photos

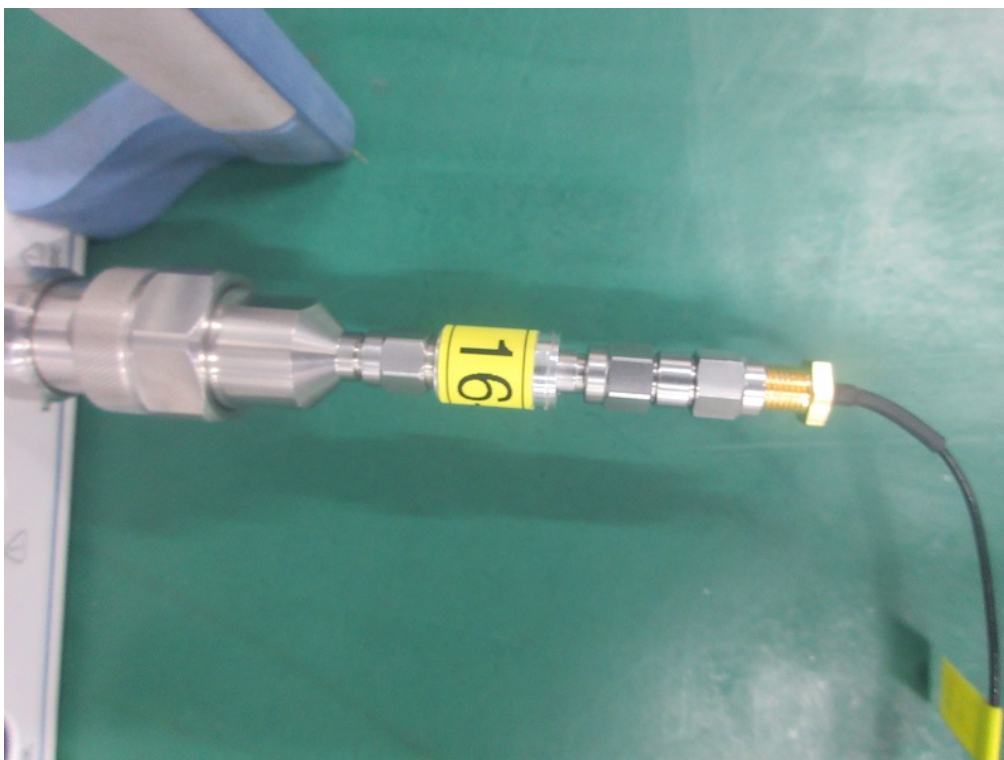

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX B Mode Channel 01	Phase	Line
-----------	----------------------	-------	------

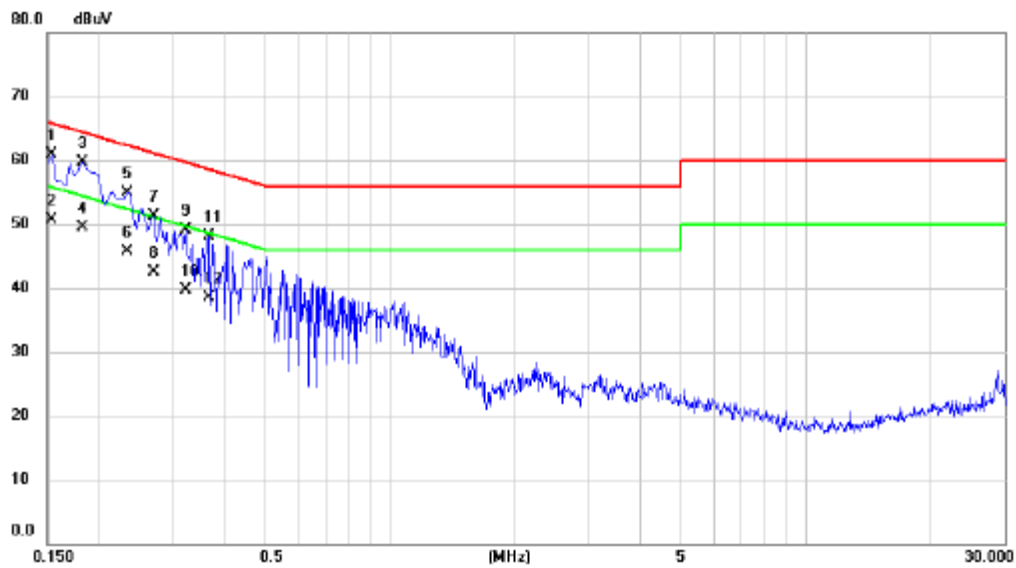


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1540	50.96	9.91	60.87	65.78	-4.91	QP	
2		0.1540	40.80	9.91	50.71	55.78	-5.07	AVG	
3	*	0.1820	49.79	9.92	59.71	64.39	-4.68	QP	
4		0.1820	39.60	9.92	49.52	54.39	-4.87	AVG	
5		0.2340	45.06	9.90	54.96	62.31	-7.35	QP	
6		0.2340	35.80	9.90	45.70	52.31	-6.61	AVG	
7		0.2700	41.41	9.92	51.33	61.12	-9.79	QP	
8		0.2700	32.60	9.92	42.52	51.12	-8.60	AVG	
9		0.3220	39.24	9.93	49.17	59.66	-10.49	QP	
10		0.3220	29.80	9.93	39.73	49.66	-9.93	AVG	
11		0.3660	38.25	9.94	48.19	58.59	-10.40	QP	
12		0.3660	28.60	9.94	38.54	48.59	-10.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 01	Phase	Neutral
-----------	----------------------	-------	---------

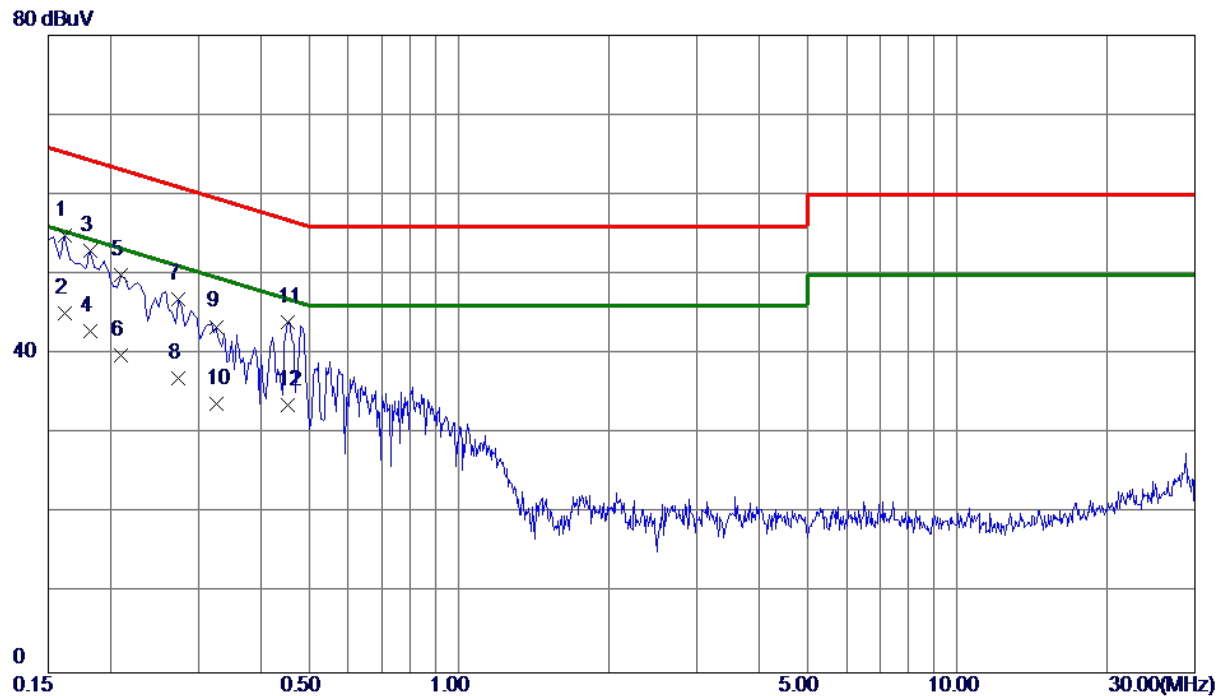

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1620	44.94	9.97	54.91	65.36	-10.45	QP	
2 *	0.1620	35.10	9.97	45.07	55.36	-10.29	AVG	
3	0.1819	42.97	9.97	52.94	64.40	-11.46	QP	
4	0.1819	32.90	9.97	42.87	54.40	-11.53	AVG	
5	0.2100	39.93	9.97	49.90	63.21	-13.31	QP	
6	0.2100	29.80	9.97	39.77	53.21	-13.44	AVG	
7	0.2740	36.87	9.99	46.86	61.00	-14.14	QP	
8	0.2740	26.90	9.99	36.89	51.00	-14.11	AVG	
9	0.3260	33.45	9.99	43.44	59.55	-16.11	QP	
10	0.3260	23.80	9.99	33.79	49.55	-15.76	AVG	
11	0.4540	33.93	10.02	43.95	56.80	-12.85	QP	
12	0.4540	23.61	10.02	33.63	46.80	-13.17	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX B Mode Channel 01	Polarization	Ant 0°
-----------	----------------------	--------------	--------

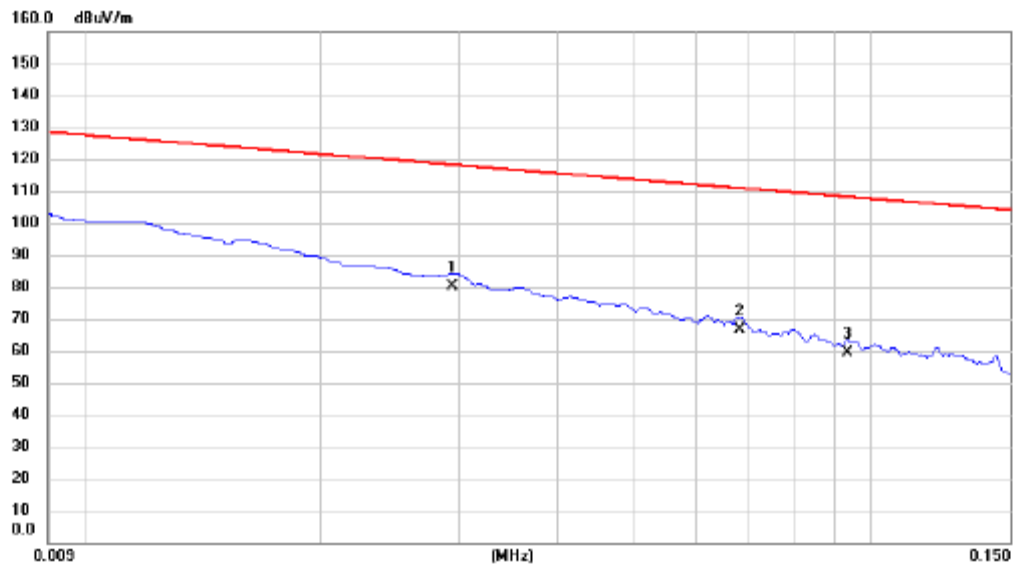


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.029	60.11	20.15	80.26	118.24	-37.98	AVG	
2		0.068	46.44	20.14	66.58	110.94	-44.36	AVG	
3		0.093	39.40	20.14	59.54	108.21	-48.67	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 01	Polarization	Ant 0°
-----------	----------------------	--------------	--------

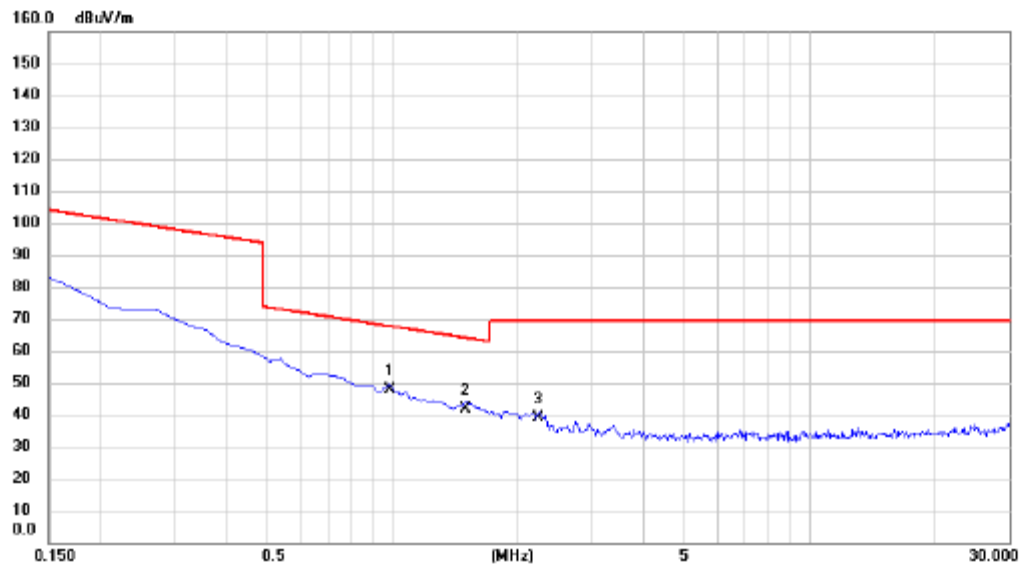


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.986	27.63	20.00	47.63	67.73	-20.10	QP	
2		1.493	21.86	20.00	41.86	64.12	-22.26	QP	
3		2.240	18.95	20.02	38.97	69.54	-30.57	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 01	Polarization	Ant 90°
-----------	----------------------	--------------	---------

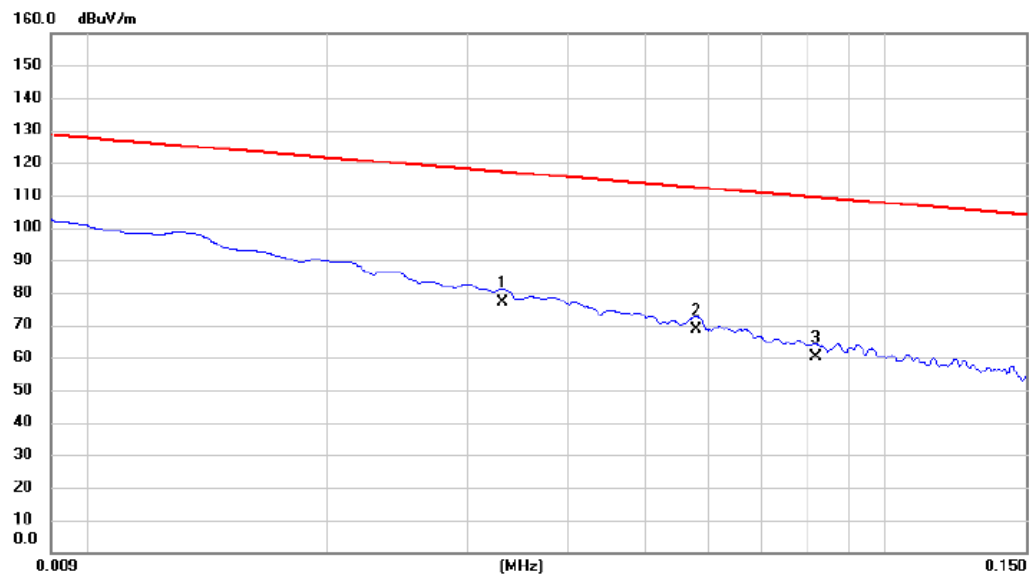


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.033	56.78	20.14	76.92	117.21	-40.29	AVG	
2		0.058	48.47	20.14	68.61	112.34	-43.73	AVG	
3		0.082	40.06	20.14	60.20	109.35	-49.15	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 01	Polarization	Ant 90°
-----------	----------------------	--------------	---------

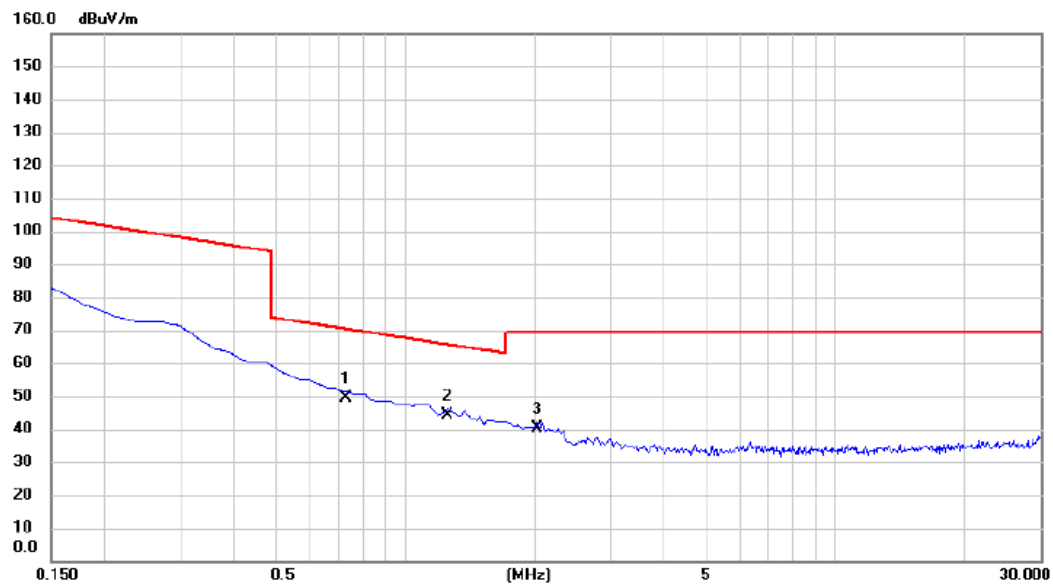

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.727	29.34	19.98	49.32	70.37	-21.05	QP	
2		1.254	24.06	20.00	44.06	65.63	-21.57	QP	
3		2.030	20.30	20.01	40.31	69.54	-29.23	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX B Mode Channel 01	Polarization	Vertical
-----------	----------------------	--------------	----------

80 dBuV/m

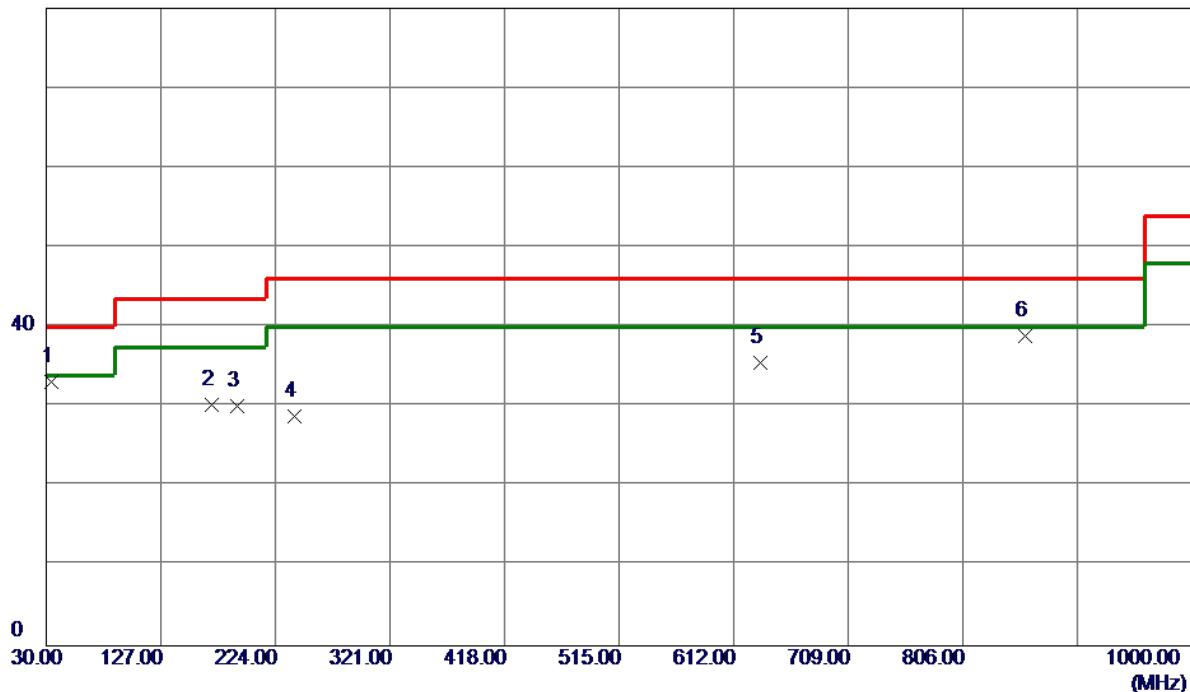

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.8800	45.37	-12.29	33.08	40.00	-6.92	Peak	
2	169.6799	40.83	-10.65	30.18	43.52	-13.34	Peak	
3	191.9900	42.97	-12.86	30.11	43.52	-13.41	Peak	
4	240.4900	40.66	-11.86	28.80	46.02	-17.22	Peak	
5	634.3100	38.04	-2.52	35.52	46.02	-10.50	Peak	
6	858.3800	38.85	-0.01	38.84	46.02	-7.18	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 01	Polarization	Horizontal
-----------	----------------------	--------------	------------

80 dBuV/m

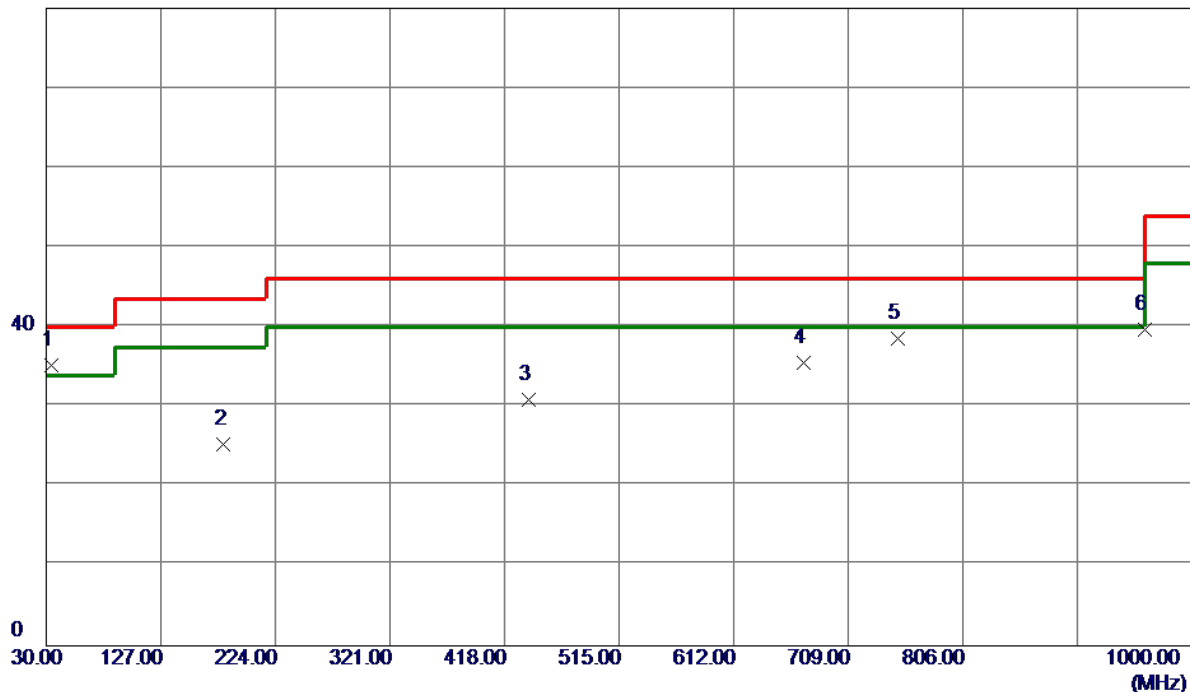

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.8800	47.53	-12.29	35.24	40.00	-4.76	Peak	
2	180.3500	36.92	-11.65	25.27	43.52	-18.25	Peak	
3	438.3700	37.16	-6.31	30.85	46.02	-15.17	Peak	
4	671.1700	37.79	-2.20	35.59	46.02	-10.43	Peak	
5	750.7100	39.09	-0.49	38.60	46.02	-7.42	Peak	
6	960.2300	38.56	1.14	39.70	53.97	-14.27	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

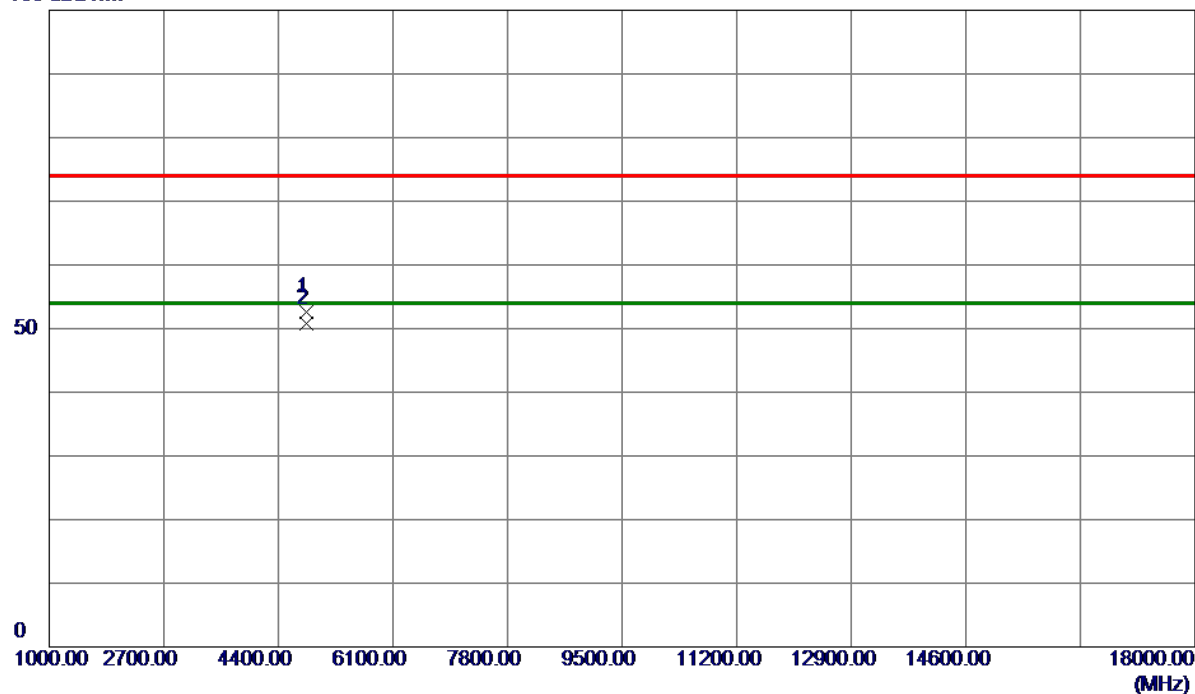


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9800	48.16	4.37	52.53	74.00	-21.47	Peak	
2 *	4824.0400	46.52	4.37	50.89	54.00	-3.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

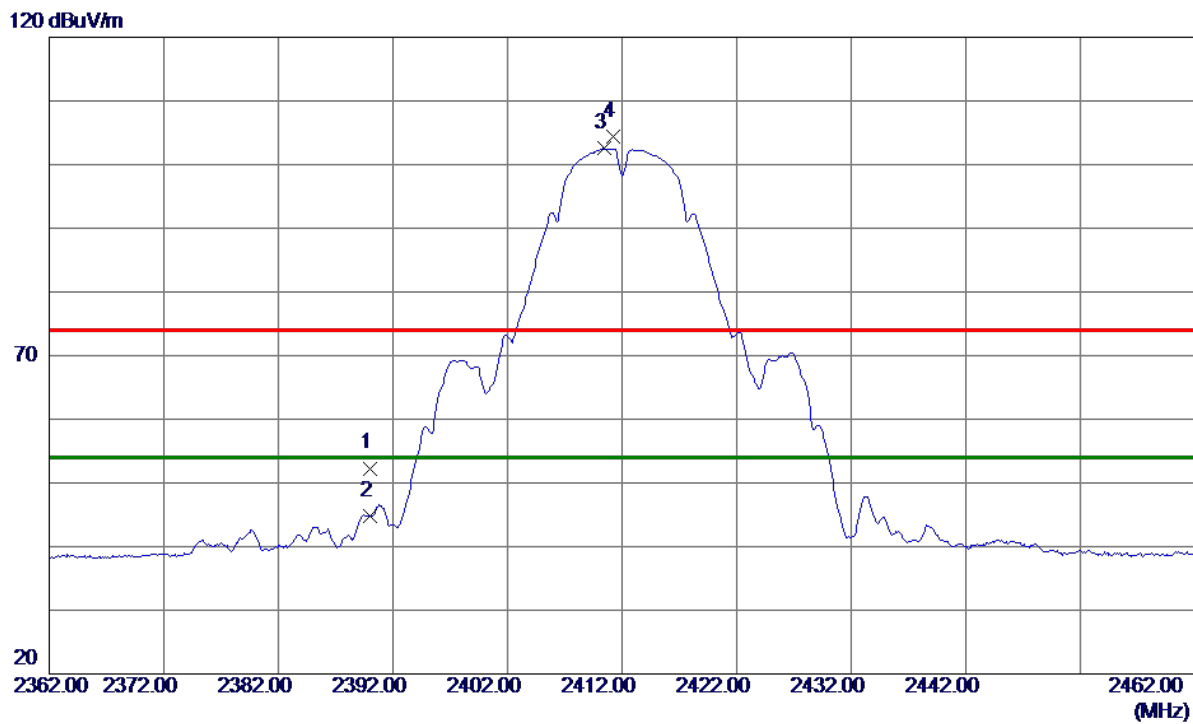


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	44.40	7.90	52.30	74.00	-21.70	Peak	
2	2390.0000	36.87	7.90	44.77	54.00	-9.23	AVG	
3 *	2410.4000	94.62	7.94	102.56	54.00	48.56	AVG	No Limit
4	2411.2000	96.52	7.95	104.47	74.00	30.47	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

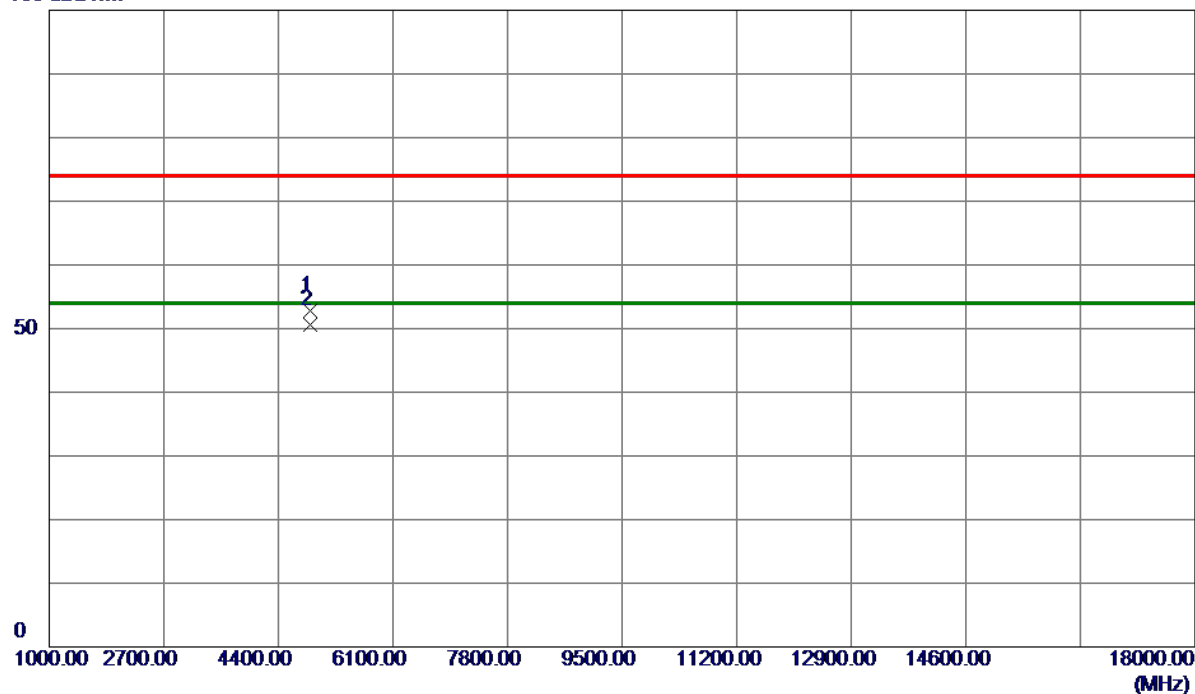


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.0200	48.42	4.40	52.82	74.00	-21.18	Peak	
2 *	4874.0400	46.28	4.40	50.68	54.00	-3.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

120 dBuV/m

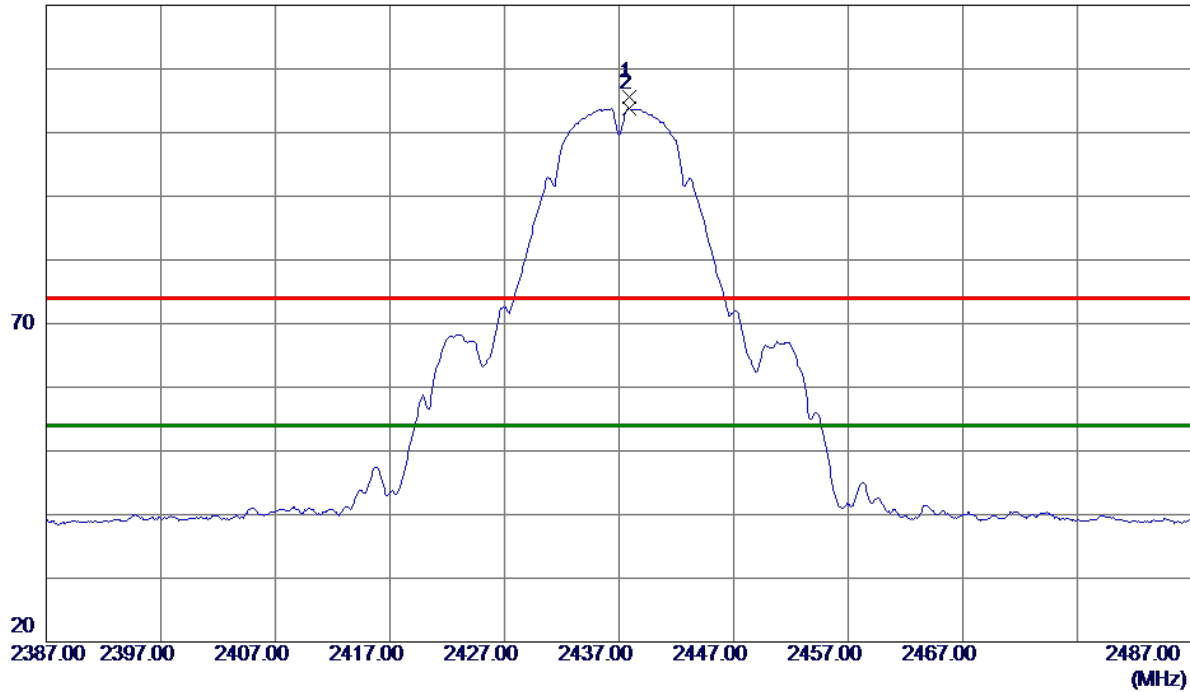

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2437.9000	97.66	8.01	105.67	74.00	31.67	Peak	No Limit
2 *	2437.9000	95.74	8.01	103.75	54.00	49.75	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

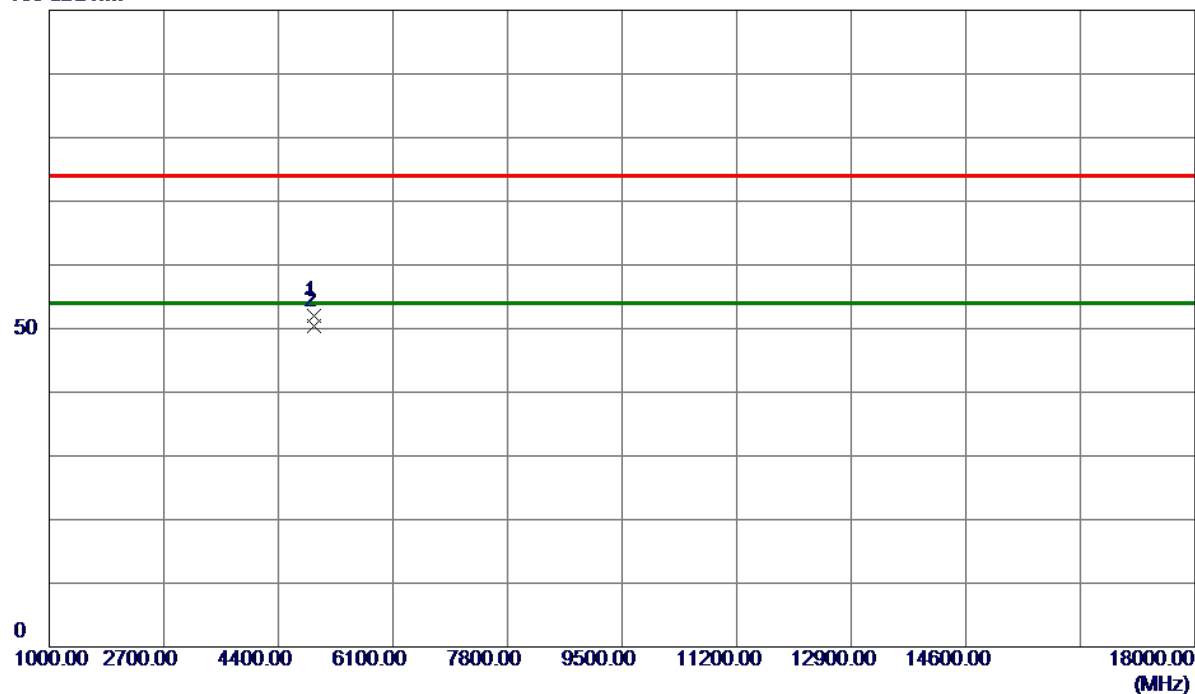


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.9800	47.66	4.43	52.09	74.00	-21.91	Peak	
2 *	4924.0000	45.95	4.43	50.38	54.00	-3.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

120 dBuV/m

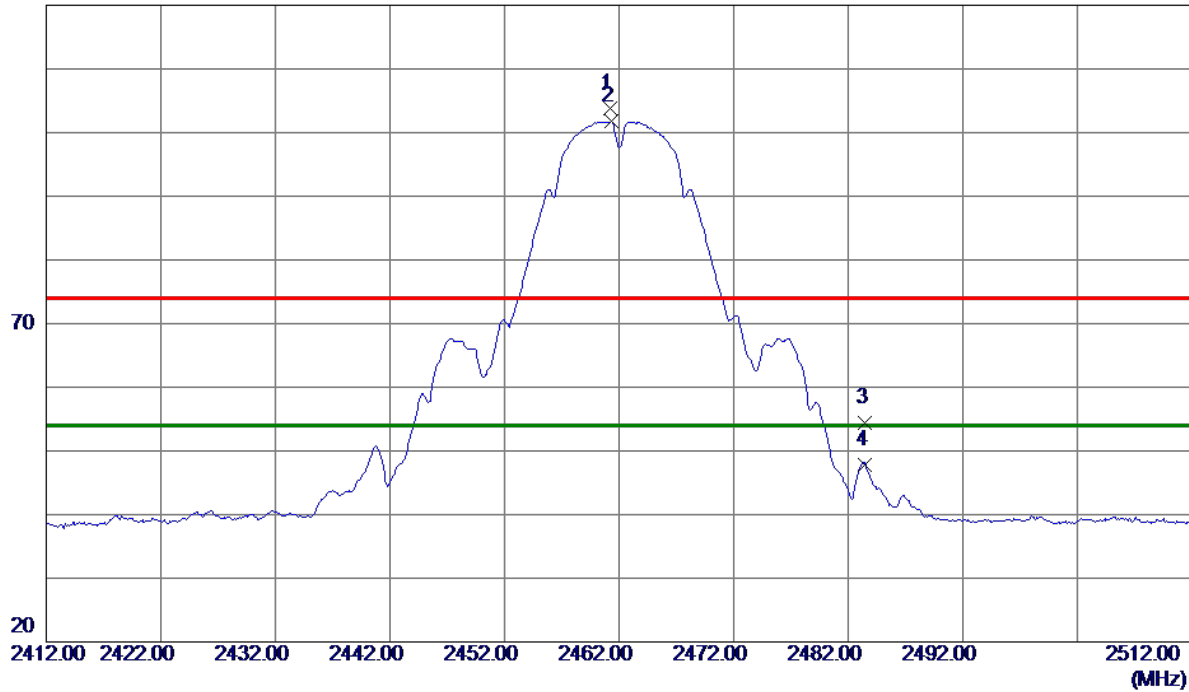

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.2000	95.64	8.06	103.70	74.00	29.70	Peak	No Limit
2 *	2461.3000	93.65	8.06	101.71	54.00	47.71	AVG	No Limit
3	2483.5000	46.27	8.11	54.38	74.00	-19.62	Peak	
4	2483.5000	39.67	8.11	47.78	54.00	-6.22	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

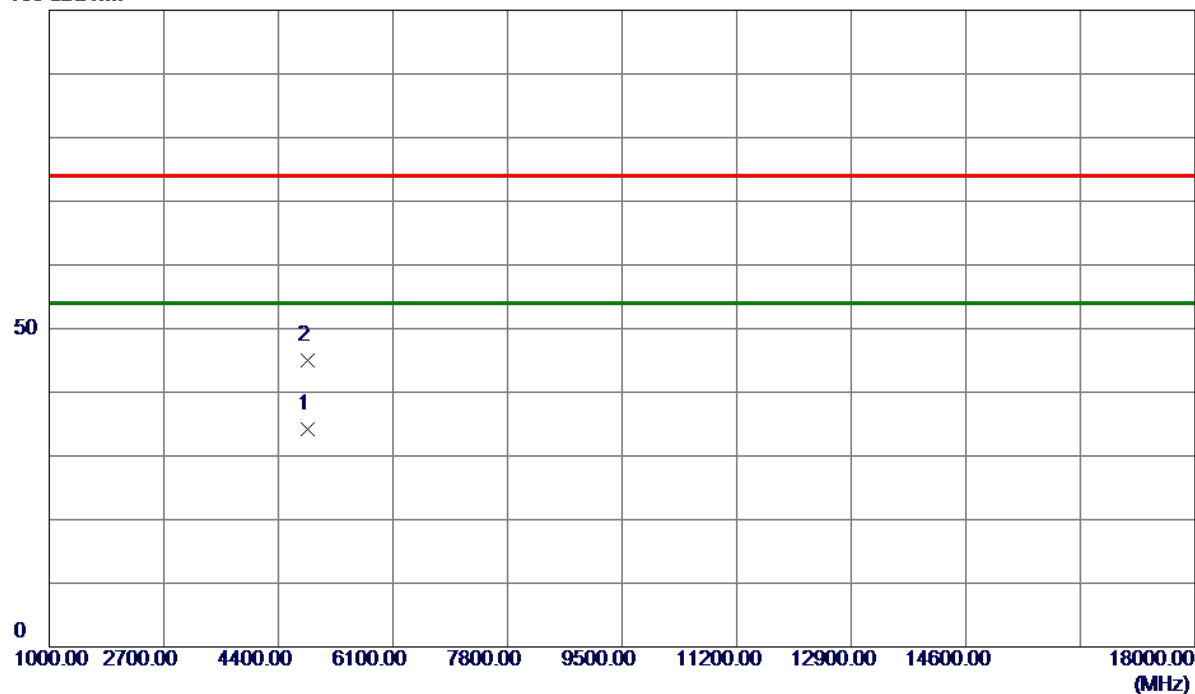


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4825.1500	29.73	4.38	34.11	54.00	-19.89	AVG	
2	4827.4500	40.56	4.38	44.94	74.00	-29.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

120 dBuV/m

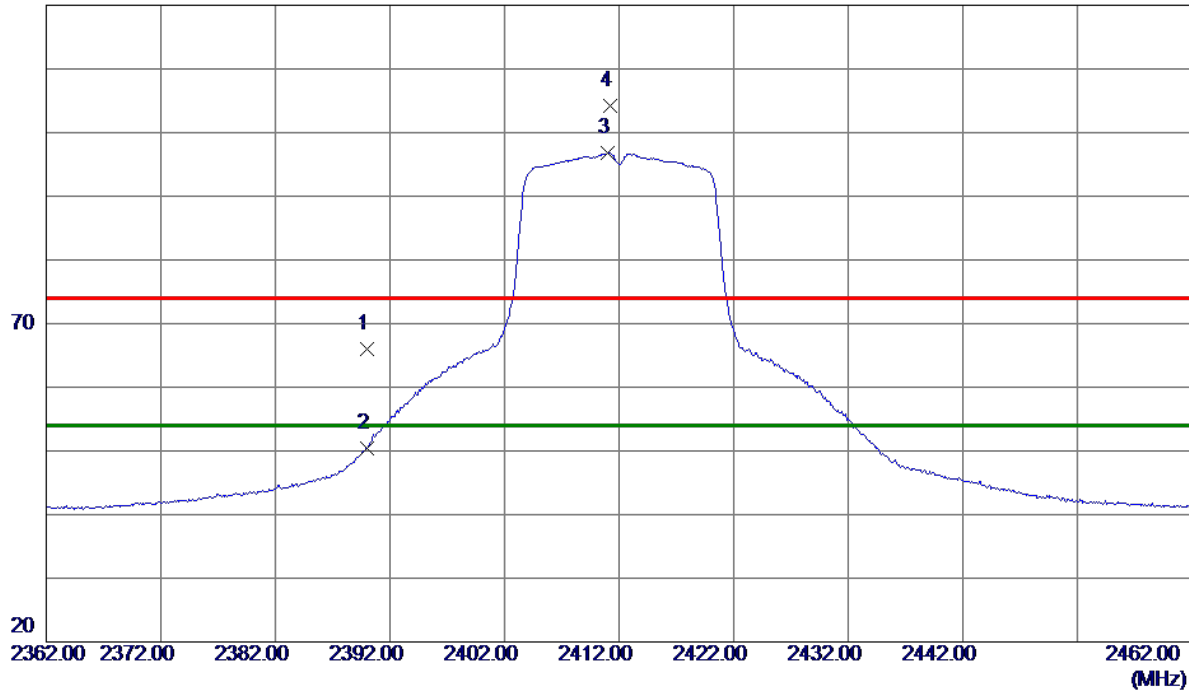

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	58.13	7.90	66.03	74.00	-7.97	Peak	
2	2390.0000	42.56	7.90	50.46	54.00	-3.54	AVG	
3 *	2411.0000	88.82	7.95	96.77	54.00	42.77	AVG	No Limit
4	2411.2000	96.20	7.95	104.15	74.00	30.15	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

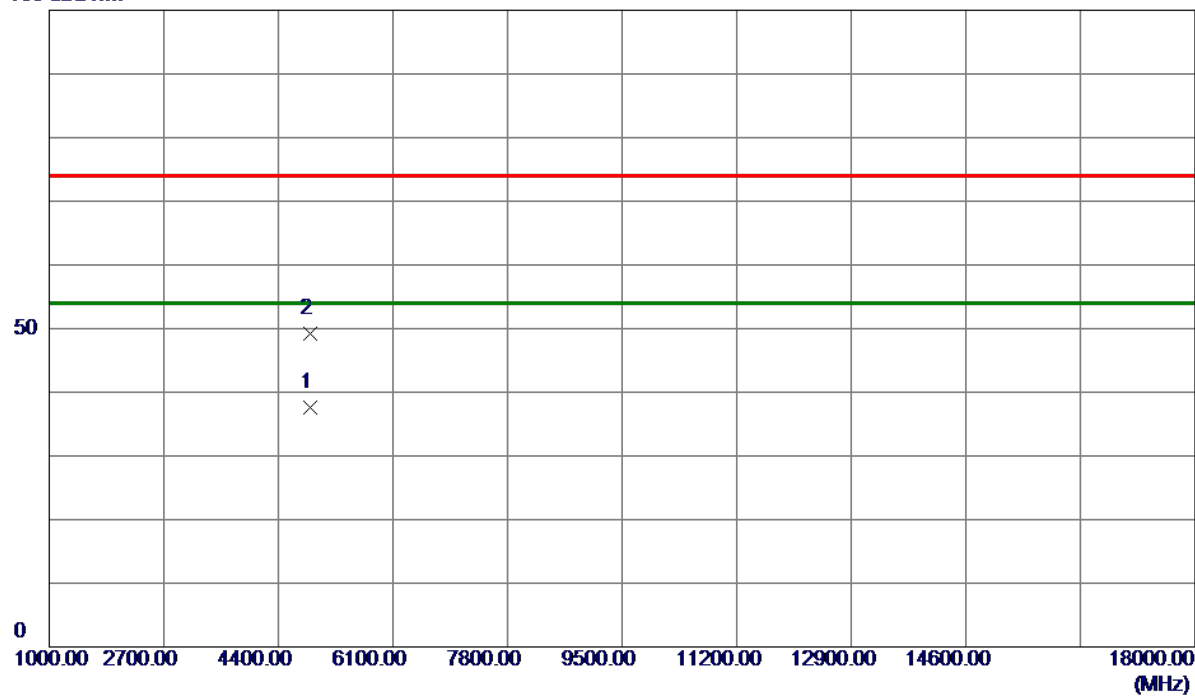


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.5000	33.24	4.40	37.64	54.00	-16.36	AVG	
2	4876.0500	44.81	4.40	49.21	74.00	-24.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

120 dBuV/m

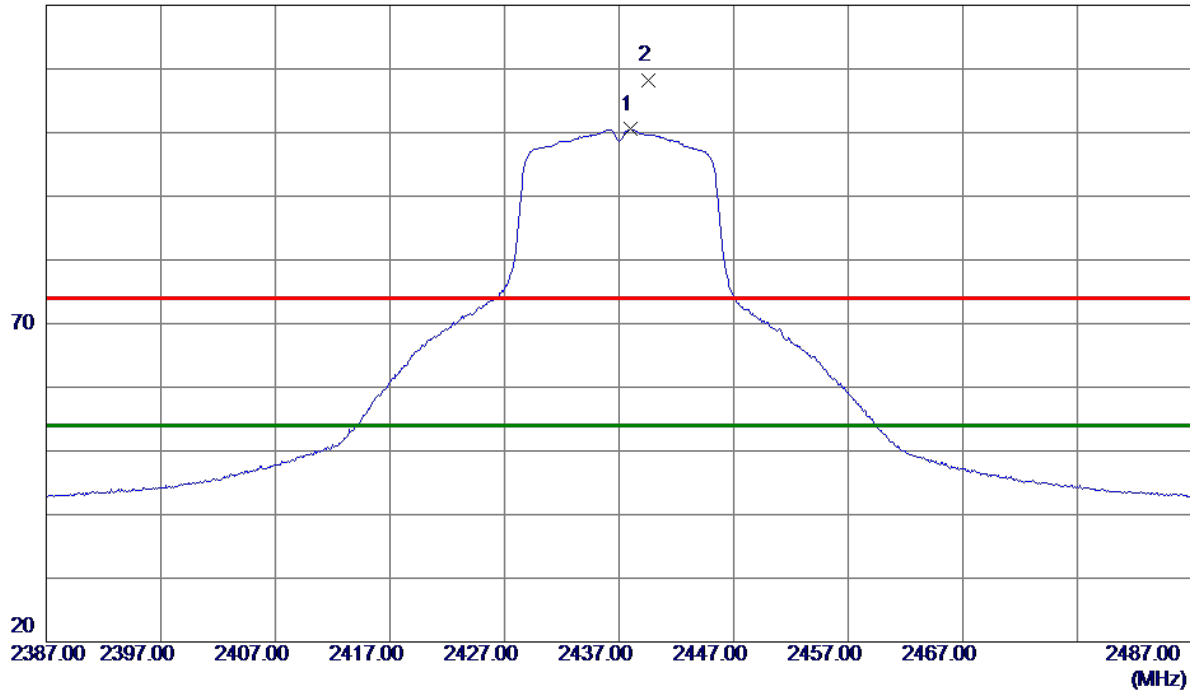

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2438.0000	92.49	8.01	100.50	54.00	46.50	AVG	No Limit
2	2439.6000	100.27	8.01	108.28	74.00	34.28	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

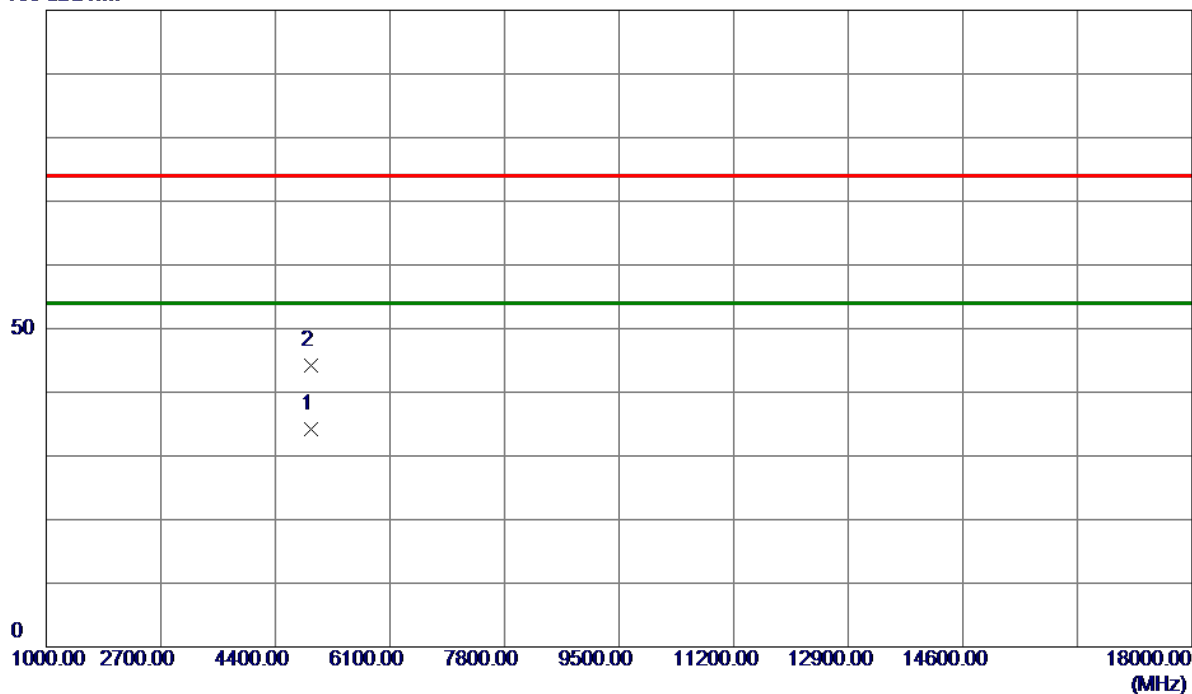


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4921.2000	29.68	4.43	34.11	54.00	-19.89	AVG	
2	4921.9000	39.86	4.43	44.29	74.00	-29.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

120 dBuV/m

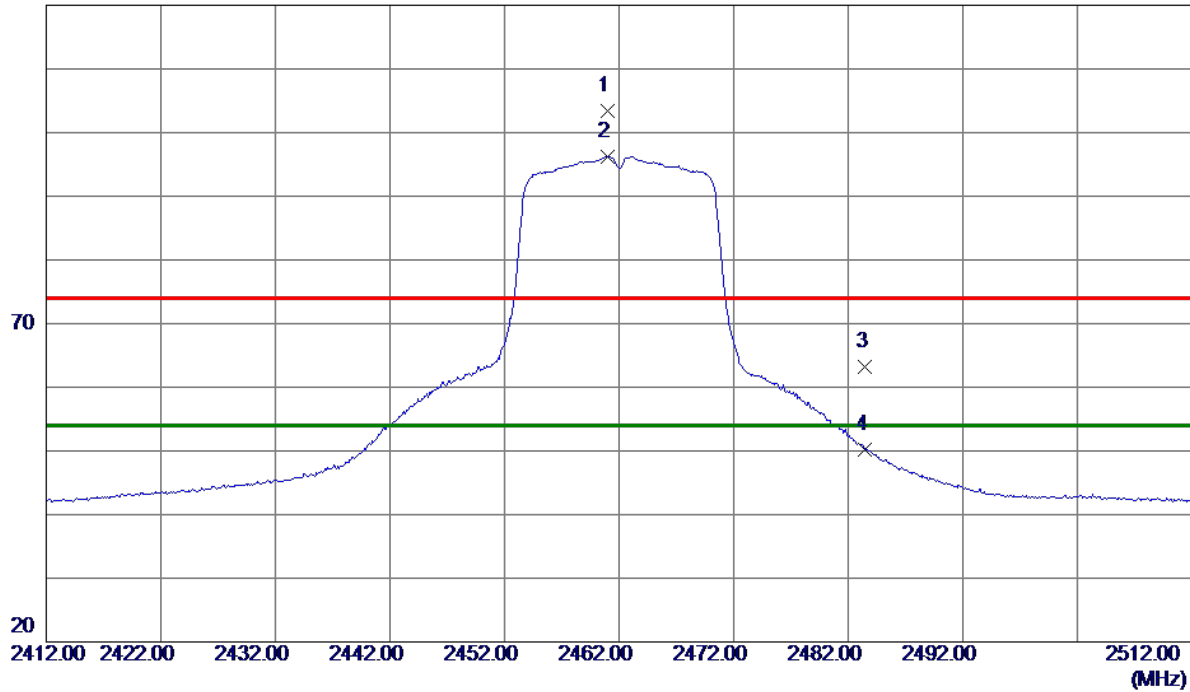

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.0000	95.27	8.06	103.33	74.00	29.33	Peak	No Limit
2 *	2461.0000	88.16	8.06	96.22	54.00	42.22	AVG	No Limit
3	2483.5000	55.11	8.11	63.22	74.00	-10.78	Peak	
4	2483.5000	42.12	8.11	50.23	54.00	-3.77	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

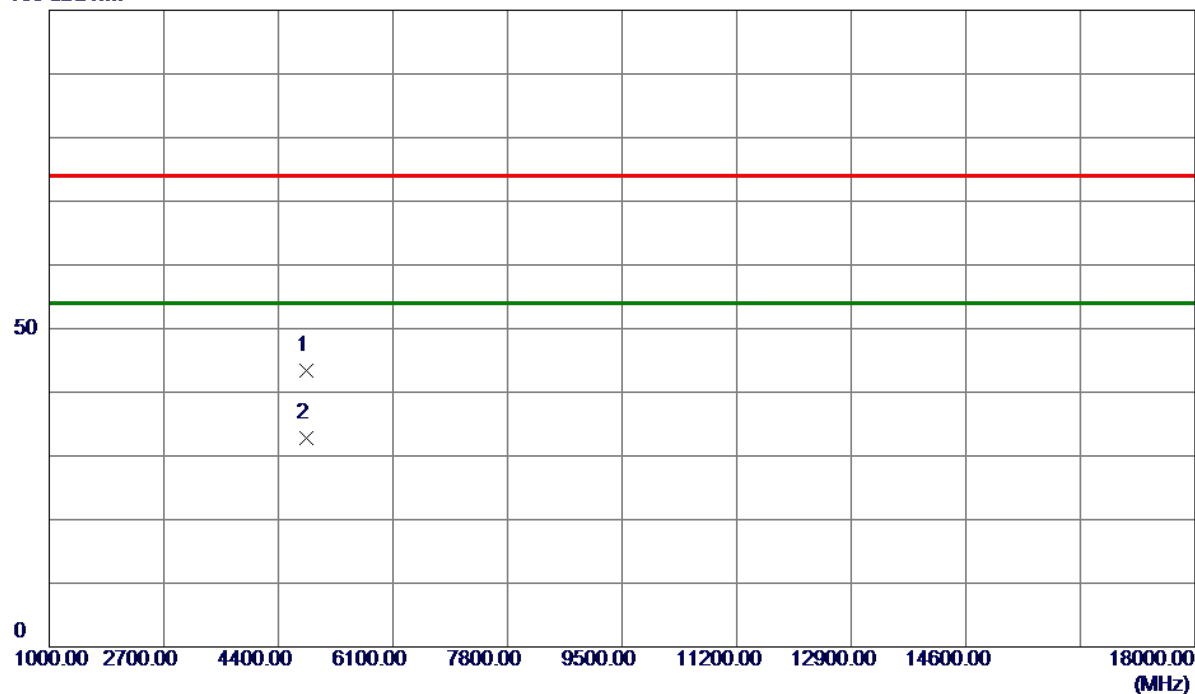


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9500	39.02	4.37	43.39	74.00	-30.61	Peak	
2 *	4824.5000	28.41	4.38	32.79	54.00	-21.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

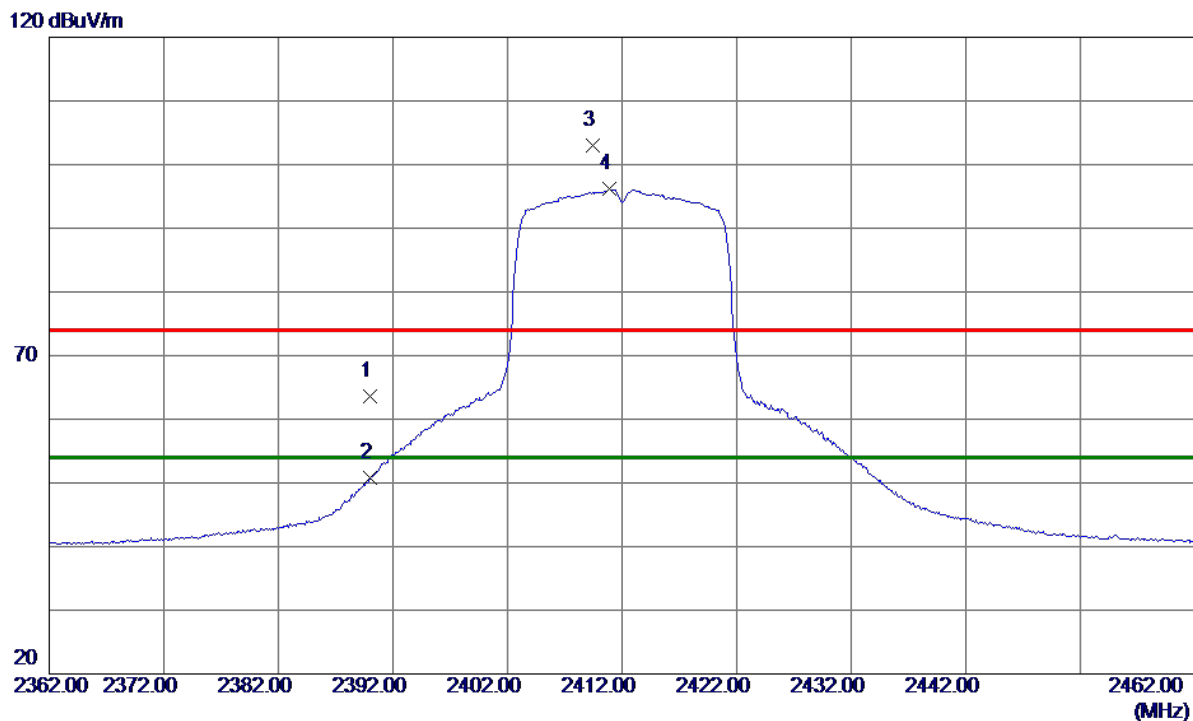


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.74	7.90	63.64	74.00	-10.36	Peak	
2	2390.0000	42.87	7.90	50.77	54.00	-3.23	AVG	
3	2409.4000	95.11	7.94	103.05	74.00	29.05	Peak	No Limit
4 *	2410.9000	88.18	7.95	96.13	54.00	42.13	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

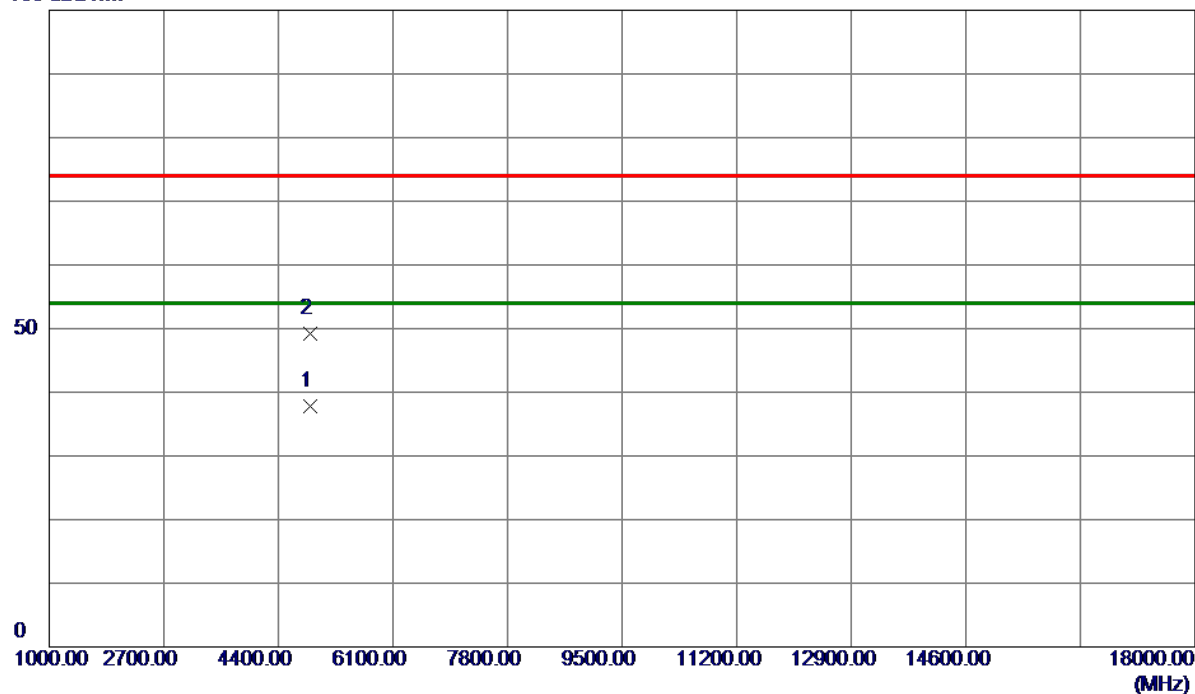


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.4000	33.32	4.40	37.72	54.00	-16.28	AVG	
2	4876.9500	44.83	4.40	49.23	74.00	-24.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

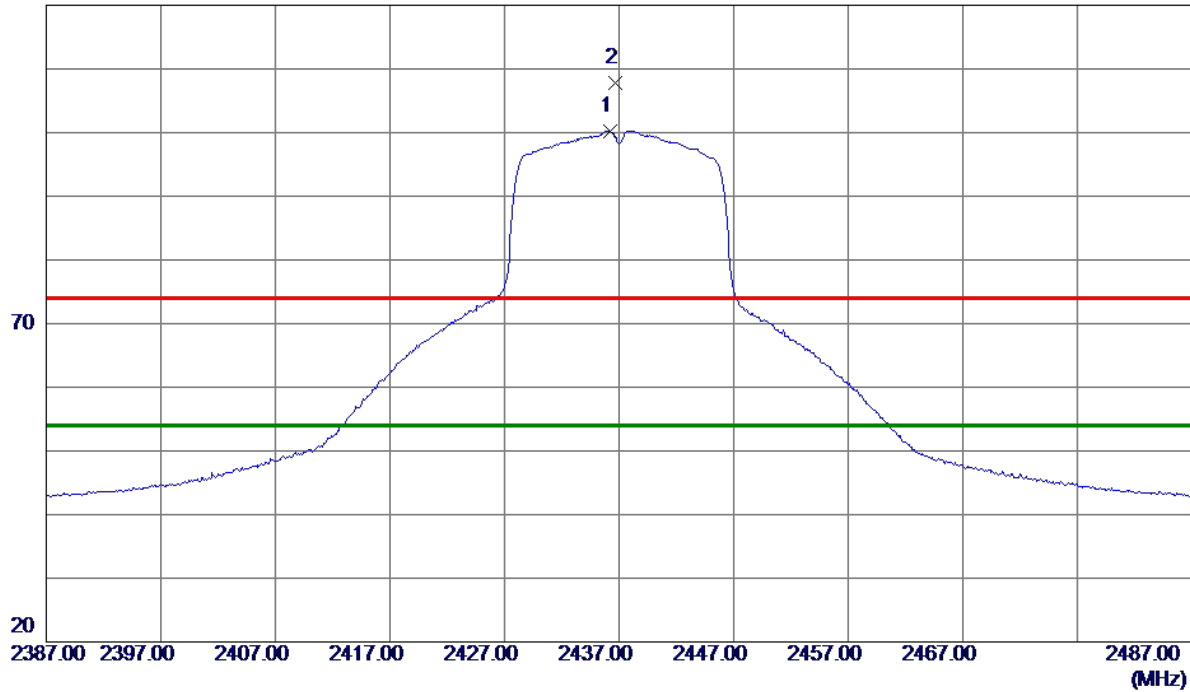

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2436.2000	92.28	8.00	100.28	54.00	46.28	AVG	No Limit
2	2436.7000	99.78	8.00	107.78	74.00	33.78	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

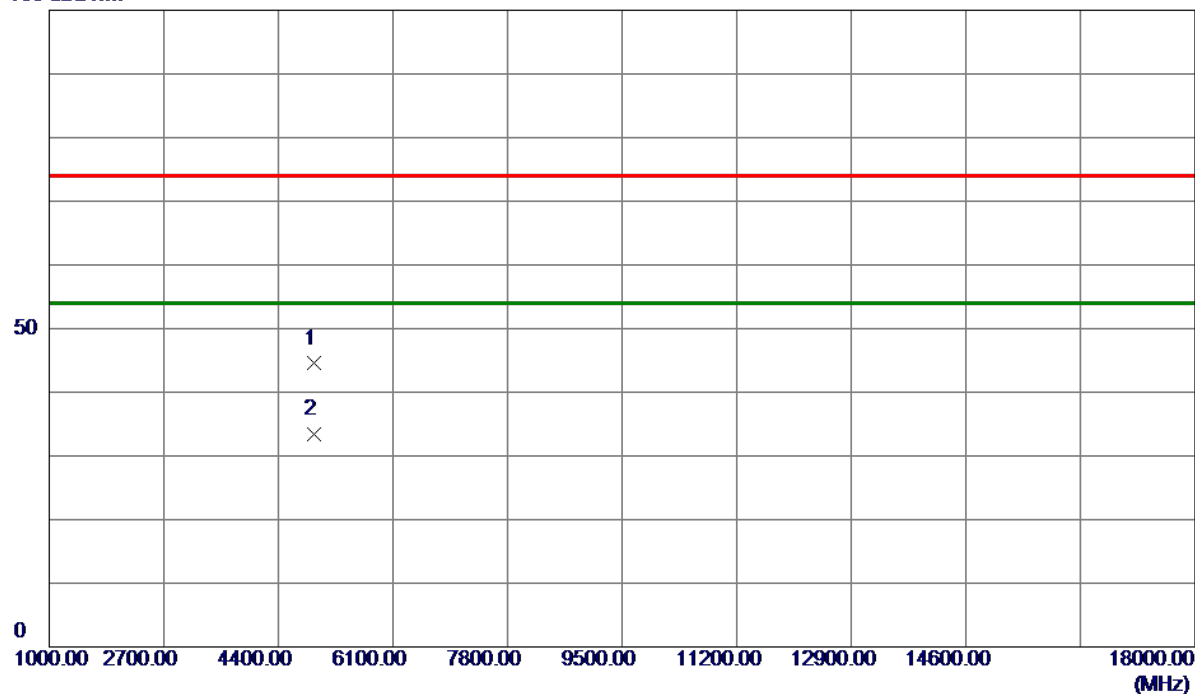


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.4000	40.07	4.43	44.50	74.00	-29.50	Peak	
2 *	4924.5000	28.97	4.43	33.40	54.00	-20.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

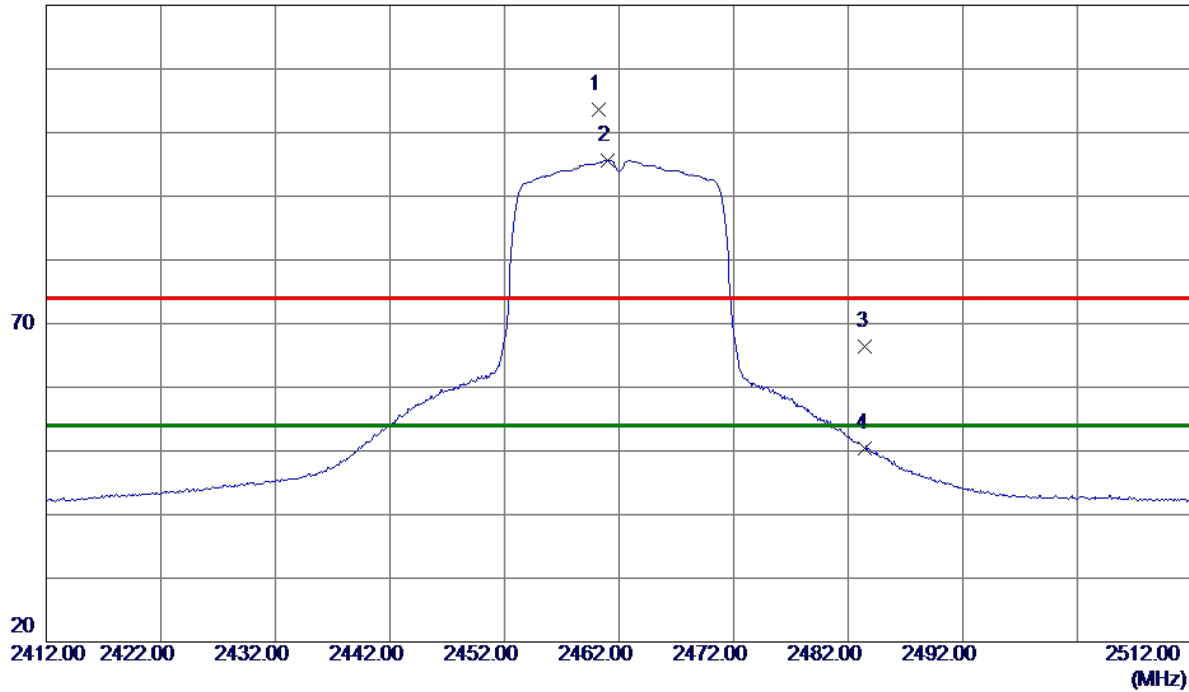

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.2000	95.59	8.06	103.65	74.00	29.65	Peak	No Limit
2 *	2461.0000	87.63	8.06	95.69	54.00	41.69	AVG	No Limit
3	2483.5000	58.28	8.11	66.39	74.00	-7.61	Peak	
4	2483.5000	42.37	8.11	50.48	54.00	-3.52	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

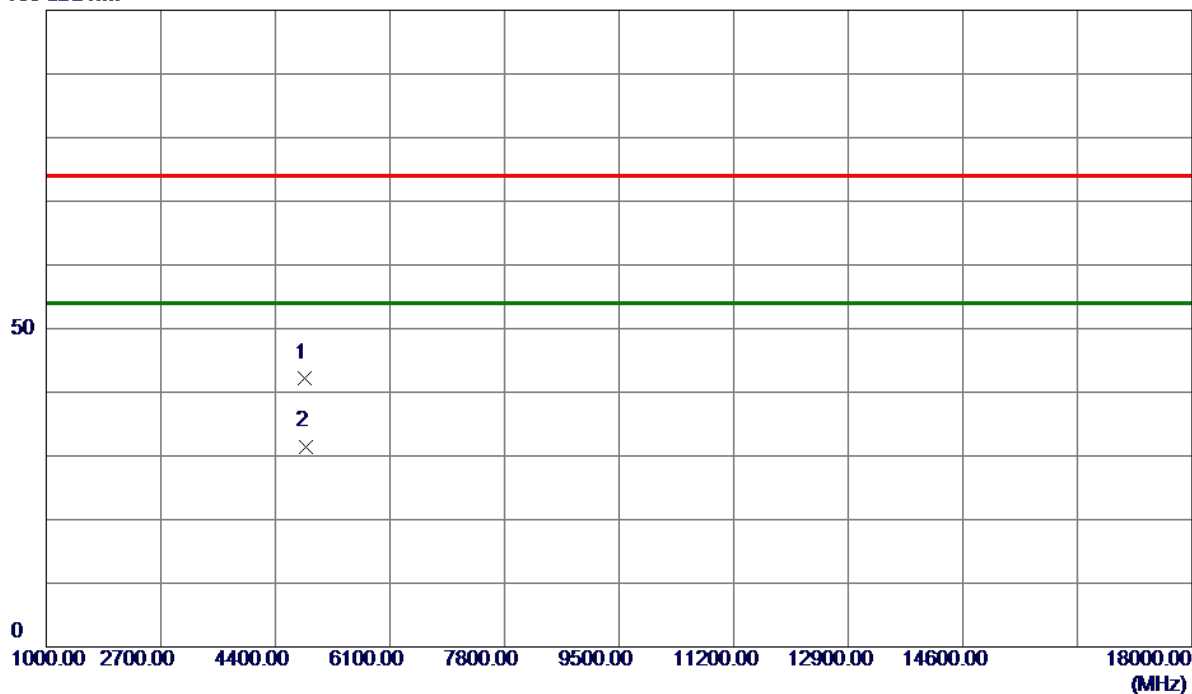


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4838.4000	37.75	4.38	42.13	74.00	-31.87	Peak	
2 *	4860.5000	27.11	4.39	31.50	54.00	-22.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2422 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

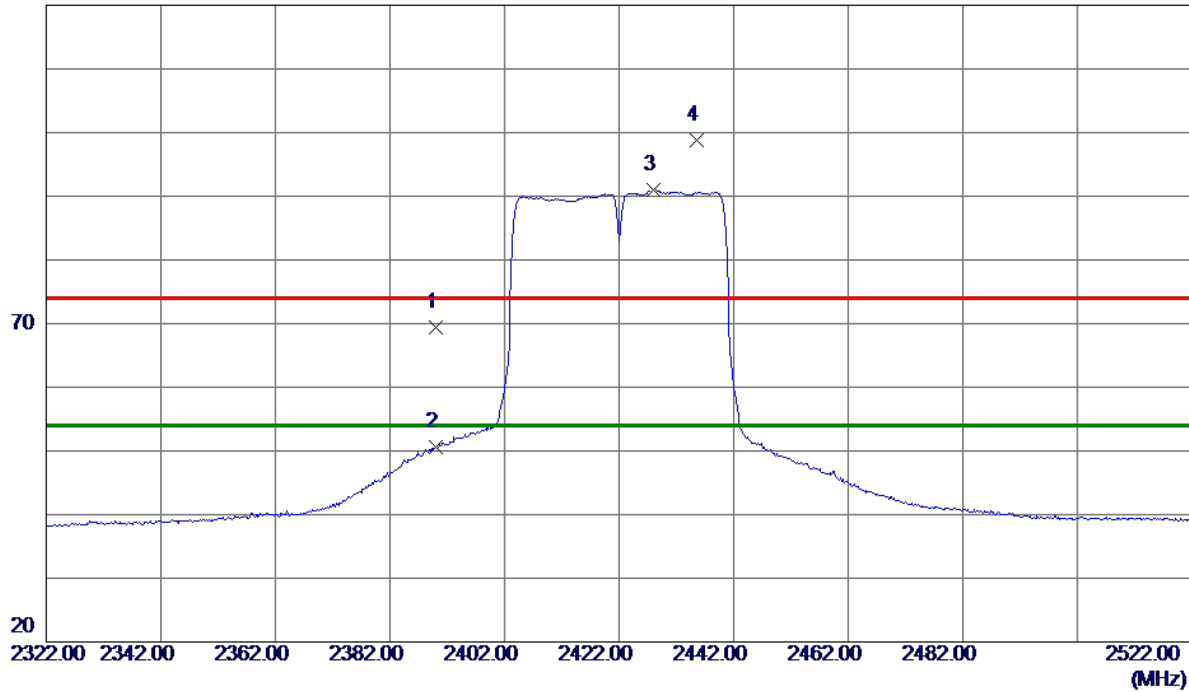

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	61.44	7.90	69.34	74.00	-4.66	Peak	
2	2390.0000	42.78	7.90	50.68	54.00	-3.32	AVG	
3 *	2428.0000	83.00	7.98	90.98	54.00	36.98	AVG	No Limit
4	2435.6000	90.82	8.00	98.82	74.00	24.82	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

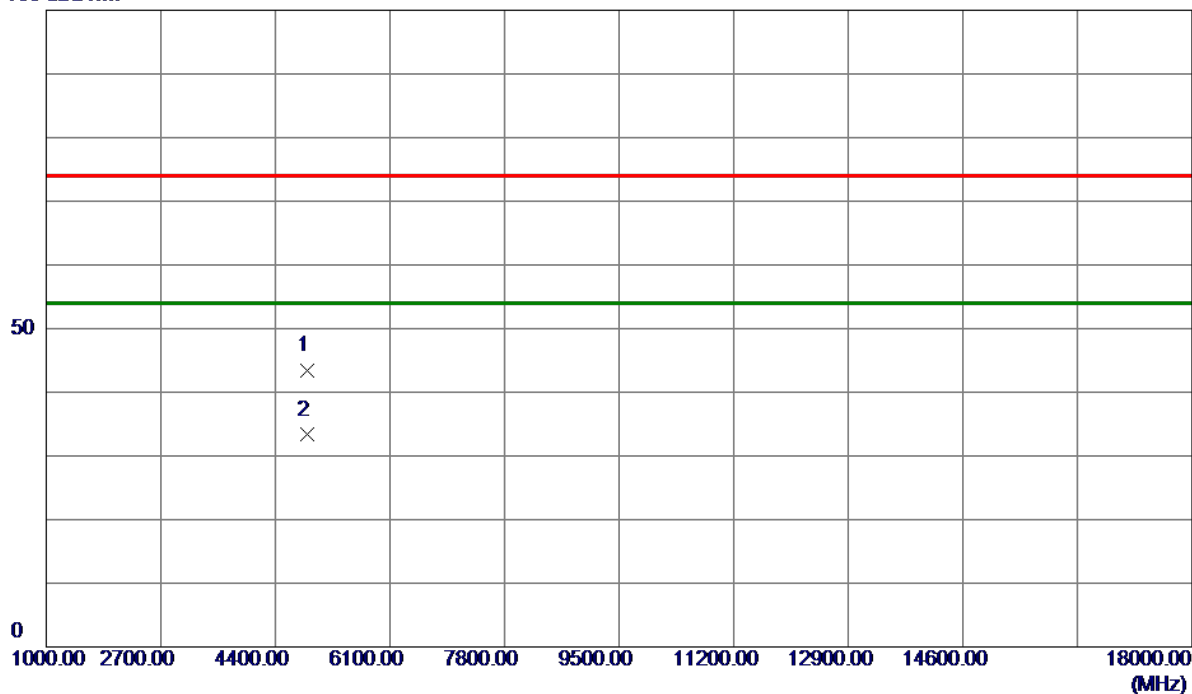


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4870.7500	39.07	4.40	43.47	74.00	-30.53	Peak	
2 *	4877.6500	28.90	4.40	33.30	54.00	-20.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

120 dBuV/m

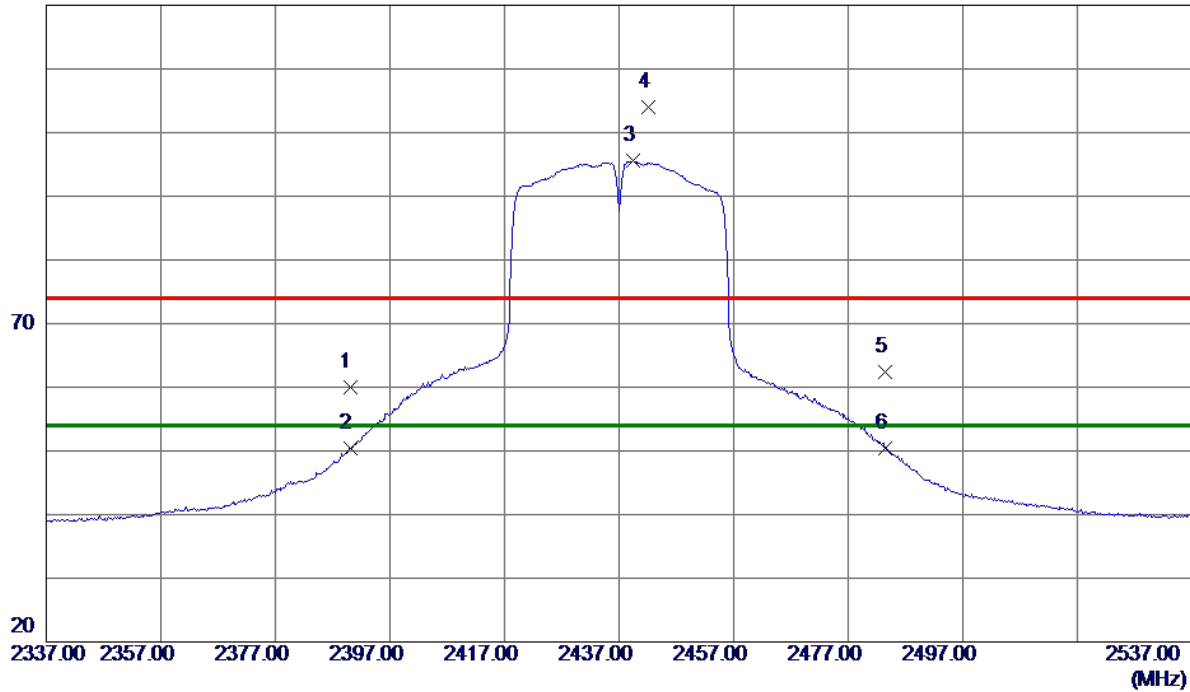

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	52.05	7.90	59.95	74.00	-14.05	Peak	
2	2390.0000	42.56	7.90	50.46	54.00	-3.54	AVG	
3 *	2439.4000	87.50	8.01	95.51	54.00	41.51	AVG	No Limit
4	2442.2000	96.02	8.02	104.04	74.00	30.04	Peak	No Limit
5	2483.5000	54.21	8.11	62.32	74.00	-11.68	Peak	
6	2483.5000	42.26	8.11	50.37	54.00	-3.63	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Vertical
-----------	--------------------------	--------------	----------

100 dBuV/m

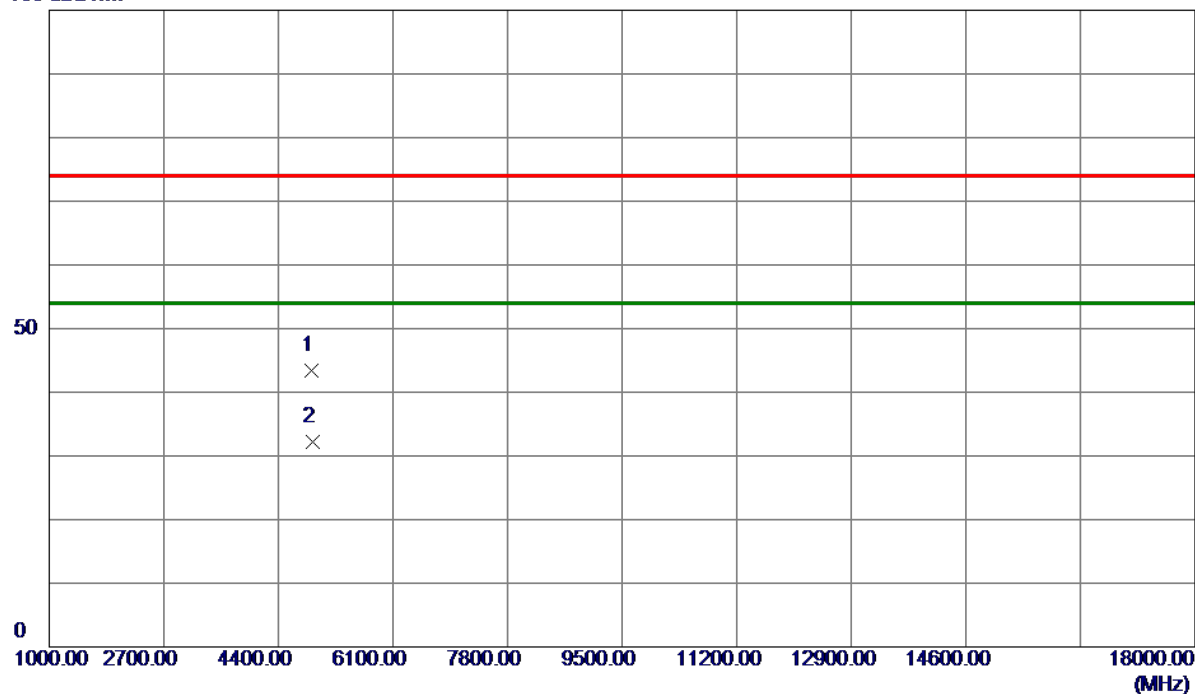


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4884.3500	38.95	4.41	43.36	74.00	-30.64	Peak	
2 *	4903.6500	27.73	4.42	32.15	54.00	-21.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT40) Mode 2452 MHz	Polarization	Horizontal
-----------	--------------------------	--------------	------------

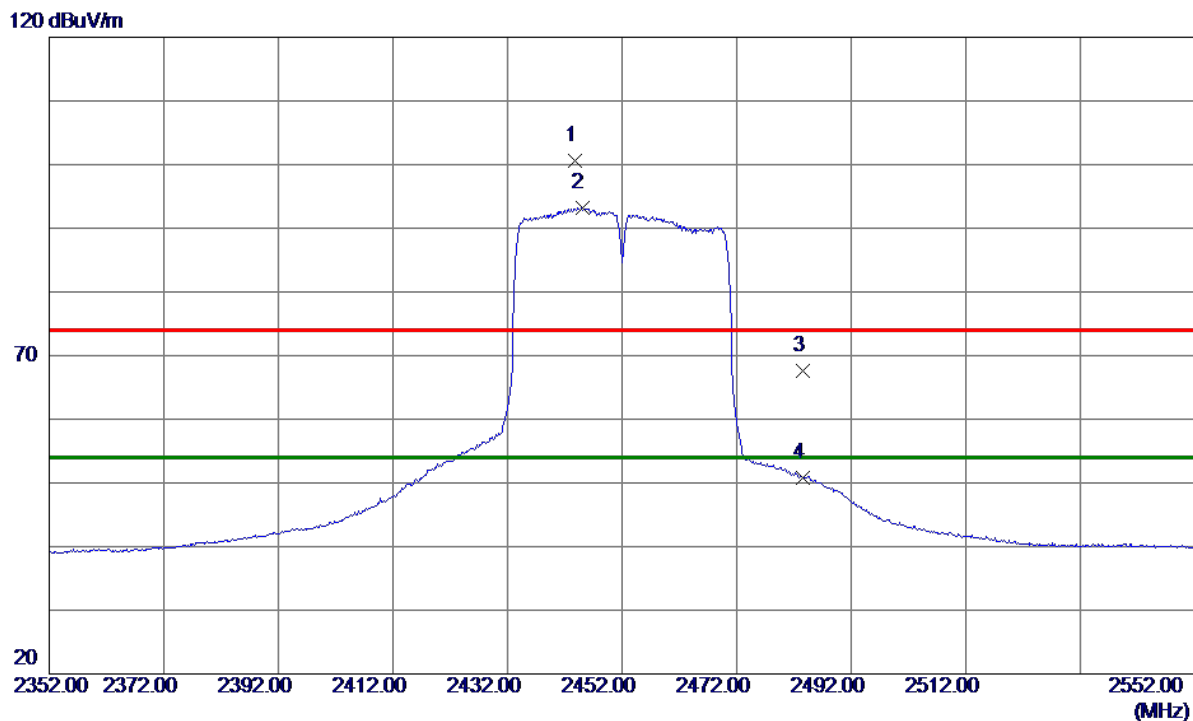


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2443.8000	92.49	8.02	100.51	74.00	26.51	Peak	No Limit
2 *	2445.0000	85.13	8.02	93.15	54.00	39.15	AVG	No Limit
3	2483.5000	59.49	8.11	67.60	74.00	-6.40	Peak	
4	2483.5000	42.67	8.11	50.78	54.00	-3.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

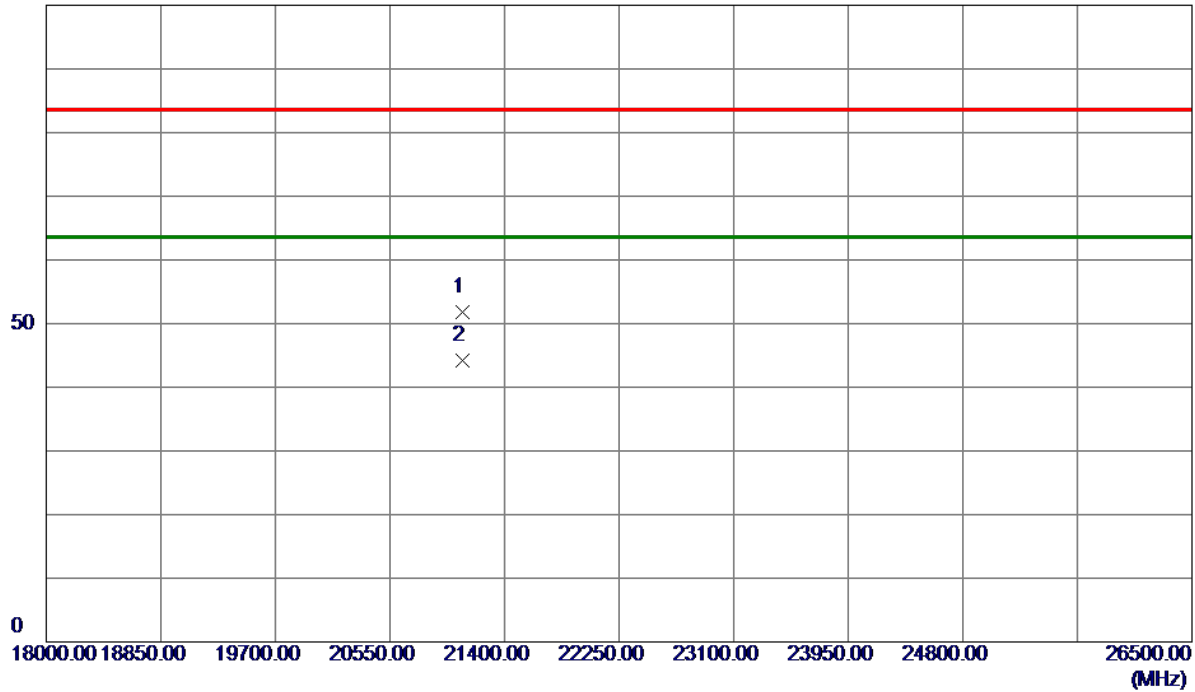

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	21085.5000	50.91	0.91	51.82	83.50	-31.68	Peak	
2 *	21085.5000	43.26	0.91	44.17	63.50	-19.33	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

100 dBuV/m

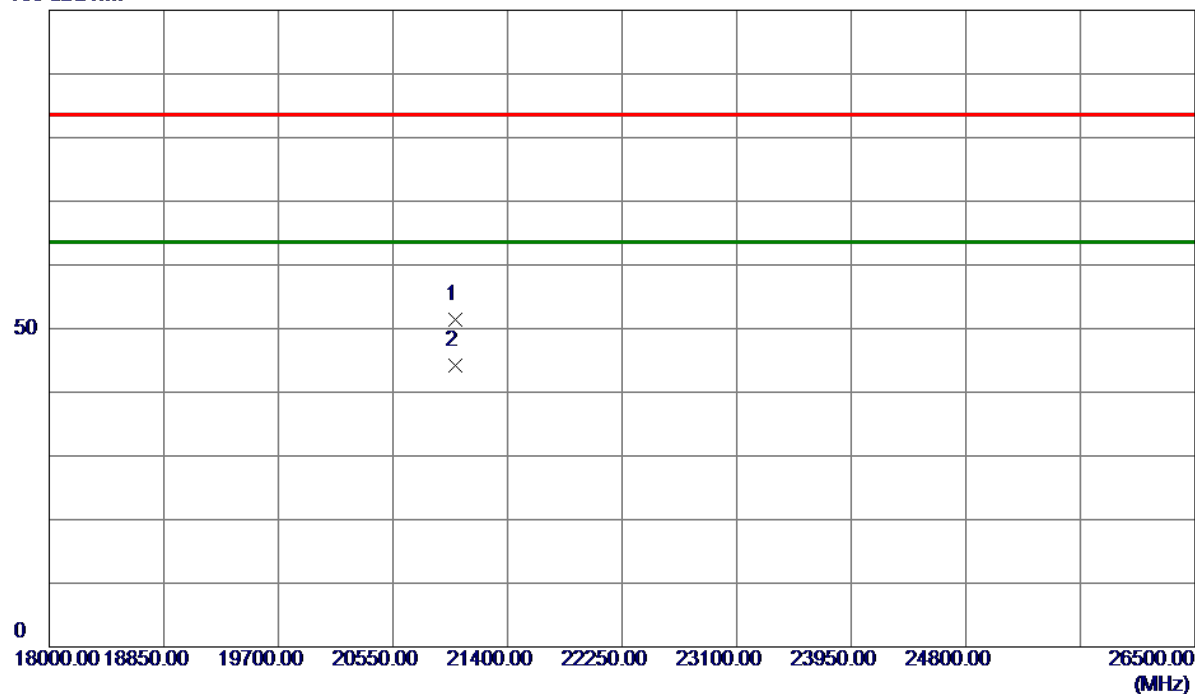

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	21009.0000	50.55	0.94	51.49	83.50	-32.01	Peak	
2 *	21009.0000	43.25	0.94	44.19	63.50	-19.31	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	9.040	12.880	0.5	Pass
06	2437	10.080	12.880	0.5	Pass
11	2462	9.120	12.880	0.5	Pass

CH01

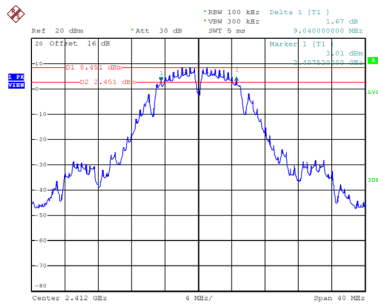


Date: 20.JUL.2025 16:12:30

CH06
6 dB Bandwidth

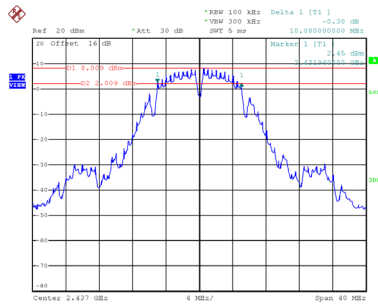


Date: 20.JUL.2025 16:13:56

CH11

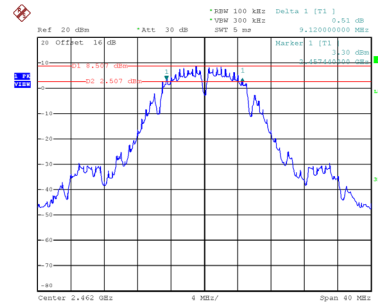


Date: 20.JUL.2025 16:15:13


99 % Occupied Bandwidth

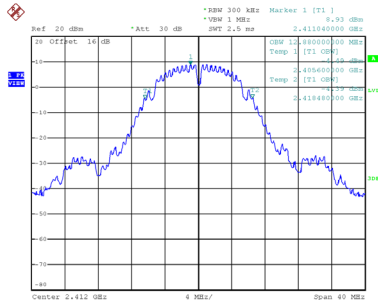

Date: 20.JUL.2025 16:12:41

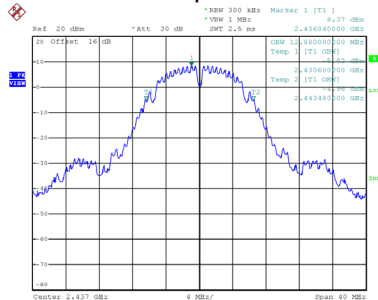

Date: 20.JUL.2025 16:14:07

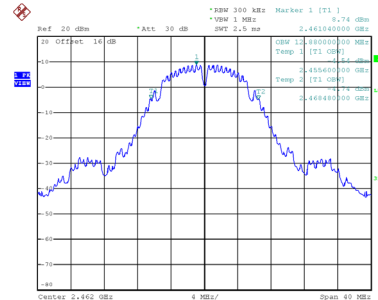


Date: 20.JUL.2025 16:15:24

Test Mode	TX G Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.040	16.880	0.5	Pass
06	2437	15.040	17.120	0.5	Pass
11	2462	15.680	16.880	0.5	Pass

CH01

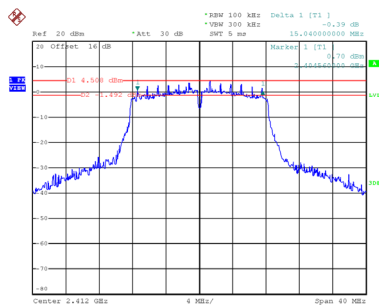


Date: 28.JUL.2025 16:17:10

CH06
6 dB Bandwidth

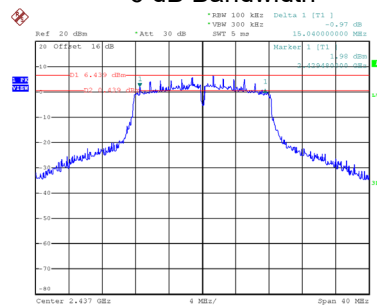


Date: 28.JUL.2025 16:18:31

CH11

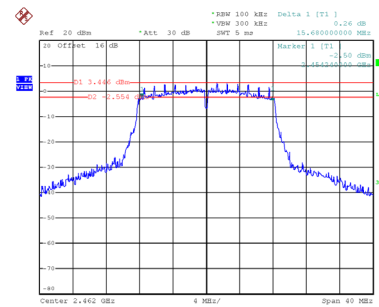


Date: 28.JUL.2025 16:20:41


99 % Occupied Bandwidth

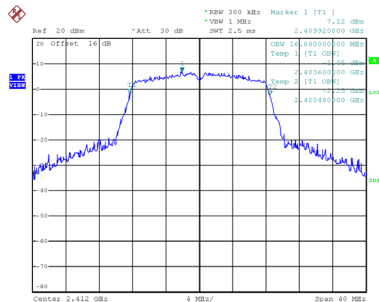

Date: 28.JUL.2025 16:17:21

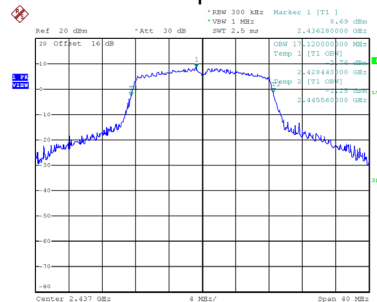

Date: 28.JUL.2025 16:18:42

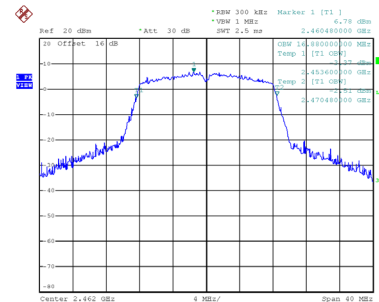


Date: 28.JUL.2025 16:20:52

Test Mode	TX N(HT20) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.120	17.680	0.5	Pass
06	2437	15.120	18.000	0.5	Pass
11	2462	15.120	17.760	0.5	Pass

CH01

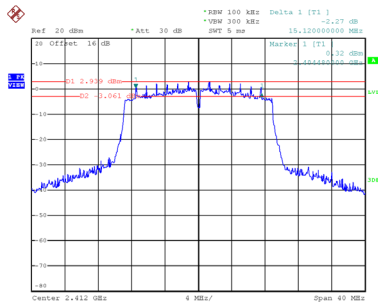


Date: 20.JUL.2025 16:22:29

CH06
6 dB Bandwidth

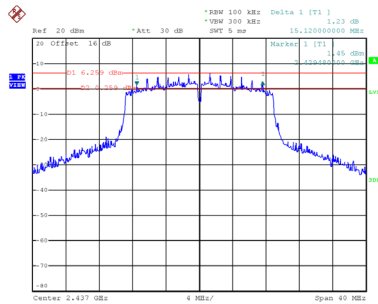


Date: 20.JUL.2025 16:25:41

CH11

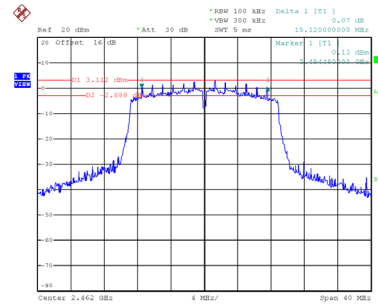


Date: 20.JUL.2025 16:32:48


99 % Occupied Bandwidth

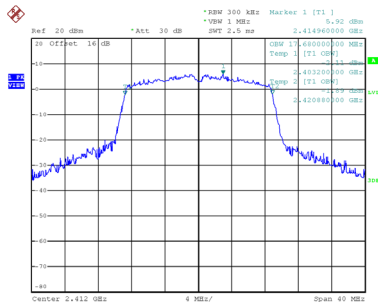

Date: 20.JUL.2025 16:22:39

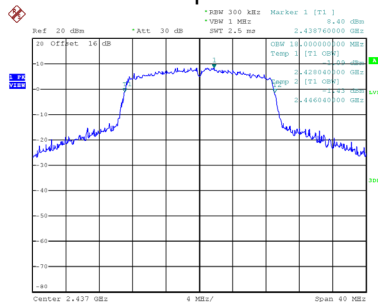

Date: 20.JUL.2025 16:25:52

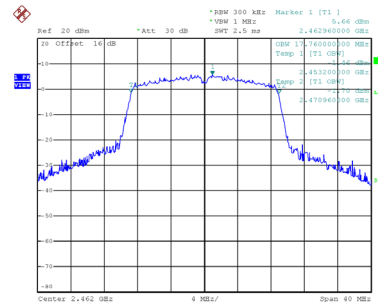


Date: 20.JUL.2025 16:32:59


Test Mode	TX N(HT40) Mode
-----------	-----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	36.160	36.800	0.5	Pass
06	2437	35.200	36.480	0.5	Pass
09	2452	35.200	36.320	0.5	Pass


CH03

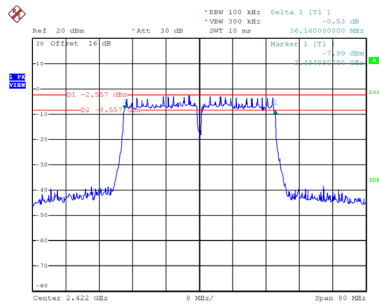




CH06
6 dB Bandwidth

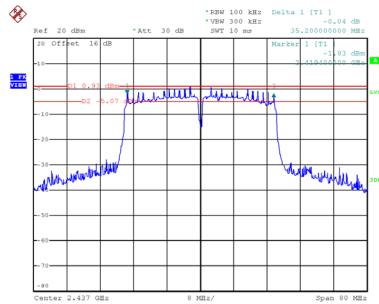

CH09

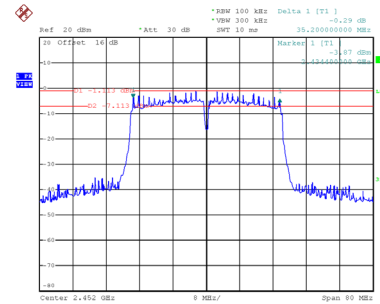

99 % Occupied Bandwidth

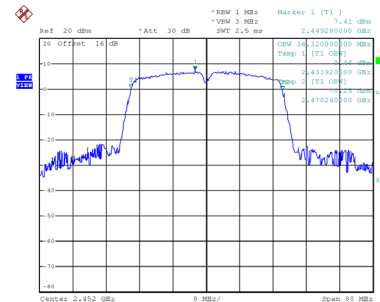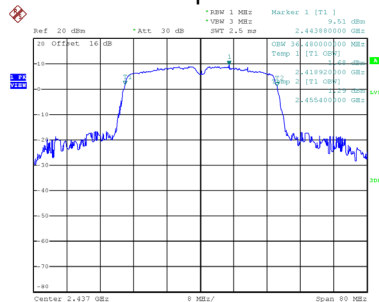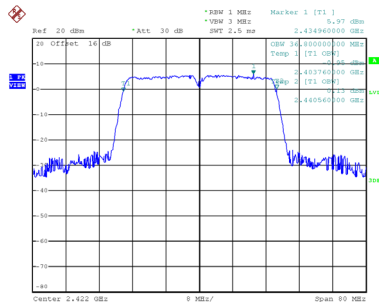

FAPPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.83	0.00	16.83	30.00	1.0000	Pass
06	2437	16.35	0.00	16.35	30.00	1.0000	Pass
11	2462	16.52	0.00	16.52	30.00	1.0000	Pass

Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.21	0.11	14.32	30.00	1.0000	Pass
06	2437	15.82	0.11	15.93	30.00	1.0000	Pass
11	2462	13.88	0.11	13.99	30.00	1.0000	Pass

Test Mode	TX N(HT20) Mode
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	13.17	0.12	13.29	30.00	1.0000	Pass
06	2437	15.92	0.12	16.04	30.00	1.0000	Pass
11	2462	13.09	0.12	13.21	30.00	1.0000	Pass

Test Mode	TX N(HT40) Mode
-----------	-----------------


Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	11.01	0.12	11.13	30.00	1.0000	Pass
06	2437	13.95	0.12	14.07	30.00	1.0000	Pass
09	2452	11.91	0.12	12.03	30.00	1.0000	Pass

Note: Output power = Measure result + Cable loss

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode

Reference Level-CH01

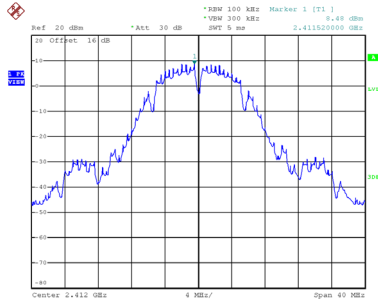


Date: 28.JUL.2025 16:13:01

Reference Level-CH06

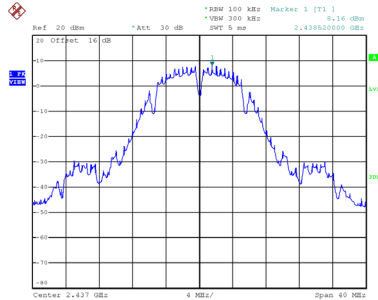


Date: 28.JUL.2025 16:14:27

Reference Level-CH11

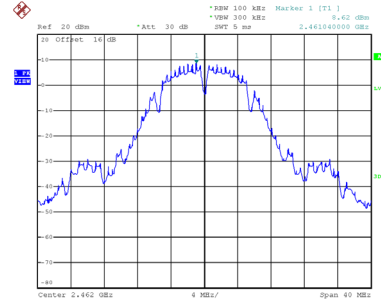


Date: 28.JUL.2025 16:15:44

Bandedge-CH01

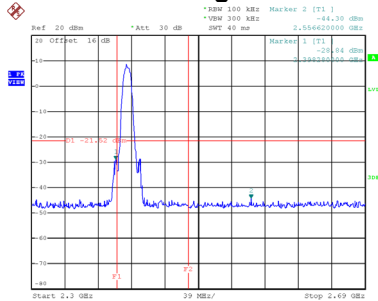


Date: 28.JUL.2025 16:13:12

Bandedge-CH11

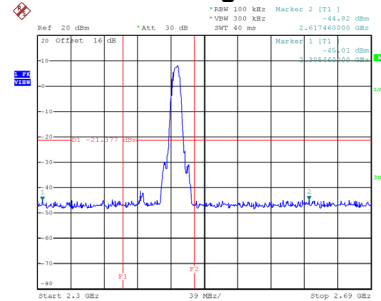


Date: 28.JUL.2025 16:15:55

Harmonic-CH01

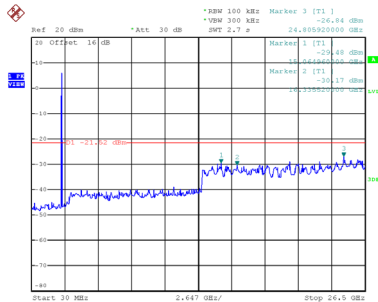


Date: 28.JUL.2025 16:13:23

Harmonic-CH06

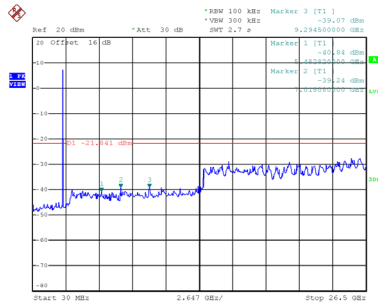

Date: 28.JUL.2025 16:14:49

Harmonic-CH11

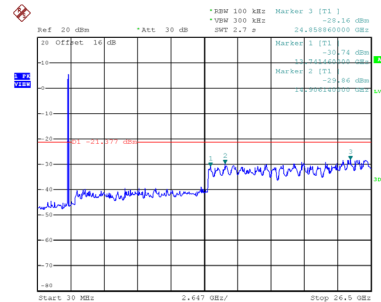

Date: 28.JUL.2025 16:16:06