




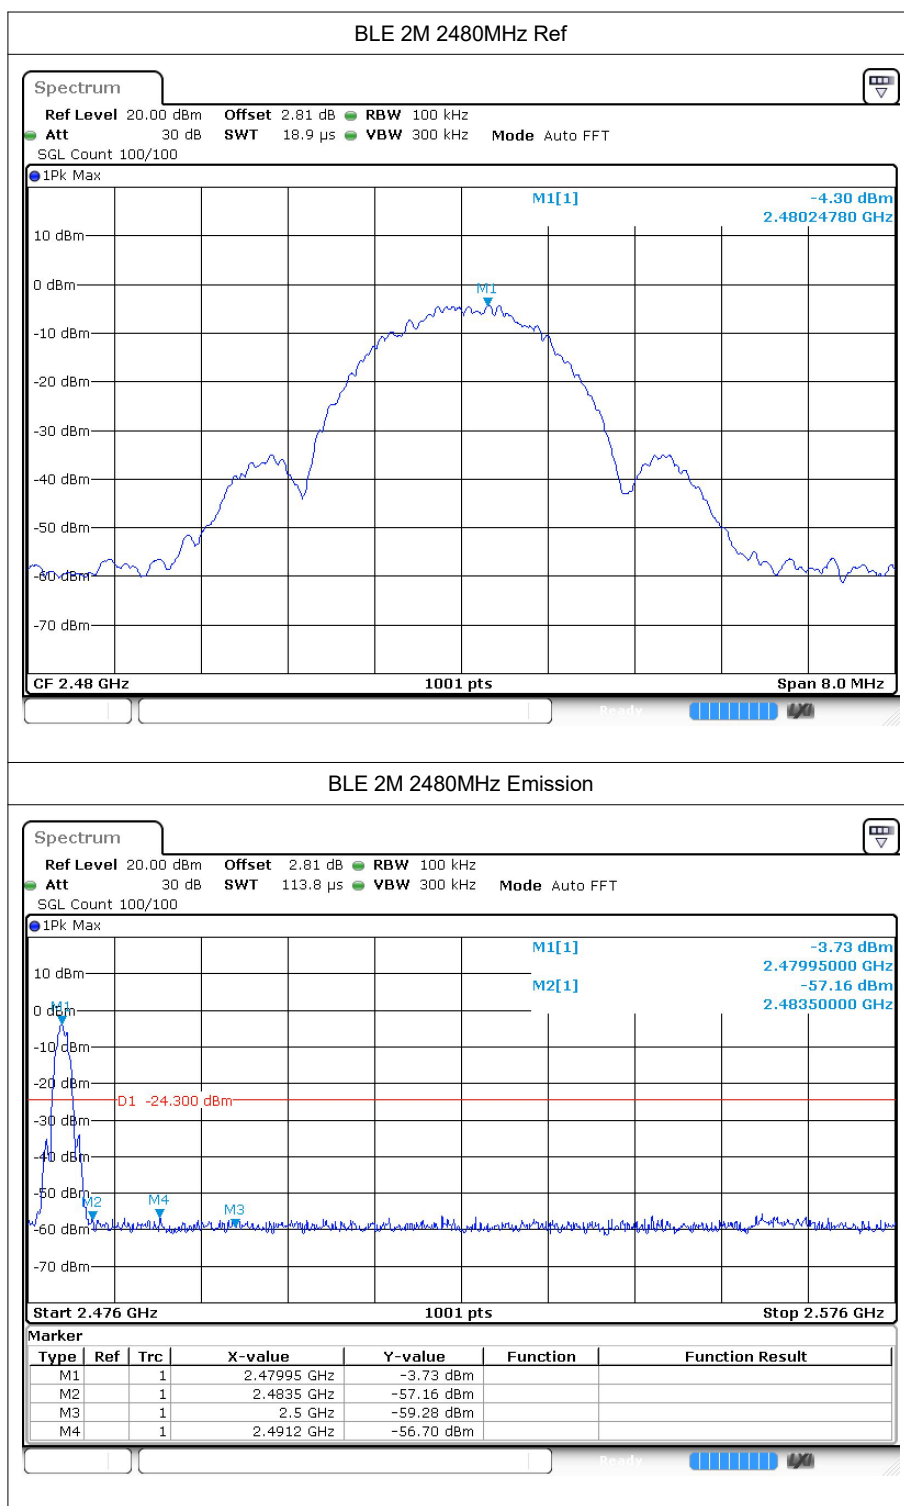



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-42.14	-20	Pass
BLE 1M	2440	-42.62	-20	Pass
BLE 1M	2480	-41.44	-20	Pass
BLE 2M	2402	-40.63	-20	Pass
BLE 2M	2440	-39.86	-20	Pass
BLE 2M	2480	-38.8	-20	Pass


6.2 Test Graphs

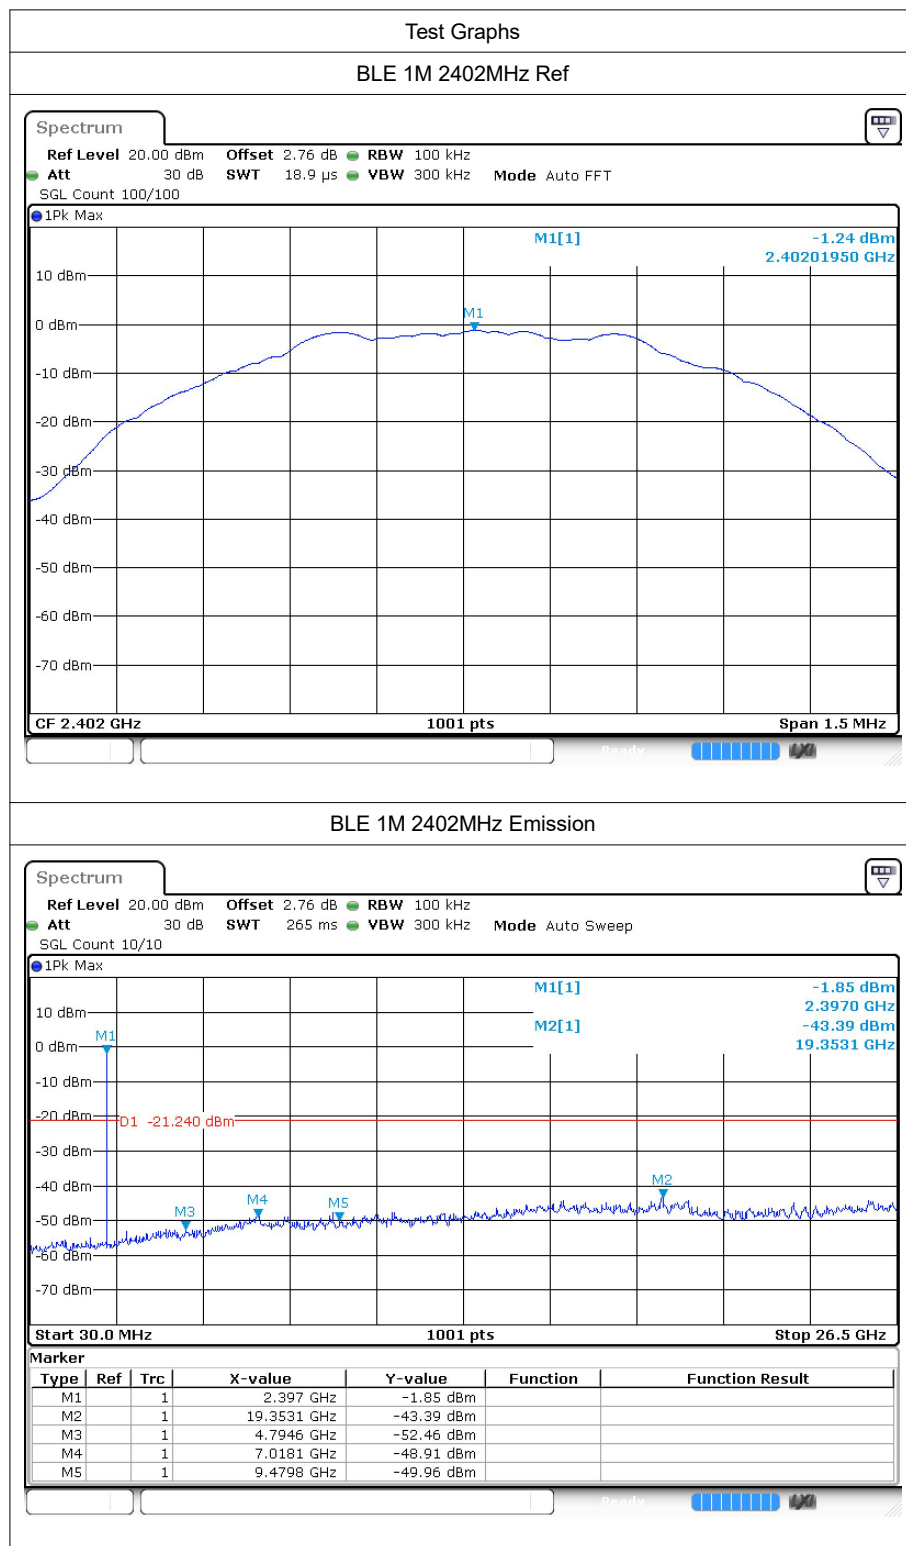


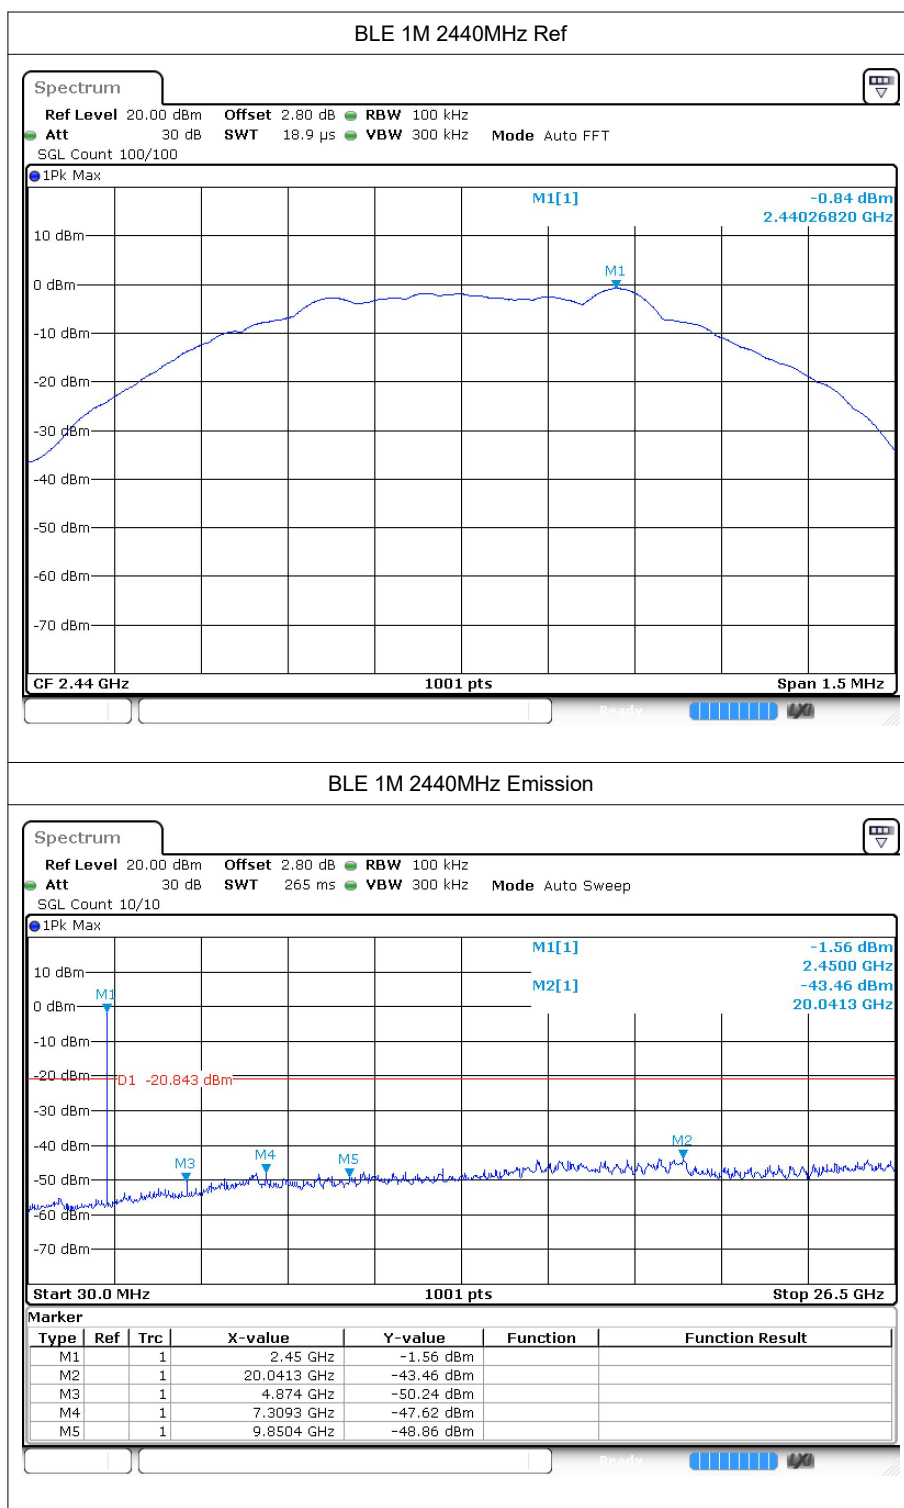

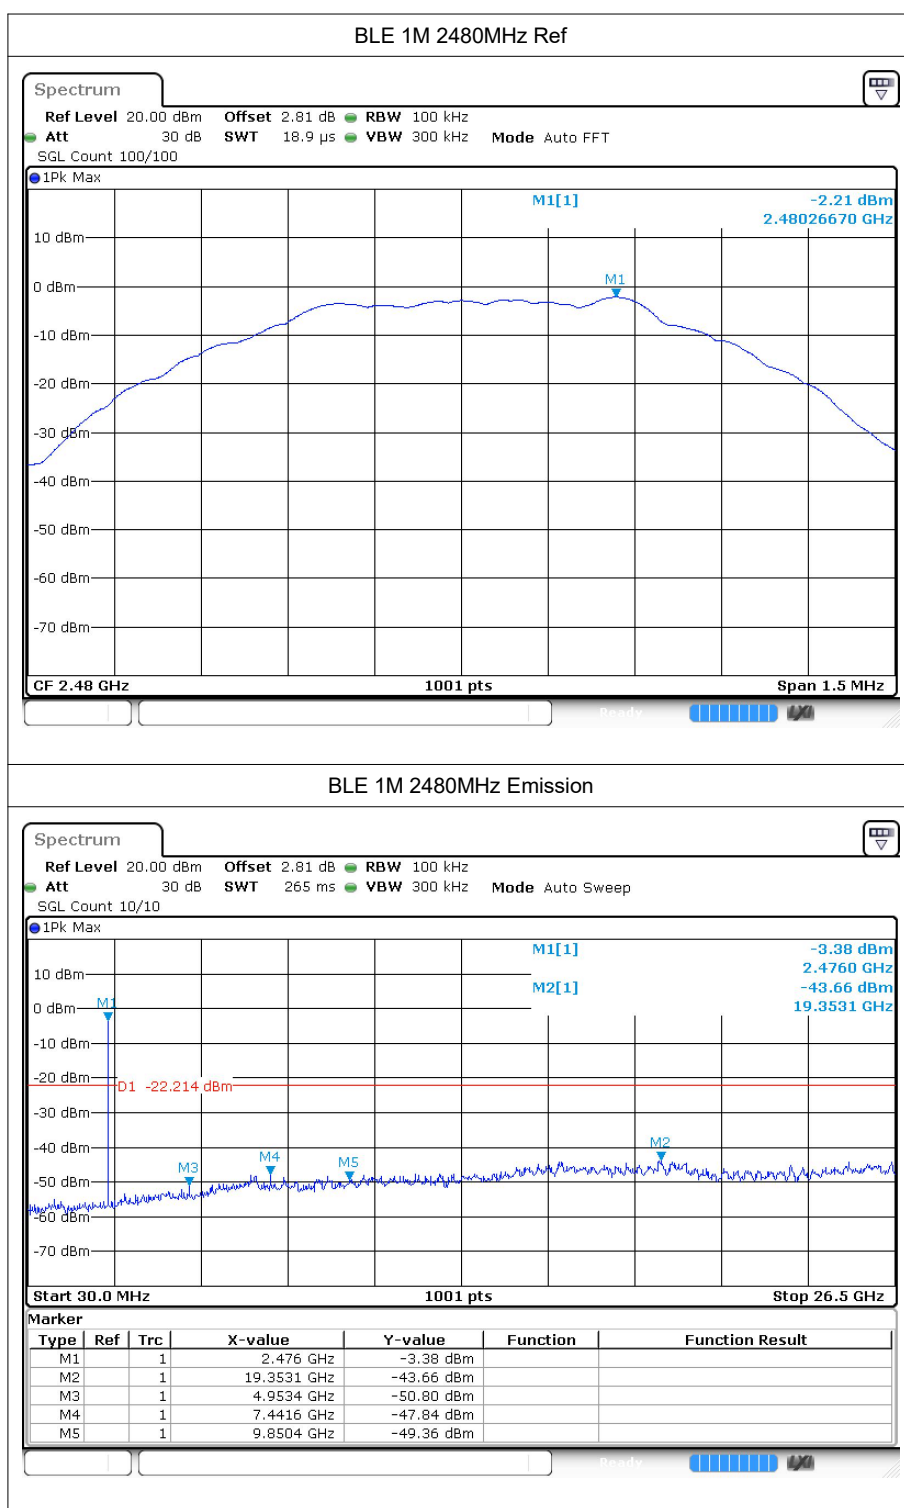

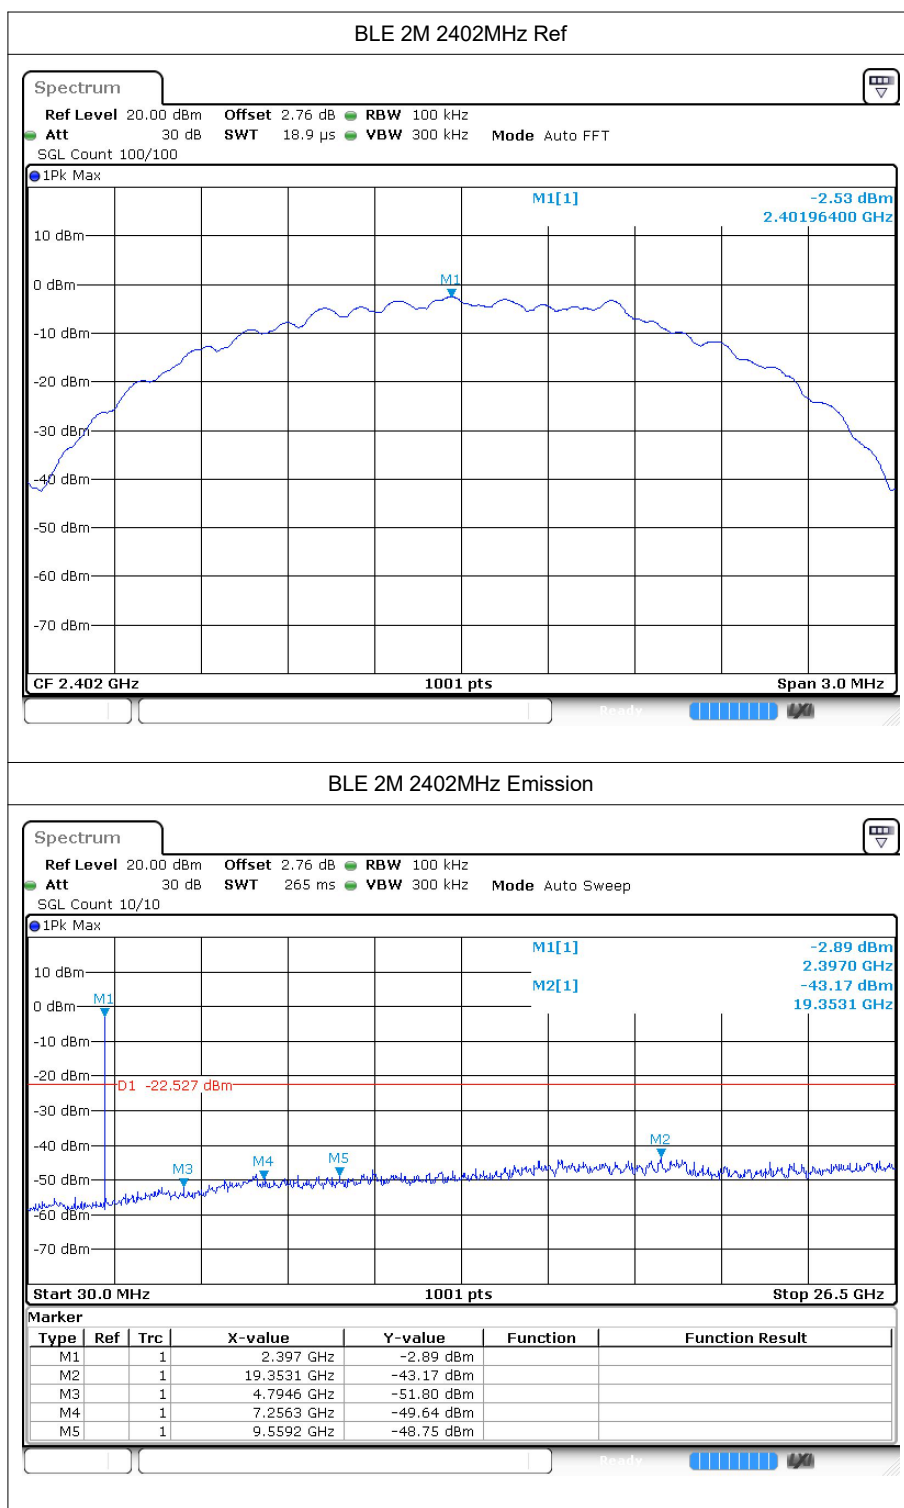

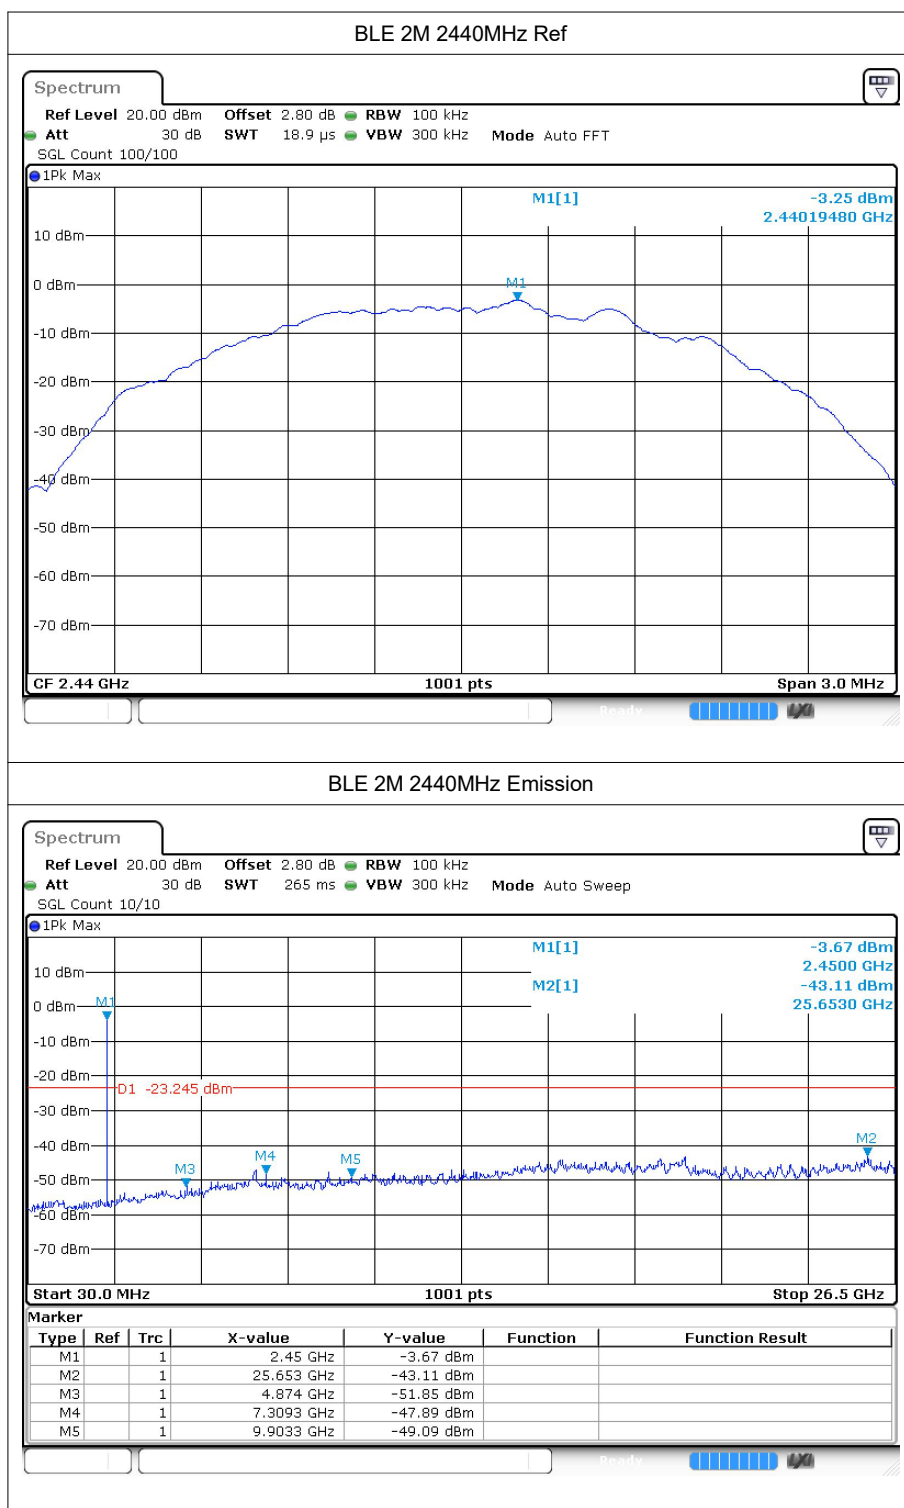

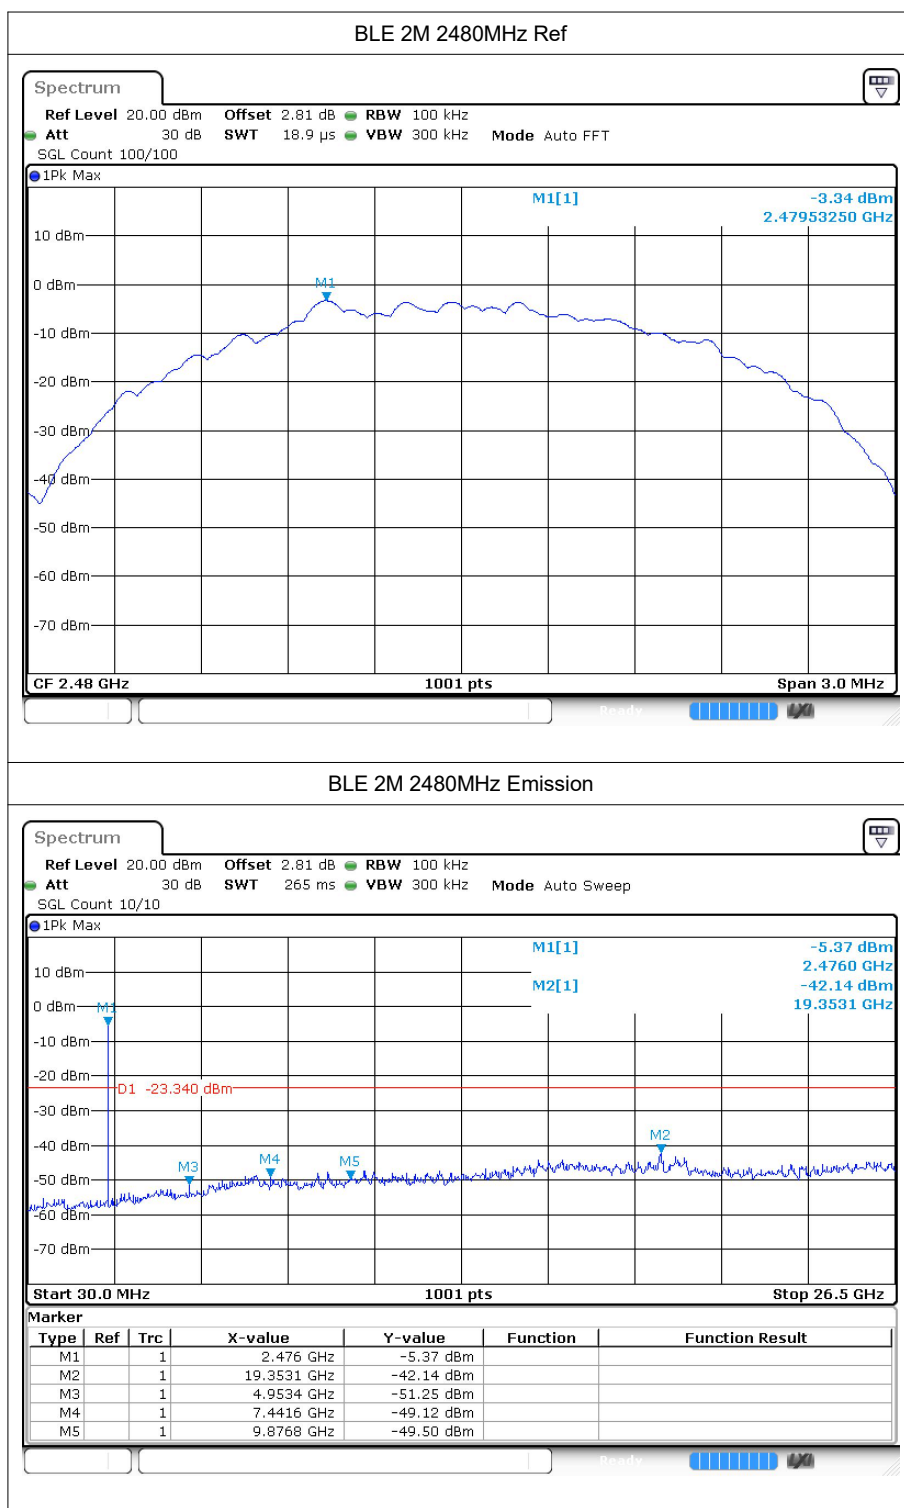





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-50.77	2	-	46.49	Peak	74	Pass
BLE 1M	2402	2310	-57	2	0	40.26	Average	54	Pass
BLE 1M	2402	2338.992	-47.03	2	-	50.23	Peak	74	Pass
BLE 1M	2402	2339.376	-54.6	2	0	42.66	Average	54	Pass
BLE 1M	2402	2390	-50.68	2	-	46.58	Peak	74	Pass
BLE 1M	2402	2390	-57.19	2	0	40.07	Average	54	Pass
BLE 1M	2480	2483.5	-49.76	2	-	47.5	Peak	74	Pass
BLE 1M	2480	2483.5	-56.86	2	0	40.4	Average	54	Pass
BLE 1M	2480	2490.376	-46.62	2	-	50.64	Peak	74	Pass
BLE 1M	2480	2489.752	-55.36	2	0	41.9	Average	54	Pass
BLE 1M	2480	2500	-51.06	2	-	46.2	Peak	74	Pass
BLE 1M	2480	2500	-56.51	2	0	40.75	Average	54	Pass
BLE 2M	2402	2310	-50.09	2	-	47.17	Peak	74	Pass
BLE 2M	2402	2310	-56.3	2	0	40.96	Average	54	Pass
BLE 2M	2402	2317.2	-45.48	2	-	51.78	Peak	74	Pass
BLE 2M	2402	2339.76	-54.58	2	0	42.68	Average	54	Pass
BLE 2M	2402	2390	-48.46	2	-	48.8	Peak	74	Pass
BLE 2M	2402	2390	-57.16	2	0	40.1	Average	54	Pass
BLE 2M	2480	2483.5	-48.93	2	-	48.33	Peak	74	Pass
BLE 2M	2480	2483.5	-55.96	2	0	41.3	Average	54	Pass
BLE 2M	2480	2492.992	-47.61	2	-	49.65	Peak	74	Pass
BLE 2M	2480	2485.36	-55.76	2	0	41.5	Average	54	Pass
BLE 2M	2480	2500	-49.06	2	-	48.2	Peak	74	Pass
BLE 2M	2480	2500	-56.41	2	0	40.85	Average	54	Pass

7.2 Test Graphs

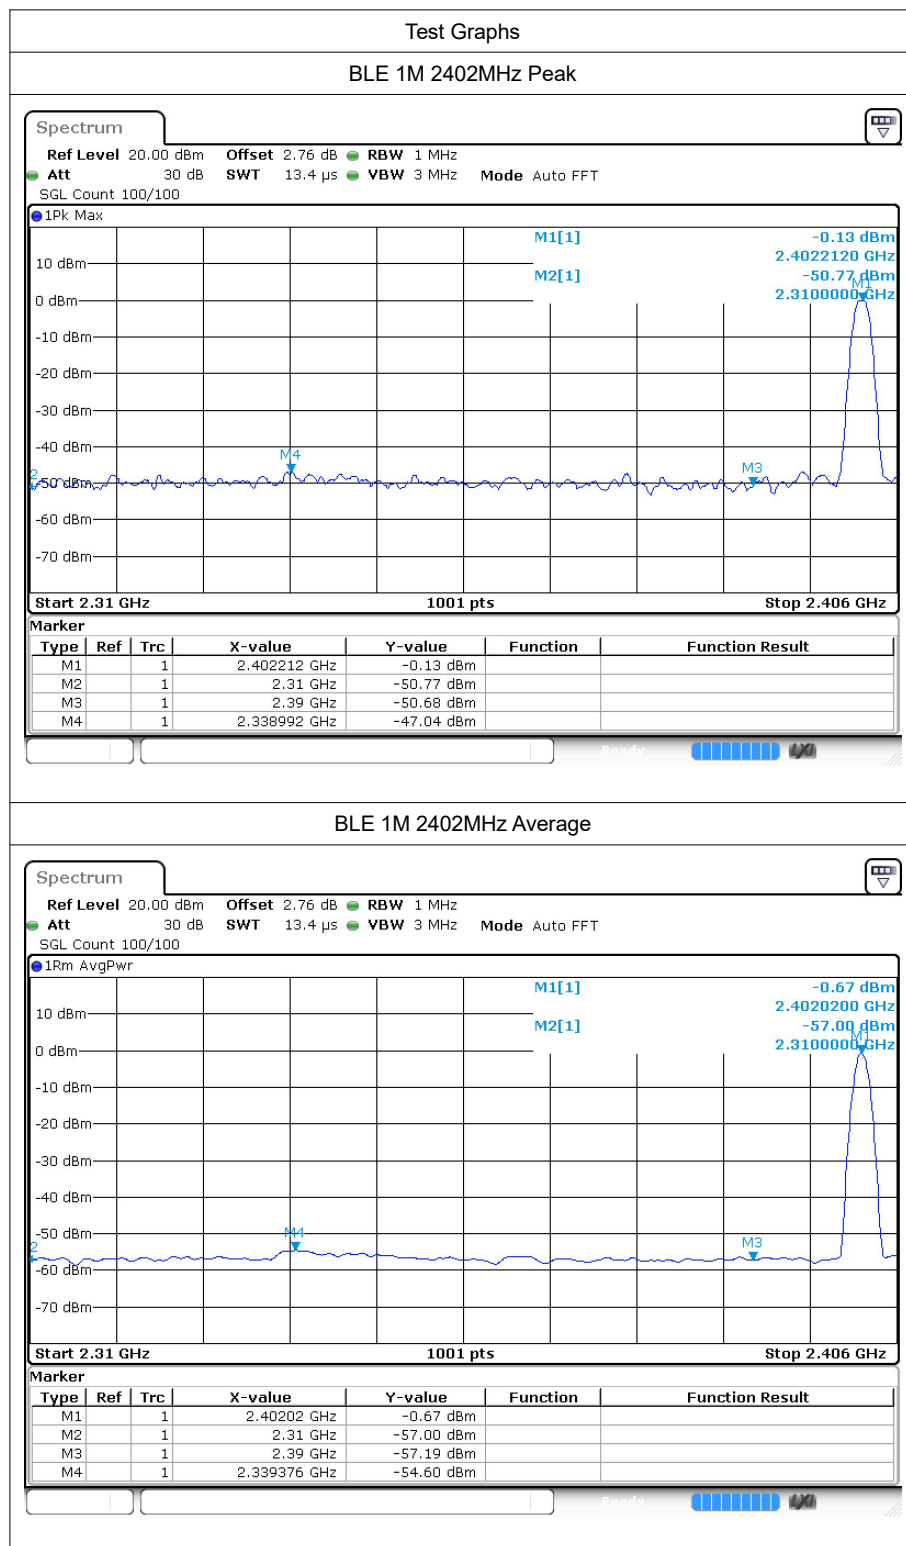

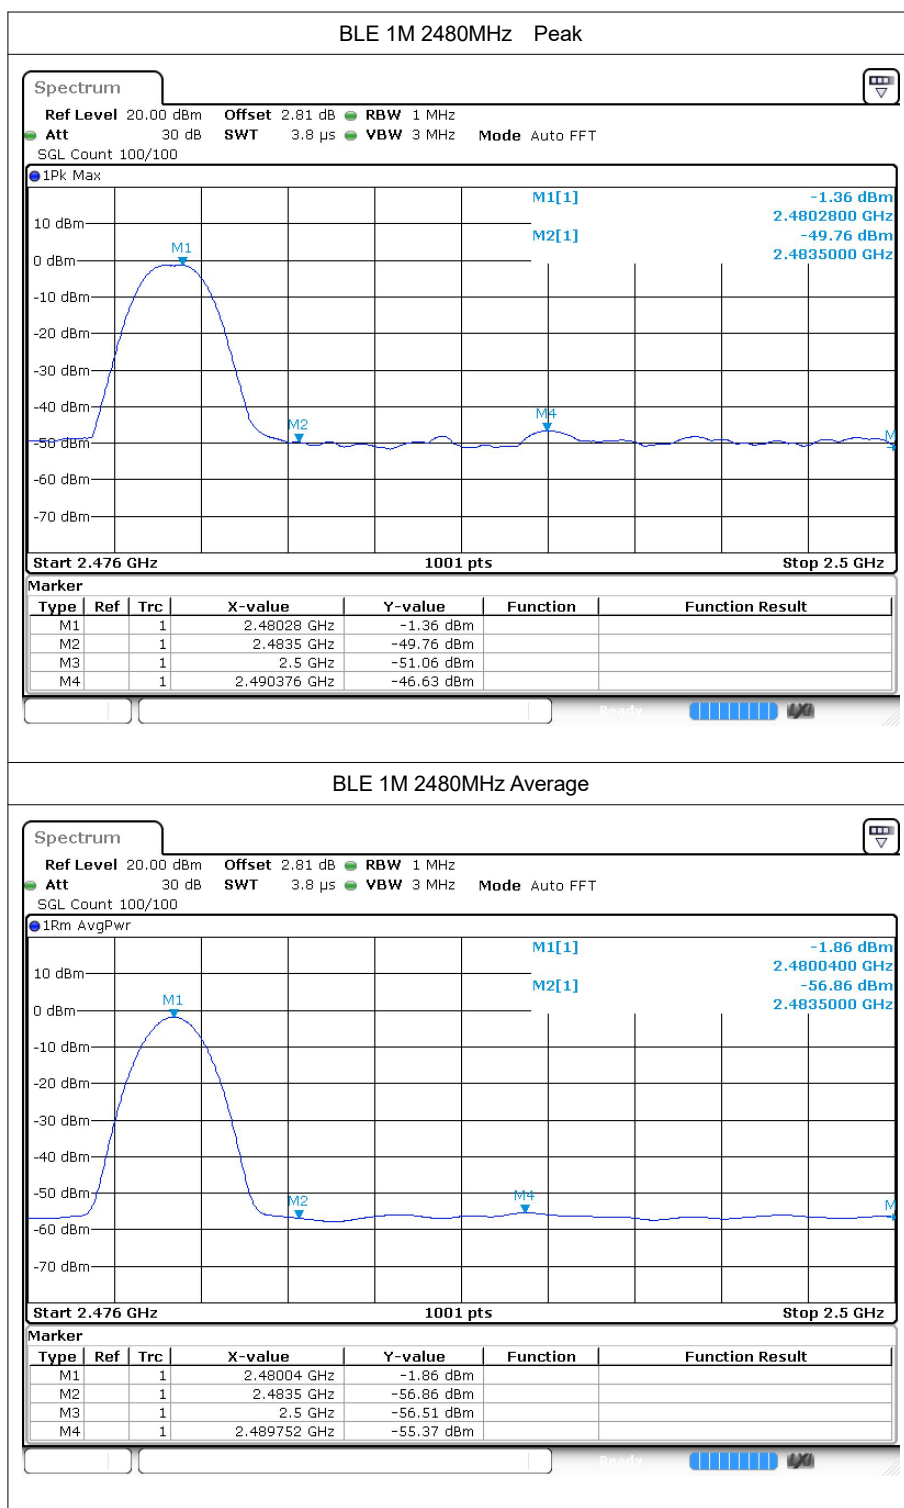

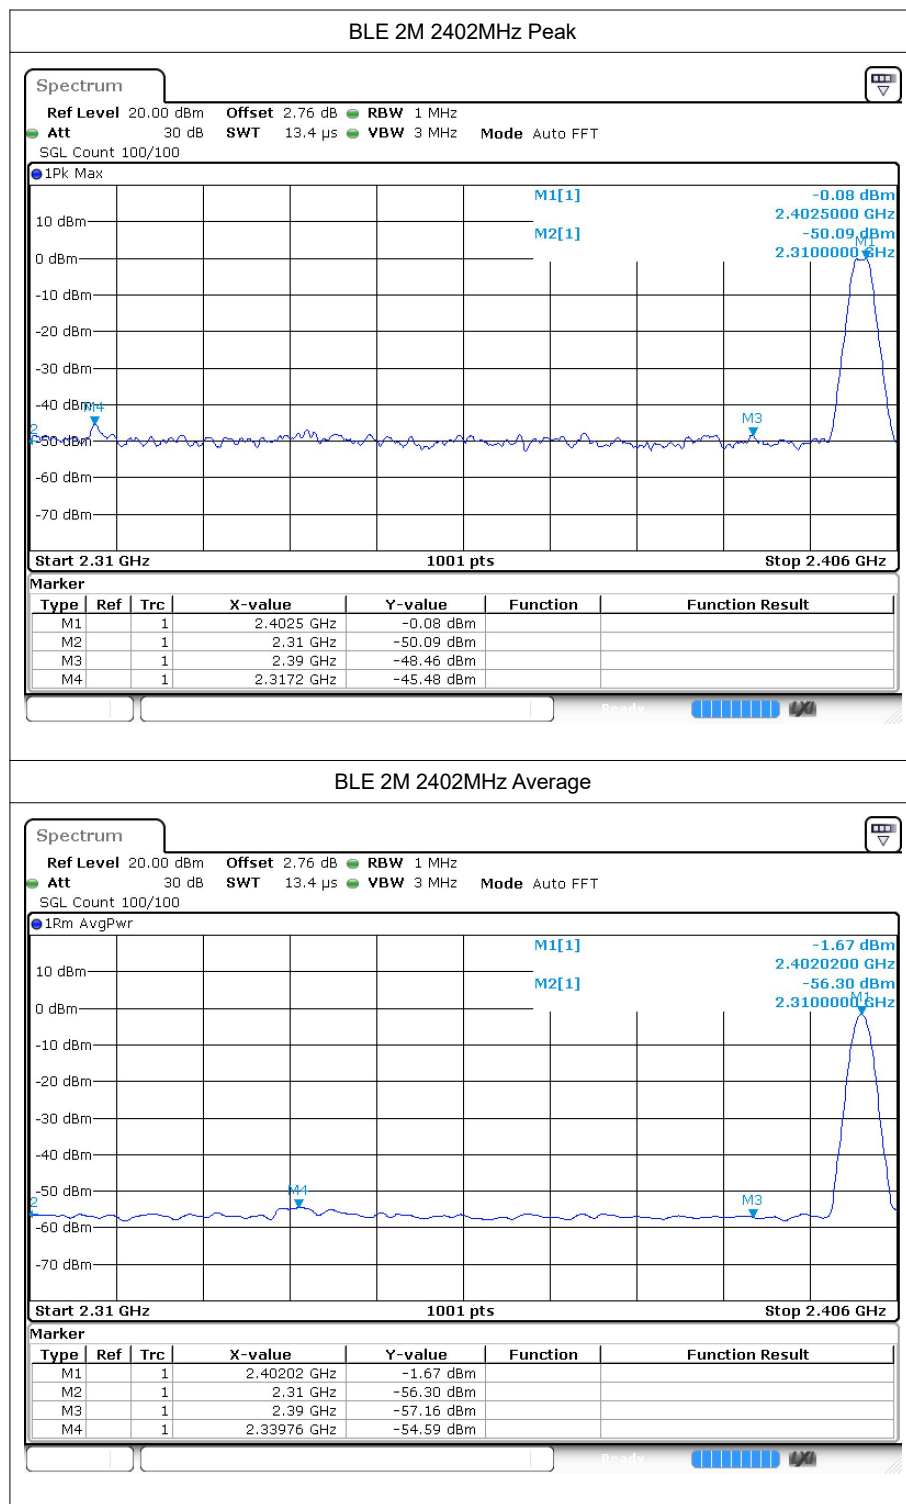

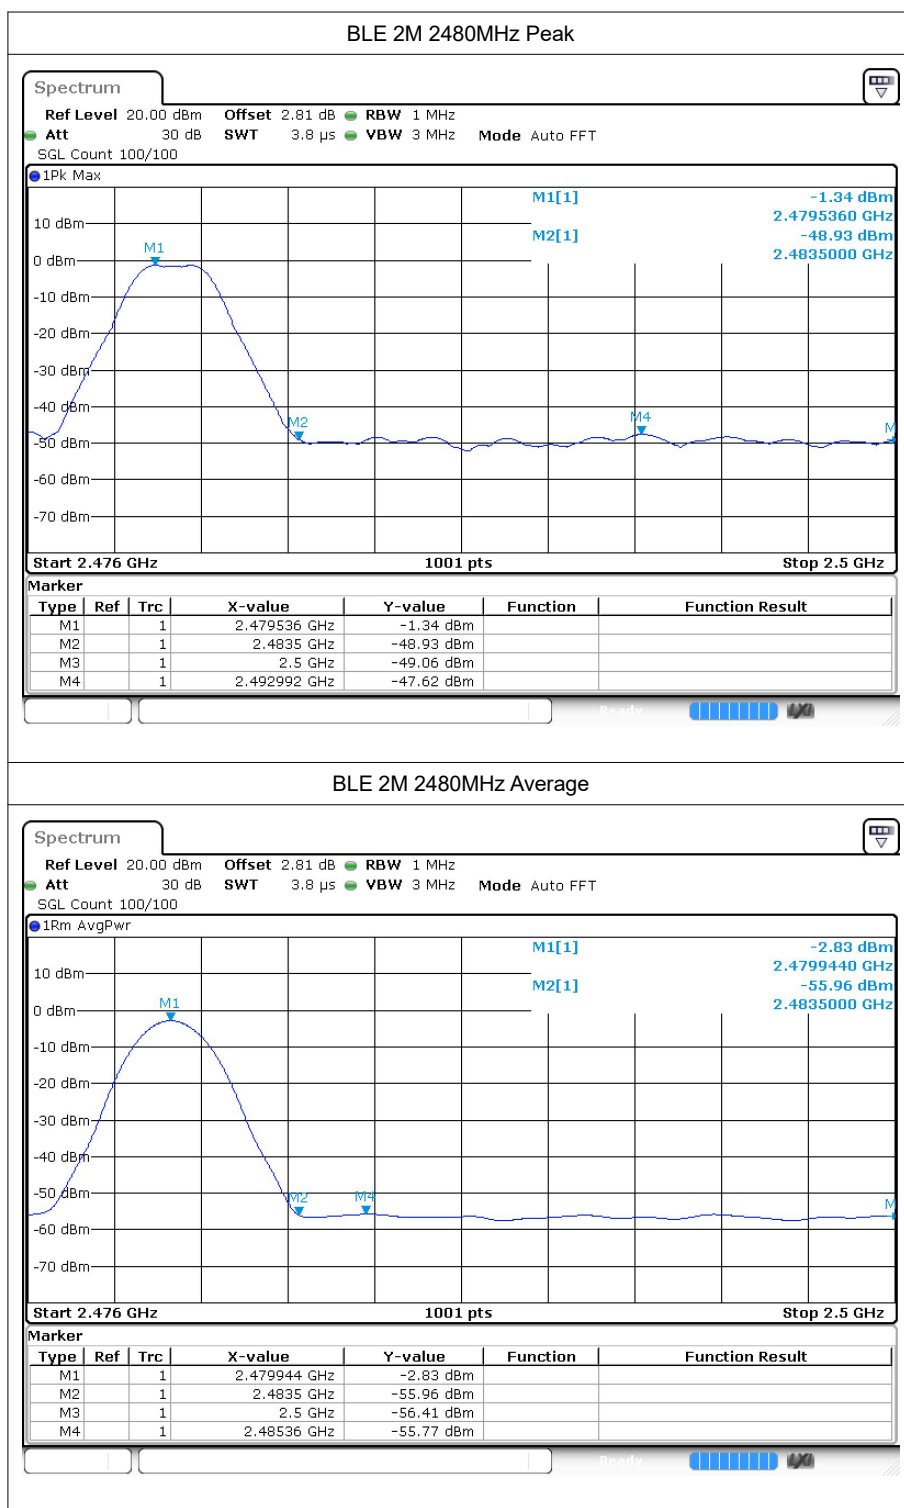

---The End---