


Shenzhen Chuangbo Da Technology Co., Ltd.

309, Building B1, Hongwan Maker Center, No. 4233 Bao'an Avenue,
Gushu Community, Xixiang Street, Bao'an District, Shenzhen, China

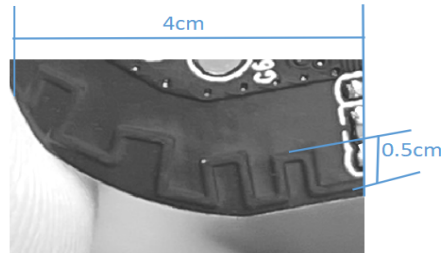

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain 0.17 DBi Max

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.0 19P White

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions

1. Network Analyzers :


Agilent 8753D 5071B

2. Communications Test Set:

Agilent E5515C

3. 3D Chamber Test System

Effiency &Gain

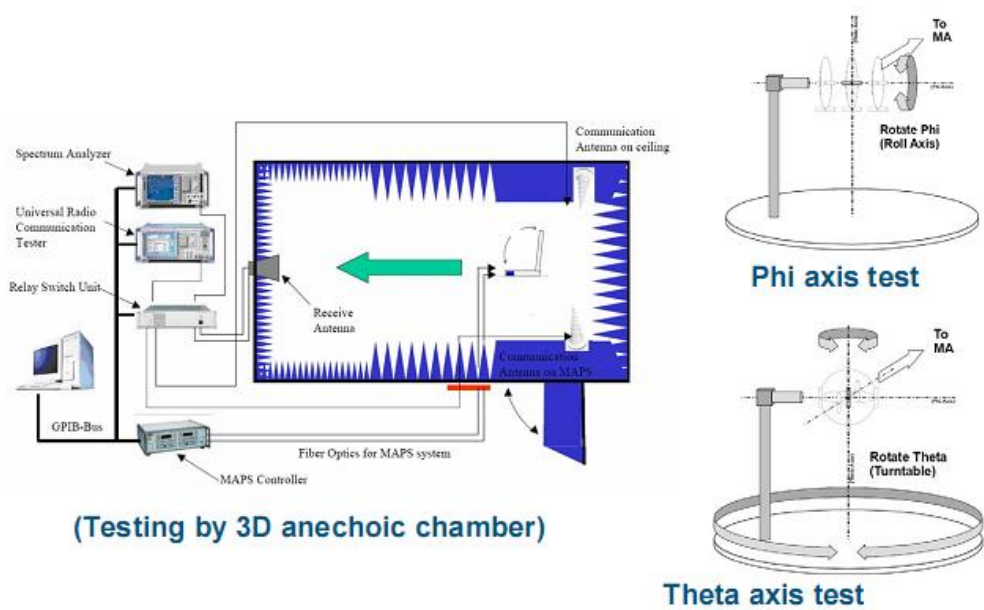

Effiency &Gain

2.40	-0.00
2.440	-0.11
2.48	-0.13

Radiation Pattern:

