

# FCC TEST REPORT

## FCC ID: 2BQTC-D01

Report No..... : ZHT-250521118W01-2

Product..... : Wireless Carplay Adapter

Trademark..... : Cleviton

Model(s)..... : D01  
D02, D03, D04, D05

Model Difference..... : D01 is the test model, while other models are derivative models. These models are the same on the circuit, with only different model names. Therefore, the test data of D01 can represent the remaining models.

Applicant..... : Maladuo Trade (Shenzhen) Co.,Ltd

Address..... : Room 765, 7th Floor, Tower A, Bairuida Building, Xintianxia, Vanke City Community, Bantian Street, Longgang District, Shenzhen, China

Manufacturer..... : Shenzhen Yinhaixing Technology Co., Ltd

Address..... : 2nd Floor, Building A, Chenwu Road 8, Xiazhong Village, Dakang Community, Longgang District, Shenzhen City

Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt..... : May 21, 2025

Date of Test(s)..... : May 21, 2025-June 11, 2025

Date of Issue..... : July 14, 2025

Test Standard(s)..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247


Test procedure..... ANSI C63.10:2013

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:

Reviewed by:

Approved by:



Kimi Lu/ Engineer



Baret Wu/ Director



Levi Lee/ Manager

**Note:** The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of ZHT. This document may be altered or revised by ZHT, personnel only, and shall be noted in the revision of the document.

## Table of Contents

|                                                     | Page      |
|-----------------------------------------------------|-----------|
| <b>1. VERSION</b>                                   | <b>4</b>  |
| <b>2. TEST SUMMARY</b>                              | <b>5</b>  |
| <b>3. GENERAL INFORMATION</b>                       | <b>6</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT                      | 6         |
| 3.2 Test Setup Configuration                        | 7         |
| 3.3 Support Equipment                               | 8         |
| 3.4 Test Mode                                       | 8         |
| <b>4. TEST FACILITY AND TEST INSTRUMENT USED</b>    | <b>9</b>  |
| 4.1 TEST FACILITY                                   | 9         |
| 4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS              | 9         |
| 4.3 Testing software                                | 9         |
| 4.4 MEASUREMENT UNCERTAINTY                         | 11        |
| <b>5. EMC EMISSION TEST</b>                         | <b>12</b> |
| 5.1 Conducted emissions                             | 12        |
| 5.1.1 POWER LINE CONDUCTED EMISSION Limits          | 12        |
| 5.1.2 TEST PROCEDURE                                | 12        |
| 5.1.3 DEVIATION FROM TEST STANDARD                  | 12        |
| 5.1.4 TEST SETUP                                    | 13        |
| 5.1.5 EUT OPERATING CONDITIONS                      | 13        |
| 5.1.6 Test Result                                   | 13        |
| 5.2 Radiated emissions                              | 16        |
| 5.2.1 Radiated Emission Limits                      | 16        |
| 5.2.2 TEST PROCEDURE                                | 16        |
| 5.2.3 DEVIATION FROM TEST STANDARD                  | 17        |
| 5.2.4 TEST SETUP                                    | 17        |
| 5.2.5 EUT OPERATING CONDITIONS                      | 18        |
| 5.2.6 TEST RESULTS                                  | 19        |
| <b>6. RADIATED BAND EMISSION MEASUREMENT</b>        | <b>27</b> |
| 6.1 Test Requirement                                | 27        |
| 6.2 TEST PROCEDURE                                  | 27        |
| 6.3 DEVIATION FROM TEST STANDARD                    | 28        |
| 6.4 TEST SETUP                                      | 28        |
| 6.5 EUT OPERATING CONDITIONS                        | 28        |
| 6.6 TEST RESULT                                     | 29        |
| <b>7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION</b> | <b>31</b> |
| 7.1 Limit                                           | 31        |
| 7.2 Test Setup                                      | 31        |
| 7.3 Test procedure                                  | 31        |
| 7.4 DEVIATION FROM STANDARD                         | 31        |
| 7.5 Test Result                                     | 32        |
| <b>8. 20DB&amp;99% BANDWIDTH</b>                    | <b>56</b> |
| 8.1 Test Setup                                      | 56        |
| 8.2 Limit                                           | 56        |
| 8.3 Test procedure                                  | 56        |
| 8.4 DEVIATION FROM STANDARD                         | 56        |
| 8.5 Test Result                                     | 56        |
| <b>9. MAXIMUM PEAK OUTPUT POWER</b>                 | <b>67</b> |
| 9.1 Block Diagram Of Test Setup                     | 67        |
| 9.2 Limit                                           | 67        |
| 9.3 Test procedure                                  | 67        |
| 9.4 DEVIATION FROM STANDARD                         | 67        |
| 9.5 Test Result                                     | 67        |
| <b>10. HOPPING CHANNEL SEPARATION</b>               | <b>73</b> |
| 10.1 Test Setup                                     | 73        |
| 10.2 Test procedure                                 | 73        |
| 10.3 DEVIATION FROM STANDARD                        | 73        |



|                                             |           |
|---------------------------------------------|-----------|
| 10.4 Test Result .....                      | 73        |
| <b>11.NUMBER OF HOPPING FREQUENCY .....</b> | <b>79</b> |
| 11.1 Test Setup .....                       | 79        |
| 11.2 Test procedure .....                   | 79        |
| 11.3 DEVIATION FROM STANDARD .....          | 79        |
| 11.4 Test Result .....                      | 80        |
| <b>12. DWELL TIME .....</b>                 | <b>82</b> |
| 12.1 Test Setup .....                       | 82        |
| 12.2 Test procedure .....                   | 82        |
| 12.3 DEVIATION FROM STANDARD .....          | 82        |
| 12.4 Test Result .....                      | 83        |
| <b>13. ANTENNA REQUIREMENT .....</b>        | <b>93</b> |
| <b>14. TEST SETUP PHOTO .....</b>           | <b>94</b> |
| <b>15. EUT CONSTRUCTIONAL DETAILS .....</b> | <b>94</b> |

1. VERSION

| Report No.         | Version | Description             | Approved      |
|--------------------|---------|-------------------------|---------------|
| ZHT-250521118W01-2 | Rev.01  | Initial issue of report | July 14, 2025 |
|                    |         |                         |               |
|                    |         |                         |               |

## 2. TEST SUMMARY

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                                               |        |        |
|---------------------------------|-----------------------------------------------|--------|--------|
| Standard Section                | Test Item                                     | Result | Remark |
| FCC part 15.203/15.247 (b)(4)   | Antenna Requirement                           | PASS   |        |
| 15.207                          | AC Power Line Conducted Emission              | PASS   |        |
| 15.247 (b)(1)                   | Conducted Peak Output Power                   | PASS   |        |
| 15.247 (a)(1)                   | 20dB Occupied Bandwidth<br>99% OCB            | PASS   |        |
| 15.247 (a)(1)                   | Carrier Frequencies Separation                | PASS   |        |
| 15.247 (a)(1)(iii)              | Hopping Channel Number                        | PASS   |        |
| 15.247 (a)(1)(iii)              | Dwell Time                                    | PASS   |        |
| 15.205/15.209                   | Radiated Emission and Restricted Band         | PASS   |        |
| 15.247(d)                       | Conducted Unwanted emissions and<br>Band Edge | PASS   |        |

**NOTE:**

(1)" N/A" denotes test is not applicable in this Test Report

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                                                                                                                                                                                                 |                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Product Name:                                                                                                                                                                                   | Wireless Carplay Adapter   |
| Test Model No.:                                                                                                                                                                                 | D01                        |
| Hardware Version:                                                                                                                                                                               | V1.0                       |
| Software Version:                                                                                                                                                                               | V1.0                       |
| Sample(s) Status:                                                                                                                                                                               | Engineer sample            |
| Channel numbers:                                                                                                                                                                                | 79                         |
| Channel separation:                                                                                                                                                                             | 2402MHz-2480MHz            |
| Modulation technology:                                                                                                                                                                          | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Antenna Type:                                                                                                                                                                                   | PCB antenna                |
| Antenna gain:                                                                                                                                                                                   | -0.93dBi                   |
| Power supply:                                                                                                                                                                                   | Input: DC 5 V              |
| Sample Number:                                                                                                                                                                                  | 250521118YP001             |
| Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility. |                            |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402MHz   | 21      | 2422MHz   | 41      | 2442MHz   | 61      | 2462MHz   |
| 2                                   | 2403MHz   | 22      | 2423MHz   | 42      | 2443MHz   | 62      | 2463MHz   |
| 3                                   | 2404MHz   | 23      | 2424MHz   | 43      | 2444MHz   | 63      | 2464MHz   |
| 4                                   | 2405MHz   | 24      | 2425MHz   | 44      | 2445MHz   | 64      | 2465MHz   |
| 5                                   | 2406MHz   | 25      | 2426MHz   | 45      | 2446MHz   | 65      | 2466MHz   |
| 6                                   | 2407MHz   | 26      | 2427MHz   | 46      | 2447MHz   | 66      | 2467MHz   |
| 7                                   | 2408MHz   | 27      | 2428MHz   | 47      | 2448MHz   | 67      | 2468MHz   |
| 8                                   | 2409MHz   | 28      | 2429MHz   | 48      | 2449MHz   | 68      | 2469MHz   |
| 9                                   | 2410MHz   | 29      | 2430MHz   | 49      | 2450MHz   | 69      | 2470MHz   |
| 10                                  | 2411MHz   | 30      | 2431MHz   | 50      | 2451MHz   | 70      | 2471MHz   |
| 11                                  | 2412MHz   | 31      | 2432MHz   | 51      | 2452MHz   | 71      | 2472MHz   |
| 12                                  | 2413MHz   | 32      | 2433MHz   | 52      | 2453MHz   | 72      | 2473MHz   |
| 13                                  | 2414MHz   | 33      | 2434MHz   | 53      | 2454MHz   | 73      | 2474MHz   |
| 14                                  | 2415MHz   | 34      | 2435MHz   | 54      | 2455MHz   | 74      | 2475MHz   |
| 15                                  | 2416MHz   | 35      | 2436MHz   | 55      | 2456MHz   | 75      | 2476MHz   |
| 16                                  | 2417MHz   | 36      | 2437MHz   | 56      | 2457MHz   | 76      | 2477MHz   |
| 17                                  | 2418MHz   | 37      | 2438MHz   | 57      | 2458MHz   | 77      | 2478MHz   |
| 18                                  | 2419MHz   | 38      | 2439MHz   | 58      | 2459MHz   | 78      | 2479MHz   |
| 19                                  | 2420MHz   | 39      | 2440MHz   | 59      | 2460MHz   | 79      | 2480MHz   |
| 20                                  | 2421MHz   | 40      | 2441MHz   | 60      | 2461MHz   |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Test channel        | Frequency |
|---------------------|-----------|
| The lowest channel  | 2402MHz   |
| The middle channel  | 2441MHz   |
| The Highest channel | 2480MHz   |

### 3.2 Test Setup Configuration

Conducted Emission

Adapter EUT

Radiated Emission

Adapter EUT

### 3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| E-1  | Adapter   | Xiaomi    | MDY-08-EH      | N/A        | AE   |
|      |           |           |                |            |      |
|      |           |           |                |            |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) The test software is the Bluetooth RF Test Tool which can set the EUT into the individual test modes.TX Power:7

### 3.4 Test Mode

|                                                                                                                                                                                                                                       |                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                     | Keep the EUT in continuously transmitting mode. |
| Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. |                                                 |

#### 4. TEST FACILITY AND TEST INSTRUMENT USED

##### 4.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.  
Add. : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District  
Shenzhen, Guangdong, China

FCC Registration Number:255941  
Designation Number: CN0325  
IC Registered No.: 29832  
CAB identifier: CN0143

##### 4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

| Item | Equipment                          | Manufacturer | Model               | Serial No. | Last Cal.     | Next Cal.     |
|------|------------------------------------|--------------|---------------------|------------|---------------|---------------|
| 1    | Receiver                           | R&S          | ESCI                | 100874     | May 6, 2025   | May 5, 2026   |
| 2    | Loop Antenna                       | TESEQ        | HLA6121             | 58357      | Oct. 11, 2024 | Oct. 10, 2025 |
| 3    | Amplifier                          | Schwarzbeck  | BBV 9743 B          | 00378      | May 6, 2025   | May 5, 2026   |
| 4    | Amplifier                          | Schwarzbeck  | BBV 9718 B          | 00040      | May 7, 2025   | May 6, 2026   |
| 5    | Bilog Antenna                      | Schwarzbeck  | VULB9162            | 00498      | May 15, 2025  | May 14, 2026  |
| 6    | Horn Antenna                       | Schwarzbeck  | BBHA9120D           | 02623      | May 15, 2025  | May 14, 2026  |
| 7    | Horn Antenna                       | A.H.SYSTEMS  | SAS574              | 588        | Oct. 21, 2024 | Oct. 20, 2025 |
| 8    | Amplifier                          | AEROFLEX     | 100KHz-40GHz        | 097        | Oct. 21, 2024 | Oct. 20, 2025 |
| 9    | Spectrum Analyzer                  | R&S          | FSV40               | 101413     | Oct. 21, 2024 | Oct. 20, 2025 |
| 10   | Spectrum Analyzer                  | KEYSIGHT     | N9020A              | MY53420208 | May 7, 2025   | May 6, 2026   |
| 11   | WIDBAND RADIO COMMUNICATION TESTER | R&S          | CMW500              | 109863     | May 7, 2025   | May 6, 2026   |
| 12   | Single Generator                   | Agilent      | N5182A              | MY48180575 | May 7, 2025   | May 6, 2026   |
| 13   | Power Sensor                       | MWRFTest     | MW100-RFCB          | /          | May 7, 2025   | May 6, 2026   |
| 14   | CABLE                              | EMToni       | DA800-NM-NM-11000MM | /          | May 6, 2025   | May 5, 2026   |

#### Conduction Test equipment

| Equipment                 | Manufacturer | Model                | Serial No.  | Last Cal.   | Next Cal.   |
|---------------------------|--------------|----------------------|-------------|-------------|-------------|
| Receiver                  | R&S          | ESCI                 | 100874      | May 6, 2025 | May 5, 2026 |
| LISN                      | R&S          | ENV216               | 102794      | May 6, 2025 | May 5, 2026 |
| ISN CAT 6                 | Schwarzbeck  | NTFM 8158            | 00318       | May 7, 2025 | May 6, 2026 |
| ISN CAT 5                 | Schwarzbeck  | CAT5 8158            | 00343       | May 7, 2025 | May 6, 2026 |
| Capacitive Voltage Probe  | Schwarzbeck  | CVP 9222 C           | 00101       | May 8, 2025 | May 7, 2026 |
| Current Transformer Clamp | Schwarzbeck  | SW 9605              | SW9605 #209 | May 8, 2025 | May 7, 2026 |
| CABLE                     | EMToni       | G223-NM-BNCM -2000MM | /           | May 7, 2025 | May 6, 2026 |

#### Conducted Test equipment

| Item | Equipment         | Manufacturer | Model      | Serial No. | Last Cal.     | Next Cal.     |
|------|-------------------|--------------|------------|------------|---------------|---------------|
| 1    | Spectrum Analyzer | R&S          | FSV40      | 101413     | Oct. 21, 2024 | Oct. 20, 2025 |
| 2    | Spectrum Analyzer | KEYSIGHT     | N9020A     | MY53420208 | May 7, 2025   | May 6, 2026   |
| 3    | Power Sensor      | MWRFTest     | MW100-RFCB | /          | May 7, 2025   | May 6, 2026   |

#### 4.3 Testing software

| Project            | Software name | Edition        |
|--------------------|---------------|----------------|
| RF Conducted       | MTS 8310      | 2.0.0.0        |
| Conducted Emission | EZ-EMC        | EMC-CON 3A1.1+ |
| Radiated Emission  | EZ-EMC        | FA-03A2 RE+    |

#### 4.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                              | Uncertainty               |
|-----|-----------------------------------|---------------------------|
| 1   | Conducted Emission Test           | $\pm 1.38\text{dB}$       |
| 2   | RF conducted power                | $\pm 0.16\text{dB}$       |
| 3   | Conducted spurious emissions      | $\pm 0.21\text{dB}$       |
| 4   | All radiated emissions (9k-30MHz) | $\pm 4.68\text{dB}$       |
| 5   | All radiated emissions (<1G)      | $\pm 4.68\text{dB}$       |
| 6   | All radiated emissions (>1G)      | $\pm 4.89\text{dB}$       |
| 7   | Temperature                       | $\pm 0.5^{\circ}\text{C}$ |
| 8   | Humidity                          | $\pm 2\%$                 |
| 9   | Occupied Bandwidth                | $\pm 4.96\text{dB}$       |

#### Decision Rule

- ☒ Uncertainty is not included  
☐ Uncertainty is included

## 5. EMC EMISSION TEST

### 5.1 Conducted emissions

|                       |                                          |
|-----------------------|------------------------------------------|
| Test Requirement:     | FCC Part15 C Section 15.207, RSS-Gen 8.8 |
| Test Method:          | ANSI C63.10:2013                         |
| Test Frequency Range: | 150KHz to 30MHz                          |
| Receiver setup:       | RBW=9KHz, VBW=30KHz, Sweep time=auto     |

#### 5.1.1 POWER LINE CONDUCTED EMISSION Limits

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

(1) \*Decreases with the logarithm of the frequency.


#### 5.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 5.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 5.1.4 TEST SETUP

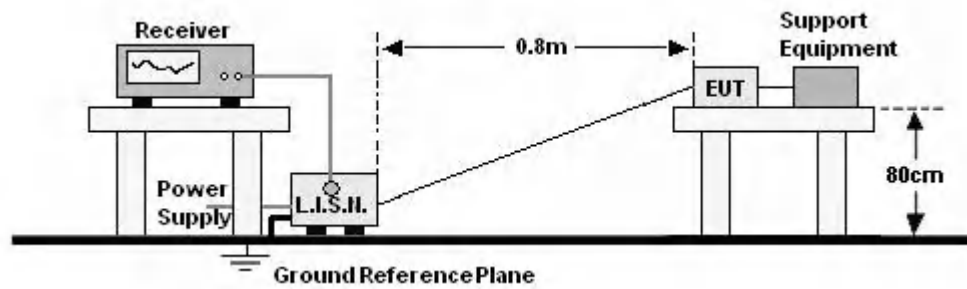


#### 5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 5.1.6 Test Result

|               |              |                     |       |
|---------------|--------------|---------------------|-------|
| Temperature:  | 24.3℃        | Relative Humidity : | 53.2% |
| Pressure:     | 1010kPa      | Phase :             | L     |
| Test Voltage: | AC 120V/60Hz |                     |       |

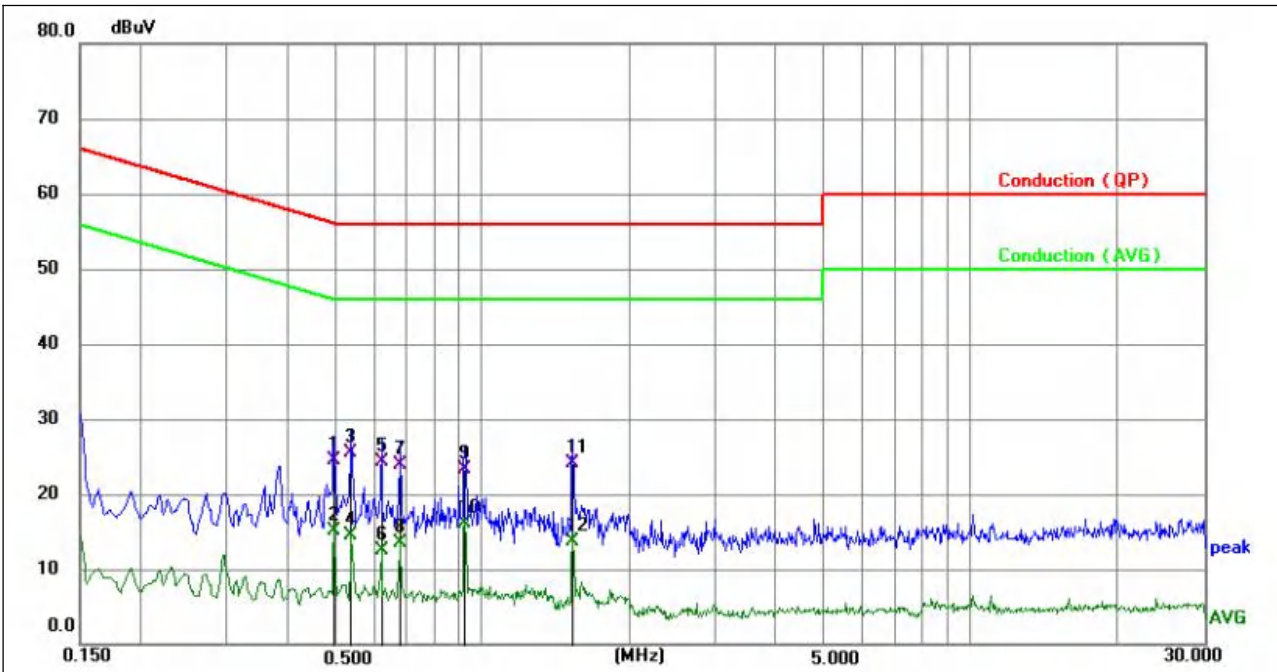


| No.  | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|------|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1    | 0.4964          | 14.54          | 10.02       | 24.56        | 56.06        | -31.50      | QP       | P   |        |
| 2    | 0.4964          | 5.07           | 10.02       | 15.09        | 46.06        | -30.97      | AVG      | P   |        |
| 3    | 0.5370          | 15.48          | 10.02       | 25.50        | 56.00        | -30.50      | QP       | P   |        |
| 4    | 0.5370          | 4.41           | 10.02       | 14.43        | 46.00        | -31.57      | AVG      | P   |        |
| 5    | 0.6225          | 14.36          | 10.03       | 24.39        | 56.00        | -31.61      | QP       | P   |        |
| 6    | 0.6225          | 2.50           | 10.03       | 12.53        | 46.00        | -33.47      | AVG      | P   |        |
| 7    | 0.6809          | 13.92          | 10.03       | 23.95        | 56.00        | -32.05      | QP       | P   |        |
| 8    | 0.6809          | 3.47           | 10.03       | 13.50        | 46.00        | -32.50      | AVG      | P   |        |
| 9    | 0.9194          | 13.27          | 10.05       | 23.32        | 56.00        | -32.68      | QP       | P   |        |
| 10 * | 0.9194          | 6.14           | 10.05       | 16.19        | 46.00        | -29.81      | AVG      | P   |        |
| 11   | 1.5315          | 13.97          | 10.06       | 24.03        | 56.00        | -31.97      | QP       | P   |        |
| 12   | 1.5315          | 3.55           | 10.06       | 13.61        | 46.00        | -32.39      | AVG      | P   |        |

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 8DPSK mode (Low Channel: 2402MHz).

|               |              |                     |       |
|---------------|--------------|---------------------|-------|
| Temperature:  | 24.3℃        | Relative Humidity : | 53.2% |
| Pressure:     | 1010kPa      | Phase :             | N     |
| Test Voltage: | AC 120V/60Hz |                     |       |

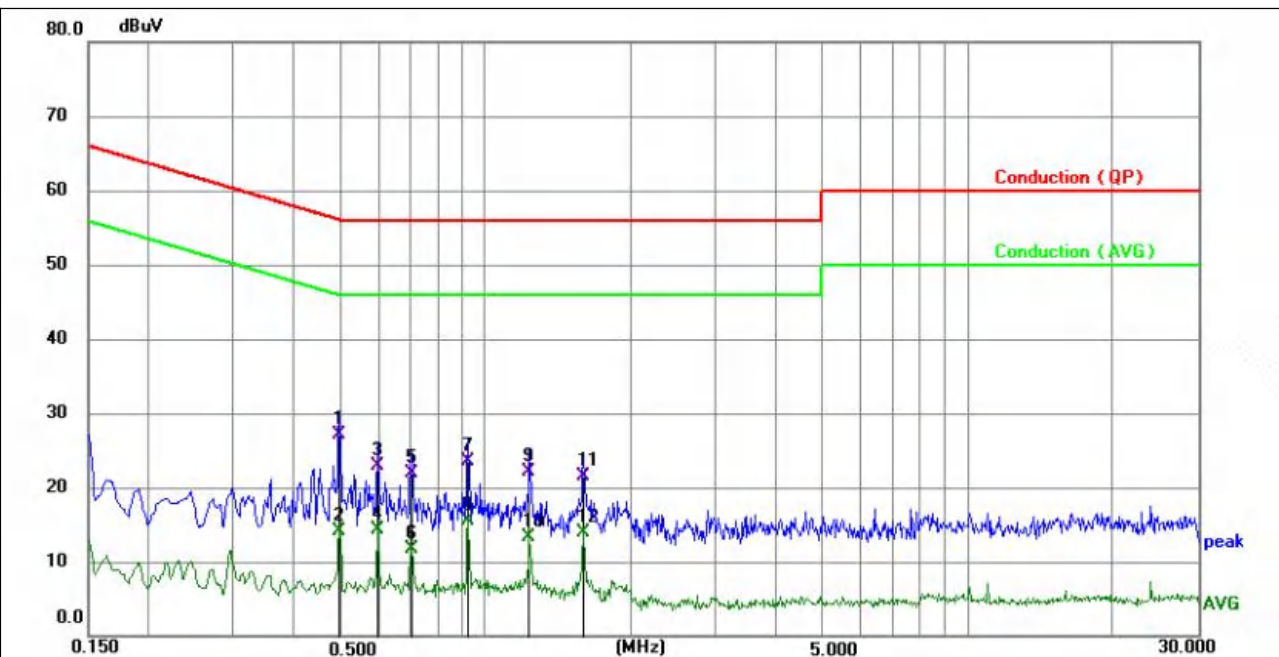

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 * | 0.4964          | 17.10          | 10.02       | 27.12        | 56.06        | -28.94      | QP       | P   |        |
| 2   | 0.4964          | 4.04           | 10.02       | 14.06        | 46.06        | -32.00      | AVG      | P   |        |
| 3   | 0.5955          | 12.93          | 10.03       | 22.96        | 56.00        | -33.04      | QP       | P   |        |
| 4   | 0.5955          | 4.20           | 10.03       | 14.23        | 46.00        | -31.77      | AVG      | P   |        |
| 5   | 0.7035          | 11.77          | 10.04       | 21.81        | 56.00        | -34.19      | QP       | P   |        |
| 6   | 0.7035          | 1.75           | 10.04       | 11.79        | 46.00        | -34.21      | AVG      | P   |        |
| 7   | 0.9194          | 13.36          | 10.05       | 23.41        | 56.00        | -32.59      | QP       | P   |        |
| 8   | 0.9194          | 5.40           | 10.05       | 15.45        | 46.00        | -30.55      | AVG      | P   |        |
| 9   | 1.2344          | 12.09          | 10.06       | 22.15        | 56.00        | -33.85      | QP       | P   |        |
| 10  | 1.2344          | 3.19           | 10.06       | 13.25        | 46.00        | -32.75      | AVG      | P   |        |
| 11  | 1.5990          | 11.41          | 10.06       | 21.47        | 56.00        | -34.53      | QP       | P   |        |
| 12  | 1.5990          | 3.77           | 10.06       | 13.83        | 46.00        | -32.17      | AVG      | P   |        |

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 8DPSK mode (Low Channel: 2402MHz).

## 5.2 Radiated emissions

|                       |                                                        |            |        |        |            |
|-----------------------|--------------------------------------------------------|------------|--------|--------|------------|
| Test Requirement:     | FCC Part15 C Section 15.209, RSS-Gen 8.9, RSS-Gen 8.10 |            |        |        |            |
| Test Method:          | ANSI C63.10:2013                                       |            |        |        |            |
| Test Frequency Range: | 9kHz to 25GHz                                          |            |        |        |            |
| Test site:            | Measurement Distance: 3m                               |            |        |        |            |
| Receiver setup:       | Frequency                                              | Detector   | RBW    | VBW    | Value      |
|                       | 9KHz-150KHz                                            | Quasi-peak | 200Hz  | 600Hz  | Quasi-peak |
|                       | 150KHz-30MHz                                           | Quasi-peak | 9KHz   | 30KHz  | Quasi-peak |
|                       | 30MHz-1GHz                                             | Quasi-peak | 100KHz | 300KHz | Quasi-peak |
|                       | Above 1GHz                                             | Peak       | 1MHz   | 3MHz   | Peak       |
|                       |                                                        | Average    | 1MHz   | 10Hz   | Average    |

### 5.2.1 Radiated Emission Limits

| Frequencies (MHz) | Field Strength (micровolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

### LIMITS OF RADIATED EMISSION MEASUREMENT

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 5.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 5.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

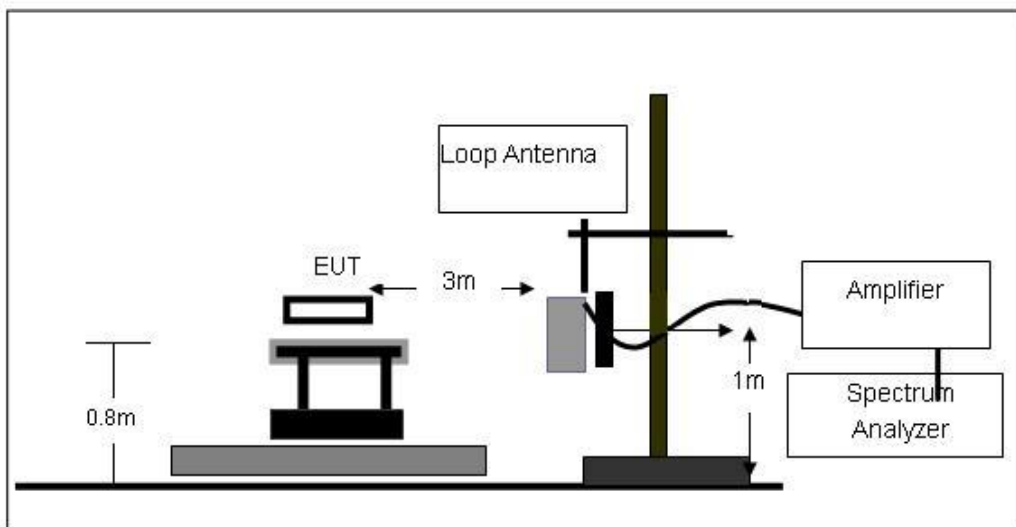

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

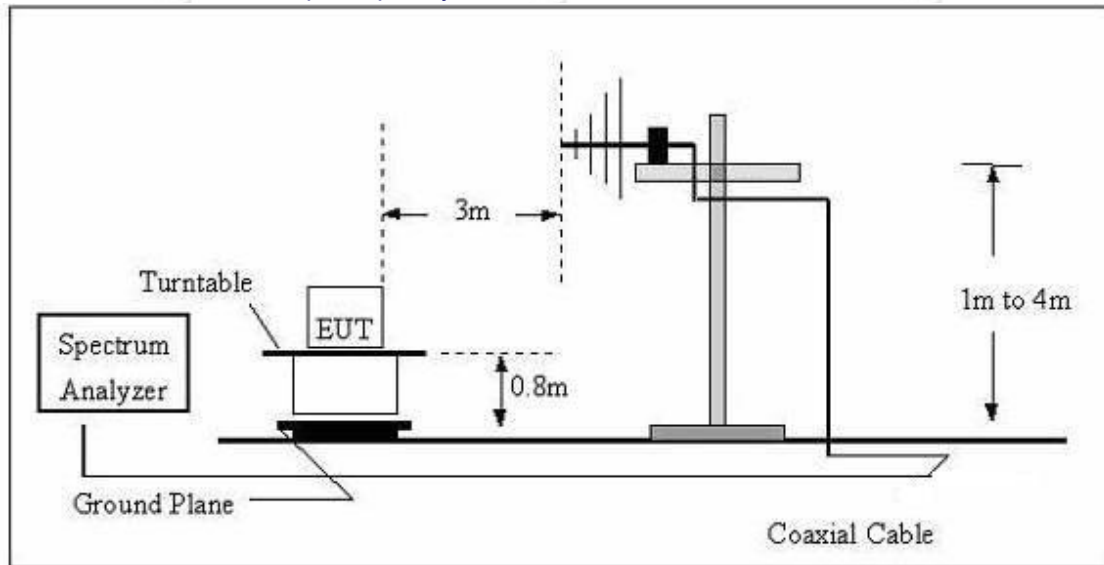

(C) Radiated Emission Test-Up Frequency Above 1GHz

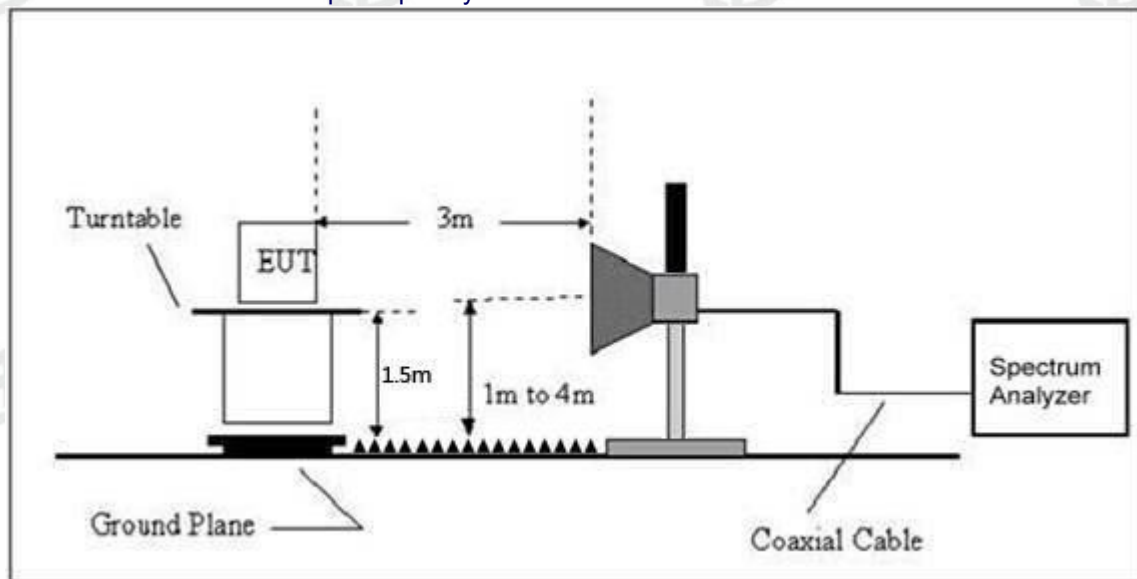

5.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


## 5.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

Between 30MHz – 1GHz

|               |              |                    |            |
|---------------|--------------|--------------------|------------|
| Temperature:  | 25.2℃        | Relative Humidity: | 50%        |
| Pressure:     | 1010kPa      | Polarization:      | Horizontal |
| Test Voltage: | AC 120V/60Hz |                    |            |

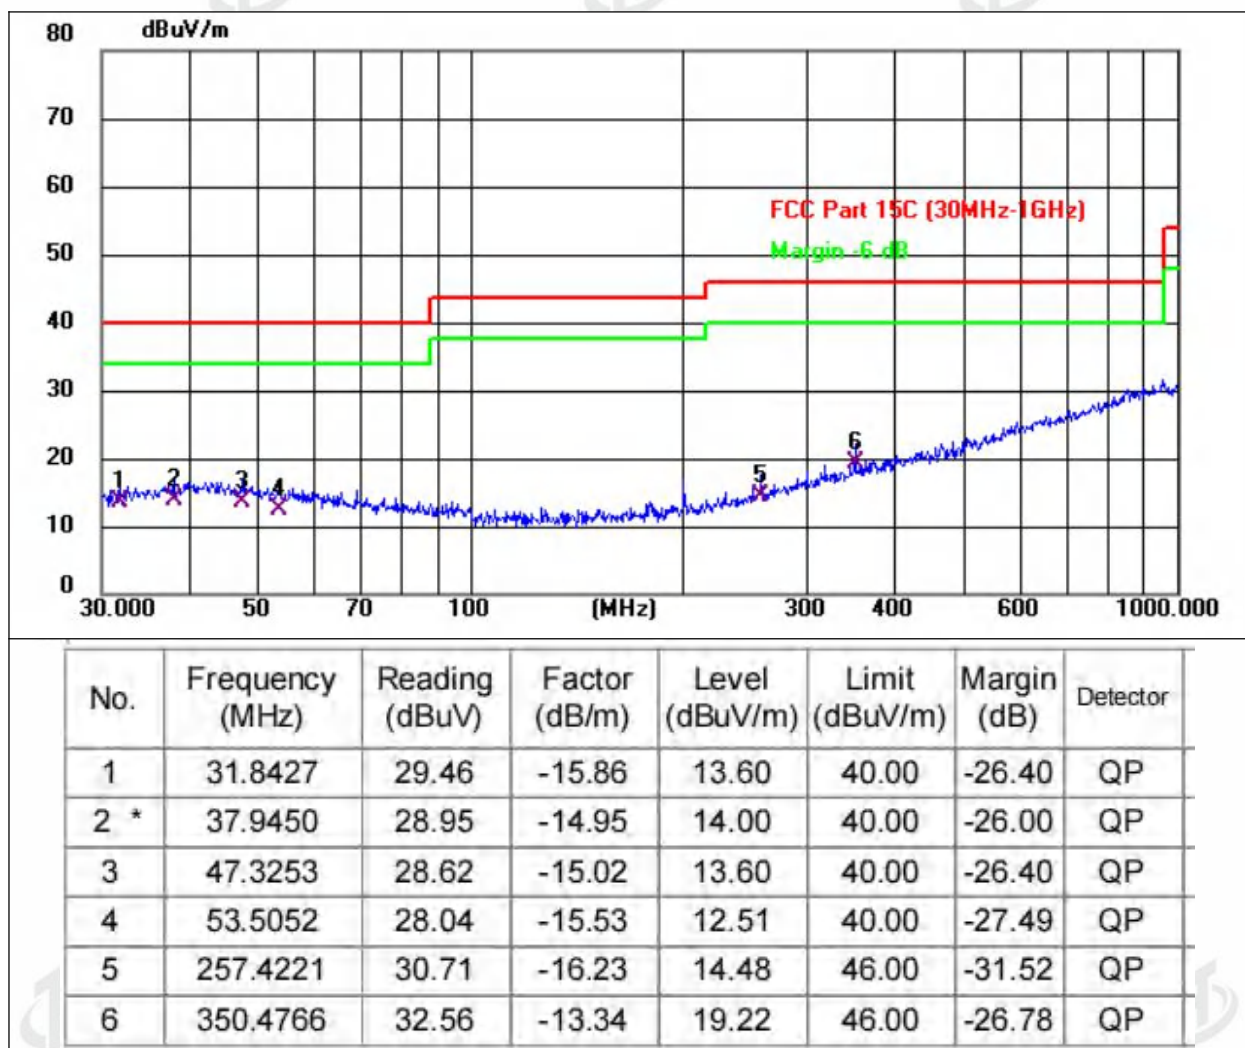

|               |              |                    |          |
|---------------|--------------|--------------------|----------|
| Temperature:  | 25.2℃        | Relative Humidity: | 50%      |
| Pressure:     | 1010kPa      | Polarization:      | Vertical |
| Test Voltage: | AC 120V/60Hz |                    |          |

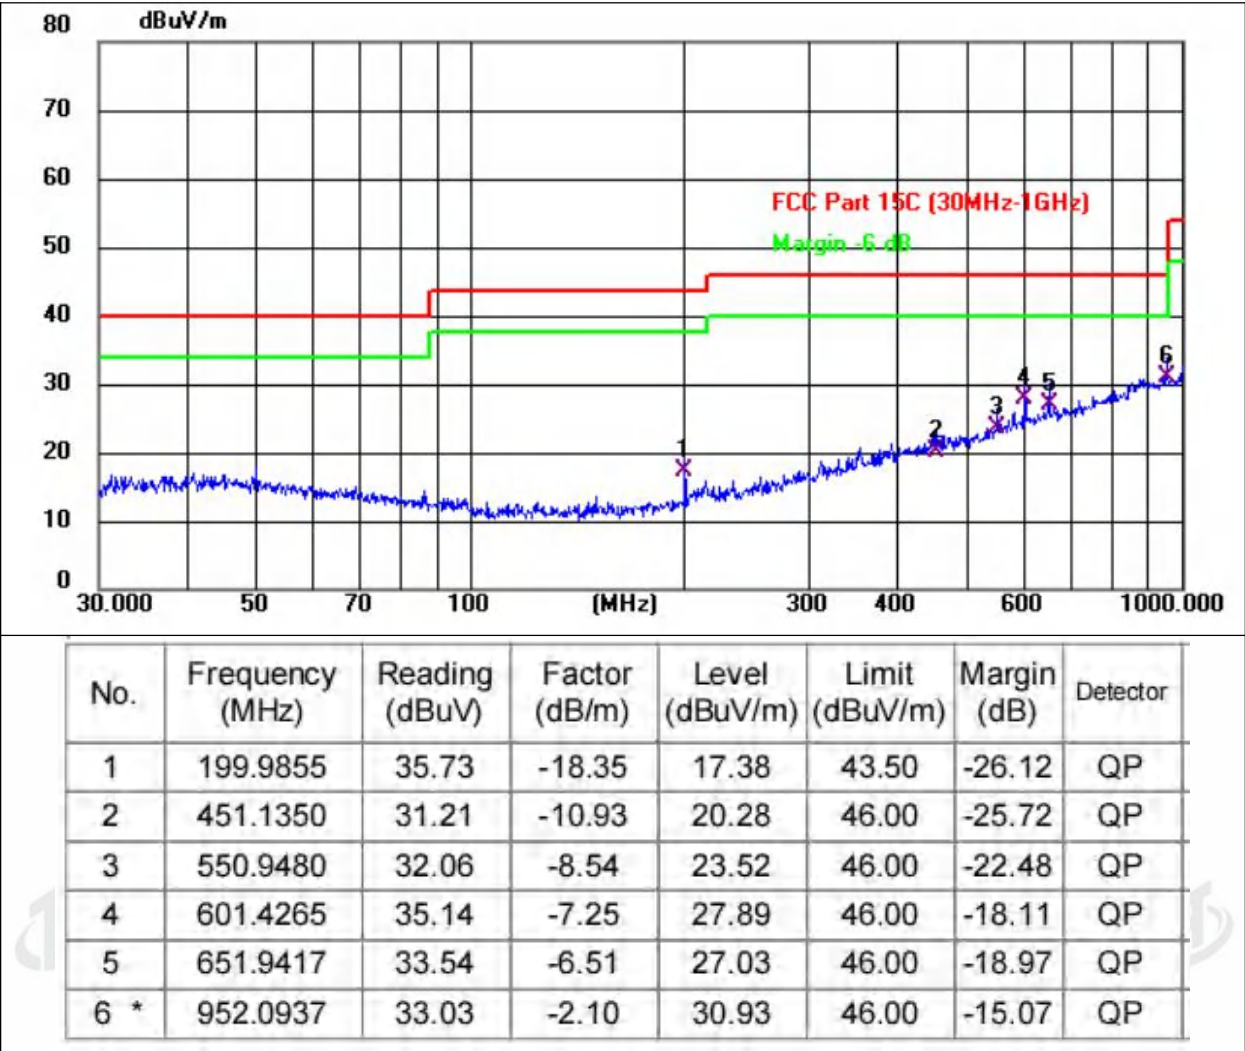

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 8DPSK mode(Low Channel:2402MHz).

1GHz~25GHz

GFSK

| Polar (H/V)         | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|---------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|---------------|
| Low Channel:2402MHz |                 |                      |                    |                 |                     |                         |                 |             |               |
| V                   | 4804.00         | 58.91                | 30.55              | 5.77            | 24.66               | 58.79                   | 74              | -15.21      | Pk            |
| V                   | 4804.00         | 42.35                | 30.55              | 5.77            | 24.66               | 42.23                   | 54              | -11.77      | AV            |
| V                   | 7206.00         | 55.5                 | 30.33              | 6.32            | 24.55               | 56.04                   | 74              | -17.96      | Pk            |
| V                   | 7206.00         | 44.23                | 30.33              | 6.32            | 24.55               | 44.77                   | 54              | -9.23       | AV            |
| V                   | 9608.00         | 56.85                | 30.55              | 5.77            | 24.66               | 56.73                   | 74              | -17.27      | Pk            |
| V                   | 9608.00         | 42.66                | 30.55              | 5.77            | 24.66               | 42.54                   | 54              | -11.46      | AV            |
| V                   | 12010.00        | 55.41                | 30.33              | 6.32            | 24.55               | 55.95                   | 74              | -18.05      | Pk            |
| V                   | 12010.00        | 43.69                | 30.33              | 6.32            | 24.55               | 44.23                   | 54              | -9.77       | AV            |
| H                   | 4804.00         | 58.31                | 30.55              | 5.77            | 24.66               | 58.19                   | 74              | -15.81      | Pk            |
| H                   | 4804.00         | 41.59                | 30.55              | 5.77            | 24.66               | 41.47                   | 54              | -12.53      | AV            |
| H                   | 7206.00         | 57.48                | 30.33              | 6.32            | 24.55               | 58.02                   | 74              | -15.98      | Pk            |
| H                   | 7206.00         | 44.44                | 30.33              | 6.32            | 24.55               | 44.98                   | 54              | -9.02       | AV            |
| H                   | 9608.00         | 55.26                | 30.55              | 5.77            | 24.66               | 55.14                   | 74              | -18.86      | Pk            |
| H                   | 9608.00         | 41.92                | 30.55              | 5.77            | 24.66               | 41.8                    | 54              | -12.2       | AV            |
| H                   | 12010.00        | 55.05                | 30.33              | 6.32            | 24.55               | 55.59                   | 74              | -18.41      | Pk            |
| H                   | 12010.00        | 41.29                | 30.33              | 6.32            | 24.55               | 41.83                   | 54              | -12.17      | AV            |

| Polar (H/V)            | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|---------------|
| Middle Channel:2441MHz |                 |                      |                    |                 |                     |                         |                 |             |               |
| V                      | 4882.00         | 57.52                | 30.55              | 5.77            | 24.66               | 57.4                    | 74              | -16.6       | Pk            |
| V                      | 4882.00         | 41.57                | 30.55              | 5.77            | 24.66               | 41.45                   | 54              | -12.55      | AV            |
| V                      | 7323.00         | 59.08                | 30.33              | 6.32            | 24.55               | 59.62                   | 74              | -14.38      | Pk            |
| V                      | 7323.00         | 42.59                | 30.33              | 6.32            | 24.55               | 43.13                   | 54              | -10.87      | AV            |
| V                      | 9764.00         | 57.28                | 30.55              | 5.77            | 24.66               | 57.16                   | 74              | -16.84      | Pk            |
| V                      | 9764.00         | 44.62                | 30.55              | 5.77            | 24.66               | 44.5                    | 54              | -9.5        | AV            |
| V                      | 12205.00        | 60                   | 30.33              | 6.32            | 24.55               | 60.54                   | 74              | -13.46      | Pk            |
| V                      | 12205.00        | 43.06                | 30.33              | 6.32            | 24.55               | 43.6                    | 54              | -10.4       | AV            |
| H                      | 4882.00         | 58.18                | 30.55              | 5.77            | 24.66               | 58.06                   | 74              | -15.94      | Pk            |
| H                      | 4882.00         | 42.32                | 30.55              | 5.77            | 24.66               | 42.2                    | 54              | -11.8       | AV            |
| H                      | 7323.00         | 57.36                | 30.33              | 6.32            | 24.55               | 57.9                    | 74              | -16.1       | Pk            |
| H                      | 7323.00         | 42.99                | 30.33              | 6.32            | 24.55               | 43.53                   | 54              | -10.47      | AV            |
| H                      | 9764.00         | 59.13                | 30.55              | 5.77            | 24.66               | 59.01                   | 74              | -14.99      | Pk            |
| H                      | 9764.00         | 43.1                 | 30.55              | 5.77            | 24.66               | 42.98                   | 54              | -11.02      | AV            |
| H                      | 12205.00        | 56.02                | 30.33              | 6.32            | 24.55               | 56.56                   | 74              | -17.44      | Pk            |
| H                      | 12205.00        | 44.47                | 30.33              | 6.32            | 24.55               | 45.01                   | 54              | -8.99       | AV            |

| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| High Channel:2480MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                    | 4960.00            | 56.24                      | 30.55                     | 5.77                  | 24.66                     | 56.12                         | 74                 | -17.88         | Pk               |
| V                    | 4960.00            | 41.66                      | 30.55                     | 5.77                  | 24.66                     | 41.54                         | 54                 | -12.46         | AV               |
| V                    | 7440.00            | 59.26                      | 30.33                     | 6.32                  | 24.55                     | 59.8                          | 74                 | -14.2          | Pk               |
| V                    | 7440.00            | 42.89                      | 30.33                     | 6.32                  | 24.55                     | 43.43                         | 54                 | -10.57         | AV               |
| V                    | 9920.00            | 56.29                      | 30.55                     | 5.77                  | 24.66                     | 56.17                         | 74                 | -17.83         | Pk               |
| V                    | 9920.00            | 41.83                      | 30.55                     | 5.77                  | 24.66                     | 41.71                         | 54                 | -12.29         | AV               |
| V                    | 12400.00           | 59.75                      | 30.33                     | 6.32                  | 24.55                     | 60.29                         | 74                 | -13.71         | Pk               |
| V                    | 12400.00           | 41.53                      | 30.33                     | 6.32                  | 24.55                     | 42.07                         | 54                 | -11.93         | AV               |
| H                    | 4960.00            | 56.6                       | 30.55                     | 5.77                  | 24.66                     | 56.48                         | 74                 | -17.52         | Pk               |
| H                    | 4960.00            | 41.67                      | 30.55                     | 5.77                  | 24.66                     | 41.55                         | 54                 | -12.45         | AV               |
| H                    | 7440.00            | 56.28                      | 30.33                     | 6.32                  | 24.55                     | 56.82                         | 74                 | -17.18         | Pk               |
| H                    | 7440.00            | 43.8                       | 30.33                     | 6.32                  | 24.55                     | 44.34                         | 54                 | -9.66          | AV               |
| H                    | 9920.00            | 56.88                      | 30.55                     | 5.77                  | 24.66                     | 56.76                         | 74                 | -17.24         | Pk               |
| H                    | 9920.00            | 44.63                      | 30.55                     | 5.77                  | 24.66                     | 44.51                         | 54                 | -9.49          | AV               |
| H                    | 12400.00           | 55.14                      | 30.33                     | 6.32                  | 24.55                     | 55.68                         | 74                 | -18.32         | Pk               |
| H                    | 12400.00           | 42.81                      | 30.33                     | 6.32                  | 24.55                     | 43.35                         | 54                 | -10.65         | AV               |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

$\pi/4$ DQPSK

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Low Channel:2402MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                   | 4804.00   | 58.29            | 30.55             | 5.77          | 24.66             | 58.17             | 74       | -15.83 | Pk               |
| V                   | 4804.00   | 44.51            | 30.55             | 5.77          | 24.66             | 44.39             | 54       | -9.61  | AV               |
| V                   | 7206.00   | 56.77            | 30.33             | 6.32          | 24.55             | 57.31             | 74       | -16.69 | Pk               |
| V                   | 7206.00   | 41.33            | 30.33             | 6.32          | 24.55             | 41.87             | 54       | -12.13 | AV               |
| V                   | 9608.00   | 55.85            | 30.55             | 5.77          | 24.66             | 55.73             | 74       | -18.27 | Pk               |
| V                   | 9608.00   | 41.05            | 30.55             | 5.77          | 24.66             | 40.93             | 54       | -13.07 | AV               |
| V                   | 12010.00  | 58.49            | 30.33             | 6.32          | 24.55             | 59.03             | 74       | -14.97 | Pk               |
| V                   | 12010.00  | 41.56            | 30.33             | 6.32          | 24.55             | 42.1              | 54       | -11.9  | AV               |
| H                   | 4804.00   | 59.64            | 30.55             | 5.77          | 24.66             | 59.52             | 74       | -14.48 | Pk               |
| H                   | 4804.00   | 41.6             | 30.55             | 5.77          | 24.66             | 41.48             | 54       | -12.52 | AV               |
| H                   | 7206.00   | 55.75            | 30.33             | 6.32          | 24.55             | 56.29             | 74       | -17.71 | Pk               |
| H                   | 7206.00   | 44.37            | 30.33             | 6.32          | 24.55             | 44.91             | 54       | -9.09  | AV               |
| H                   | 9608.00   | 56.27            | 30.55             | 5.77          | 24.66             | 56.15             | 74       | -17.85 | Pk               |
| H                   | 9608.00   | 41.15            | 30.55             | 5.77          | 24.66             | 41.03             | 54       | -12.97 | AV               |
| H                   | 12010.00  | 56.43            | 30.33             | 6.32          | 24.55             | 56.97             | 74       | -17.03 | Pk               |
| H                   | 12010.00  | 41.1             | 30.33             | 6.32          | 24.55             | 41.64             | 54       | -12.36 | AV               |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Middle Channel:2441MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V                      | 4882.00   | 55.32            | 30.55             | 5.77          | 24.66             | 55.2              | 74       | -18.8  | Pk               |
| V                      | 4882.00   | 41               | 30.55             | 5.77          | 24.66             | 40.88             | 54       | -13.12 | AV               |
| V                      | 7323.00   | 57.18            | 30.33             | 6.32          | 24.55             | 57.72             | 74       | -16.28 | Pk               |
| V                      | 7323.00   | 42.74            | 30.33             | 6.32          | 24.55             | 43.28             | 54       | -10.72 | AV               |
| V                      | 9764.00   | 58.88            | 30.55             | 5.77          | 24.66             | 58.76             | 74       | -15.24 | Pk               |
| V                      | 9764.00   | 42.38            | 30.55             | 5.77          | 24.66             | 42.26             | 54       | -11.74 | AV               |
| V                      | 12205.00  | 57.16            | 30.33             | 6.32          | 24.55             | 57.7              | 74       | -16.3  | Pk               |
| V                      | 12205.00  | 44.6             | 30.33             | 6.32          | 24.55             | 45.14             | 54       | -8.86  | AV               |
| H                      | 4882.00   | 55.49            | 30.55             | 5.77          | 24.66             | 55.37             | 74       | -18.63 | Pk               |
| H                      | 4882.00   | 43.6             | 30.55             | 5.77          | 24.66             | 43.48             | 54       | -10.52 | AV               |
| H                      | 7323.00   | 58.31            | 30.33             | 6.32          | 24.55             | 58.85             | 74       | -15.15 | Pk               |
| H                      | 7323.00   | 41.13            | 30.33             | 6.32          | 24.55             | 41.67             | 54       | -12.33 | AV               |
| H                      | 9764.00   | 56.78            | 30.55             | 5.77          | 24.66             | 56.66             | 74       | -17.34 | Pk               |
| H                      | 9764.00   | 43.48            | 30.55             | 5.77          | 24.66             | 43.36             | 54       | -10.64 | AV               |
| H                      | 12205.00  | 59.45            | 30.33             | 6.32          | 24.55             | 59.99             | 74       | -14.01 | Pk               |
| H                      | 12205.00  | 44.75            | 30.33             | 6.32          | 24.55             | 45.29             | 54       | -8.71  | AV               |

| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| High Channel:2480MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                    | 4960.00            | 59.58                      | 30.55                     | 5.77                  | 24.66                     | 59.46                         | 74                 | -14.54         | Pk               |
| V                    | 4960.00            | 41.36                      | 30.55                     | 5.77                  | 24.66                     | 41.24                         | 54                 | -12.76         | AV               |
| V                    | 7440.00            | 55.21                      | 30.33                     | 6.32                  | 24.55                     | 55.75                         | 74                 | -18.25         | Pk               |
| V                    | 7440.00            | 44.95                      | 30.33                     | 6.32                  | 24.55                     | 45.49                         | 54                 | -8.51          | AV               |
| V                    | 9920.00            | 55.86                      | 30.55                     | 5.77                  | 24.66                     | 55.74                         | 74                 | -18.26         | Pk               |
| V                    | 9920.00            | 41.67                      | 30.55                     | 5.77                  | 24.66                     | 41.55                         | 54                 | -12.45         | AV               |
| V                    | 12400.00           | 58.99                      | 30.33                     | 6.32                  | 24.55                     | 59.53                         | 74                 | -14.47         | Pk               |
| V                    | 12400.00           | 41.34                      | 30.33                     | 6.32                  | 24.55                     | 41.88                         | 54                 | -12.12         | AV               |
| H                    | 4960.00            | 59.51                      | 30.55                     | 5.77                  | 24.66                     | 59.39                         | 74                 | -14.61         | Pk               |
| H                    | 4960.00            | 41.55                      | 30.55                     | 5.77                  | 24.66                     | 41.43                         | 54                 | -12.57         | AV               |
| H                    | 7440.00            | 59.89                      | 30.33                     | 6.32                  | 24.55                     | 60.43                         | 74                 | -13.57         | Pk               |
| H                    | 7440.00            | 42.4                       | 30.33                     | 6.32                  | 24.55                     | 42.94                         | 54                 | -11.06         | AV               |
| H                    | 9920.00            | 56.76                      | 30.55                     | 5.77                  | 24.66                     | 56.64                         | 74                 | -17.36         | Pk               |
| H                    | 9920.00            | 43.35                      | 30.55                     | 5.77                  | 24.66                     | 43.23                         | 54                 | -10.77         | AV               |
| H                    | 12400.00           | 57.36                      | 30.33                     | 6.32                  | 24.55                     | 57.9                          | 74                 | -16.1          | Pk               |
| H                    | 12400.00           | 43.49                      | 30.33                     | 6.32                  | 24.55                     | 44.03                         | 54                 | -9.97          | AV               |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8DPSK

| Polar (H/V)         | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|---------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|---------------|
| Low Channel:2402MHz |                 |                      |                    |                 |                     |                         |                 |             |               |
| V                   | 4804.00         | 57.53                | 30.55              | 5.77            | 24.66               | 57.41                   | 74              | -16.59      | Pk            |
| V                   | 4804.00         | 42.98                | 30.55              | 5.77            | 24.66               | 42.86                   | 54              | -11.14      | AV            |
| V                   | 7206.00         | 57                   | 30.33              | 6.32            | 24.55               | 57.54                   | 74              | -16.46      | Pk            |
| V                   | 7206.00         | 43.33                | 30.33              | 6.32            | 24.55               | 43.87                   | 54              | -10.13      | AV            |
| V                   | 9608.00         | 56.64                | 30.55              | 5.77            | 24.66               | 56.52                   | 74              | -17.48      | Pk            |
| V                   | 9608.00         | 43.29                | 30.55              | 5.77            | 24.66               | 43.17                   | 54              | -10.83      | AV            |
| V                   | 12010.00        | 57.31                | 30.33              | 6.32            | 24.55               | 57.85                   | 74              | -16.15      | Pk            |
| V                   | 12010.00        | 44.82                | 30.33              | 6.32            | 24.55               | 45.36                   | 54              | -8.64       | AV            |
| H                   | 4804.00         | 58.98                | 30.55              | 5.77            | 24.66               | 58.86                   | 74              | -15.14      | Pk            |
| H                   | 4804.00         | 41.26                | 30.55              | 5.77            | 24.66               | 41.14                   | 54              | -12.86      | AV            |
| H                   | 7206.00         | 56.29                | 30.33              | 6.32            | 24.55               | 56.83                   | 74              | -17.17      | Pk            |
| H                   | 7206.00         | 41.2                 | 30.33              | 6.32            | 24.55               | 41.74                   | 54              | -12.26      | AV            |
| H                   | 9608.00         | 58.66                | 30.55              | 5.77            | 24.66               | 58.54                   | 74              | -15.46      | Pk            |
| H                   | 9608.00         | 41.66                | 30.55              | 5.77            | 24.66               | 41.54                   | 54              | -12.46      | AV            |
| H                   | 12010.00        | 57.9                 | 30.33              | 6.32            | 24.55               | 58.44                   | 74              | -15.56      | Pk            |
| H                   | 12010.00        | 41.78                | 30.33              | 6.32            | 24.55               | 42.32                   | 54              | -11.68      | AV            |

| Polar (H/V)            | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------|-----------------|----------------------|--------------------|-----------------|---------------------|-------------------------|-----------------|-------------|---------------|
| Middle Channel:2441MHz |                 |                      |                    |                 |                     |                         |                 |             |               |
| V                      | 4882.00         | 57.89                | 30.55              | 5.77            | 24.66               | 57.77                   | 74              | -16.23      | Pk            |
| V                      | 4882.00         | 41.95                | 30.55              | 5.77            | 24.66               | 41.83                   | 54              | -12.17      | AV            |
| V                      | 7323.00         | 59.8                 | 30.33              | 6.32            | 24.55               | 60.34                   | 74              | -13.66      | Pk            |
| V                      | 7323.00         | 41.28                | 30.33              | 6.32            | 24.55               | 41.82                   | 54              | -12.18      | AV            |
| V                      | 9764.00         | 55.79                | 30.55              | 5.77            | 24.66               | 55.67                   | 74              | -18.33      | Pk            |
| V                      | 9764.00         | 44.81                | 30.55              | 5.77            | 24.66               | 44.69                   | 54              | -9.31       | AV            |
| V                      | 12205.00        | 58.7                 | 30.33              | 6.32            | 24.55               | 59.24                   | 74              | -14.76      | Pk            |
| V                      | 12205.00        | 41.54                | 30.33              | 6.32            | 24.55               | 42.08                   | 54              | -11.92      | AV            |
| H                      | 4882.00         | 55.59                | 30.55              | 5.77            | 24.66               | 55.47                   | 74              | -18.53      | Pk            |
| H                      | 4882.00         | 43.64                | 30.55              | 5.77            | 24.66               | 43.52                   | 54              | -10.48      | AV            |
| H                      | 7323.00         | 57.81                | 30.33              | 6.32            | 24.55               | 58.35                   | 74              | -15.65      | Pk            |
| H                      | 7323.00         | 41.3                 | 30.33              | 6.32            | 24.55               | 41.84                   | 54              | -12.16      | AV            |
| H                      | 9764.00         | 56.42                | 30.55              | 5.77            | 24.66               | 56.3                    | 74              | -17.7       | Pk            |
| H                      | 9764.00         | 44.25                | 30.55              | 5.77            | 24.66               | 44.13                   | 54              | -9.87       | AV            |
| H                      | 12205.00        | 57.89                | 30.33              | 6.32            | 24.55               | 58.43                   | 74              | -15.57      | Pk            |
| H                      | 12205.00        | 42.25                | 30.33              | 6.32            | 24.55               | 42.79                   | 54              | -11.21      | AV            |

| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|------------------|
| High Channel:2480MHz |                    |                            |                           |                       |                           |                               |                    |                |                  |
| V                    | 4960.00            | 56.49                      | 30.55                     | 5.77                  | 24.66                     | 56.37                         | 74                 | -17.63         | Pk               |
| V                    | 4960.00            | 41.37                      | 30.55                     | 5.77                  | 24.66                     | 41.25                         | 54                 | -12.75         | AV               |
| V                    | 7440.00            | 57.28                      | 30.33                     | 6.32                  | 24.55                     | 57.82                         | 74                 | -16.18         | Pk               |
| V                    | 7440.00            | 44.27                      | 30.33                     | 6.32                  | 24.55                     | 44.81                         | 54                 | -9.19          | AV               |
| V                    | 9920.00            | 59.65                      | 30.55                     | 5.77                  | 24.66                     | 59.53                         | 74                 | -14.47         | Pk               |
| V                    | 9920.00            | 41.84                      | 30.55                     | 5.77                  | 24.66                     | 41.72                         | 54                 | -12.28         | AV               |
| V                    | 12400.00           | 56.86                      | 30.33                     | 6.32                  | 24.55                     | 57.4                          | 74                 | -16.6          | Pk               |
| V                    | 12400.00           | 41.66                      | 30.33                     | 6.32                  | 24.55                     | 42.2                          | 54                 | -11.8          | AV               |
| H                    | 4960.00            | 57.38                      | 30.55                     | 5.77                  | 24.66                     | 57.26                         | 74                 | -16.74         | Pk               |
| H                    | 4960.00            | 41.92                      | 30.55                     | 5.77                  | 24.66                     | 41.8                          | 54                 | -12.2          | AV               |
| H                    | 7440.00            | 57.33                      | 30.33                     | 6.32                  | 24.55                     | 57.87                         | 74                 | -16.13         | Pk               |
| H                    | 7440.00            | 44.4                       | 30.33                     | 6.32                  | 24.55                     | 44.94                         | 54                 | -9.06          | AV               |
| H                    | 9920.00            | 57.79                      | 30.55                     | 5.77                  | 24.66                     | 57.67                         | 74                 | -16.33         | Pk               |
| H                    | 9920.00            | 44.14                      | 30.55                     | 5.77                  | 24.66                     | 44.02                         | 54                 | -9.98          | AV               |
| H                    | 12400.00           | 59.09                      | 30.33                     | 6.32                  | 24.55                     | 59.63                         | 74                 | -14.37         | Pk               |
| H                    | 12400.00           | 43.13                      | 30.33                     | 6.32                  | 24.55                     | 43.67                         | 54                 | -10.33         | AV               |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 6. RADIATED BAND EMISSION MEASUREMENT

### 6.1 Test Requirement

|                       |                                                                                                    |          |      |      |         |
|-----------------------|----------------------------------------------------------------------------------------------------|----------|------|------|---------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205, RSS-Gen 8.9, RSS-Gen 8.10                                  |          |      |      |         |
| Test Method:          | ANSI C63.10: 2013                                                                                  |          |      |      |         |
| Test Frequency Range: | All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed. |          |      |      |         |
| Test site:            | Measurement Distance: 3m                                                                           |          |      |      |         |
| Receiver setup:       | Frequency                                                                                          | Detector | RBW  | VBW  | Value   |
|                       | Above 1GHz                                                                                         | Peak     | 1MHz | 3MHz | Peak    |
|                       |                                                                                                    | Average  | 1MHz | 3MHz | Average |

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 2300MHz                                          |
| Stop Frequency                        | 2520                                             |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

### 6.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

#### Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 6.3 DEVIATION FROM TEST STANDARD

No deviation

### 6.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

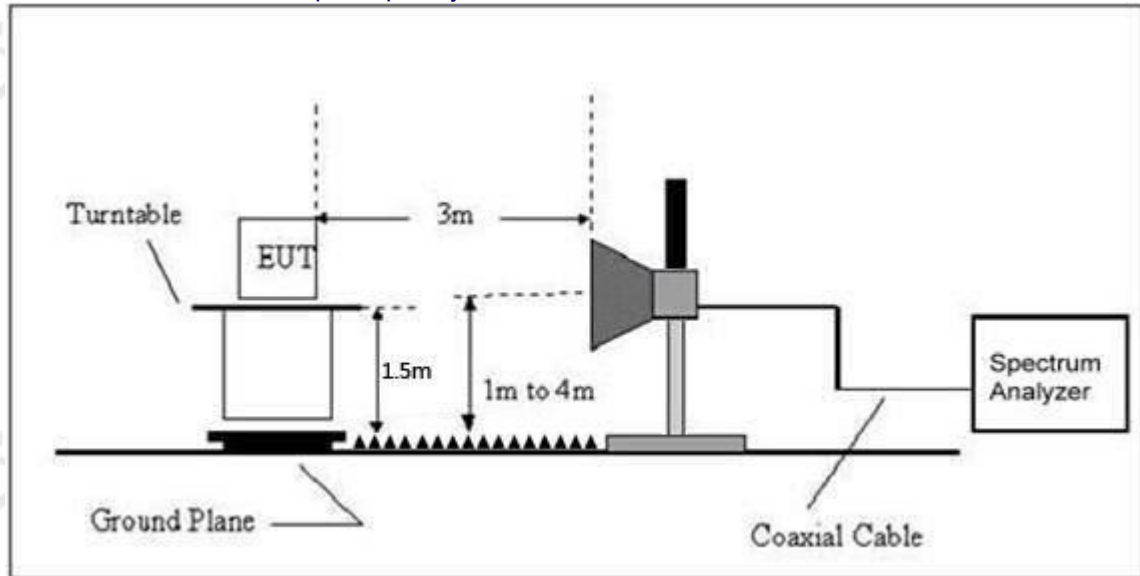

### 6.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 TEST RESULT

|                   | Polar<br>(H/V)        | Frequenc<br>y<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBuV<br>/m) | Margi<br>n<br>(dB) | Detec<br>tor<br>Type | Result |
|-------------------|-----------------------|------------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-----------------------|--------------------|----------------------|--------|
| GFSK              | Low Channel: 2402MHz  |                        |                            |                           |                       |                             |                               |                       |                    |                      |        |
|                   | H                     | 2390.00                | 59.14                      | 30.22                     | 4.85                  | 23.98                       | 57.75                         | 74.00                 | -16.25             | PK                   | PASS   |
|                   | H                     | 2390.00                | 46.44                      | 30.22                     | 4.85                  | 23.98                       | 45.05                         | 54.00                 | -8.95              | AV                   | PASS   |
|                   | H                     | 2400.00                | 60.73                      | 30.22                     | 4.85                  | 23.98                       | 59.34                         | 74.00                 | -14.66             | PK                   | PASS   |
|                   | H                     | 2400.00                | 47.17                      | 30.22                     | 4.85                  | 23.98                       | 45.78                         | 54.00                 | -8.22              | AV                   | PASS   |
|                   | V                     | 2390.00                | 61.70                      | 30.22                     | 4.85                  | 23.98                       | 60.31                         | 74.00                 | -13.69             | PK                   | PASS   |
|                   | V                     | 2390.00                | 46.56                      | 30.22                     | 4.85                  | 23.98                       | 45.17                         | 54.00                 | -8.83              | AV                   | PASS   |
|                   | V                     | 2400.00                | 59.84                      | 30.22                     | 4.85                  | 23.98                       | 58.45                         | 74.00                 | -15.55             | PK                   | PASS   |
|                   | V                     | 2400.00                | 48.12                      | 30.22                     | 4.85                  | 23.98                       | 46.73                         | 54.00                 | -7.27              | AV                   | PASS   |
|                   | High Channel: 2480MHz |                        |                            |                           |                       |                             |                               |                       |                    |                      |        |
|                   | H                     | 2483.50                | 61.05                      | 30.22                     | 4.85                  | 23.98                       | 59.66                         | 74.00                 | -14.34             | PK                   | PASS   |
|                   | H                     | 2483.50                | 48.77                      | 30.22                     | 4.85                  | 23.98                       | 47.38                         | 54.00                 | -6.62              | AV                   | PASS   |
|                   | H                     | 2500.00                | 60.43                      | 30.22                     | 4.85                  | 23.98                       | 59.04                         | 74.00                 | -14.96             | PK                   | PASS   |
|                   | H                     | 2500.00                | 48.88                      | 30.22                     | 4.85                  | 23.98                       | 47.49                         | 54.00                 | -6.51              | AV                   | PASS   |
|                   | V                     | 2483.50                | 62.04                      | 30.22                     | 4.85                  | 23.98                       | 60.65                         | 74.00                 | -13.35             | PK                   | PASS   |
|                   | V                     | 2483.50                | 48.76                      | 30.22                     | 4.85                  | 23.98                       | 47.37                         | 54.00                 | -6.63              | AV                   | PASS   |
|                   | V                     | 2500.00                | 59.66                      | 30.22                     | 4.85                  | 23.98                       | 58.27                         | 74.00                 | -15.73             | PK                   | PASS   |
|                   | V                     | 2500.00                | 48.63                      | 30.22                     | 4.85                  | 23.98                       | 47.24                         | 54.00                 | -6.76              | AV                   | PASS   |
| $\pi/4$ DQPS<br>K | Low Channel: 2402MHz  |                        |                            |                           |                       |                             |                               |                       |                    |                      |        |
|                   | H                     | 2390.00                | 60.10                      | 30.22                     | 4.85                  | 23.98                       | 58.71                         | 74.00                 | -15.29             | PK                   | PASS   |
|                   | H                     | 2390.00                | 46.01                      | 30.22                     | 4.85                  | 23.98                       | 44.62                         | 54.00                 | -9.38              | AV                   | PASS   |
|                   | H                     | 2400.00                | 61.86                      | 30.22                     | 4.85                  | 23.98                       | 60.47                         | 74.00                 | -13.53             | PK                   | PASS   |
|                   | H                     | 2400.00                | 47.30                      | 30.22                     | 4.85                  | 23.98                       | 45.91                         | 54.00                 | -8.09              | AV                   | PASS   |
|                   | V                     | 2390.00                | 61.21                      | 30.22                     | 4.85                  | 23.98                       | 59.82                         | 74.00                 | -14.18             | PK                   | PASS   |
|                   | V                     | 2390.00                | 48.29                      | 30.22                     | 4.85                  | 23.98                       | 46.90                         | 54.00                 | -7.10              | AV                   | PASS   |
|                   | V                     | 2400.00                | 59.36                      | 30.22                     | 4.85                  | 23.98                       | 57.97                         | 74.00                 | -16.03             | PK                   | PASS   |
|                   | V                     | 2400.00                | 47.40                      | 30.22                     | 4.85                  | 23.98                       | 46.01                         | 54.00                 | -7.99              | AV                   | PASS   |
|                   | High Channel: 2480MHz |                        |                            |                           |                       |                             |                               |                       |                    |                      |        |
|                   | H                     | 2483.50                | 61.02                      | 30.22                     | 4.85                  | 23.98                       | 59.63                         | 74.00                 | -14.37             | PK                   | PASS   |
|                   | H                     | 2483.50                | 47.58                      | 30.22                     | 4.85                  | 23.98                       | 46.19                         | 54.00                 | -7.81              | AV                   | PASS   |
|                   | H                     | 2500.00                | 62.83                      | 30.22                     | 4.85                  | 23.98                       | 61.44                         | 74.00                 | -12.56             | PK                   | PASS   |
|                   | H                     | 2500.00                | 48.87                      | 30.22                     | 4.85                  | 23.98                       | 47.48                         | 54.00                 | -6.52              | AV                   | PASS   |
|                   | V                     | 2483.50                | 60.40                      | 30.22                     | 4.85                  | 23.98                       | 59.01                         | 74.00                 | -14.99             | PK                   | PASS   |
|                   | V                     | 2483.50                | 48.99                      | 30.22                     | 4.85                  | 23.98                       | 47.60                         | 54.00                 | -6.40              | AV                   | PASS   |
|                   | V                     | 2500.00                | 62.21                      | 30.22                     | 4.85                  | 23.98                       | 60.82                         | 74.00                 | -13.18             | PK                   | PASS   |
|                   | V                     | 2500.00                | 46.46                      | 30.22                     | 4.85                  | 23.98                       | 45.07                         | 54.00                 | -8.93              | AV                   | PASS   |
| 8DPSK             | Low Channel: 2402MHz  |                        |                            |                           |                       |                             |                               |                       |                    |                      |        |
|                   | H                     | 2390.00                | 61.04                      | 30.22                     | 4.85                  | 23.98                       | 59.65                         | 74.00                 | -14.35             | PK                   | PASS   |
|                   | H                     | 2390.00                | 48.42                      | 30.22                     | 4.85                  | 23.98                       | 47.03                         | 54.00                 | -6.97              | AV                   | PASS   |
|                   | H                     | 2400.00                | 61.65                      | 30.22                     | 4.85                  | 23.98                       | 60.26                         | 74.00                 | -13.74             | PK                   | PASS   |
|                   | H                     | 2400.00                | 48.19                      | 30.22                     | 4.85                  | 23.98                       | 46.80                         | 54.00                 | -7.20              | AV                   | PASS   |
|                   | V                     | 2390.00                | 62.26                      | 30.22                     | 4.85                  | 23.98                       | 60.87                         | 74.00                 | -13.13             | PK                   | PASS   |
|                   | V                     | 2390.00                | 48.23                      | 30.22                     | 4.85                  | 23.98                       | 46.84                         | 54.00                 | -7.16              | AV                   | PASS   |
|                   | V                     | 2400.00                | 60.42                      | 30.22                     | 4.85                  | 23.98                       | 59.03                         | 74.00                 | -14.97             | PK                   | PASS   |
|                   | V                     | 2400.00                | 47.45                      | 30.22                     | 4.85                  | 23.98                       | 46.06                         | 54.00                 | -7.94              | AV                   | PASS   |
|                   | High Channel: 2480MHz |                        |                            |                           |                       |                             |                               |                       |                    |                      |        |
|                   | H                     | 2483.50                | 61.23                      | 30.22                     | 4.85                  | 23.98                       | 59.84                         | 74.00                 | -14.16             | PK                   | PASS   |
|                   | H                     | 2483.50                | 46.15                      | 30.22                     | 4.85                  | 23.98                       | 44.76                         | 54.00                 | -9.24              | AV                   | PASS   |
|                   | H                     | 2500.00                | 59.98                      | 30.22                     | 4.85                  | 23.98                       | 58.59                         | 74.00                 | -15.41             | PK                   | PASS   |
|                   | H                     | 2500.00                | 46.30                      | 30.22                     | 4.85                  | 23.98                       | 44.91                         | 54.00                 | -9.09              | AV                   | PASS   |
|                   | V                     | 2483.50                | 59.03                      | 30.22                     | 4.85                  | 23.98                       | 57.64                         | 74.00                 | -16.36             | PK                   | PASS   |
|                   | V                     | 2483.50                | 46.20                      | 30.22                     | 4.85                  | 23.98                       | 44.81                         | 54.00                 | -9.19              | AV                   | PASS   |



|  |   |         |       |       |      |       |       |       |        |    |      |
|--|---|---------|-------|-------|------|-------|-------|-------|--------|----|------|
|  | V | 2500.00 | 62.14 | 30.22 | 4.85 | 23.98 | 60.75 | 74.00 | -13.25 | PK | PASS |
|  | V | 2500.00 | 48.91 | 30.22 | 4.85 | 23.98 | 47.52 | 54.00 | -6.48  | AV | PASS |

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

## 7. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

|                   |                                              |
|-------------------|----------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d), RSS-247 5.5 |
| Test Method:      | ANSI C63.10                                  |

### 7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

According to RSS-247§5.5 and RSS-Gen§8.9, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) or RSS-Gen is not required.

### 7.2 Test Setup



### 7.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

### 7.4 DEVIATION FROM STANDARD

No deviation.


## 7.5 Test Result

## Band Edge


| Condition | Mode  | Frequency (MHz) | Antenna | Hopping Mode | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|--------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | No-Hopping   | -58.47          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | No-Hopping   | -57.94          | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | No-Hopping   | -56.72          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | No-Hopping   | -58.94          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | No-Hopping   | -54.66          | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | No-Hopping   | -58.14          | -20         | Pass    |



### Test Graphs



#### Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref


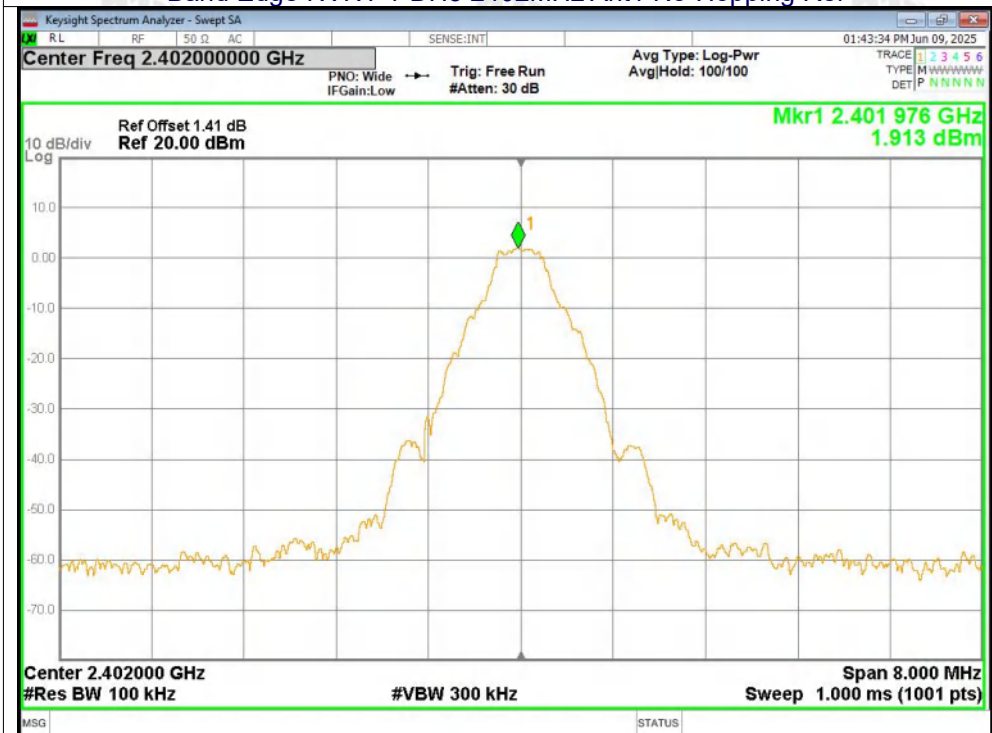




#### Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission


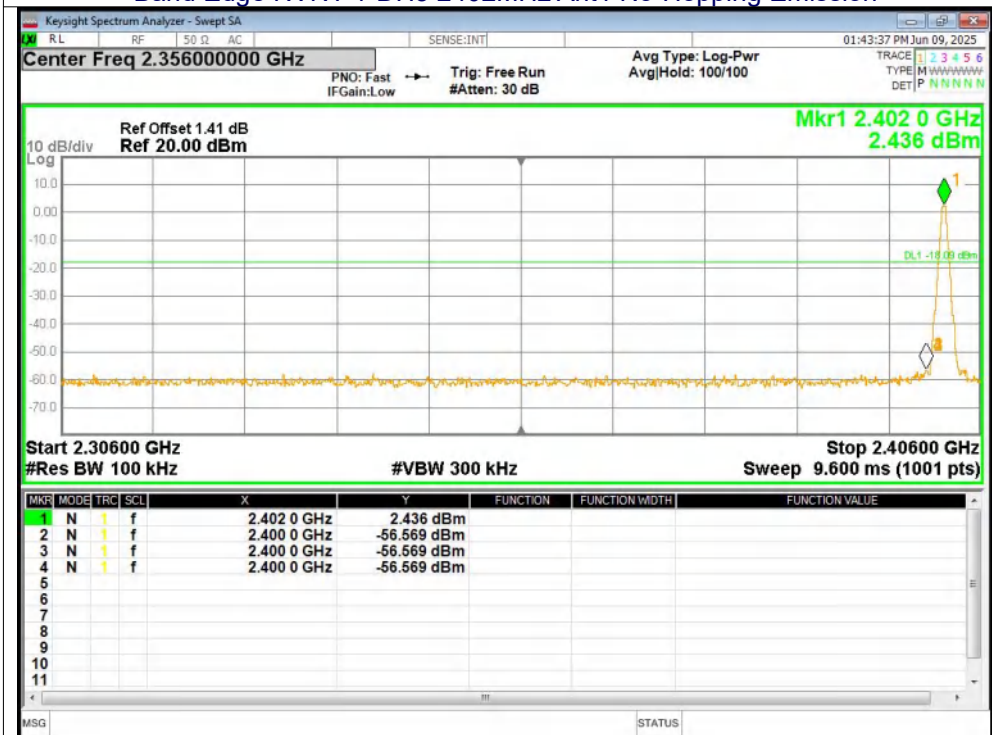


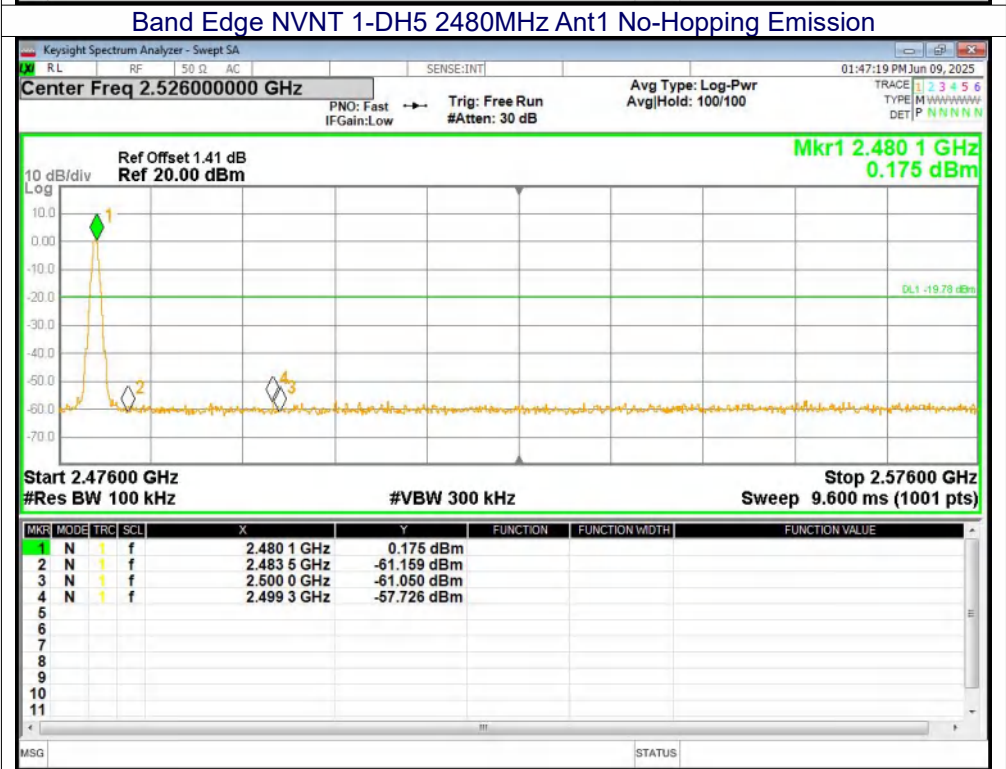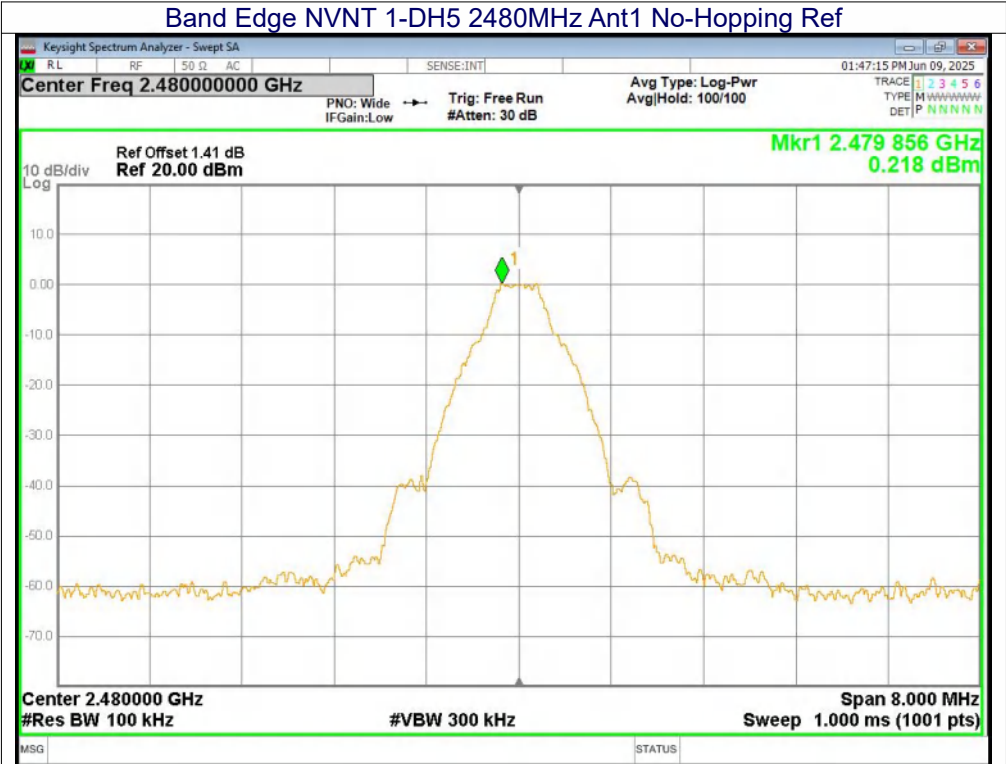

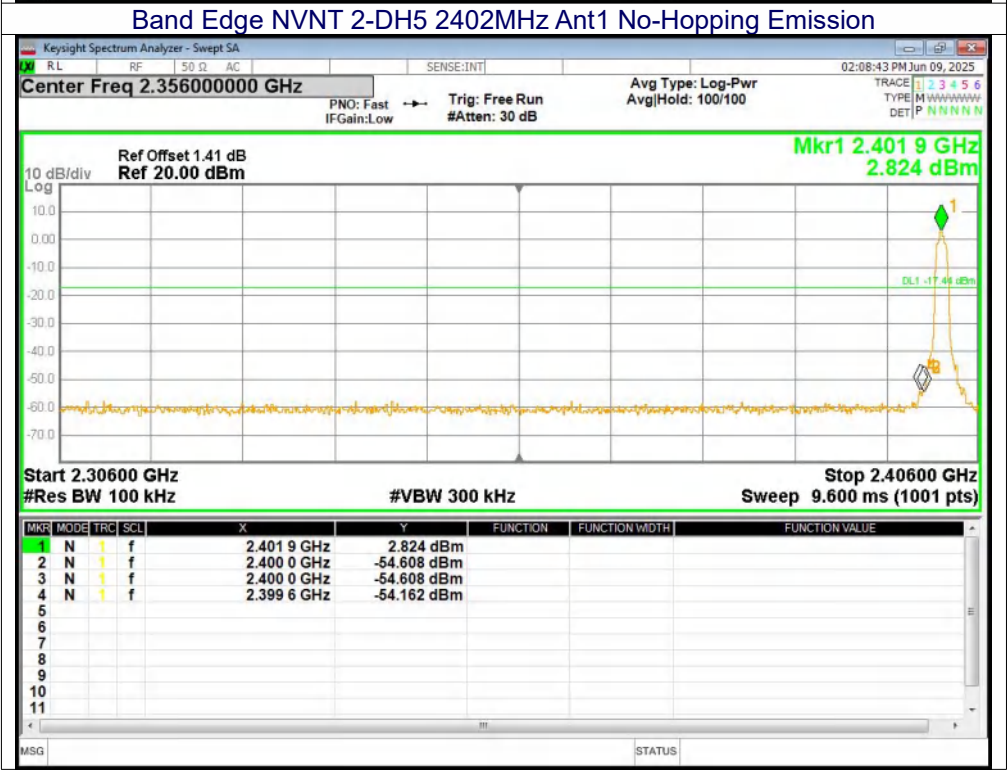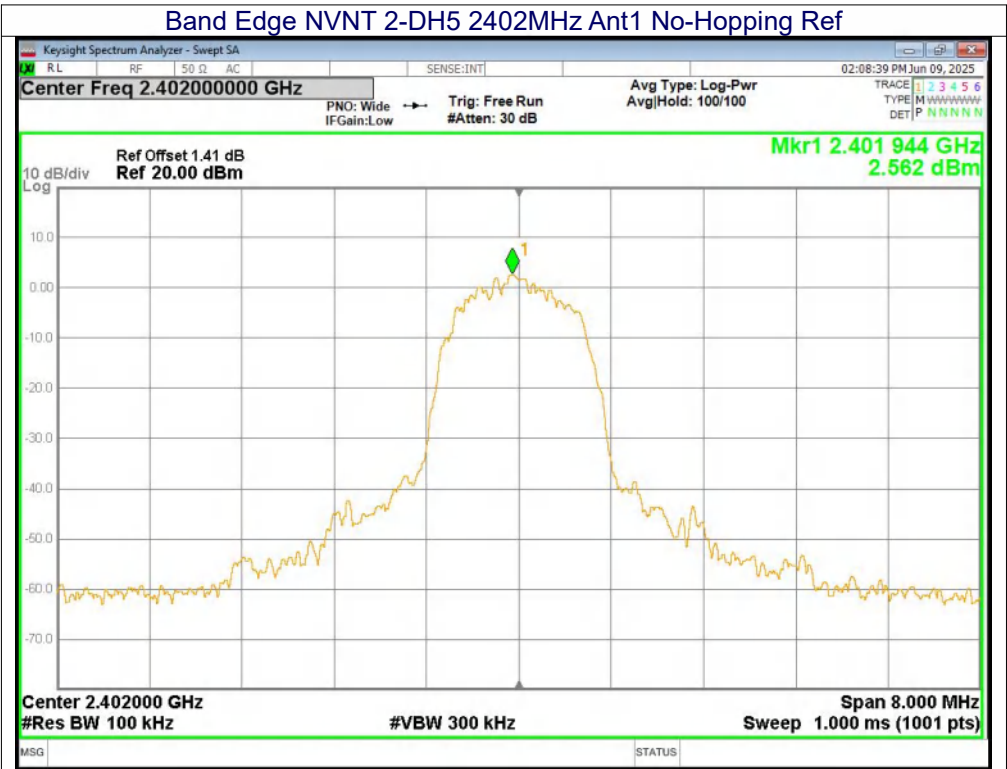

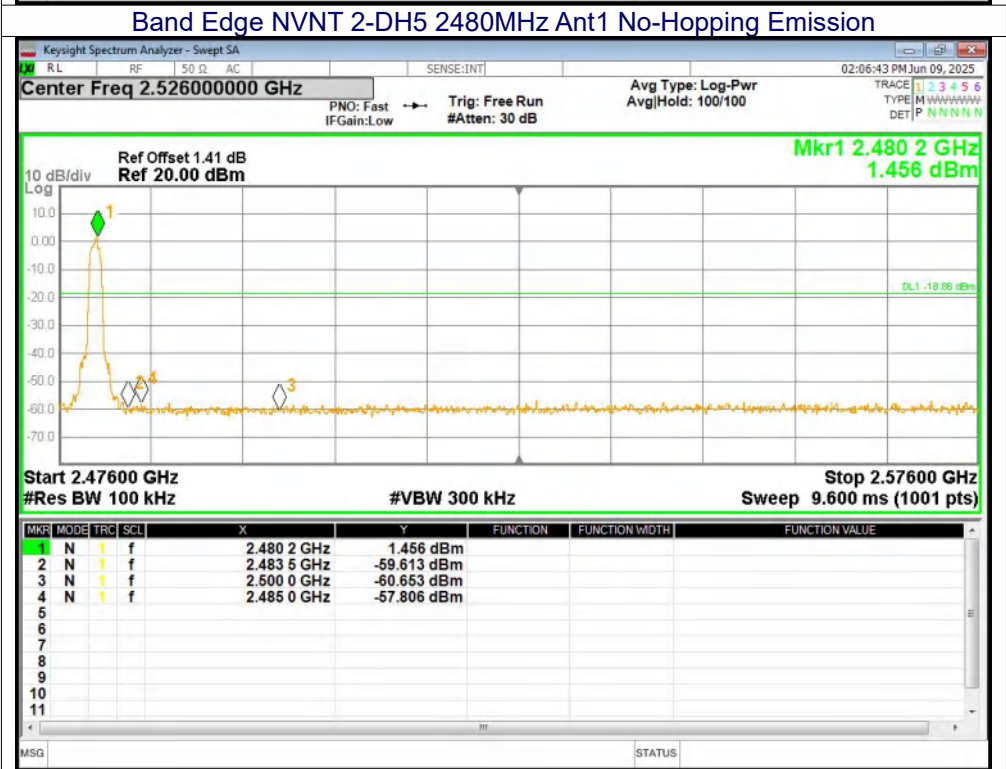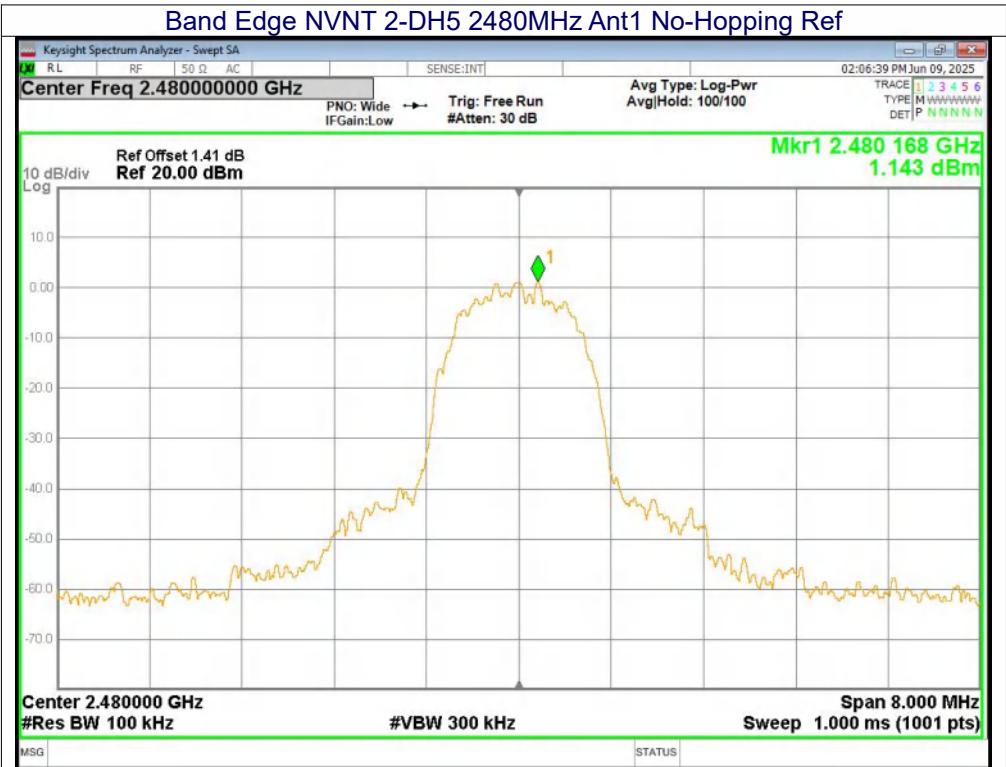

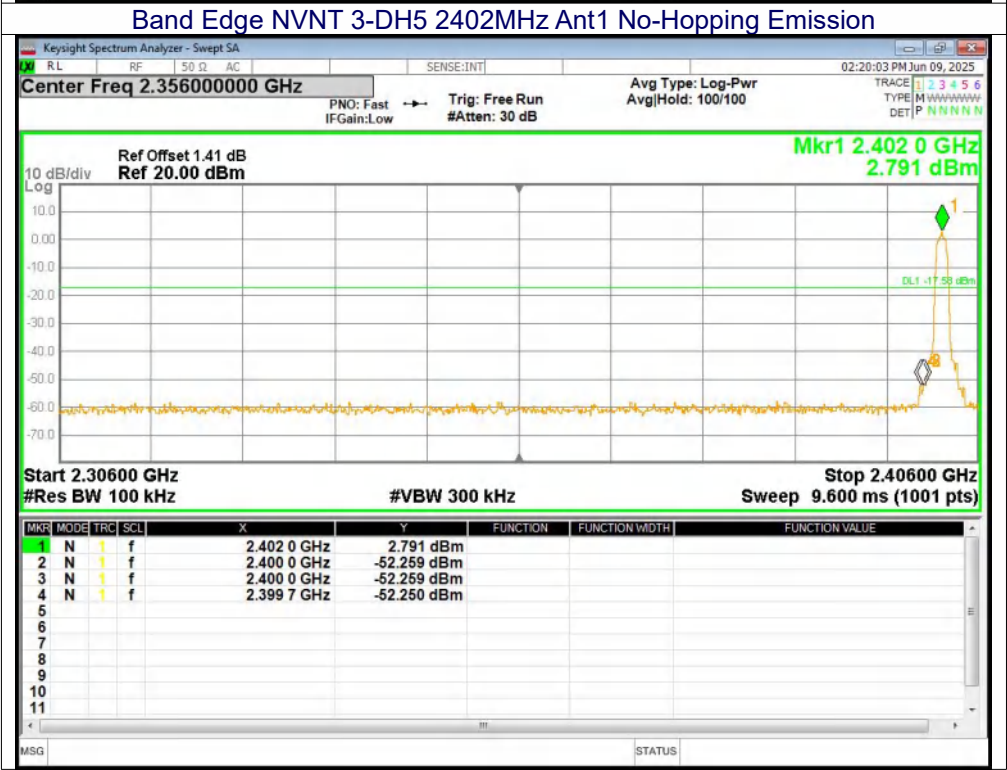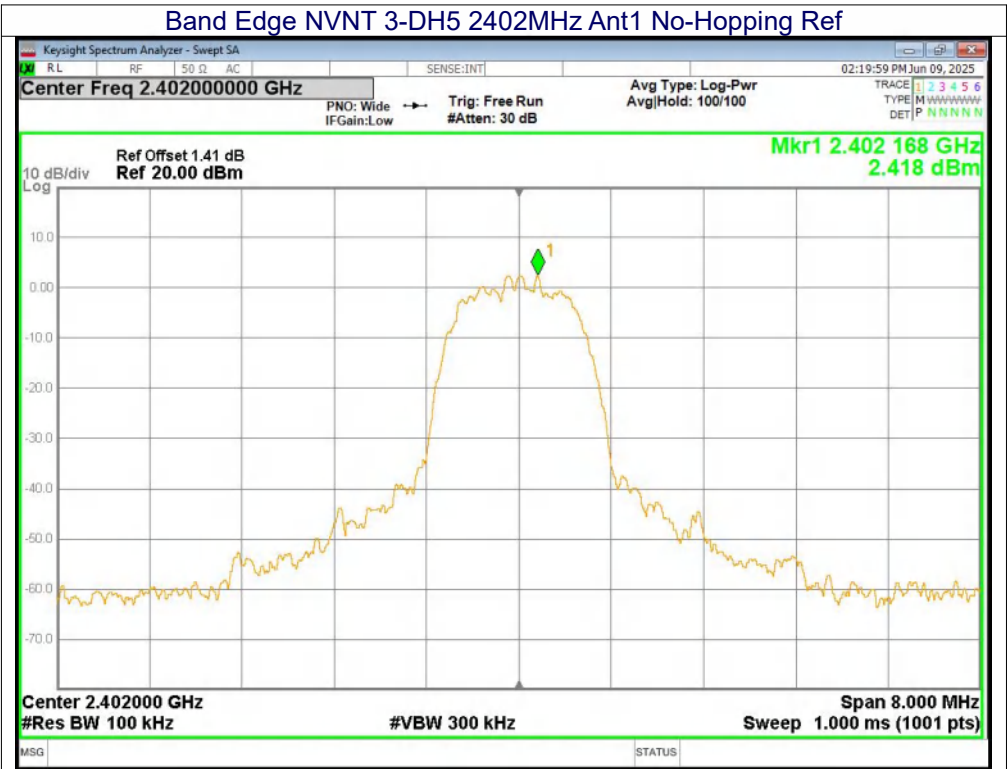

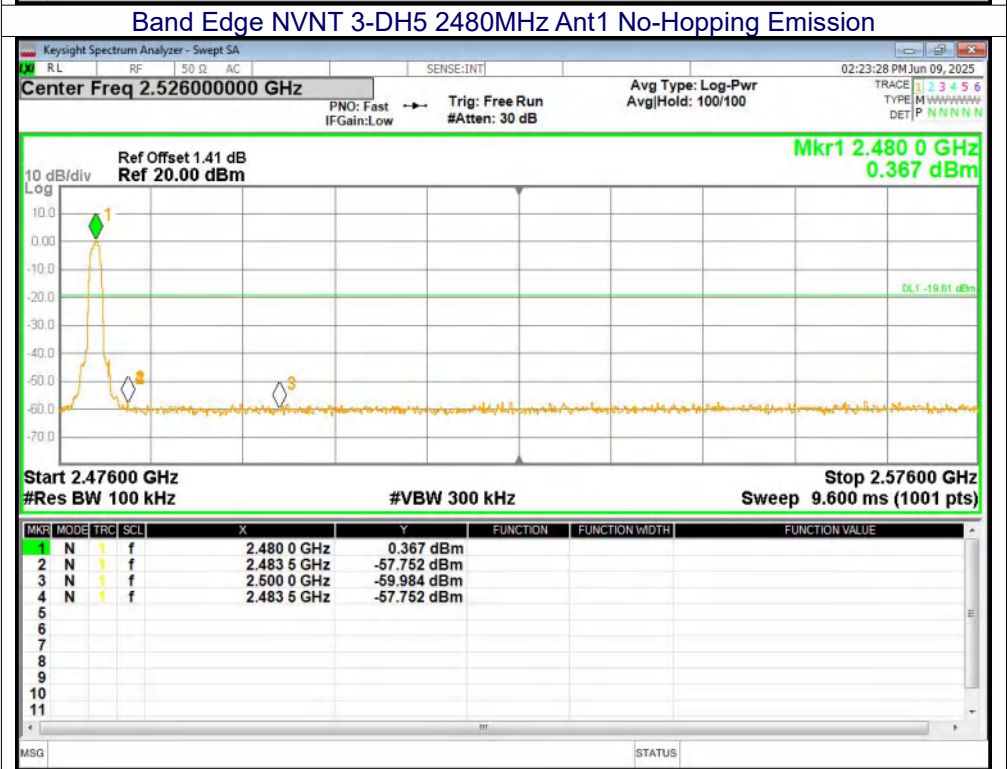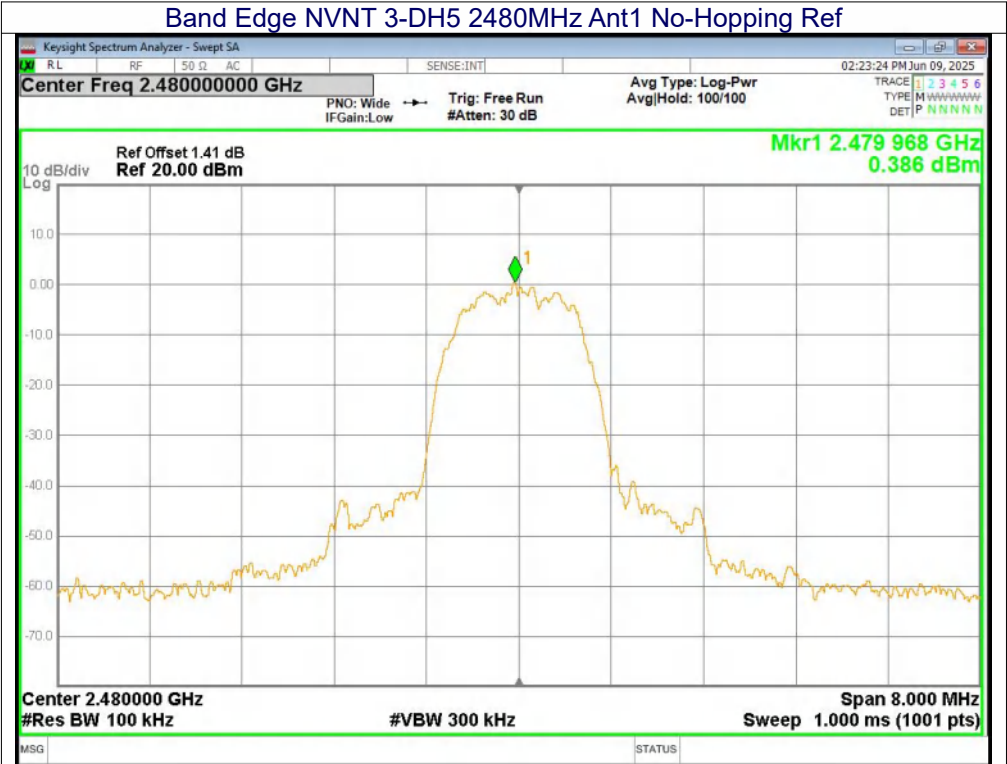

**Band Edge(Hopping)**


| Condition | Mode  | Frequency (MHz) | Antenna | Hopping Mode | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|--------------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | Hopping      | -59.18          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | Hopping      | -57.62          | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | Hopping      | -59.33          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | Hopping      | -56.44          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | Hopping      | -59.46          | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | Hopping      | -57.66          | -20         | Pass    |

### Test Graphs


#### Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref




#### Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

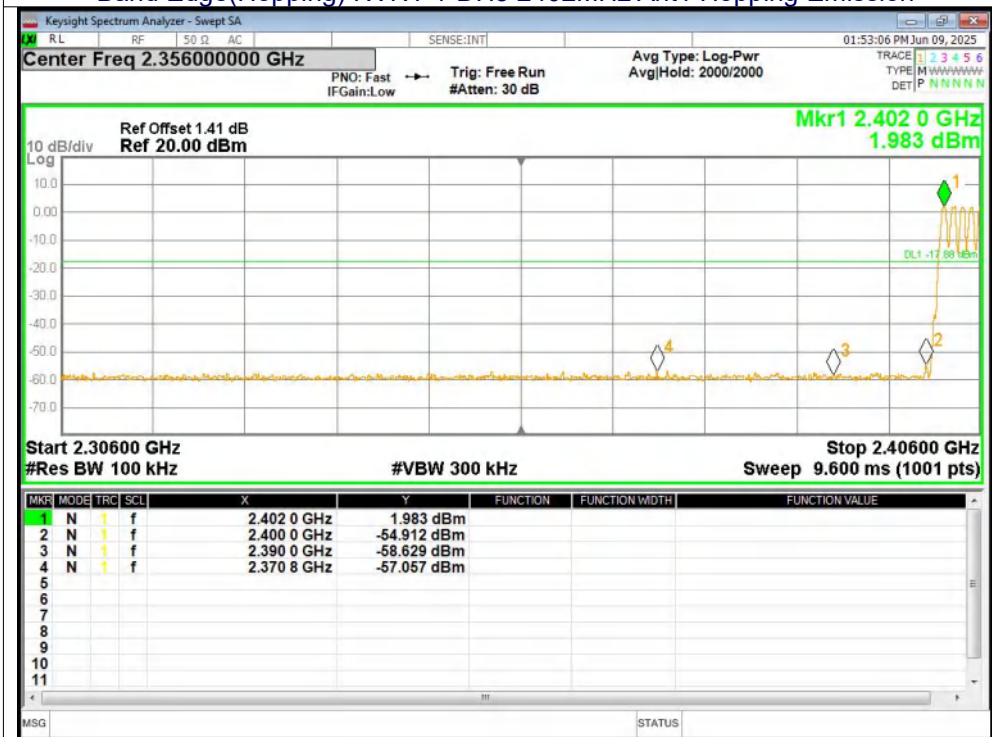


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

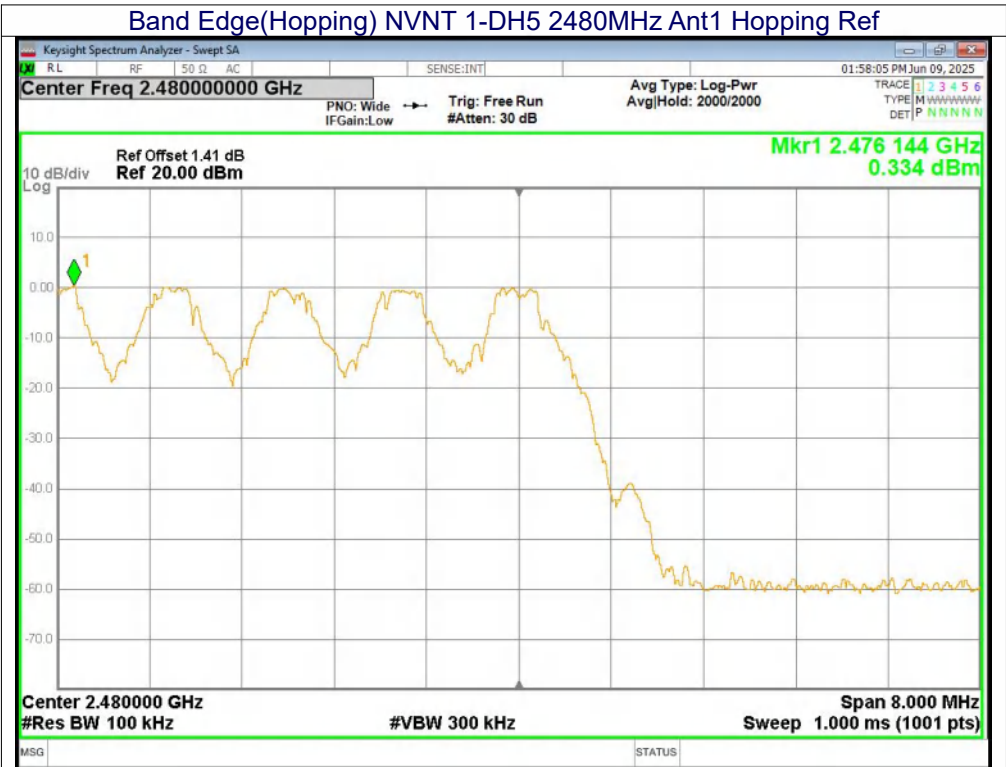


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

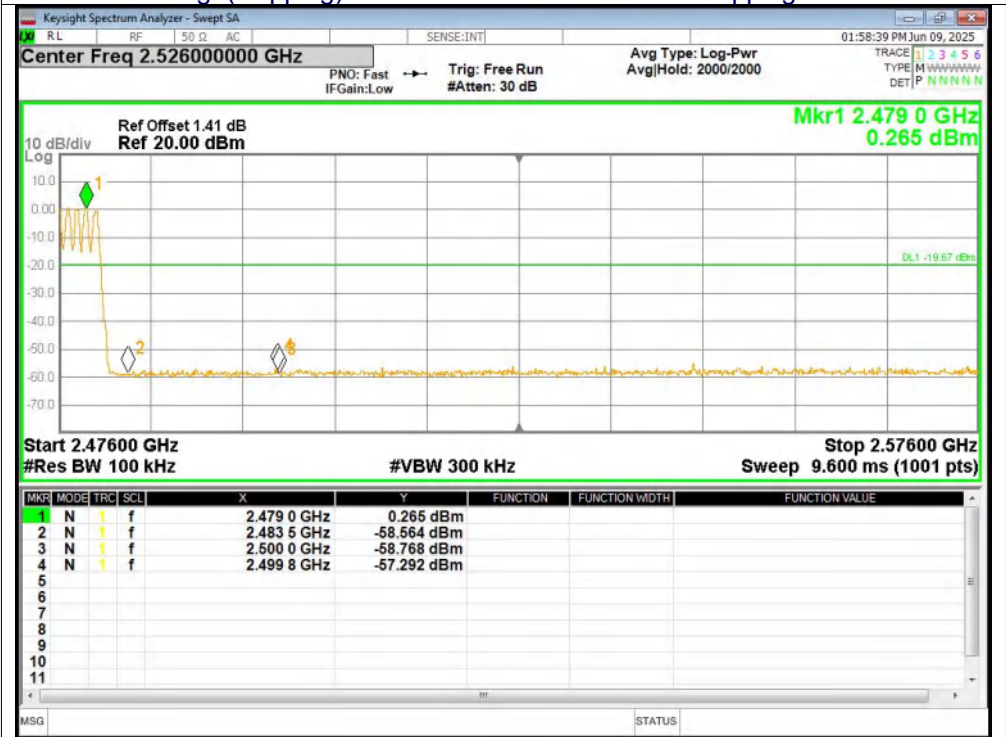


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

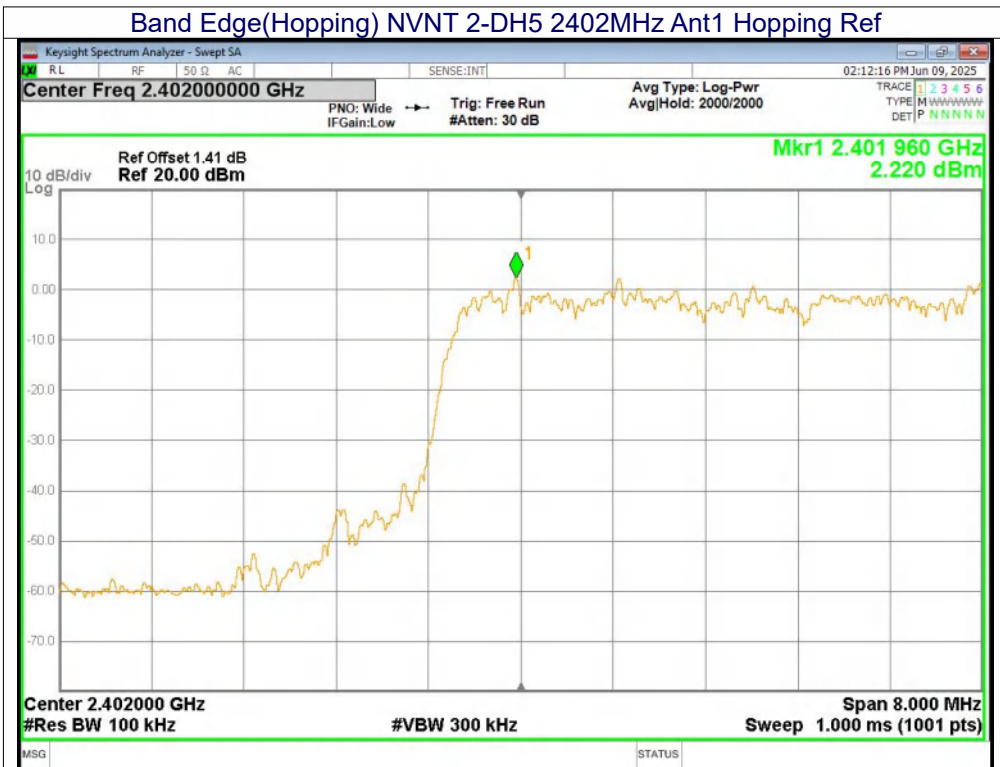


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

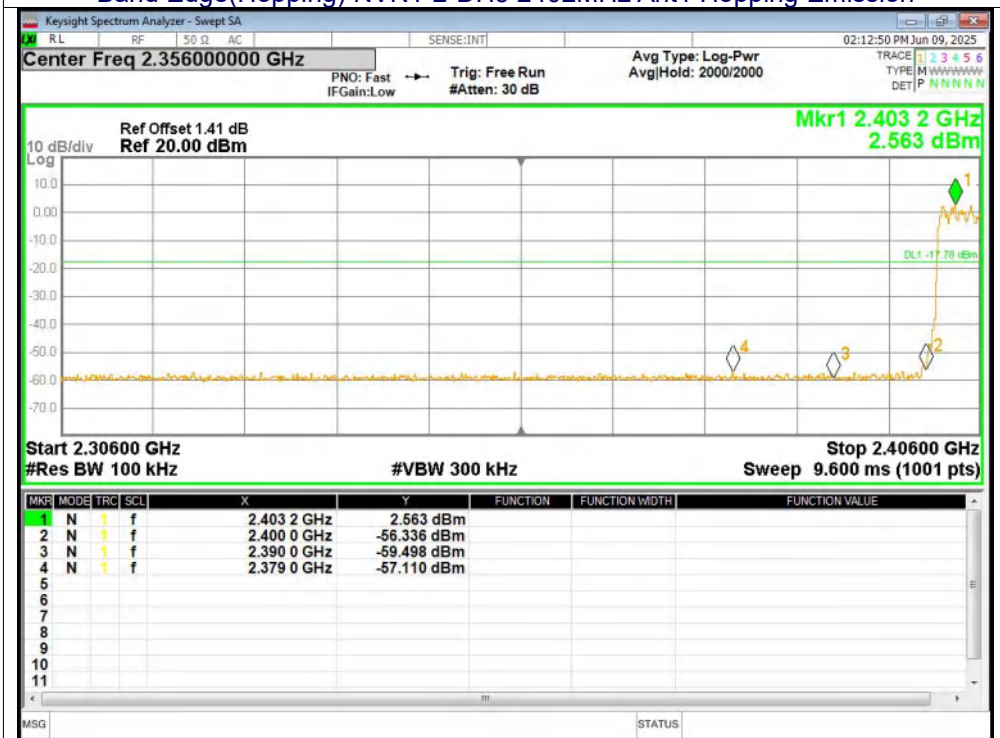


Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

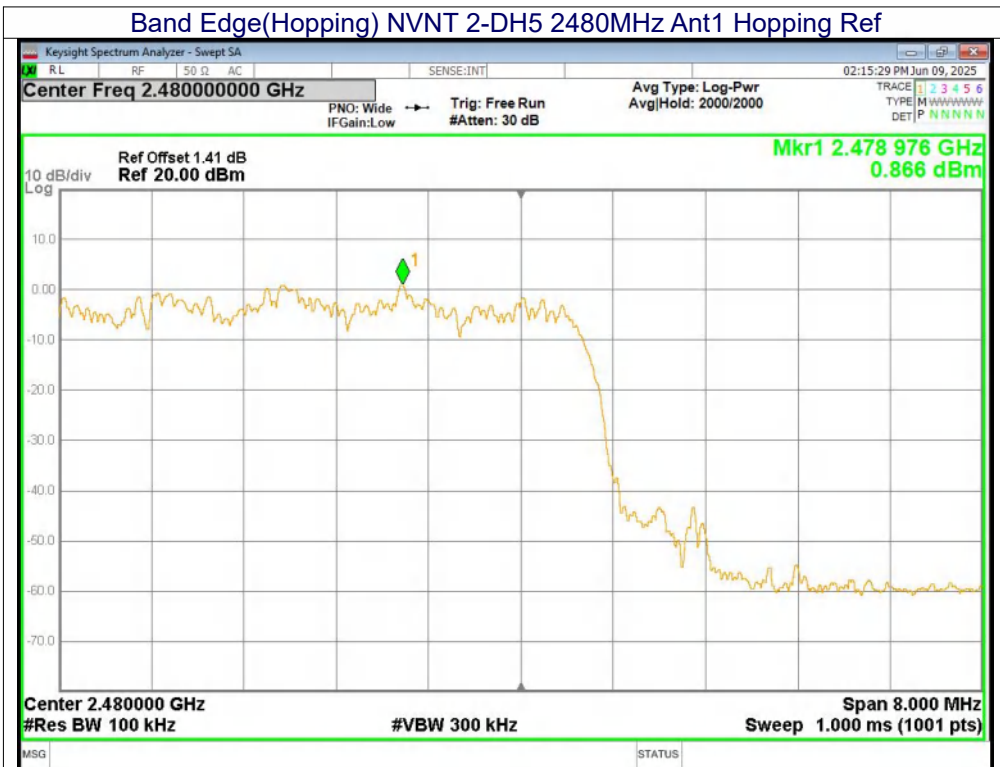


Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

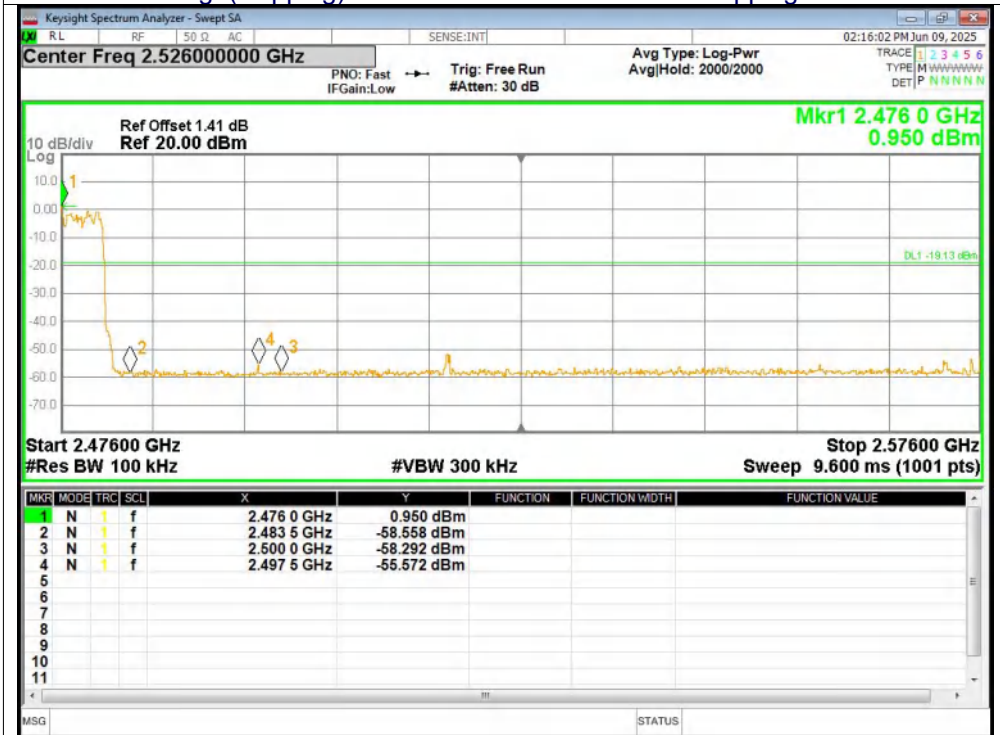


Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

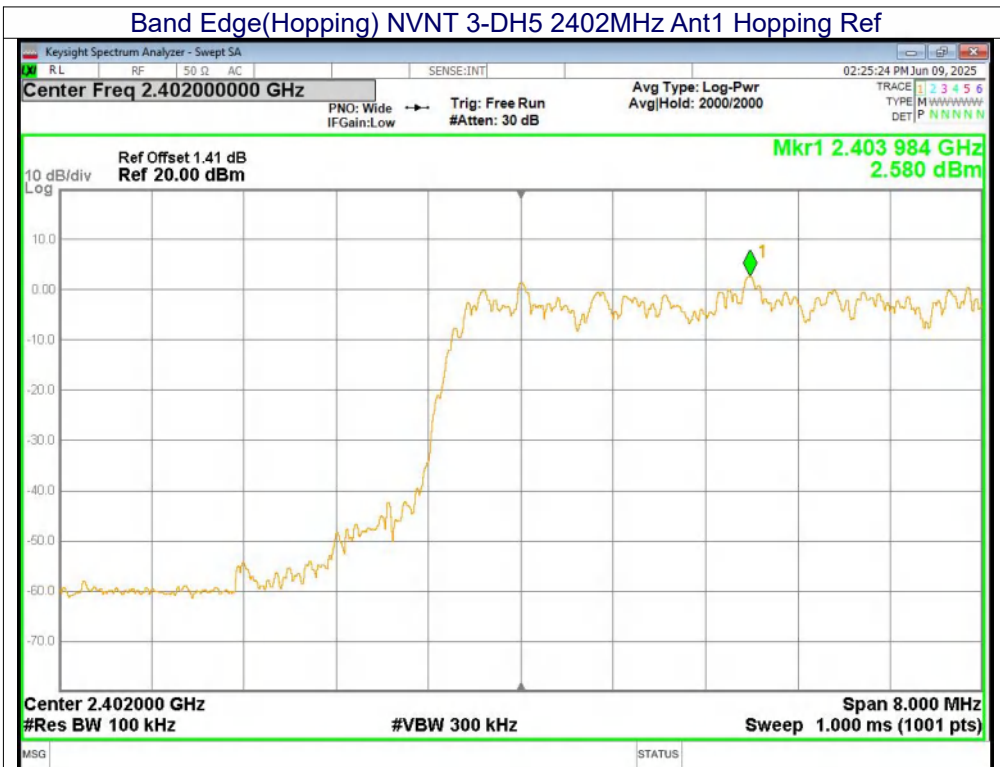


Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

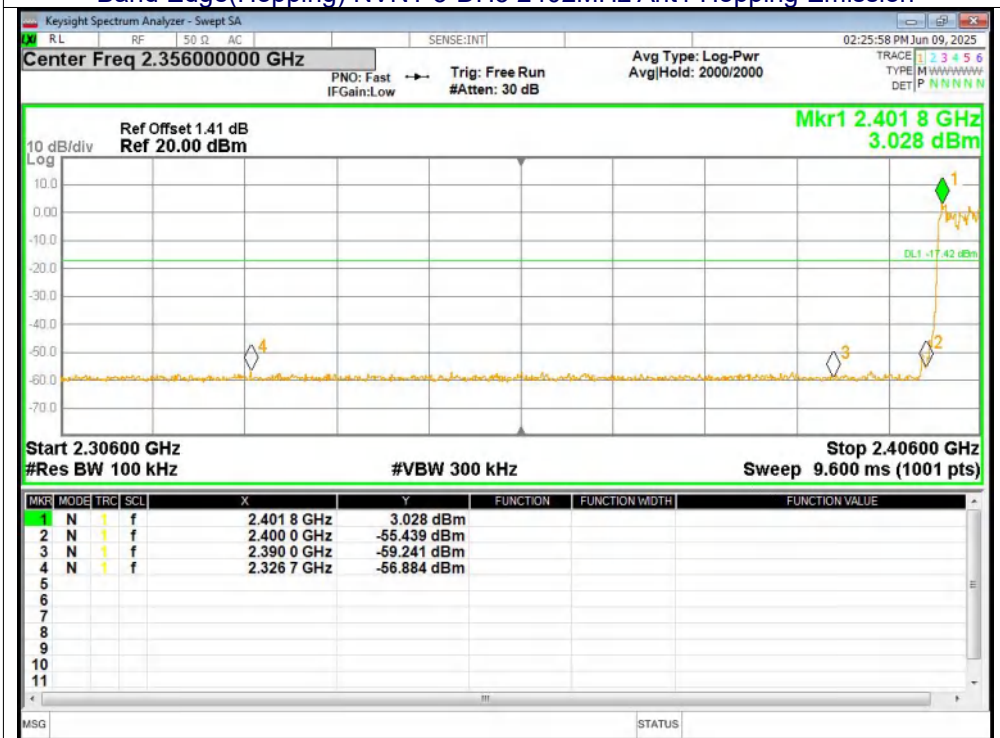

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

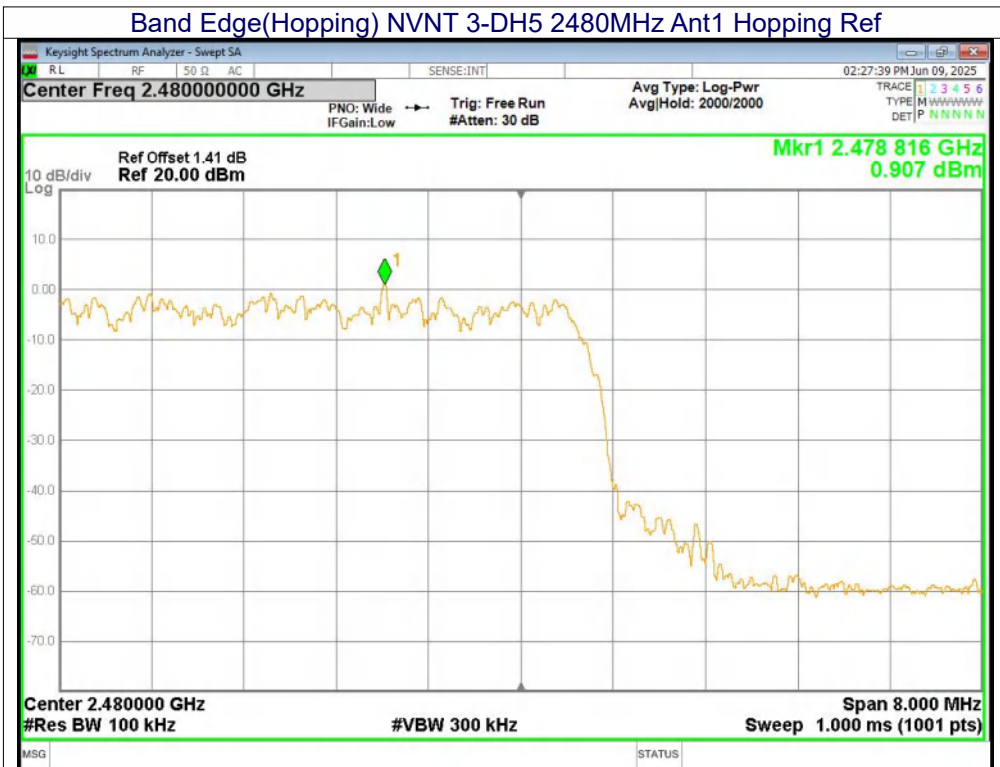

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

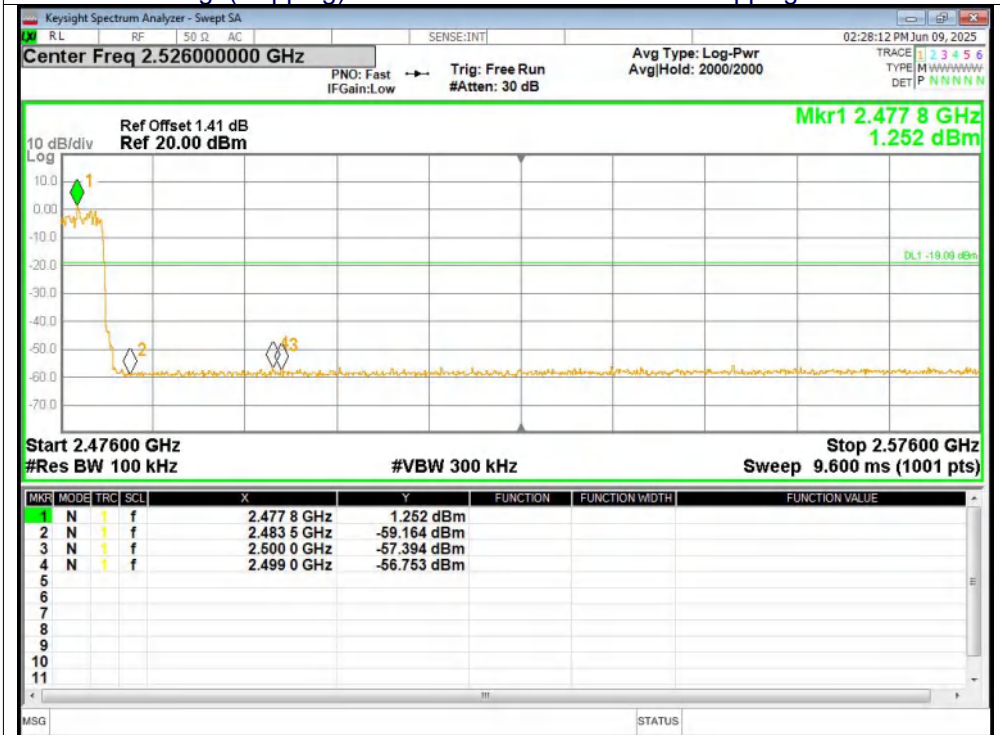


## Conducted RF Spurious Emission


| Condition | Mode  | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|-------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | 1-DH5 | 2402            | Ant1    | -58.92          | -20         | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | -57.89          | -20         | Pass    |
| NVNT      | 1-DH5 | 2480            | Ant1    | -56.95          | -20         | Pass    |
| NVNT      | 2-DH5 | 2402            | Ant1    | -59.29          | -20         | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | -58.05          | -20         | Pass    |
| NVNT      | 2-DH5 | 2480            | Ant1    | -57.08          | -20         | Pass    |
| NVNT      | 3-DH5 | 2402            | Ant1    | -59.43          | -20         | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | -57.73          | -20         | Pass    |
| NVNT      | 3-DH5 | 2480            | Ant1    | -58.2           | -20         | Pass    |

### Test Graphs


#### Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

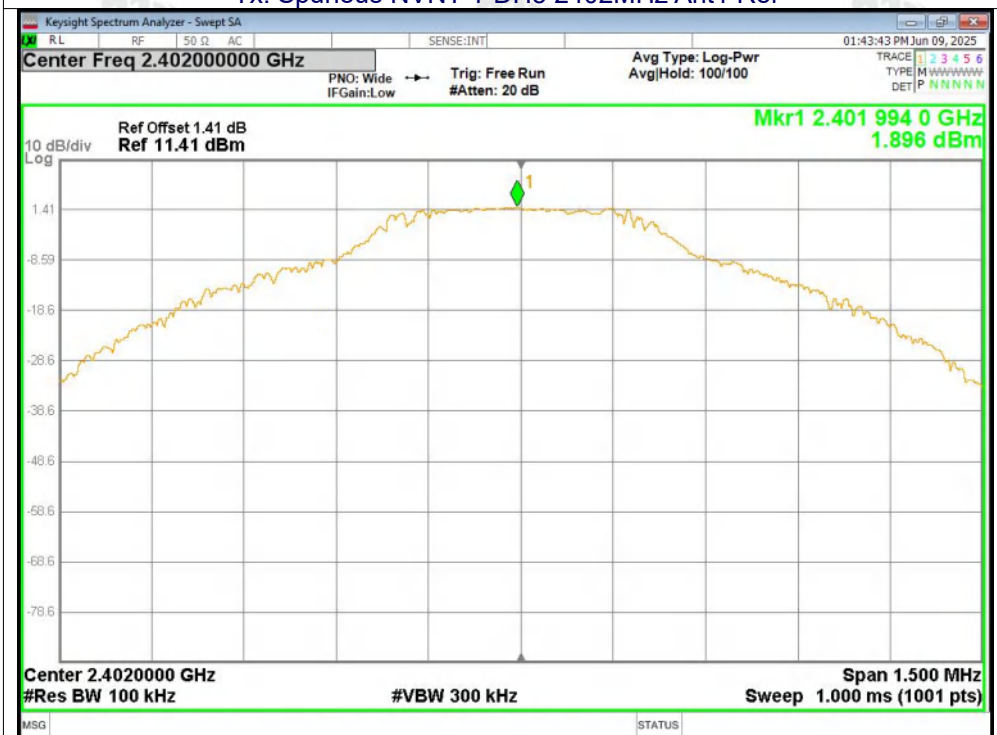


#### Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

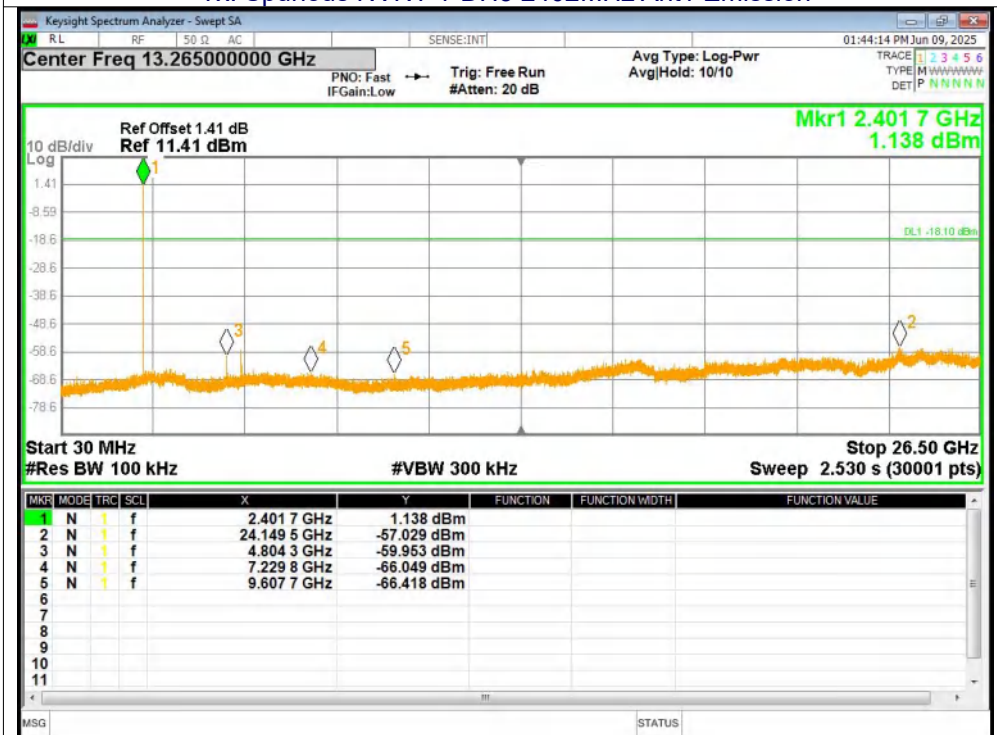


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

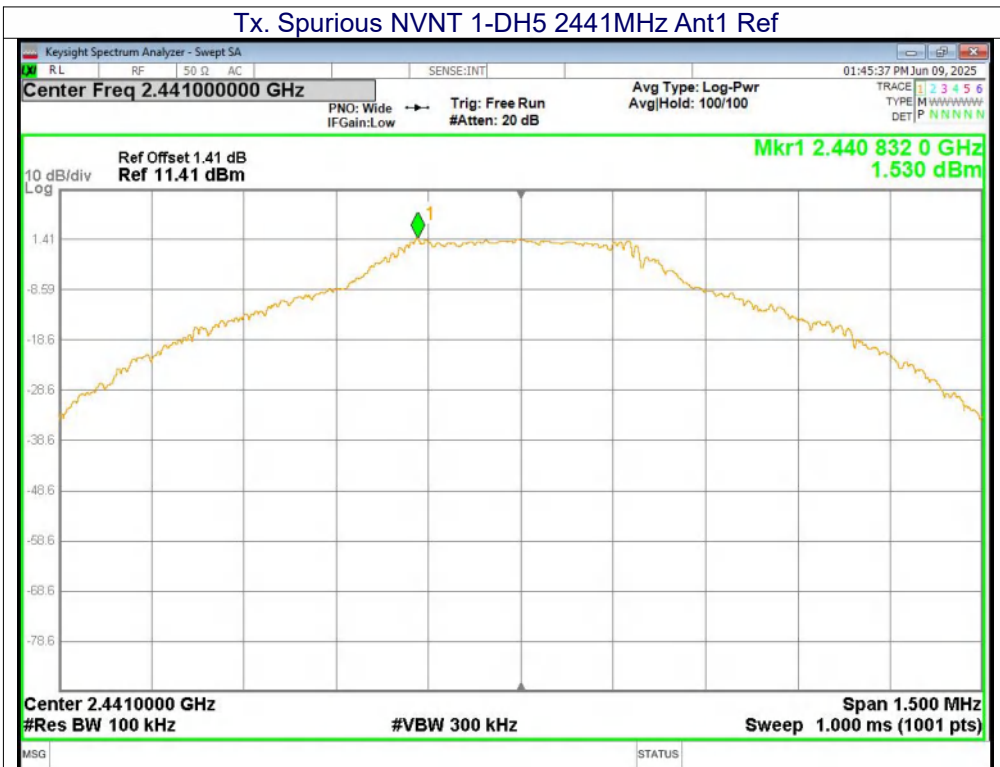


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

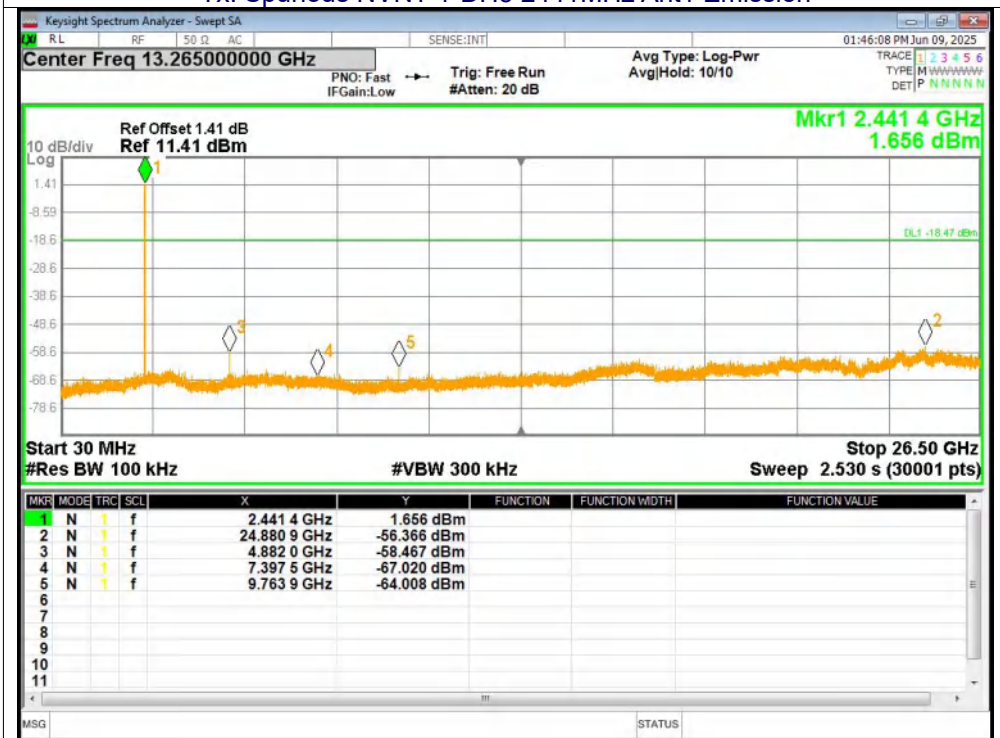


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

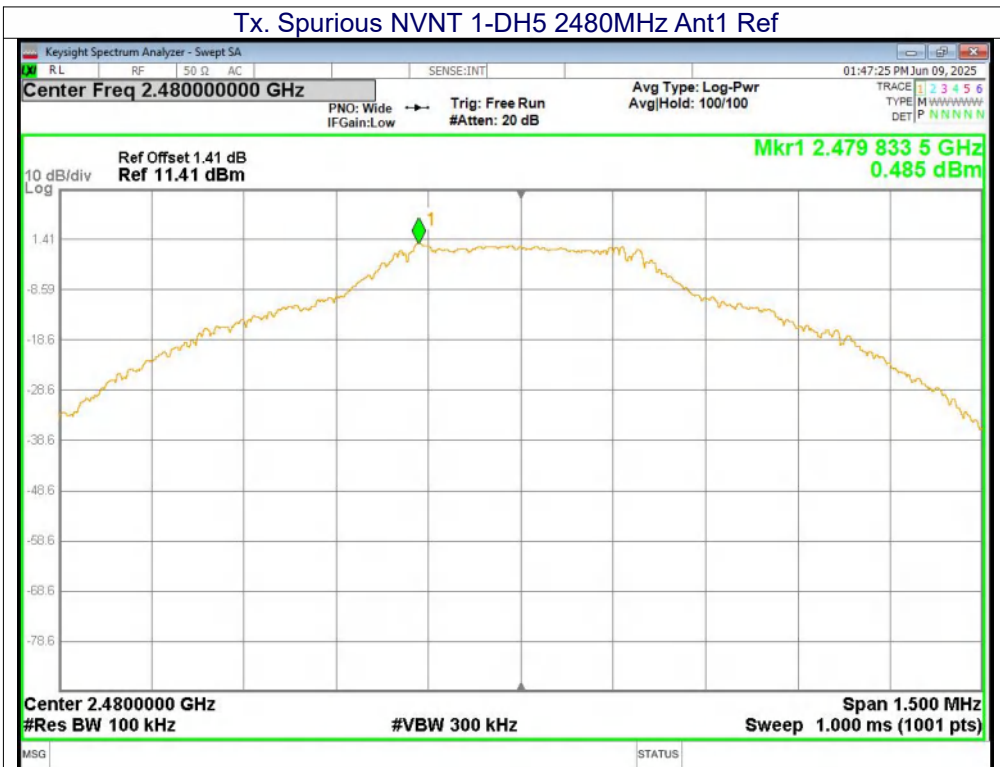


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

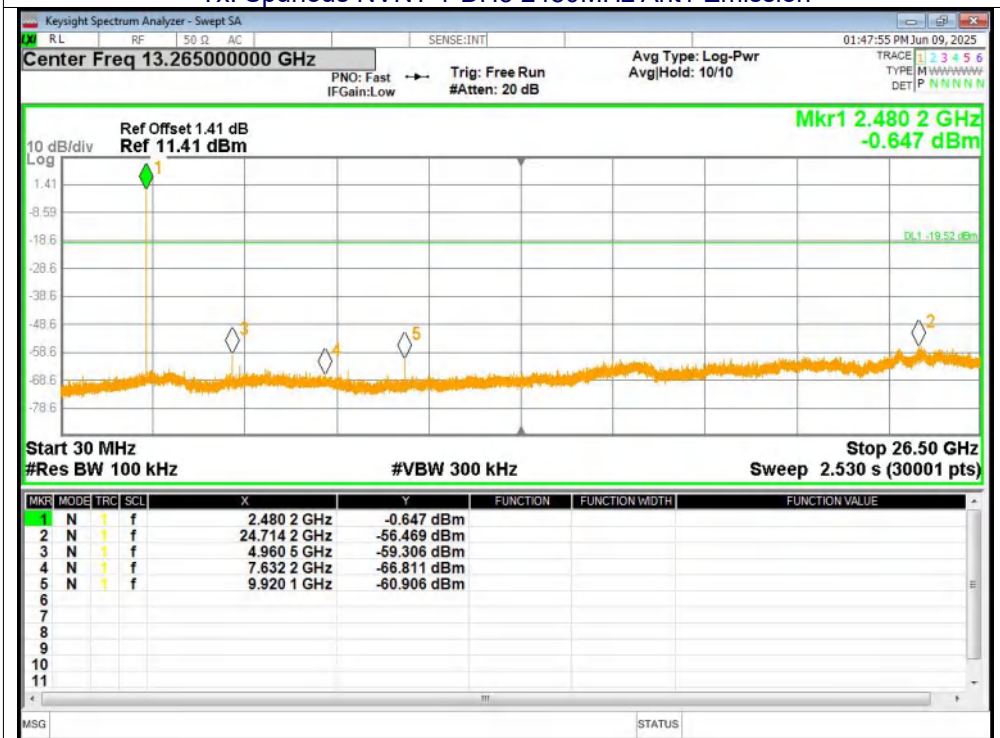


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

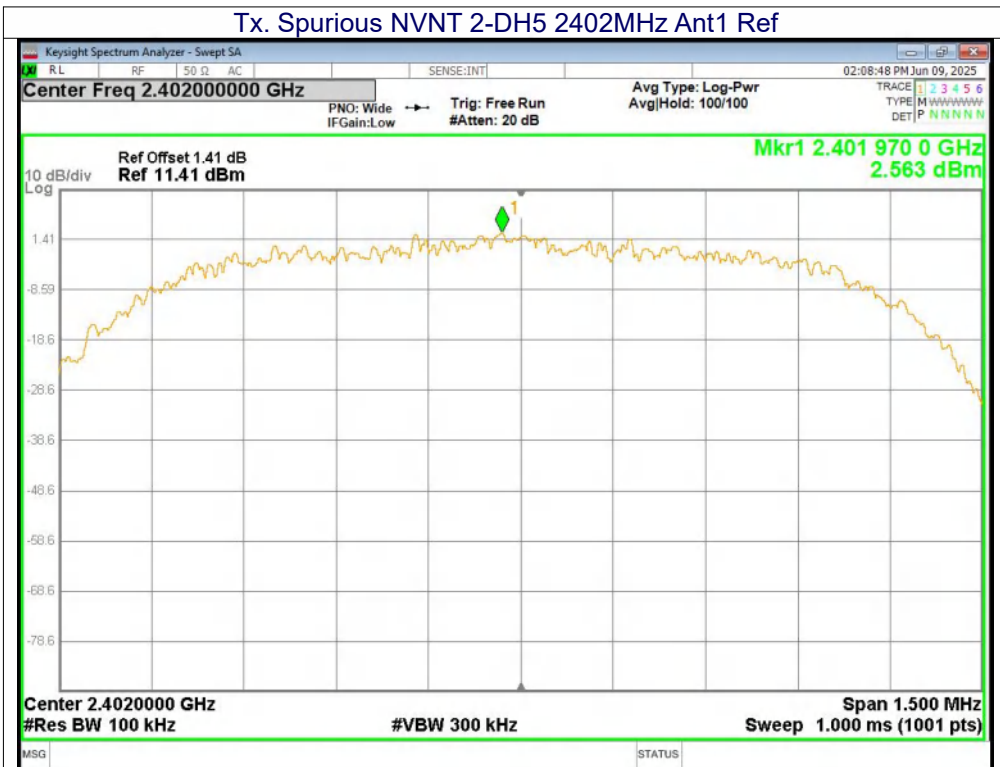


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

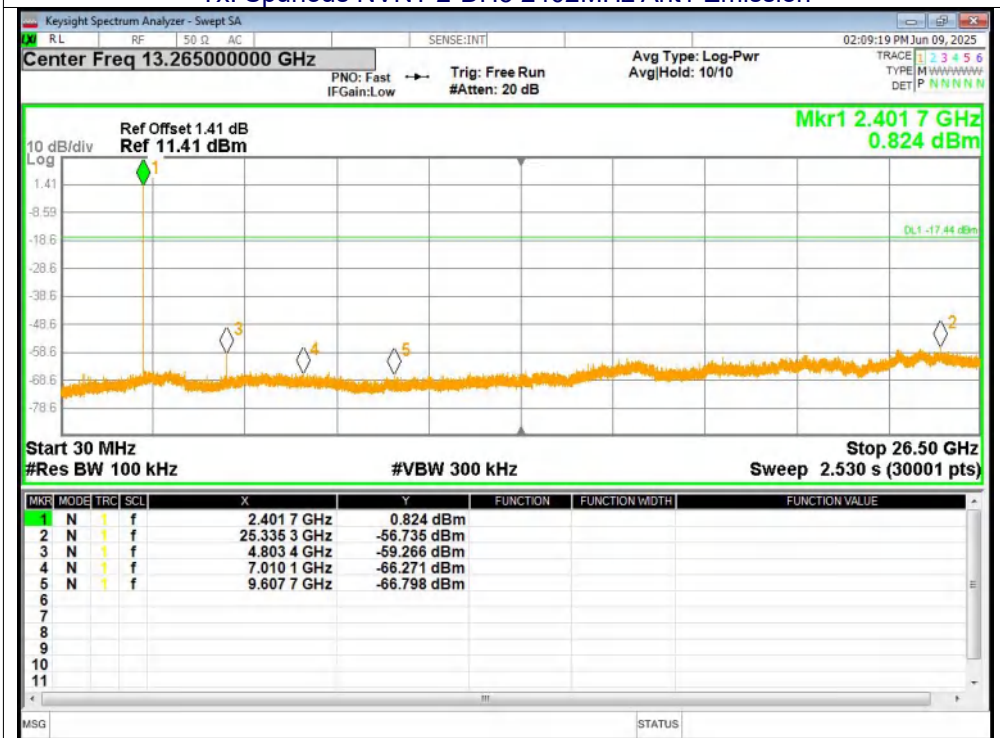


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

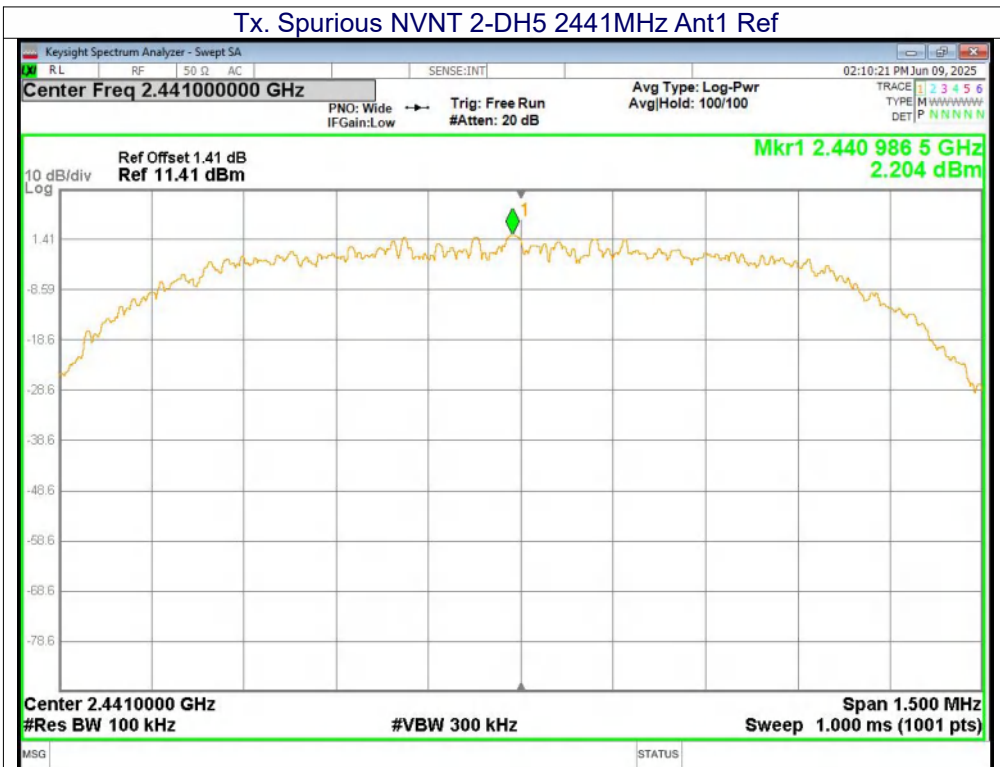


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

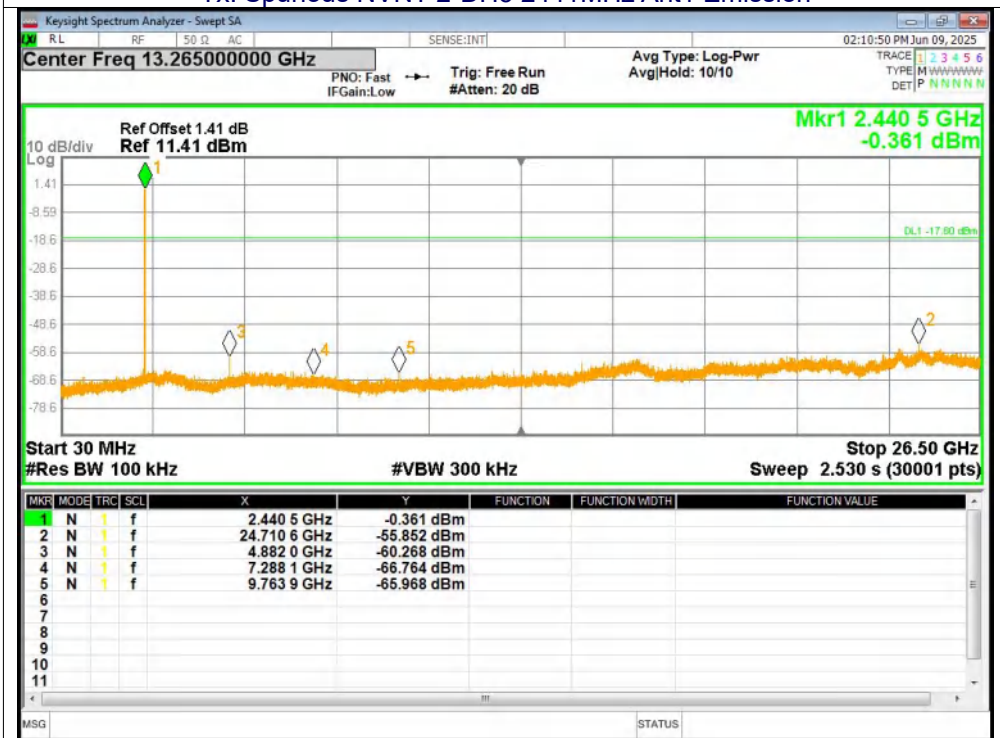


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

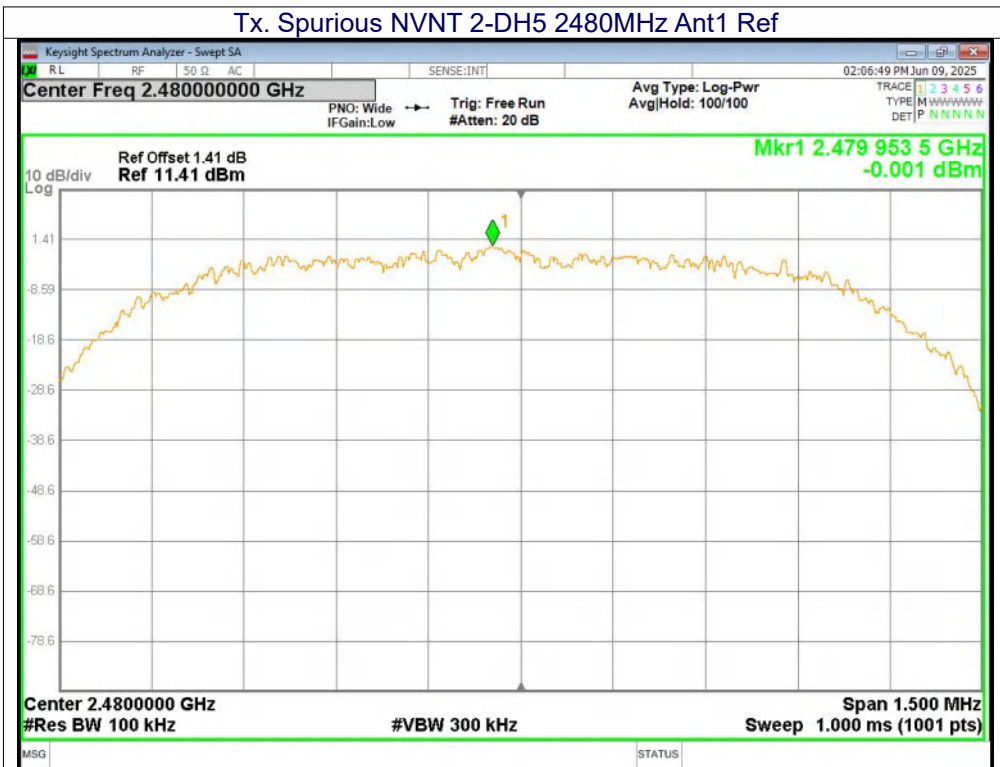


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

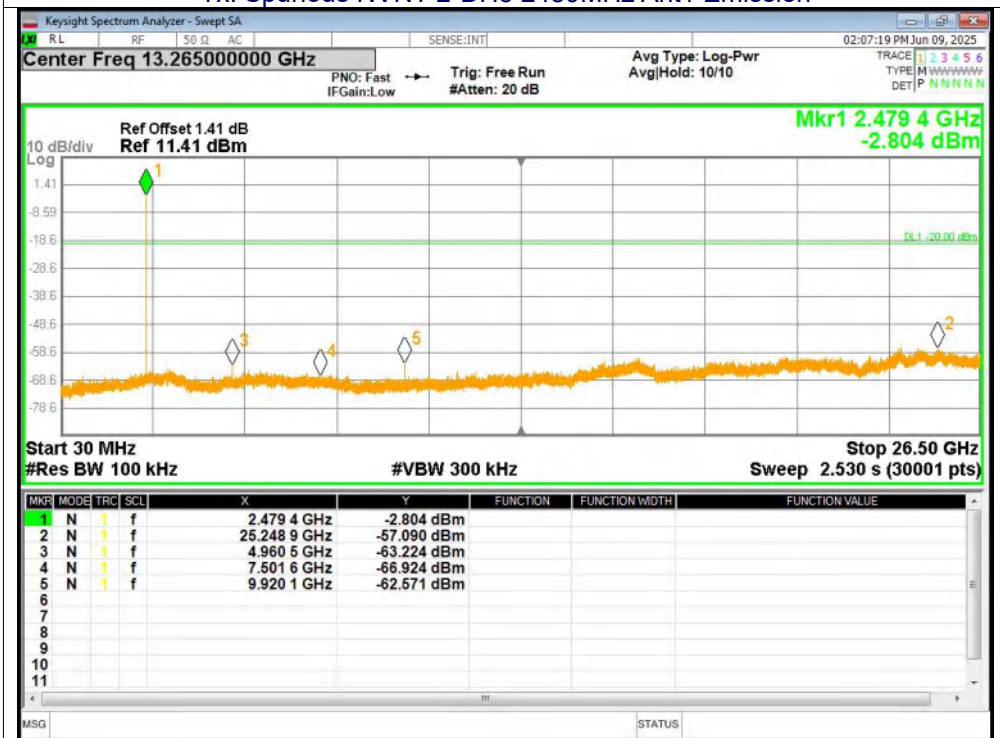


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

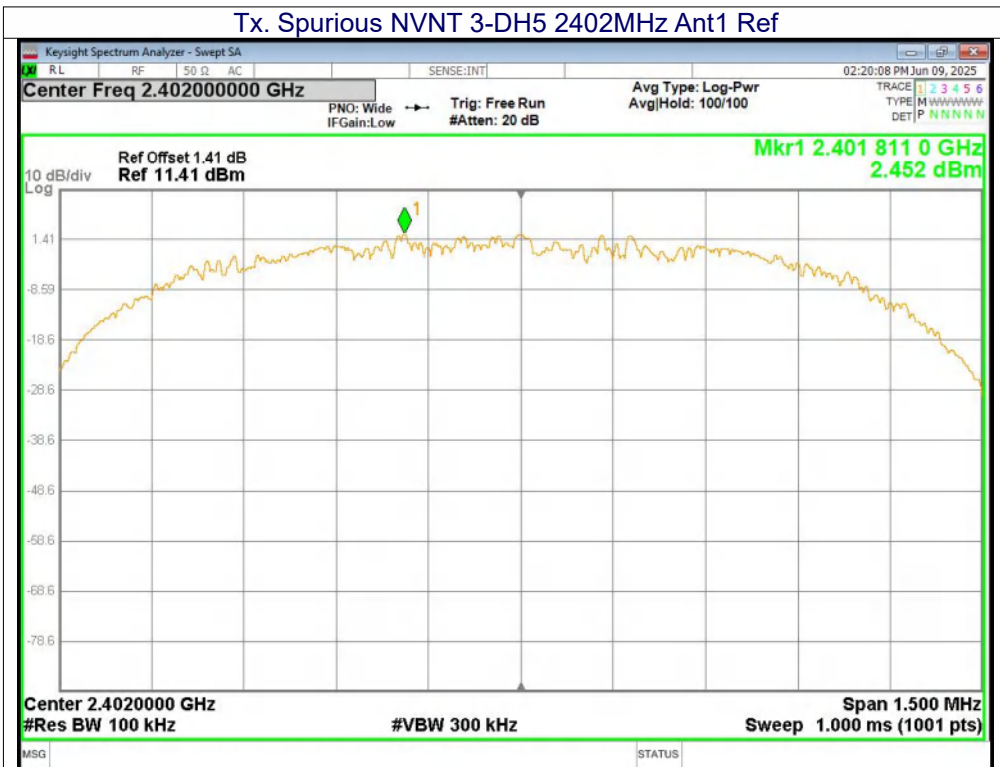


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

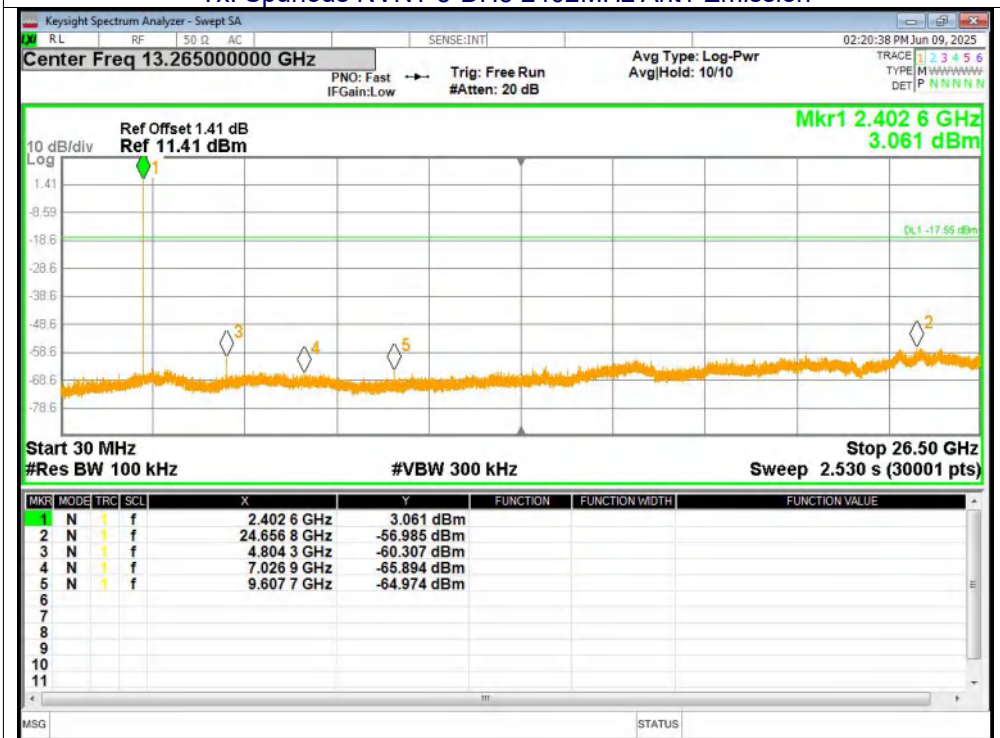


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

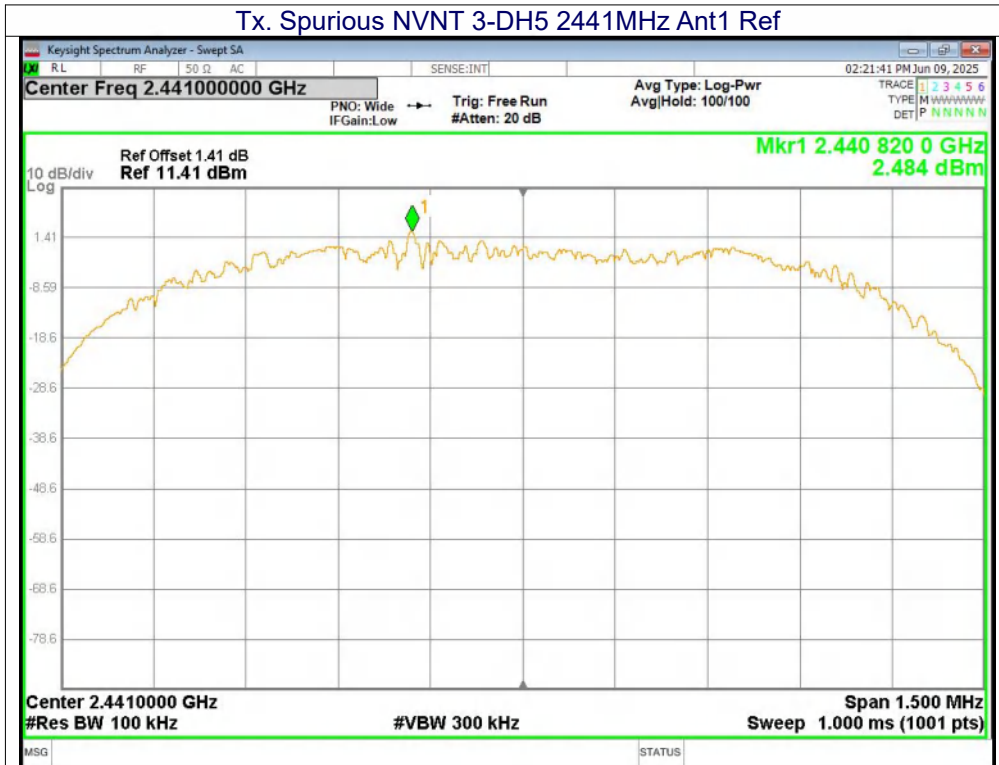


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

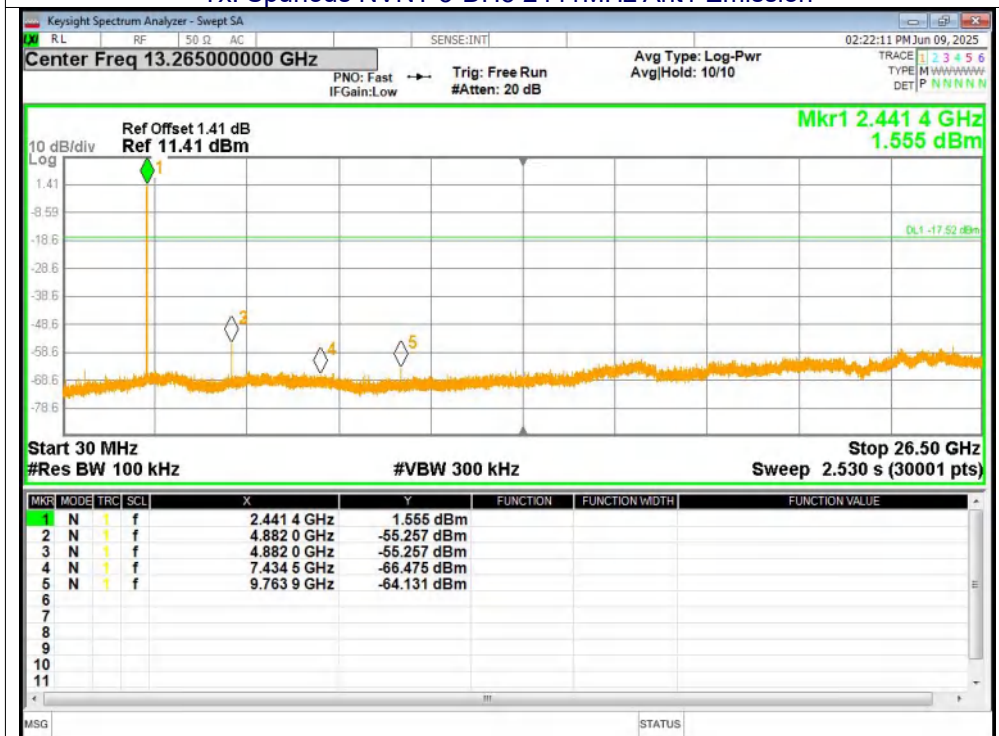

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

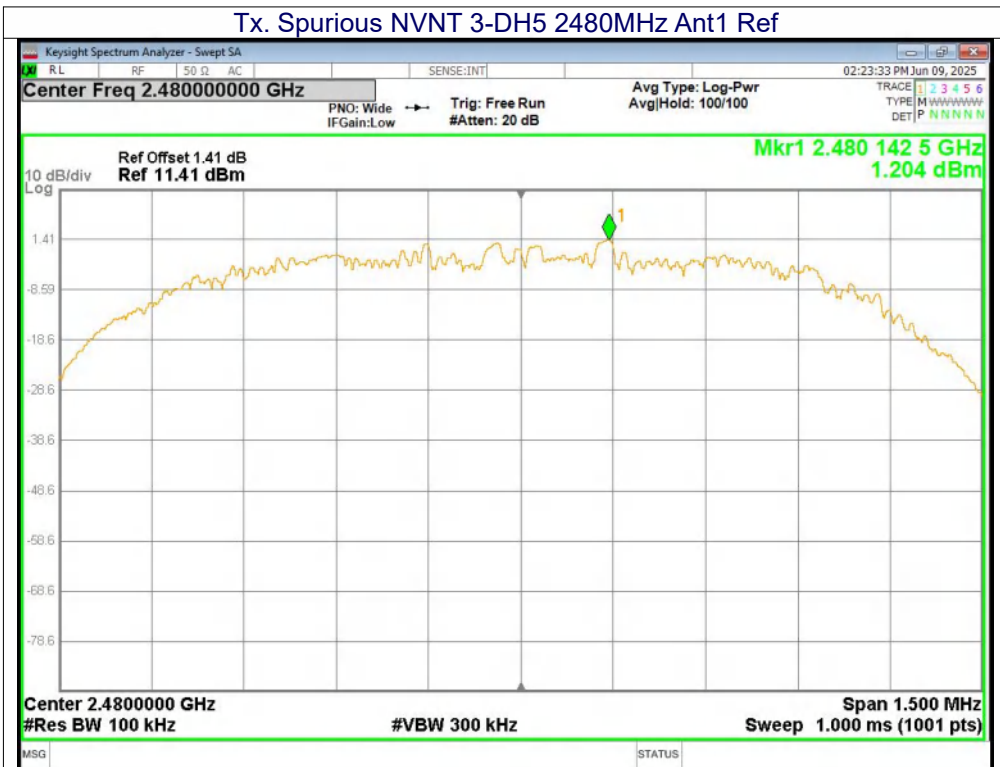

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

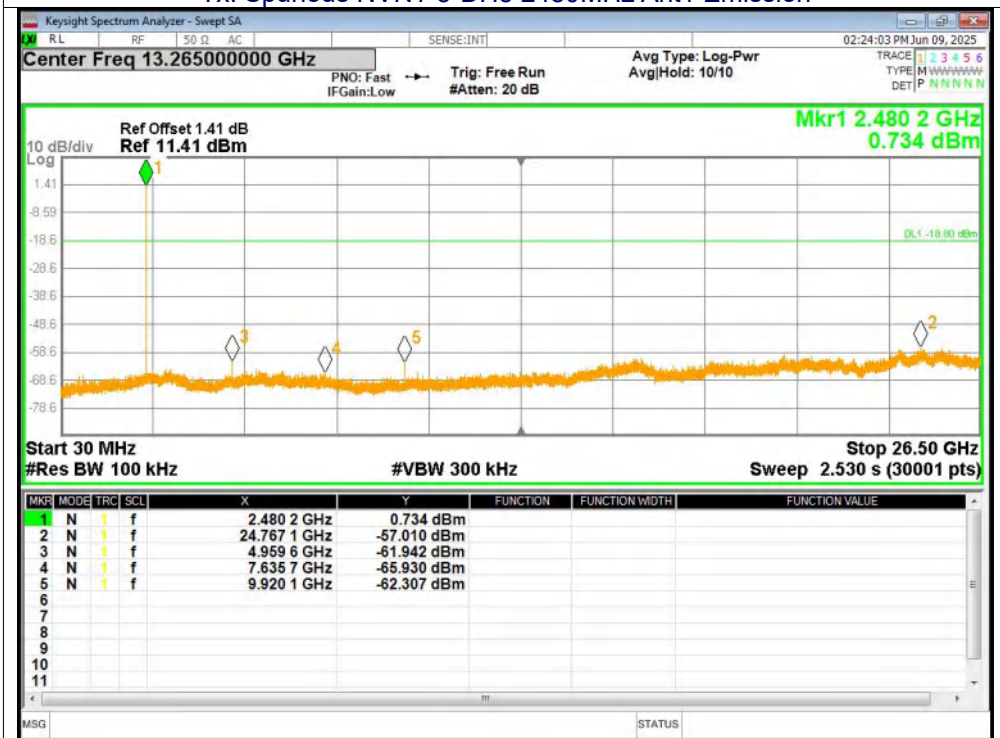

## 8. 20DB&99% BANDWIDTH

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1), RSS 247 5.1, RSS-Gen 6.7 |
| Test Method:      | ANSI C63.10:2013                                             |

### 8.1 Test Setup



### 8.2 Limit

There is no corresponding limit requirement for this test item.

### 8.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
8. The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30KHz RBW and 100 KHz VBW record the 99% bandwidth.

### 8.4 DEVIATION FROM STANDARD


No deviation.

### 8.5 Test Result


| Mode          | Test channel | 20dB Emission Bandwidth (MHz) | 99%Bandwidth (MHz) | Result |
|---------------|--------------|-------------------------------|--------------------|--------|
| GFSK          | Lowest       | 0.987                         | 0.895              | Pass   |
|               | Middle       | 0.979                         | 0.891              |        |
|               | Highest      | 1.042                         | 0.887              |        |
| $\pi/4$ DQPSK | Lowest       | 1.309                         | 1.181              | Pass   |
|               | Middle       | 1.303                         | 1.198              |        |
|               | Highest      | 1.277                         | 1.193              |        |
| 8DPSK         | Lowest       | 1.277                         | 1.193              | Pass   |
|               | Middle       | 1.327                         | 1.185              |        |
|               | Highest      | 1.31                          | 1.171              |        |



### Test Graphs



#### -20dB Bandwidth NVNT 1-DH5 2402MHz Ant1


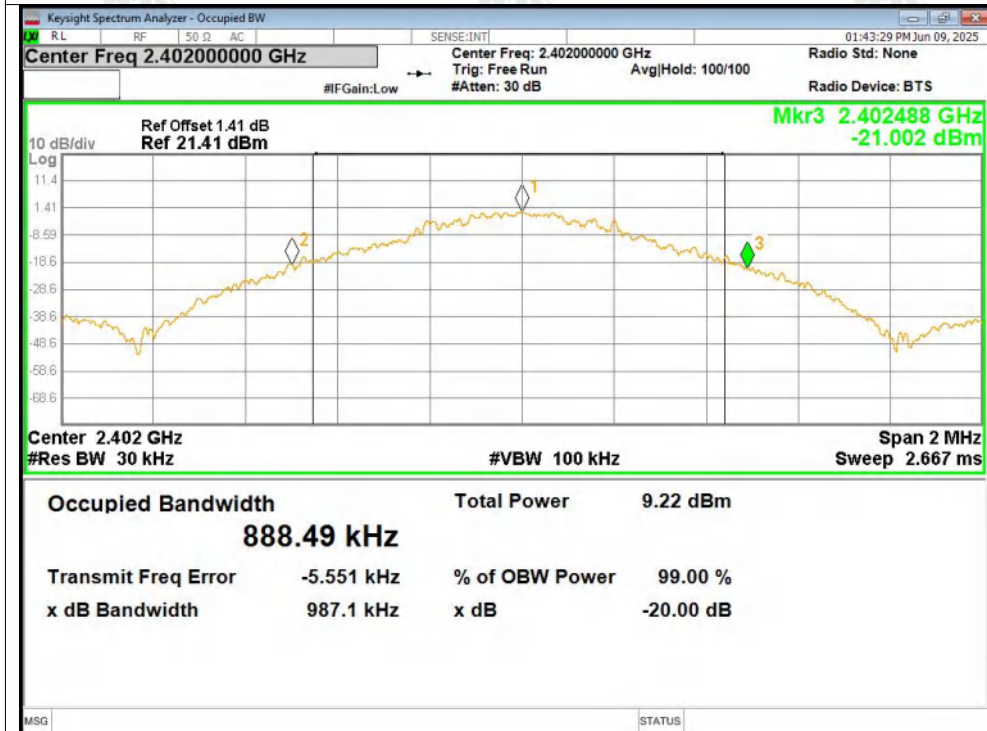



#### -20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

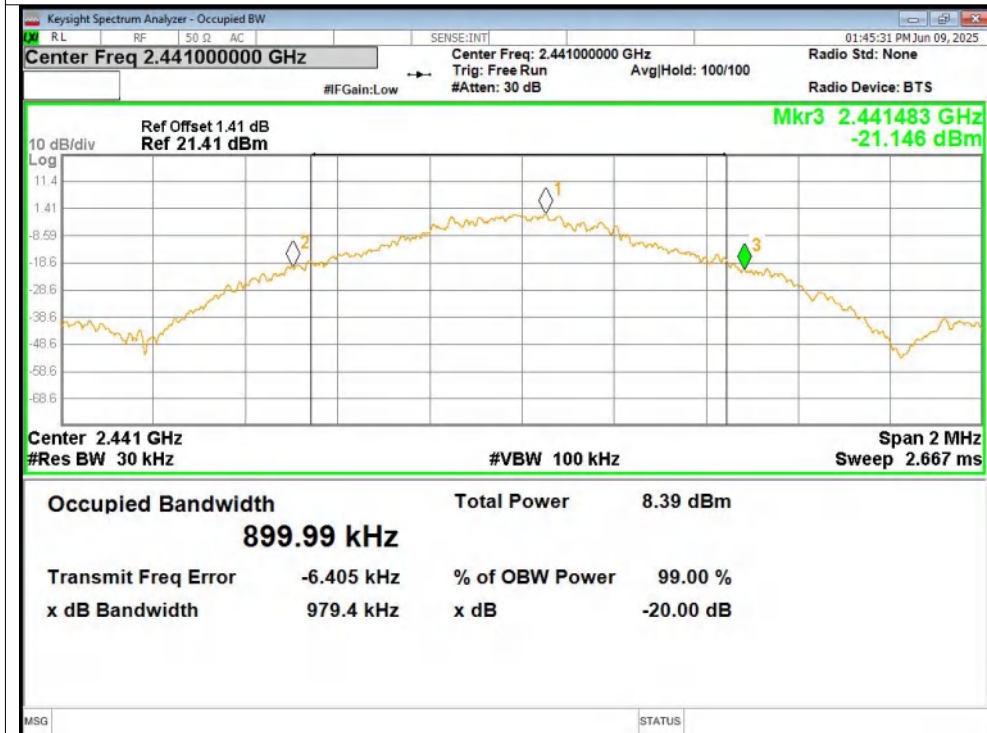

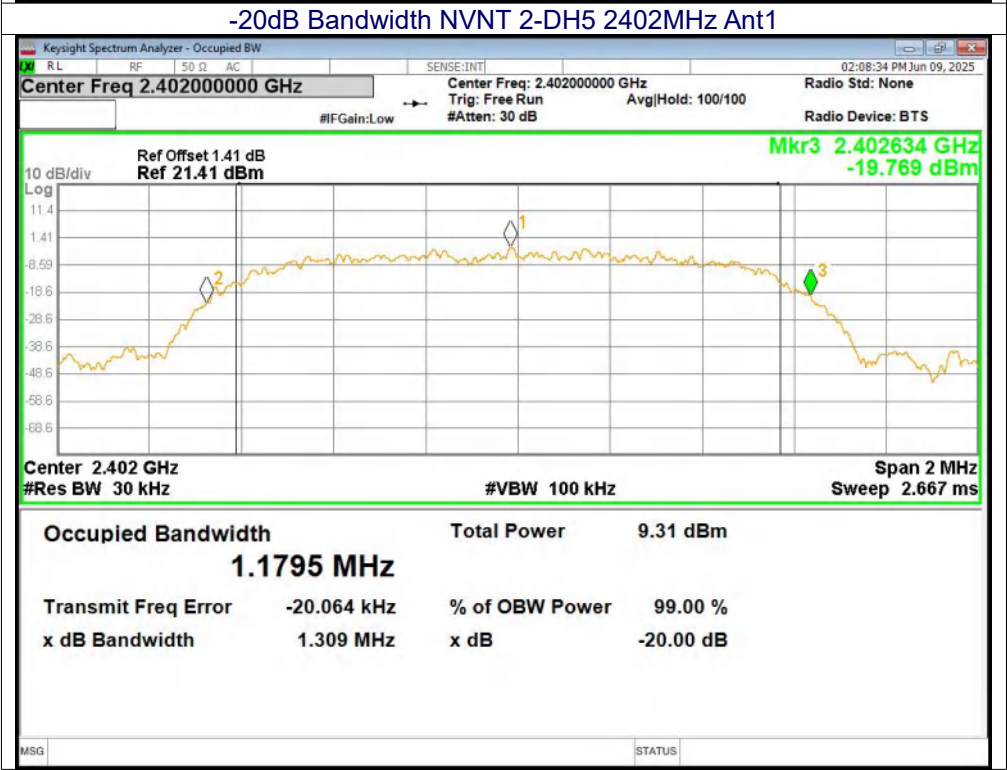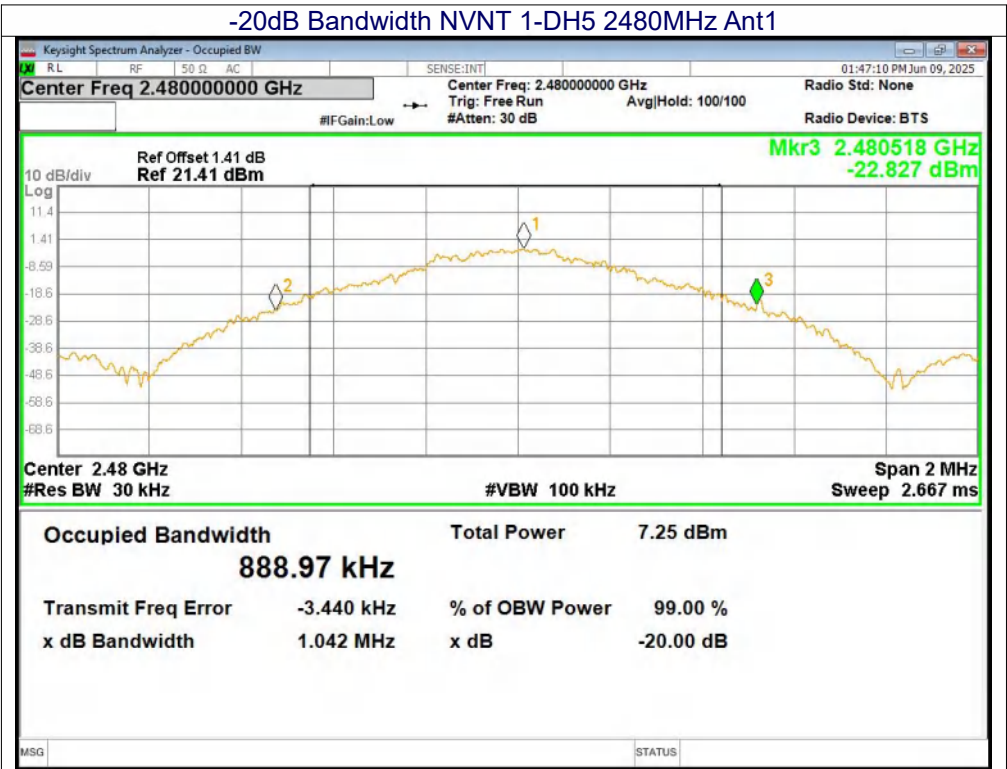


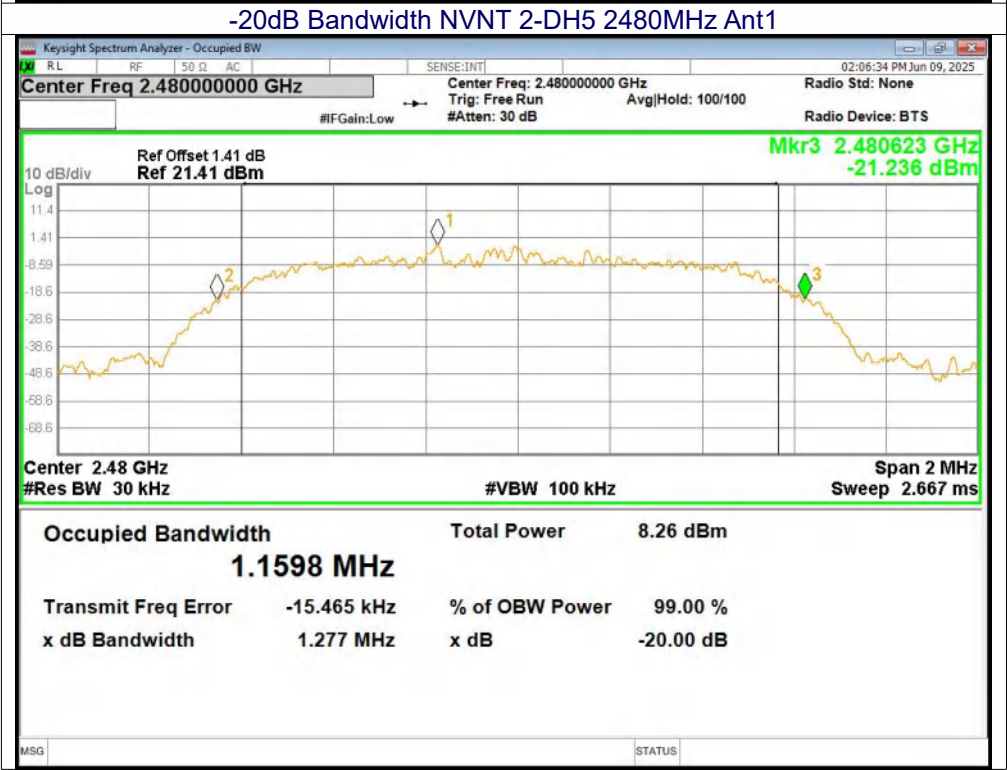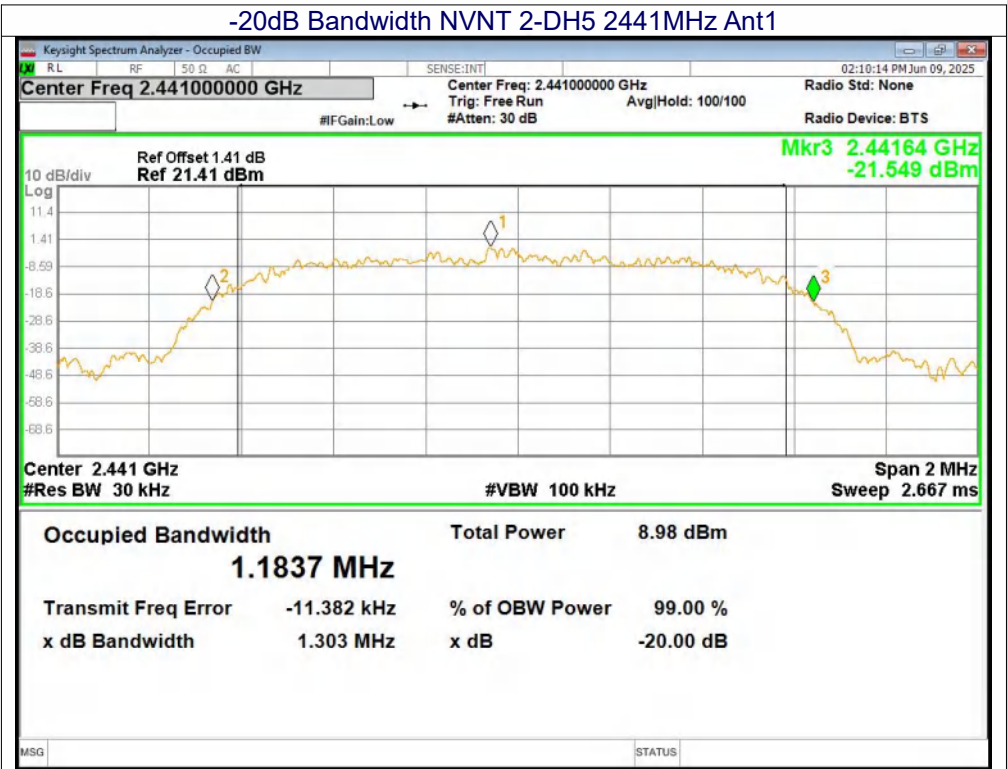

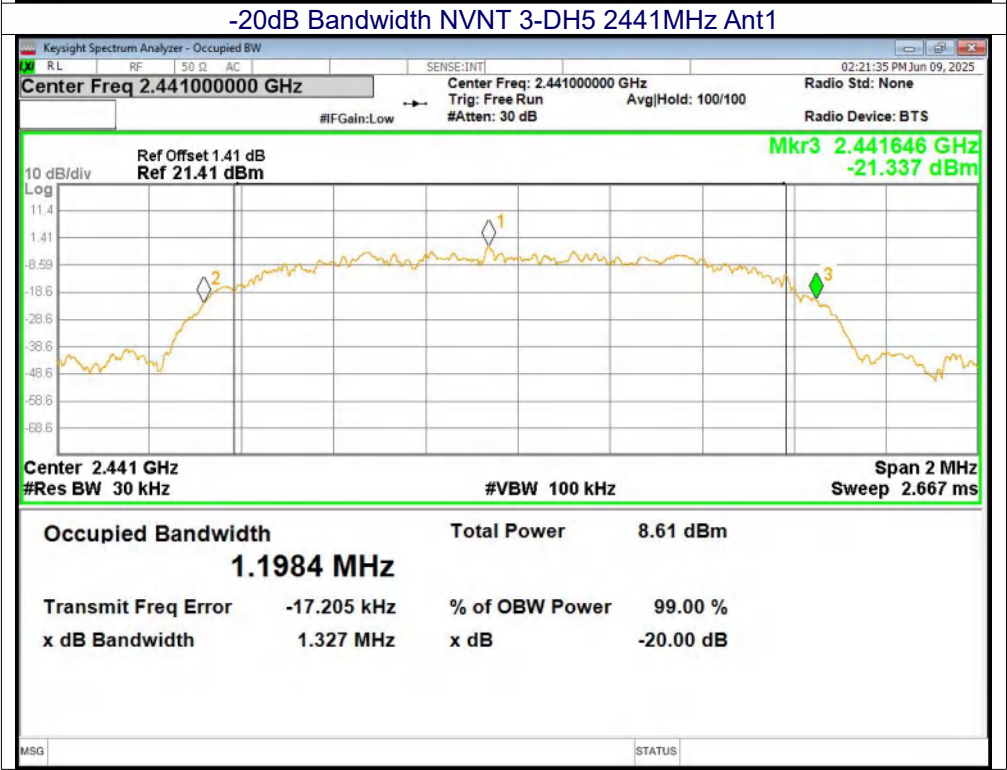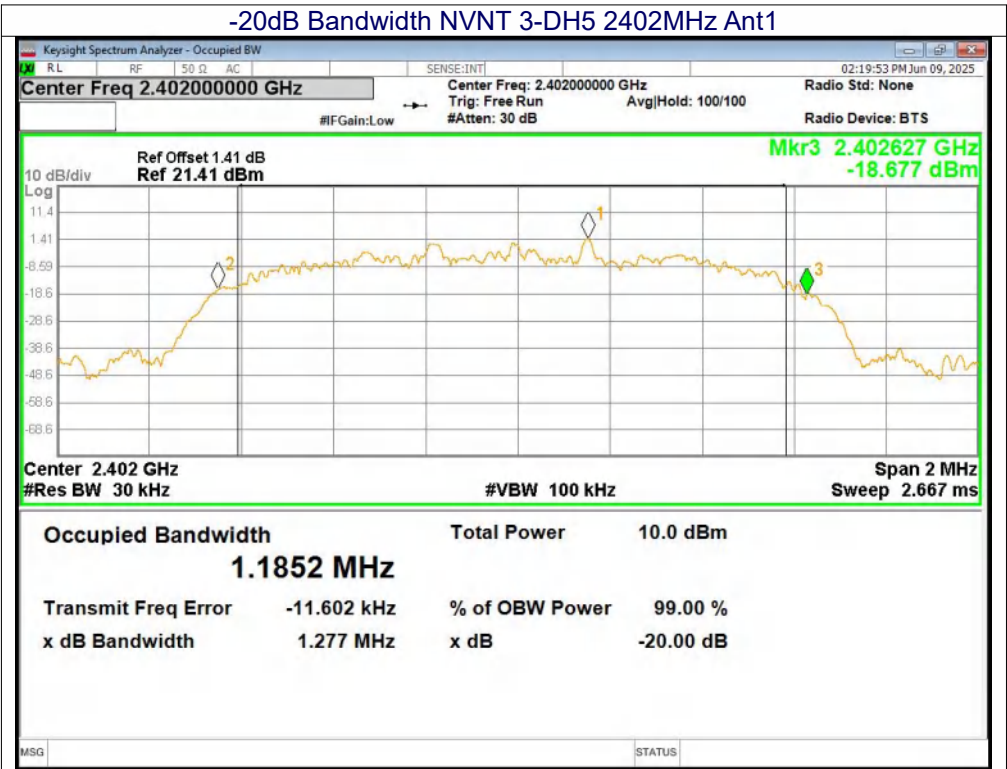


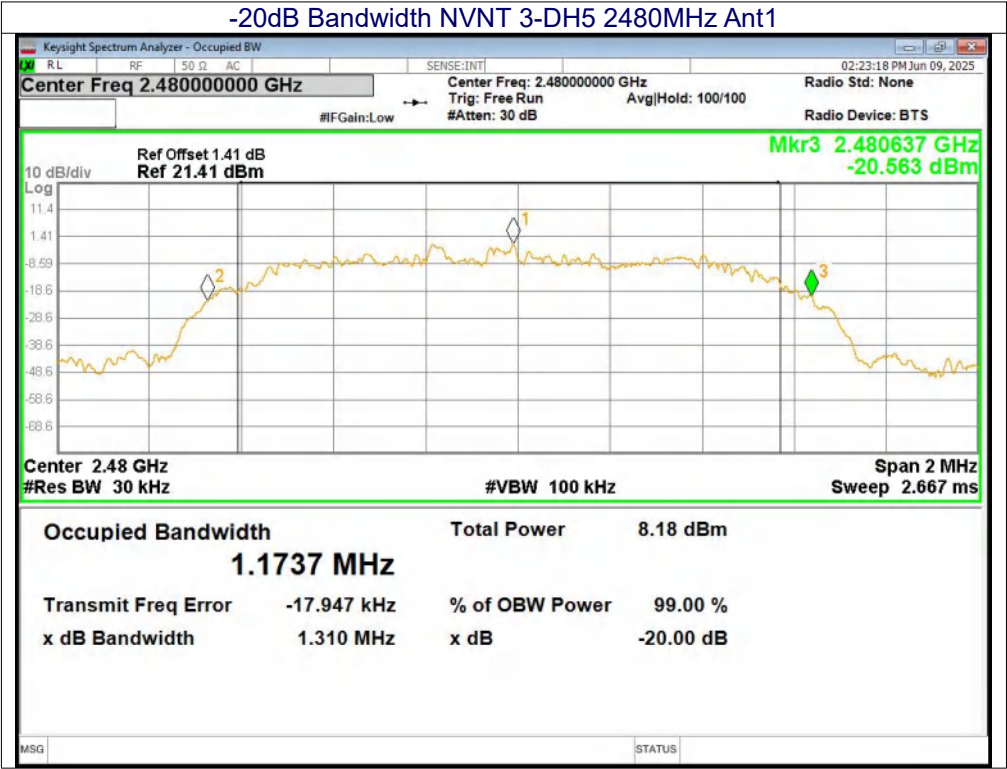


OBW NVNT 1-DH5 2402MHz Ant1

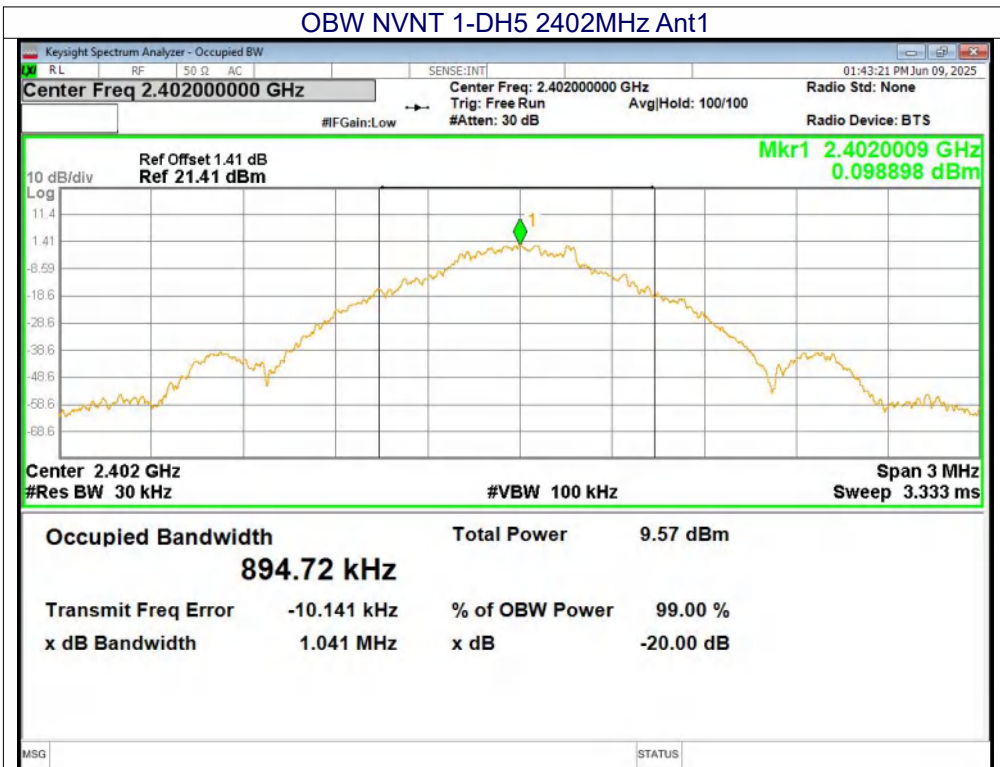


OBW NVNT 1-DH5 2441MHz Ant1


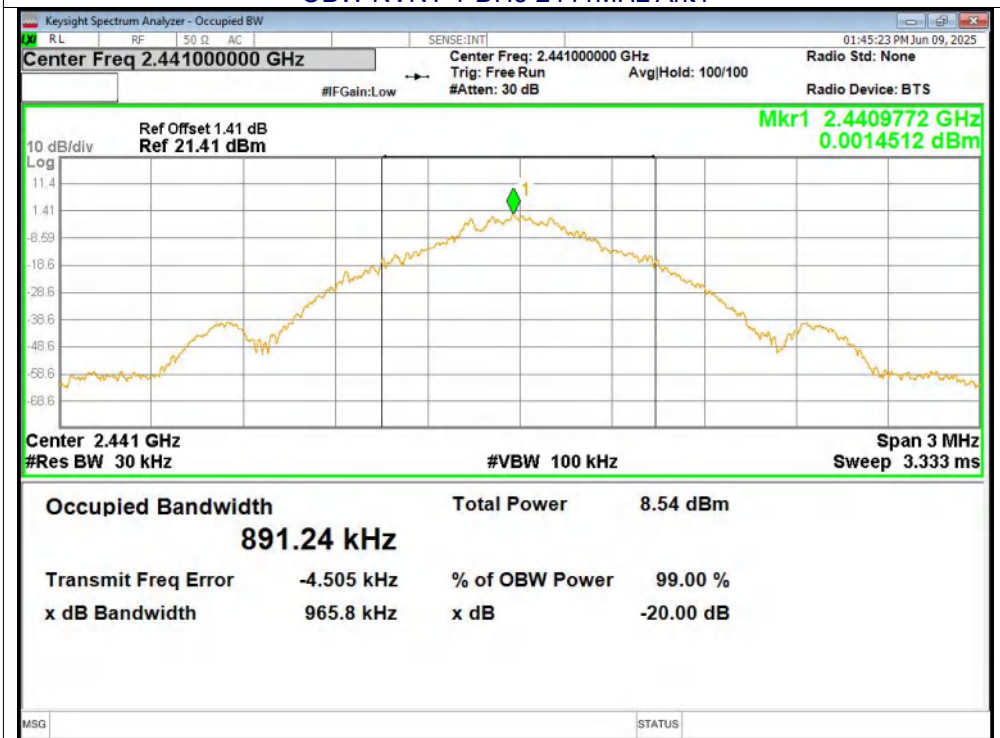




OBW NVNT 1-DH5 2480MHz Ant1

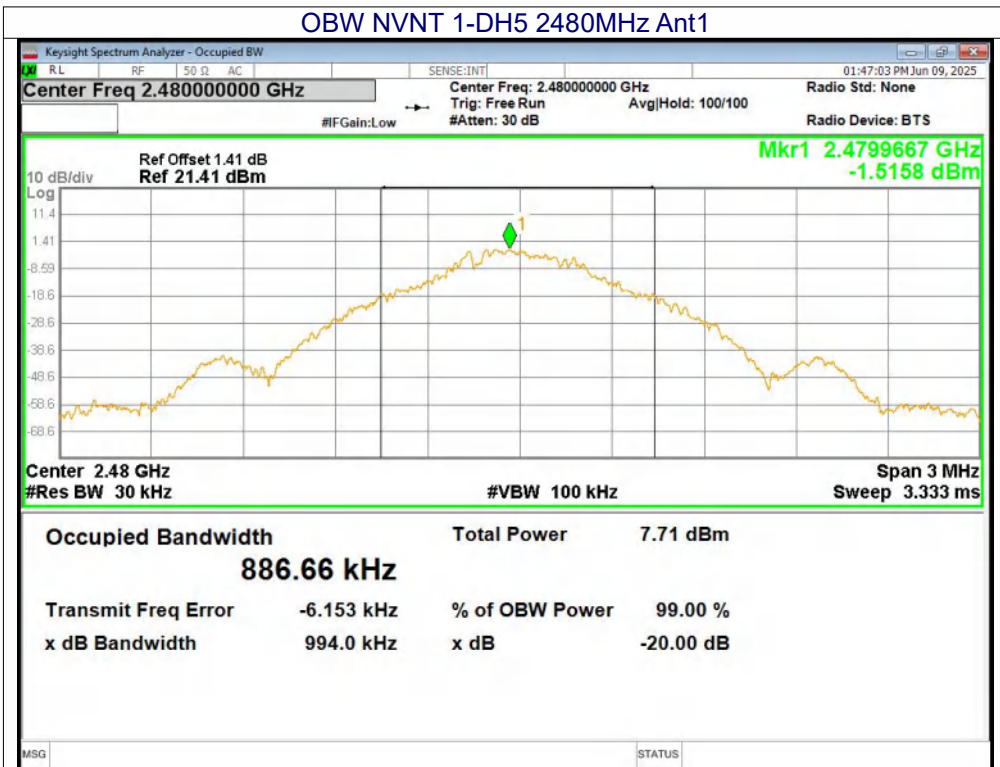


OBW NVNT 2-DH5 2402MHz Ant1

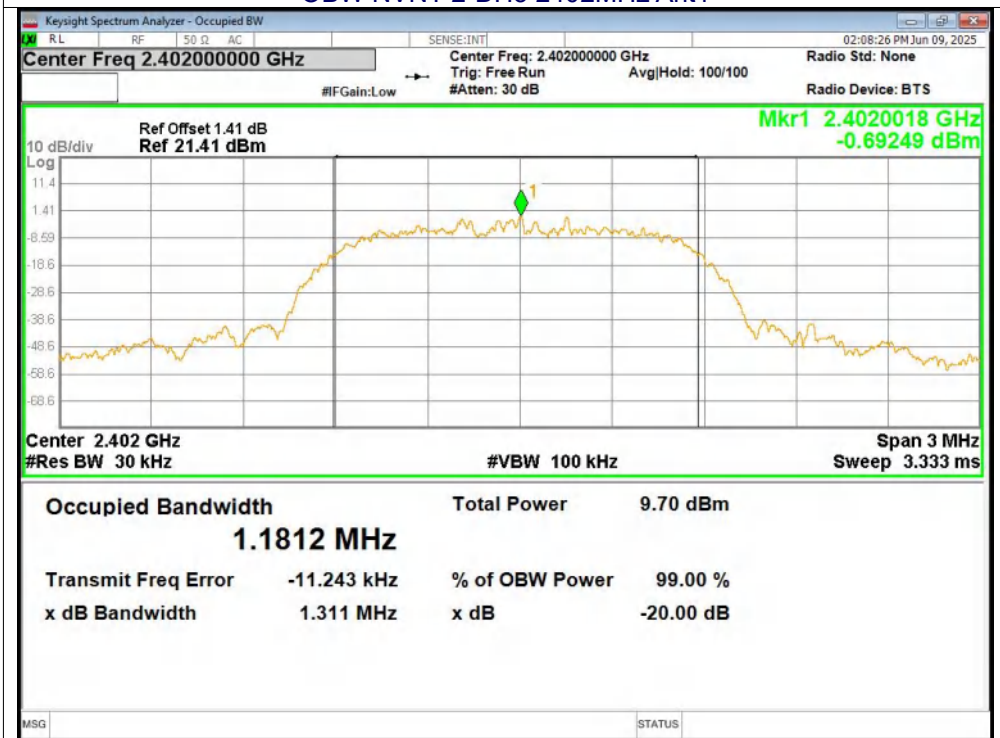

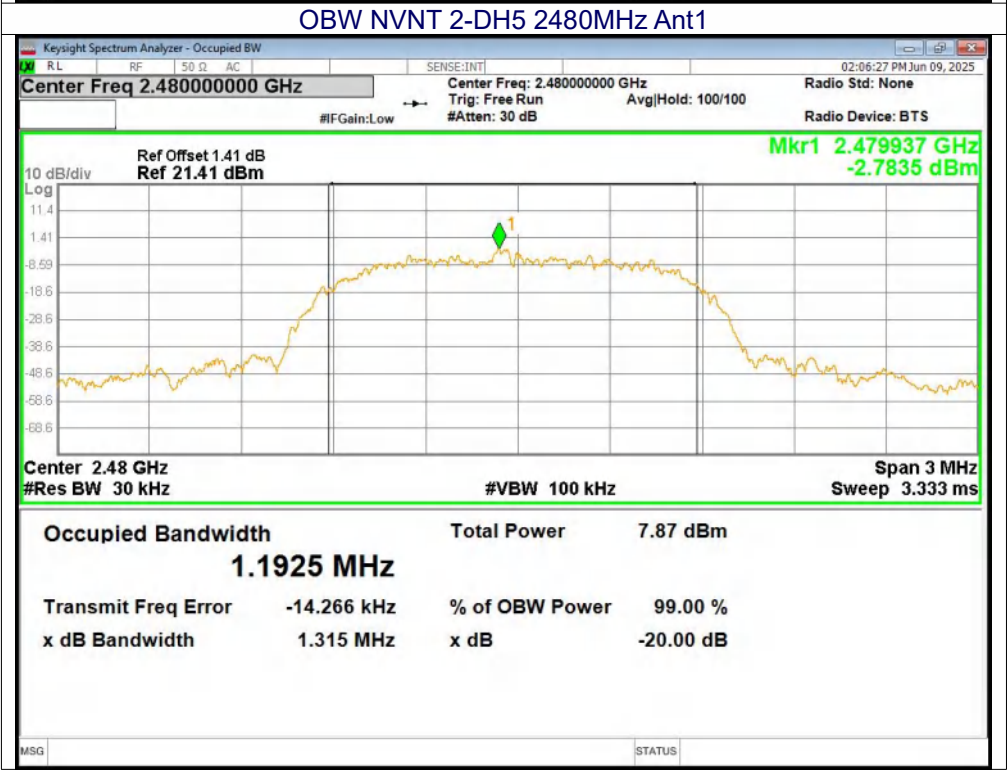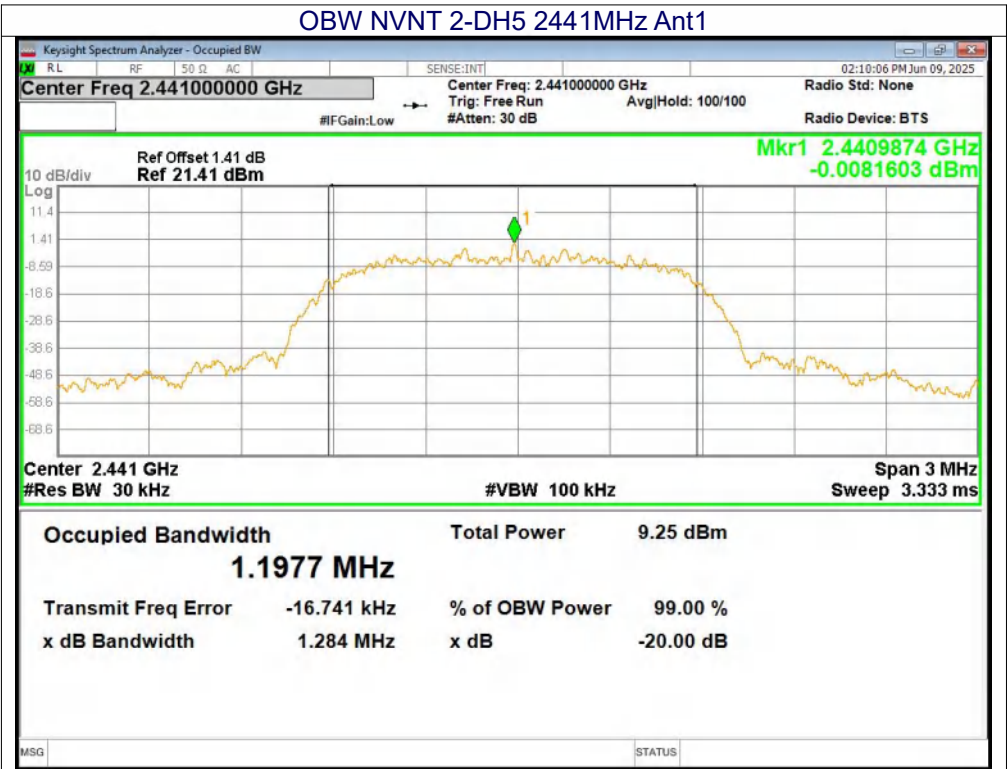

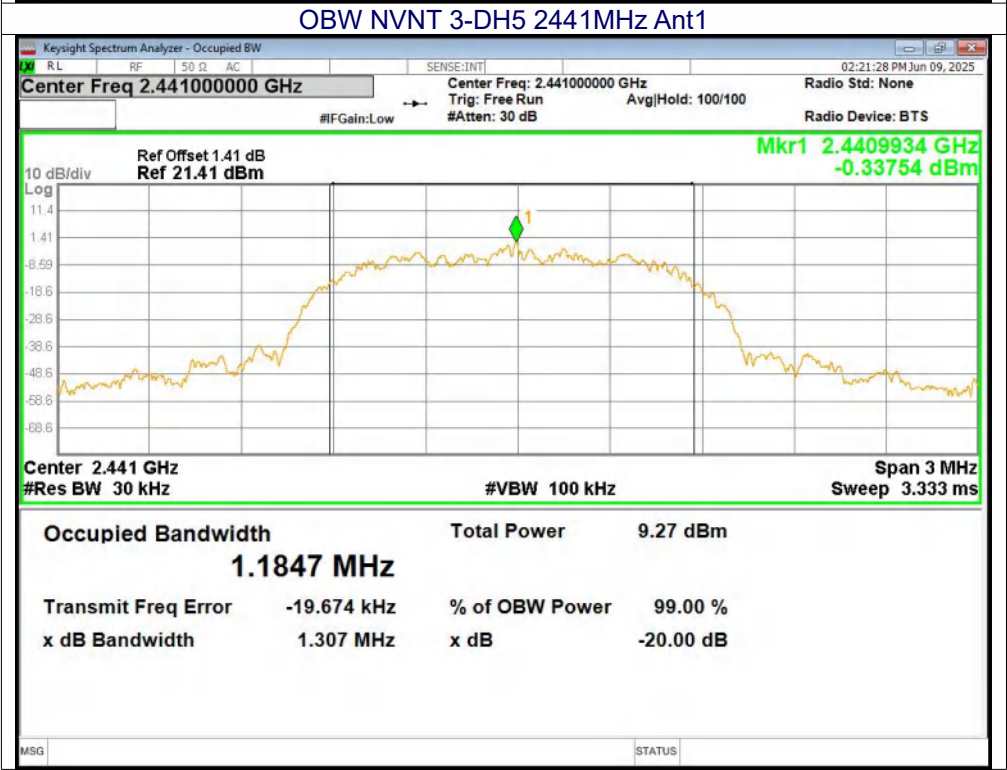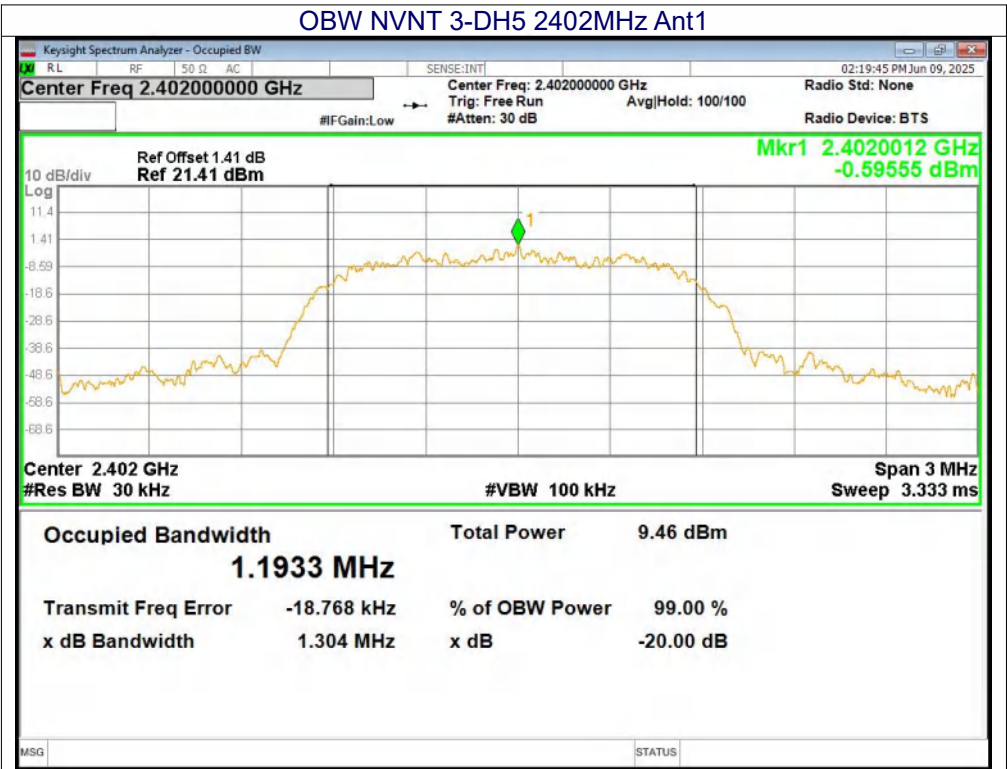

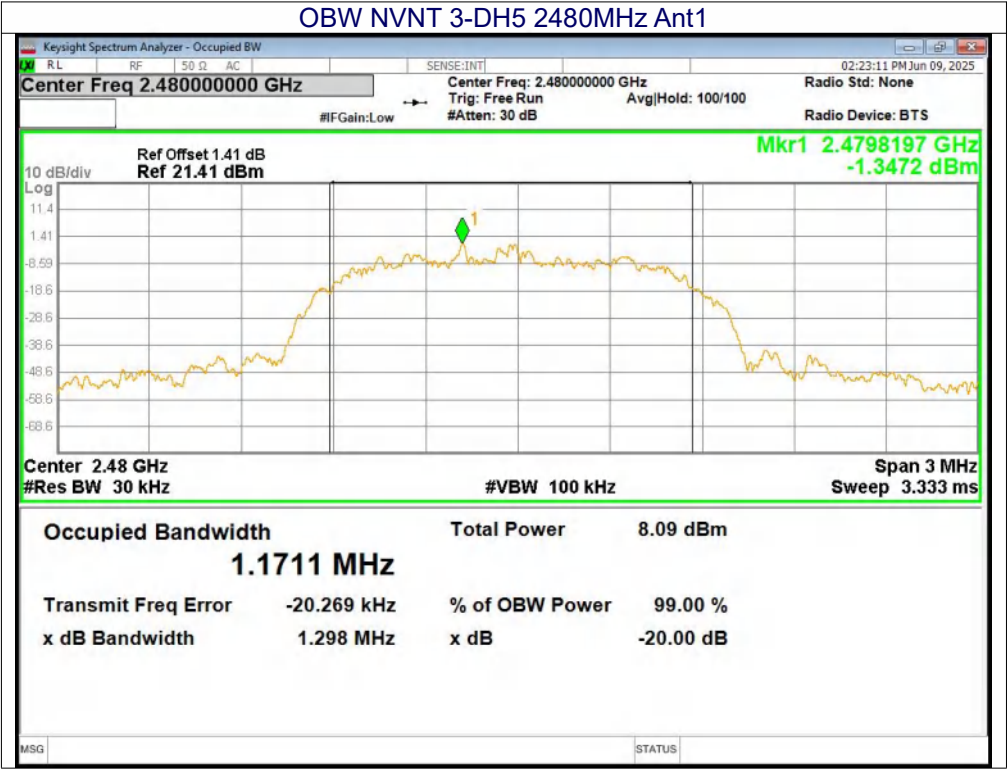

## 9. Maximum Peak Output Power

|                   |                                                     |
|-------------------|-----------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(1), RSS 247 5.4 (b) |
| Test Method:      | ANSI C63.10:2013                                    |

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

### 9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 9.4 DEVIATION FROM STANDARD


No deviation.

### 9.5 Test Result


| Mode          | Test channel | Peak Output Power (dBm) | Peak Output Power Limit (dBm) | Result |
|---------------|--------------|-------------------------|-------------------------------|--------|
| GFSK          | Lowest       | 2.62                    | 21.00                         | Pass   |
|               | Middle       | 1.82                    |                               |        |
|               | Highest      | 0.76                    |                               |        |
| $\pi/4$ DQPSK | Lowest       | 4.65                    | 21.00                         | Pass   |
|               | Middle       | 4.13                    |                               |        |
|               | Highest      | 2.91                    |                               |        |
| 8DPSK         | Lowest       | 5.01                    | 21.00                         | Pass   |
|               | Middle       | 4.55                    |                               |        |
|               | Highest      | 3.2                     |                               |        |

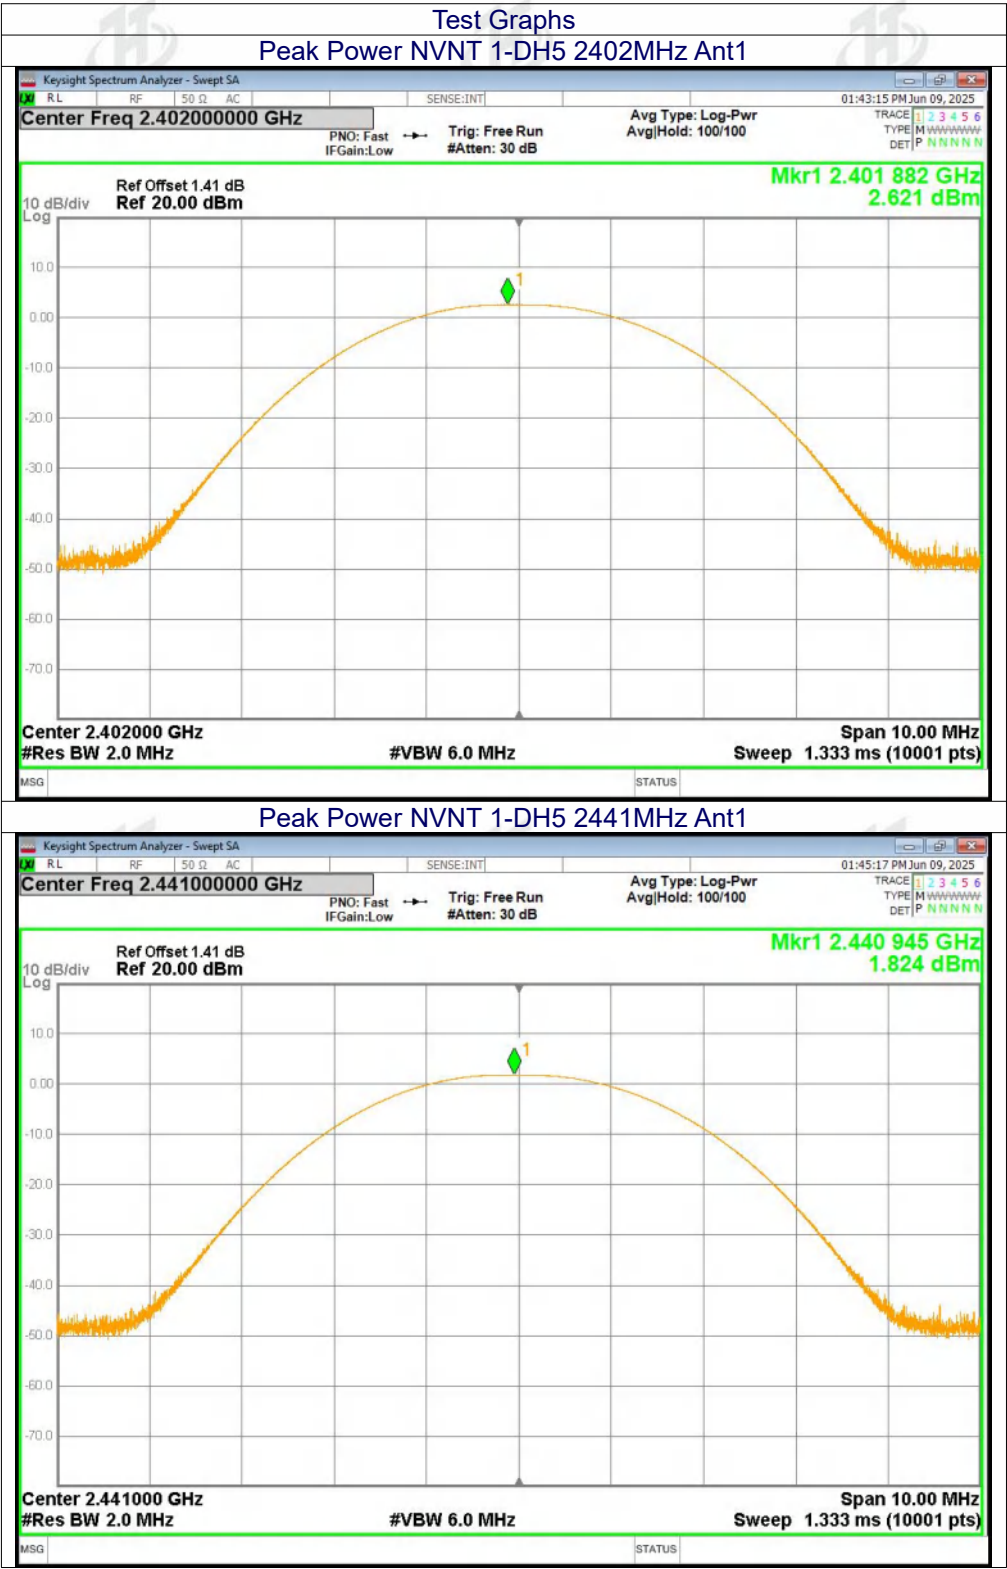


Peak Power NVNT 1-DH5 2480MHz Ant1

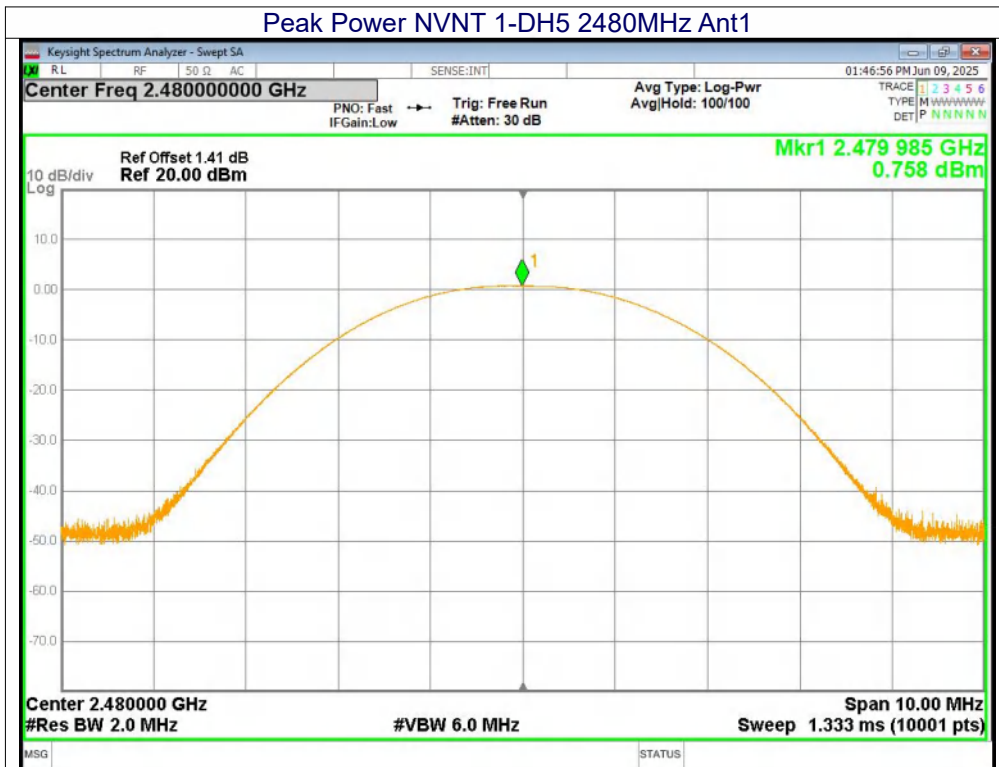


Peak Power NVNT 2-DH5 2402MHz Ant1

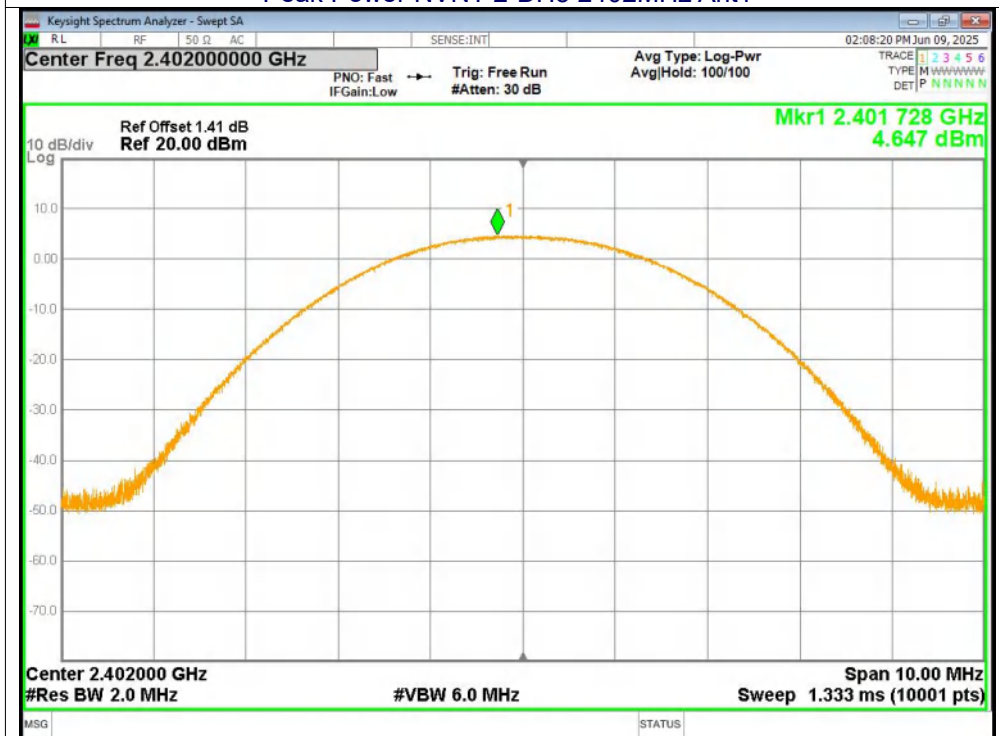


Peak Power NVNT 2-DH5 2441MHz Ant1

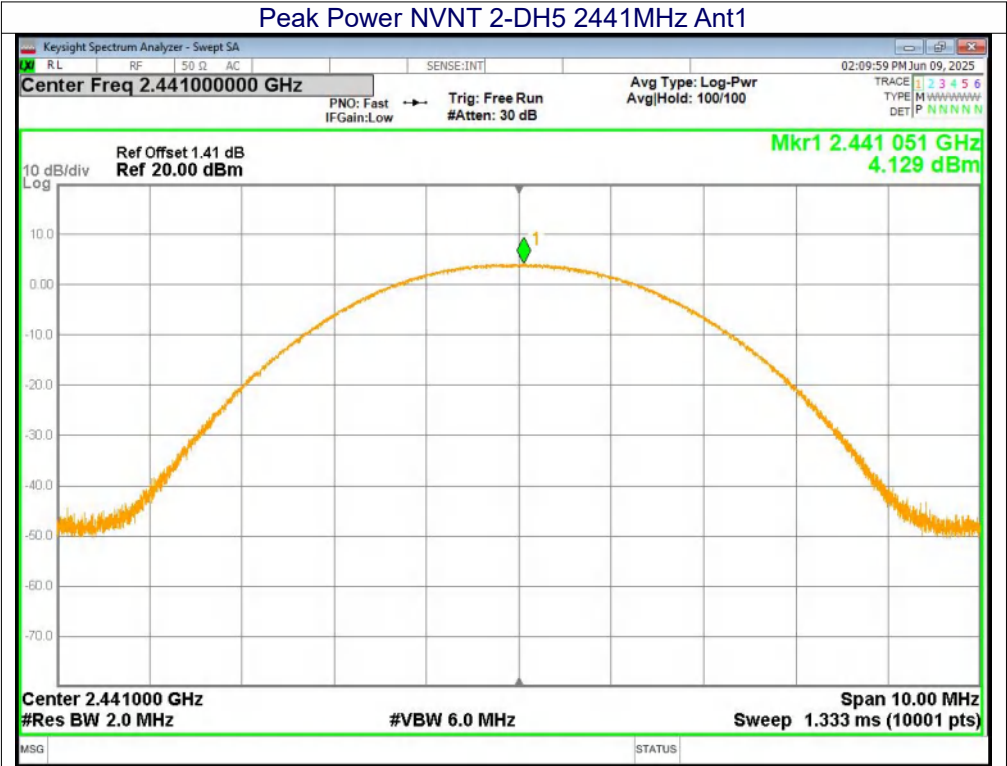


Peak Power NVNT 2-DH5 2480MHz Ant1

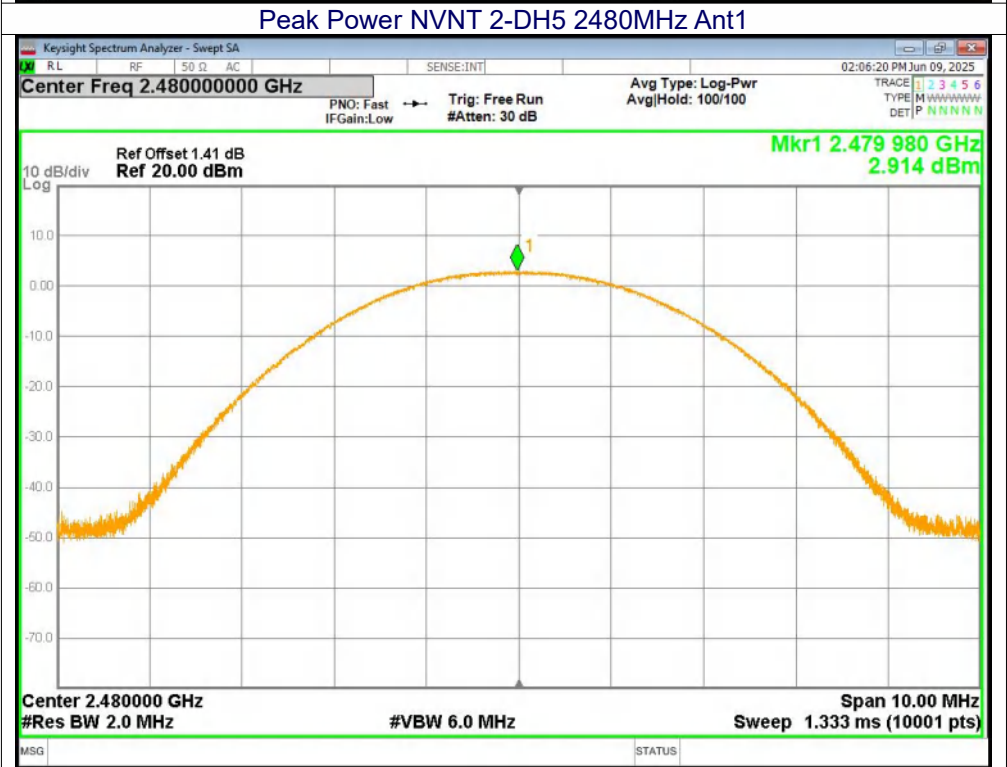


Peak Power NVNT 3-DH5 2402MHz Ant1

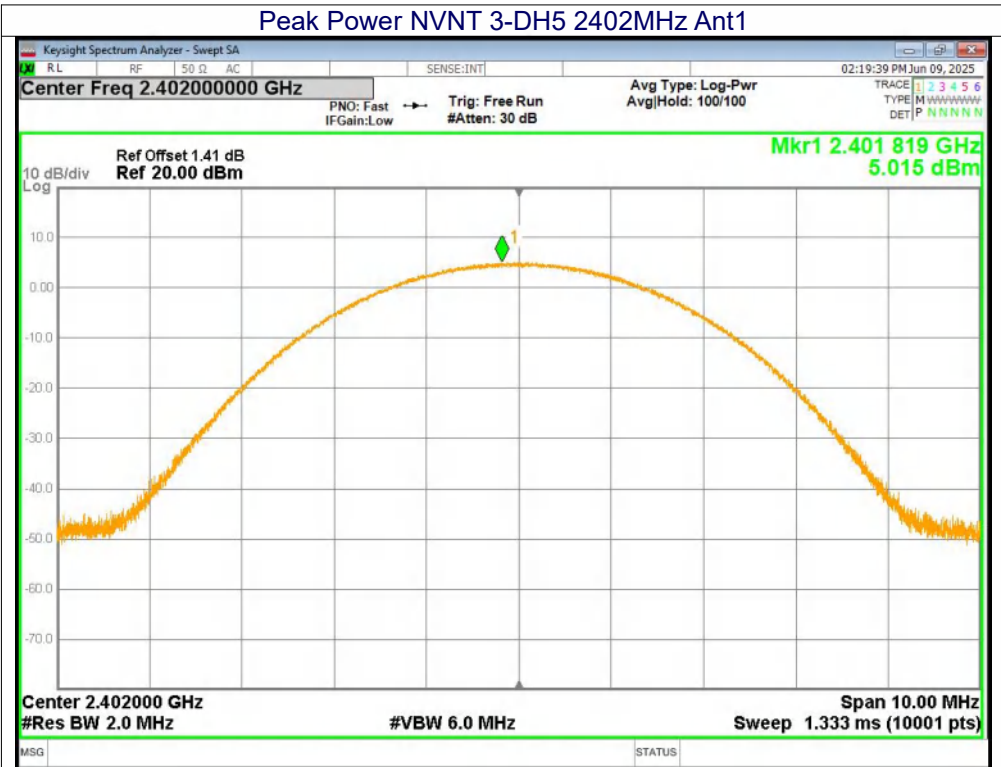

Peak Power NVNT 3-DH5 2441MHz Ant1

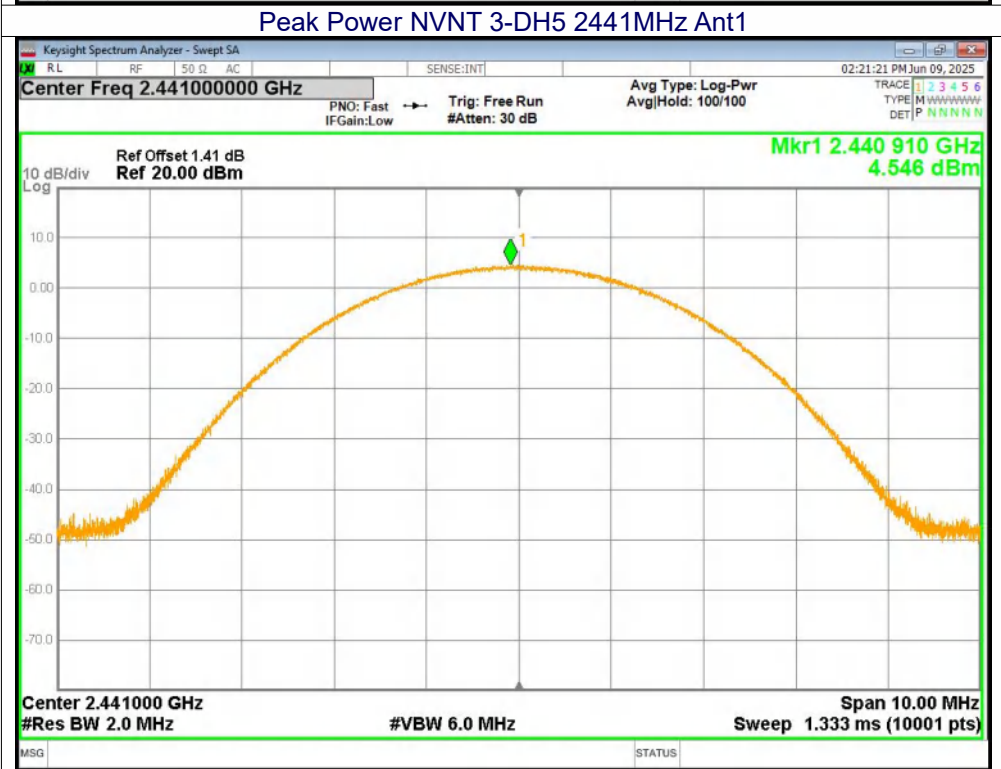

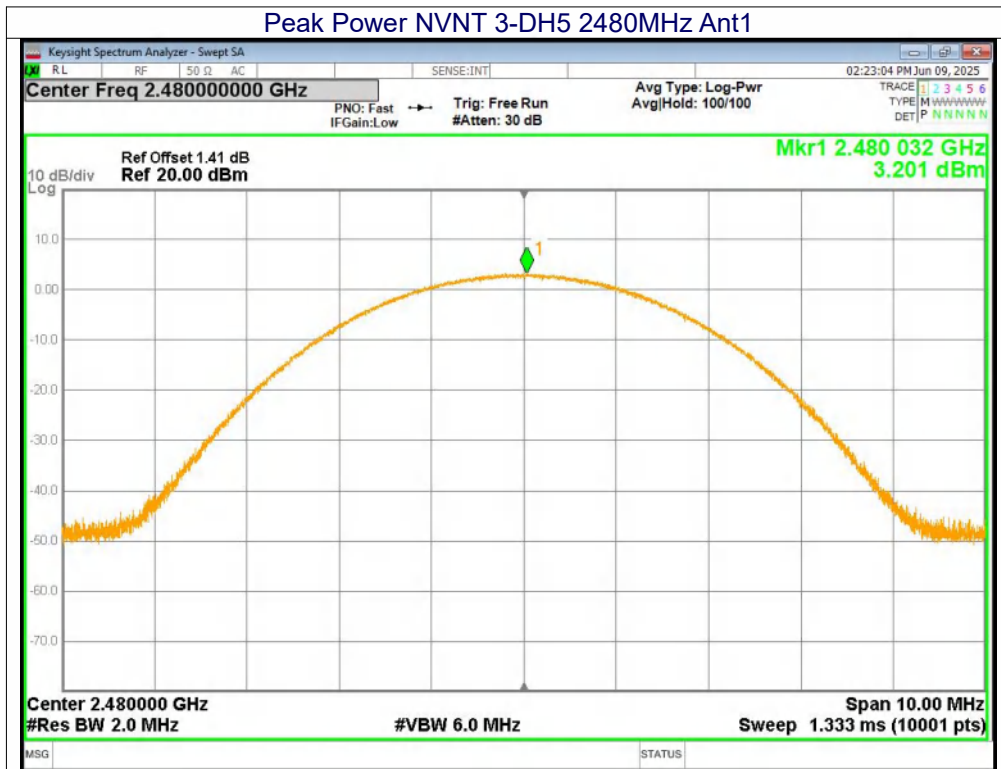

## 10. HOPPING CHANNEL SEPARATION

|                   |                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1), RSS 247 5.1                                           |
| Test Method:      | ANSI C63.10:2013                                                                          |
| Receiver setup:   | RBW=30KHz, VBW=100KHz, detector=Peak                                                      |
| Limit:            | GFSK, $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater) |

### 10.1 Test Setup



### 10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 300kHz. VBW = 300kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 10.3 DEVIATION FROM STANDARD


No deviation.

### 10.4 Test Result


| Condition | Mode  | Antenna | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH5 | Ant1    | 2401.83             | 2402.834            | 1.004     | 0.895       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2440.832            | 2441.826            | 0.994     | 0.891       | Pass    |
| NVNT      | 1-DH5 | Ant1    | 2478.834            | 2480.158            | 1.324     | 0.887       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2401.8266           | 2402.8068           | 0.9802    | 0.873       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2441.1386           | 2442.1448           | 1.0062    | 0.869       | Pass    |
| NVNT      | 2-DH5 | Ant1    | 2478.811            | 2479.8068           | 0.9958    | 0.851       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2401.8422           | 2402.812            | 0.9698    | 0.851       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2440.876            | 2442.1396           | 1.2636    | 0.885       | Pass    |
| NVNT      | 3-DH5 | Ant1    | 2479.1386           | 2480.1604           | 1.0218    | 0.873       | Pass    |

### Test Graphs


#### CFS NVNT 1-DH5 2402MHz Ant1

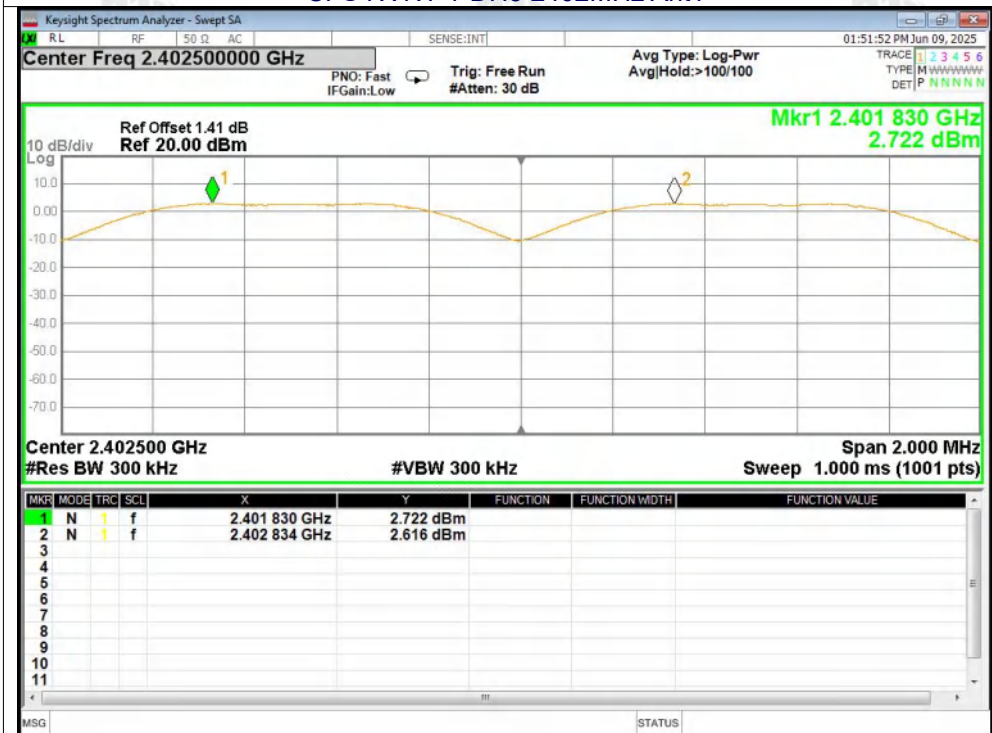


#### CFS NVNT 1-DH5 2441MHz Ant1

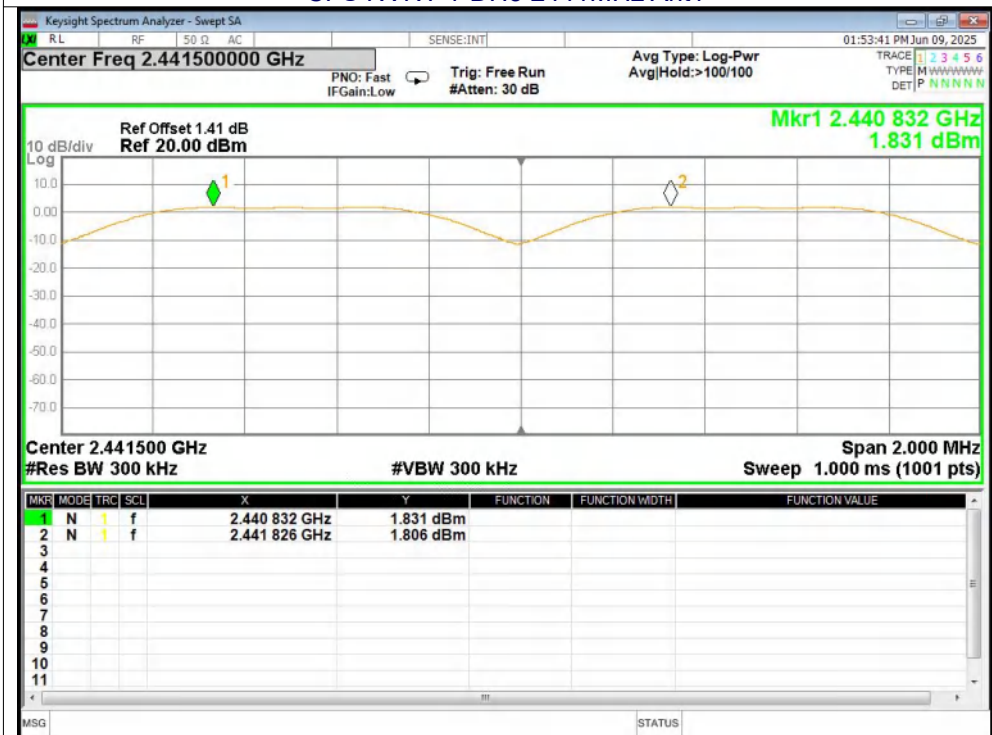


CFS NVNT 1-DH5 2480MHz Ant1

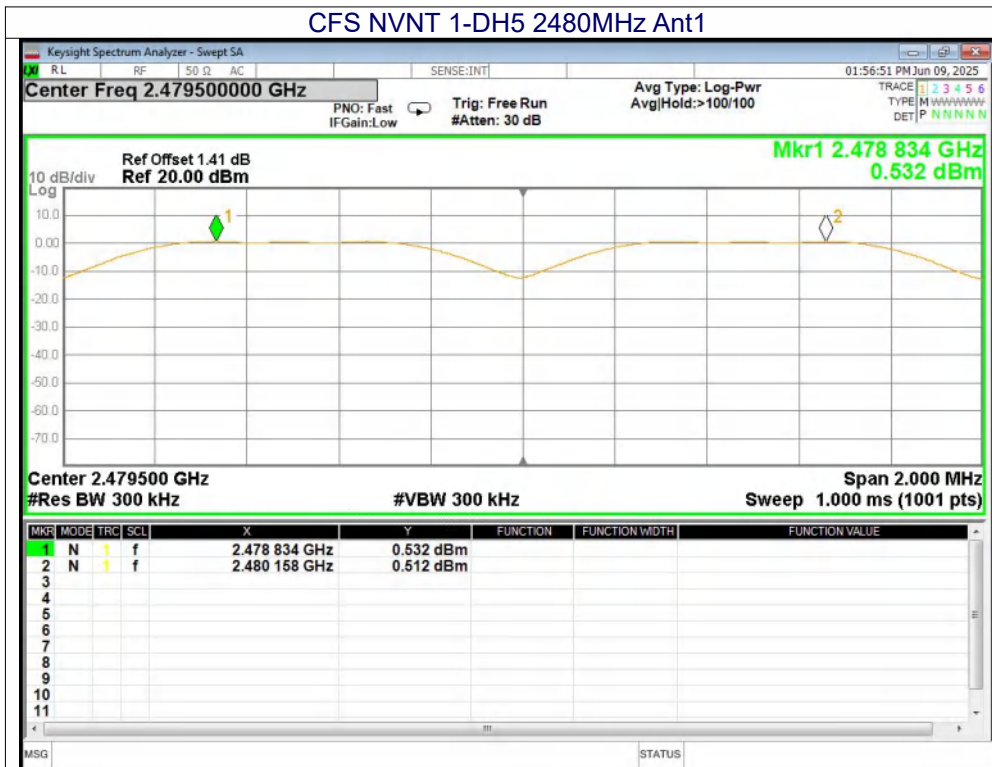


CFS NVNT 2-DH5 2402MHz Ant1

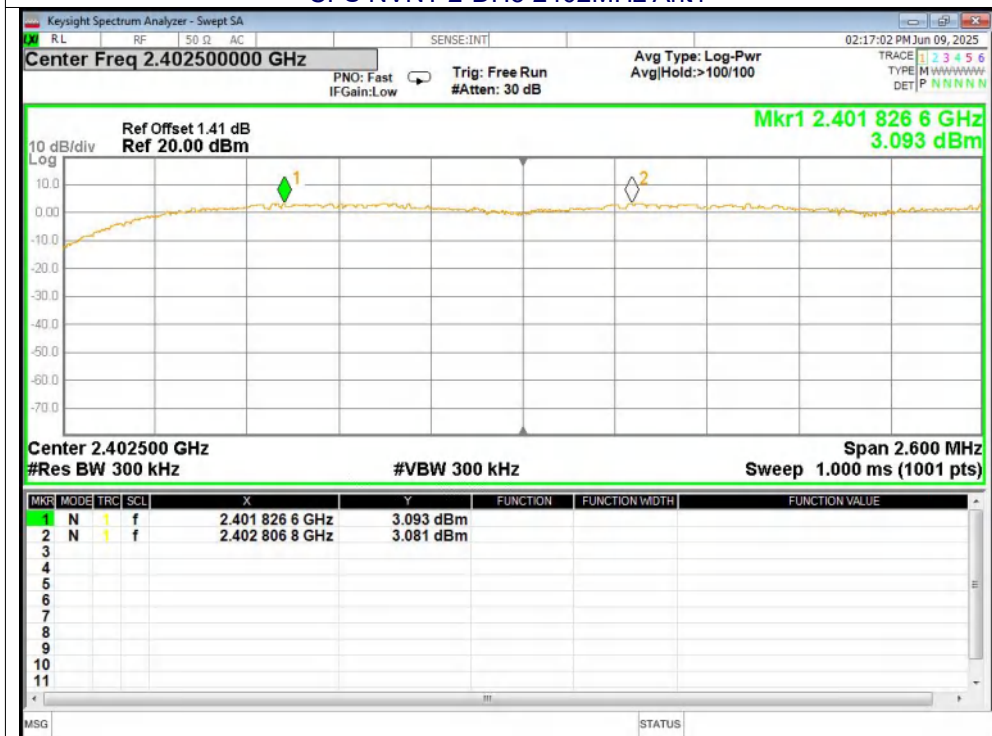


### CFS NVNT 2-DH5 2441MHz Ant1

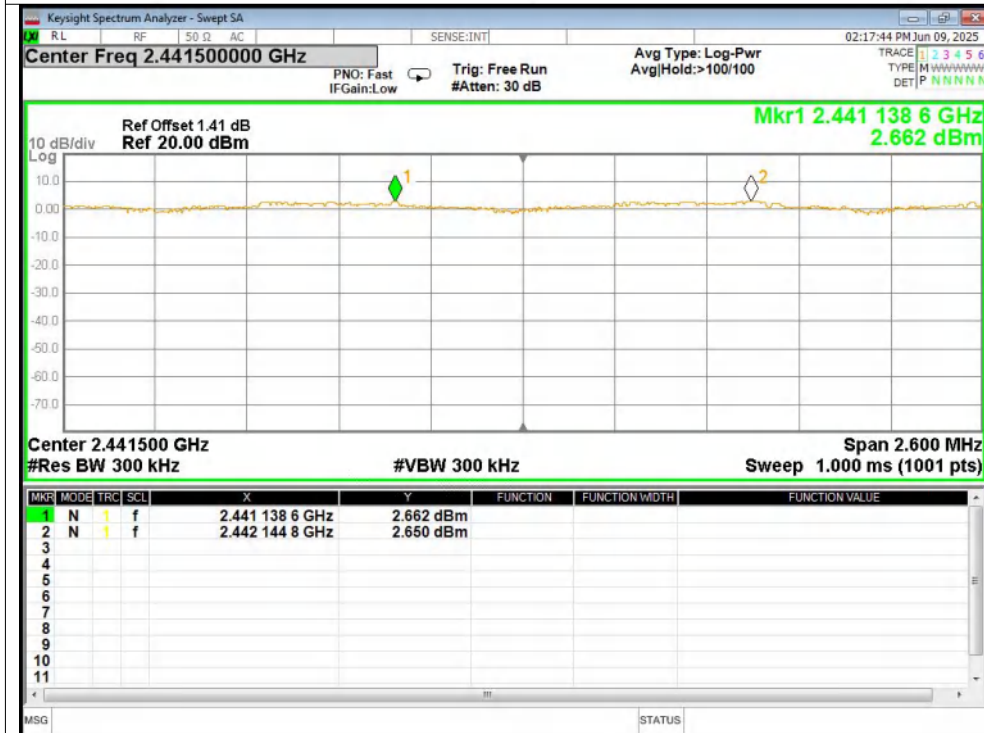


### CFS NVNT 2-DH5 2480MHz Ant1

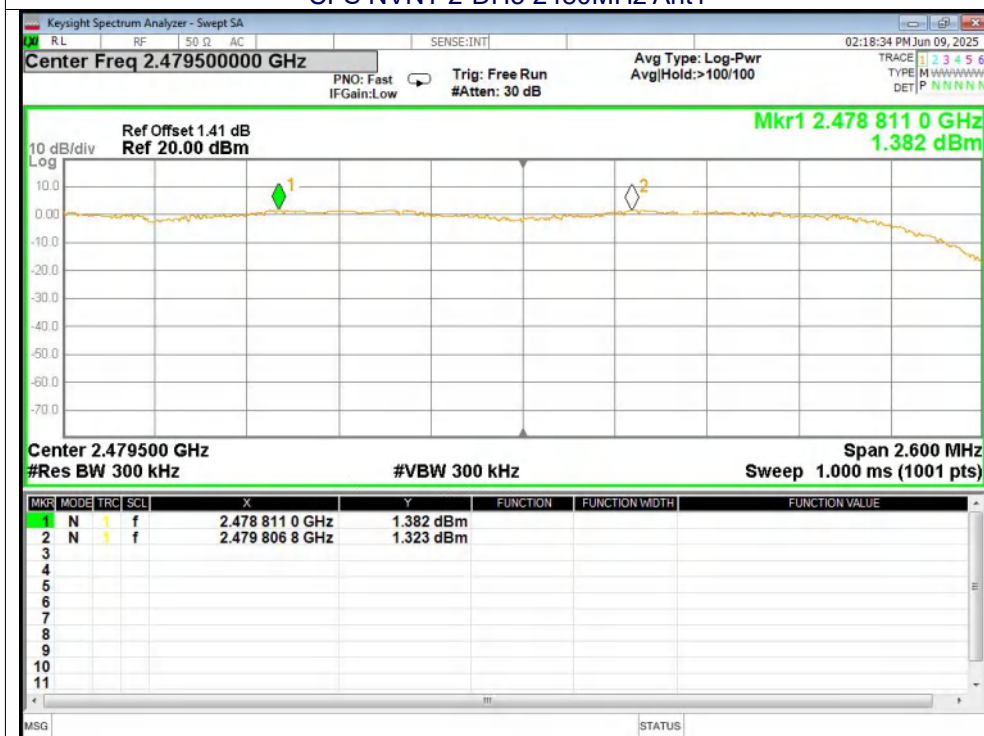


CFS NVNT 3-DH5 2402MHz Ant1

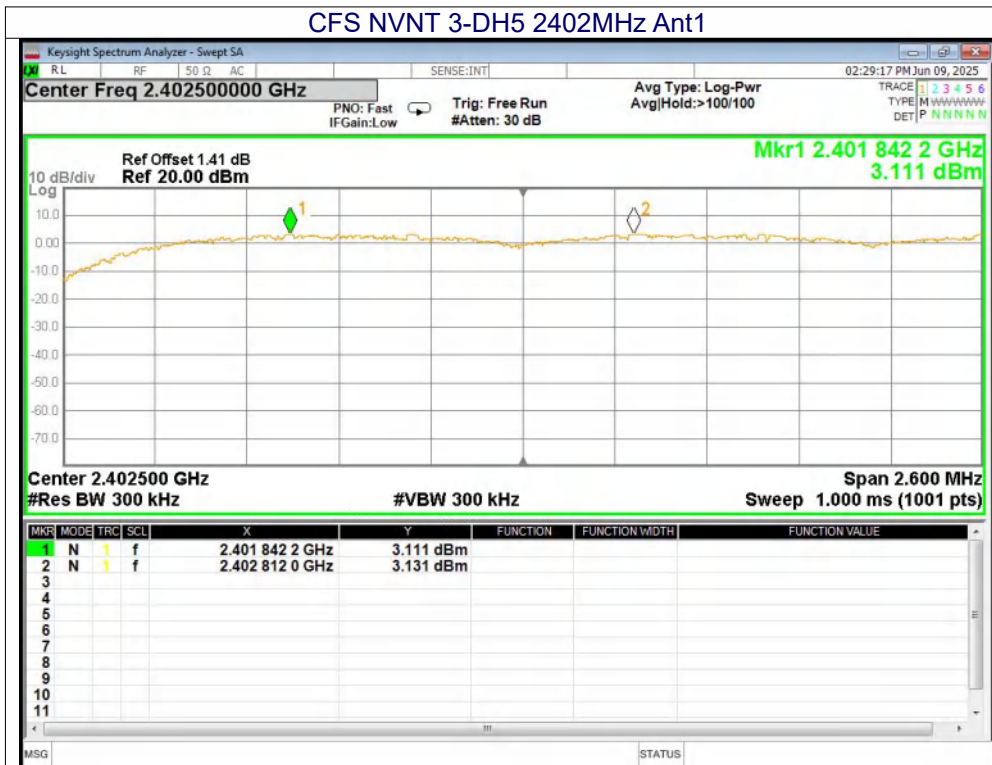

CFS NVNT 3-DH5 2441MHz Ant1

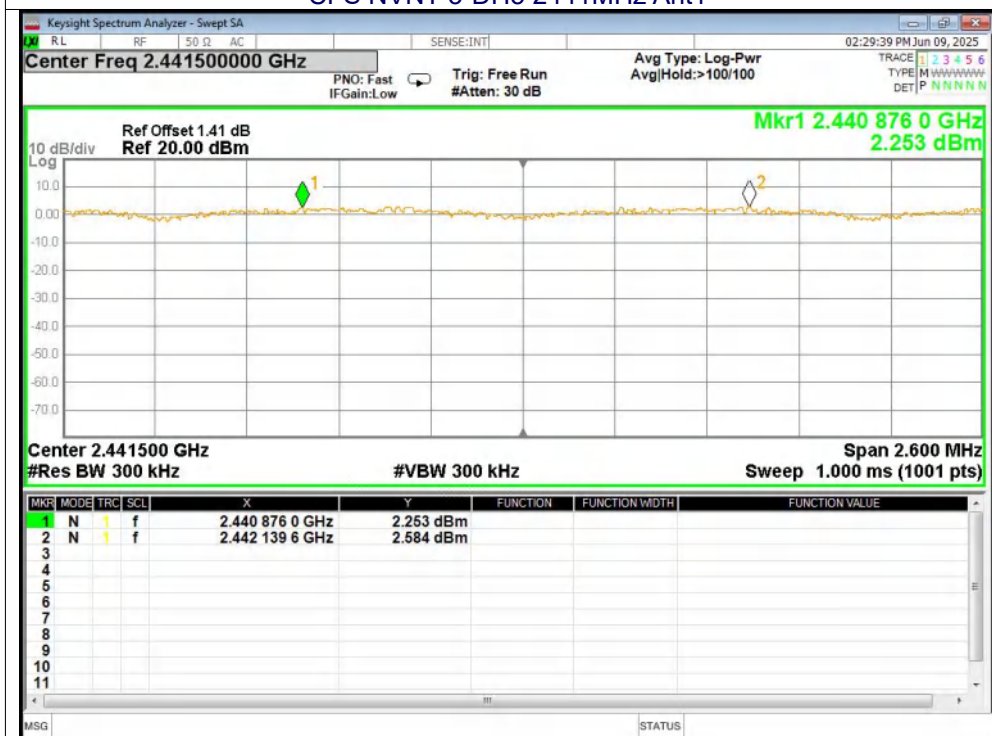


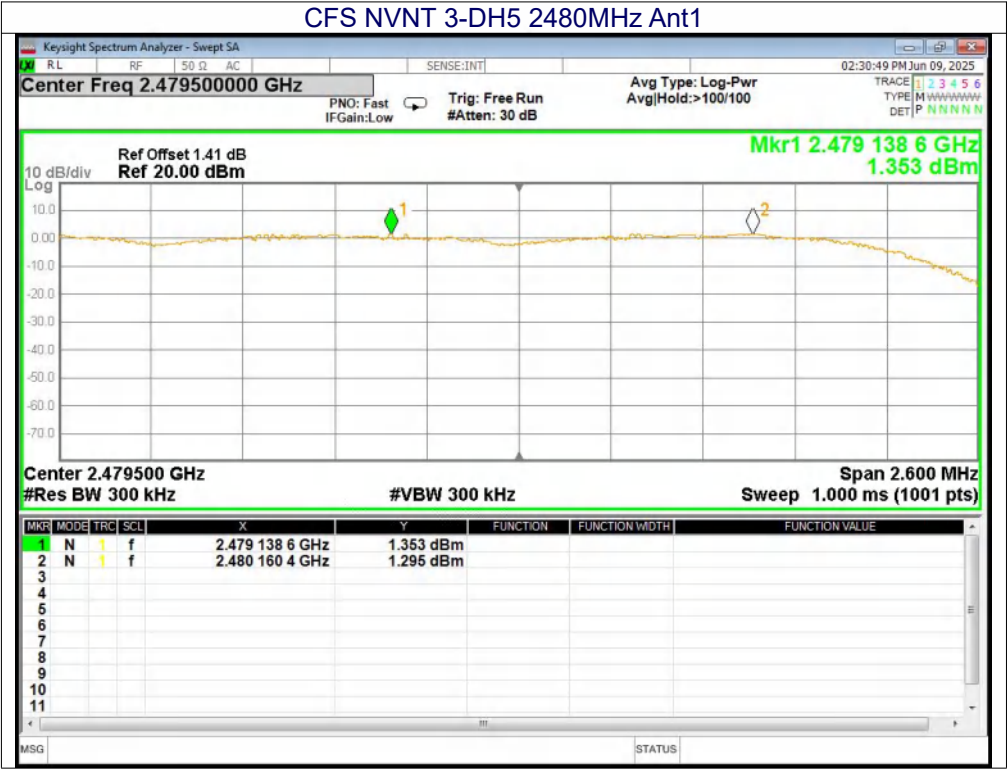

## 11.NUMBER OF HOPPING FREQUENCY

|                   |                                                                          |
|-------------------|--------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)(iii), RSS-247 5.1                     |
| Test Method:      | ANSI C63.10:2013                                                         |
| Receiver setup:   | RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak |
| Limit:            | 15 channels                                                              |

### 11.1 Test Setup




### 11.2 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 11.3 DEVIATION FROM STANDARD

No deviation.

11.4 Test Result

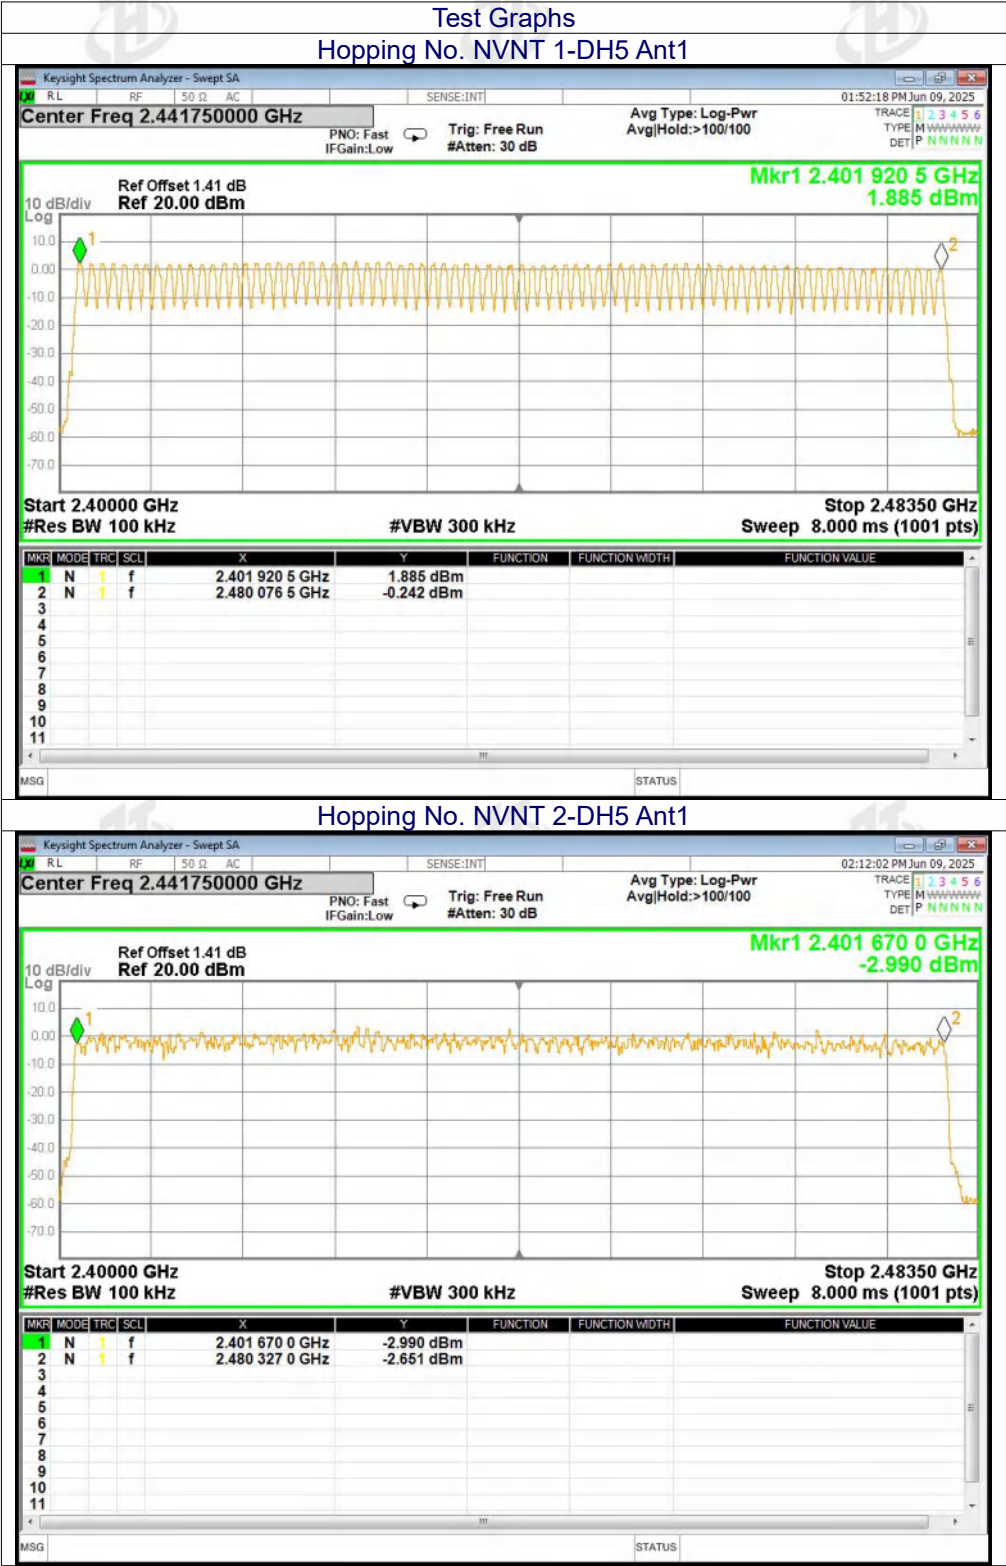

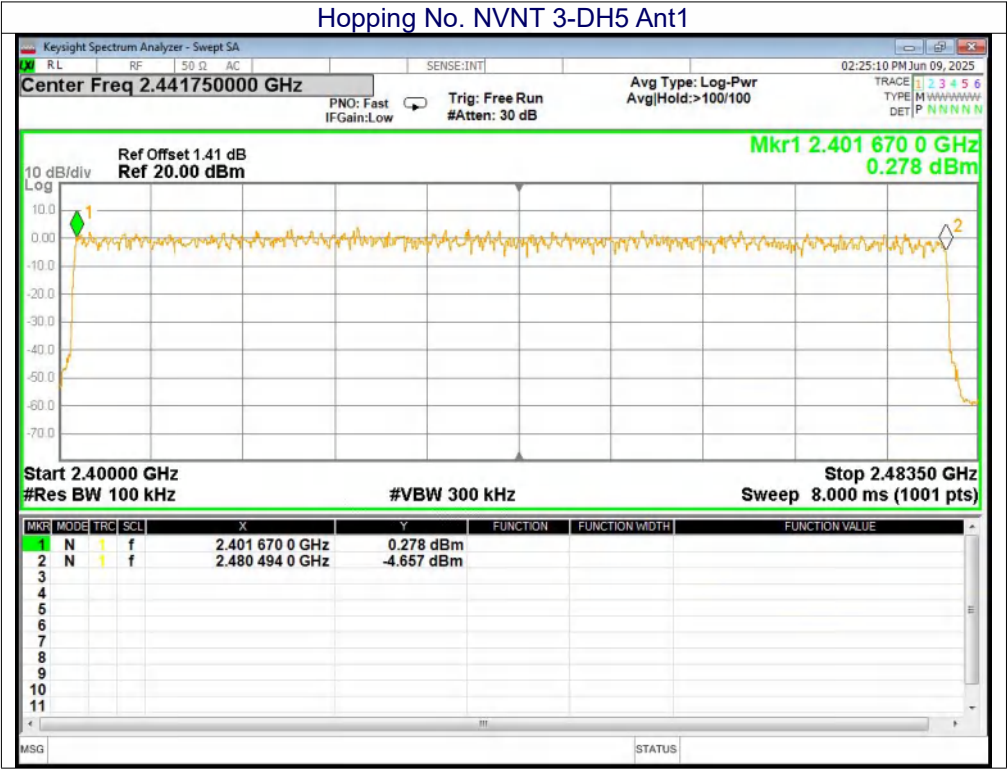

## 12. DWELL TIME

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1)(iii), RSS-247 5.1 |
| Test Method:      | ANSI C63.10:2013                                     |
| Receiver setup:   | RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak          |
| Limit:            | 0.4 Second                                           |

### 12.1 Test Setup



### 12.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 12.3 DEVIATION FROM STANDARD

No deviation.

### 12.4 Test Result

| Condition | Mode  | Frequency (MHz) | Antenna | Pulse Time (ms) | Total Dwell Time (ms) | Burst Count | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|---------|-----------------|-----------------------|-------------|------------------|------------|---------|
| NVNT      | 1-DH1 | 2441            | Ant1    | 0.383           | 122.177               | 319         | 31600            | 400        | Pass    |
| NVNT      | 1-DH3 | 2441            | Ant1    | 1.639           | 270.435               | 165         | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 2.887           | 308.909               | 107         | 31600            | 400        | Pass    |
| NVNT      | 2-DH1 | 2441            | Ant1    | 0.391           | 124.338               | 318         | 31600            | 400        | Pass    |
| NVNT      | 2-DH3 | 2441            | Ant1    | 1.643           | 269.452               | 164         | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 2.892           | 309.444               | 107         | 31600            | 400        | Pass    |
| NVNT      | 3-DH1 | 2441            | Ant1    | 0.392           | 125.048               | 319         | 31600            | 400        | Pass    |
| NVNT      | 3-DH3 | 2441            | Ant1    | 1.642           | 254.51                | 155         | 31600            | 400        | Pass    |
| NVNT      | 3-DH5 | 2441            | Ant1    | 2.893           | 352.946               | 122         | 31600            | 400        | Pass    |


#### Remarks:



The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

(1 / 2 / 3)-DH1: Dwell time (ms) = Pulse Time (ms) \*  $[1600 / (2 * 79)] * 31.6\text{s}$


(1 / 2 / 3)-DH3: Dwell time (ms) = Pulse Time (ms) \*  $[1600 / (4 * 79)] * 31.6\text{s}$

(1 / 2 / 3)-DH5: Dwell time (ms) = Pulse Time (ms) \*  $[1600 / (6 * 79)] * 31.6\text{s}$

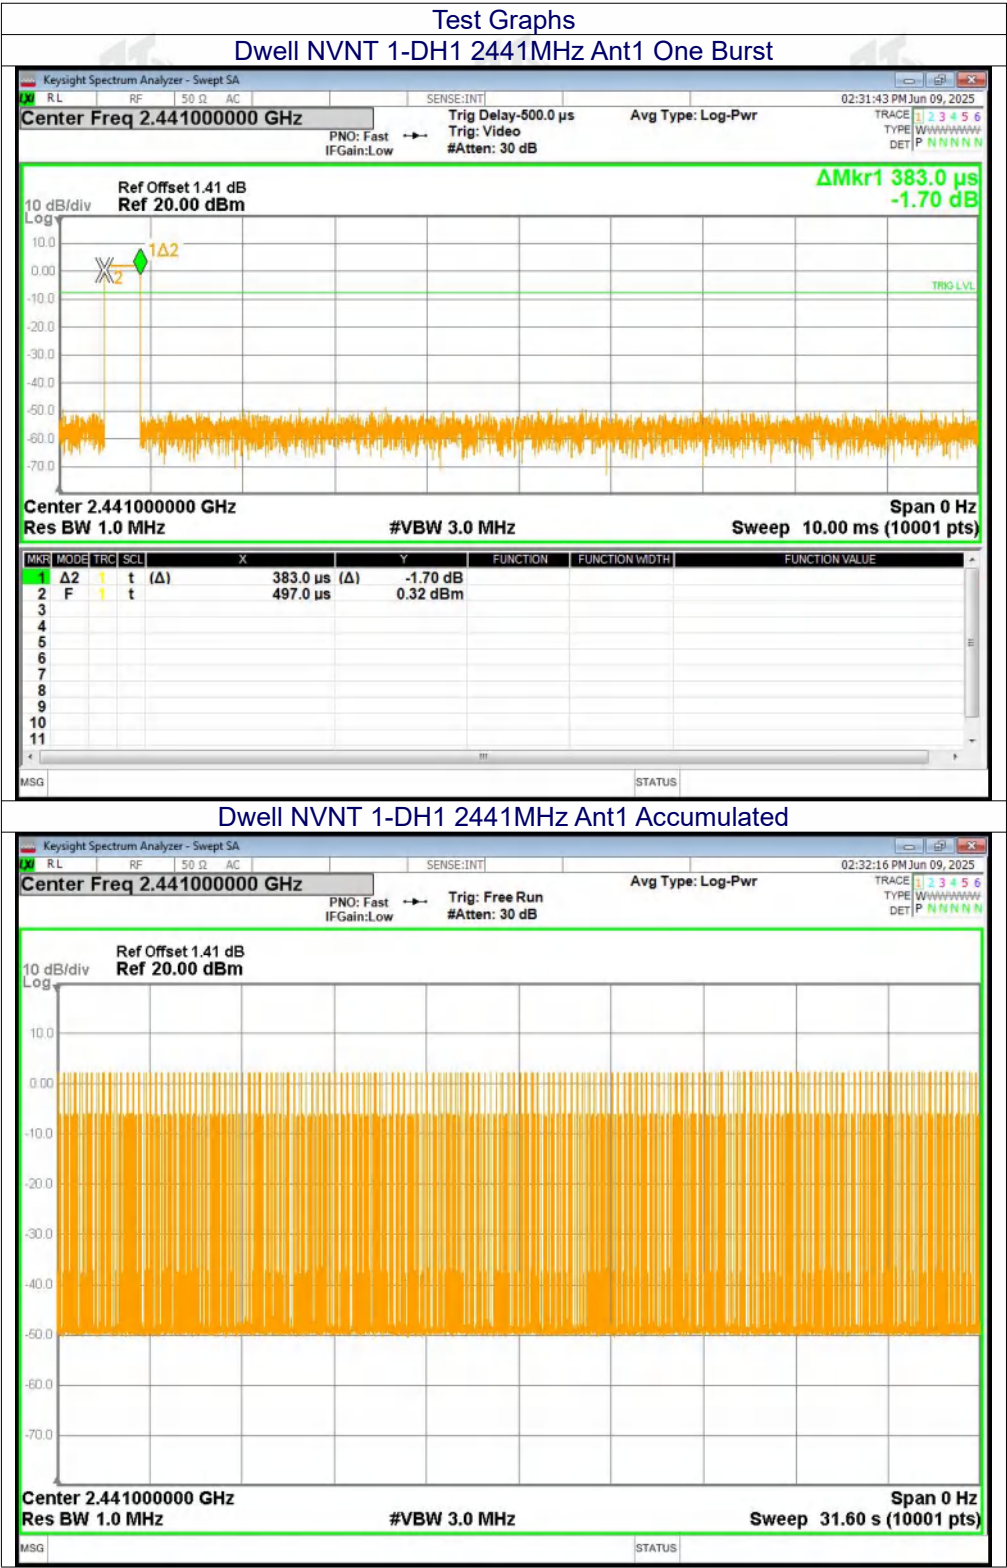


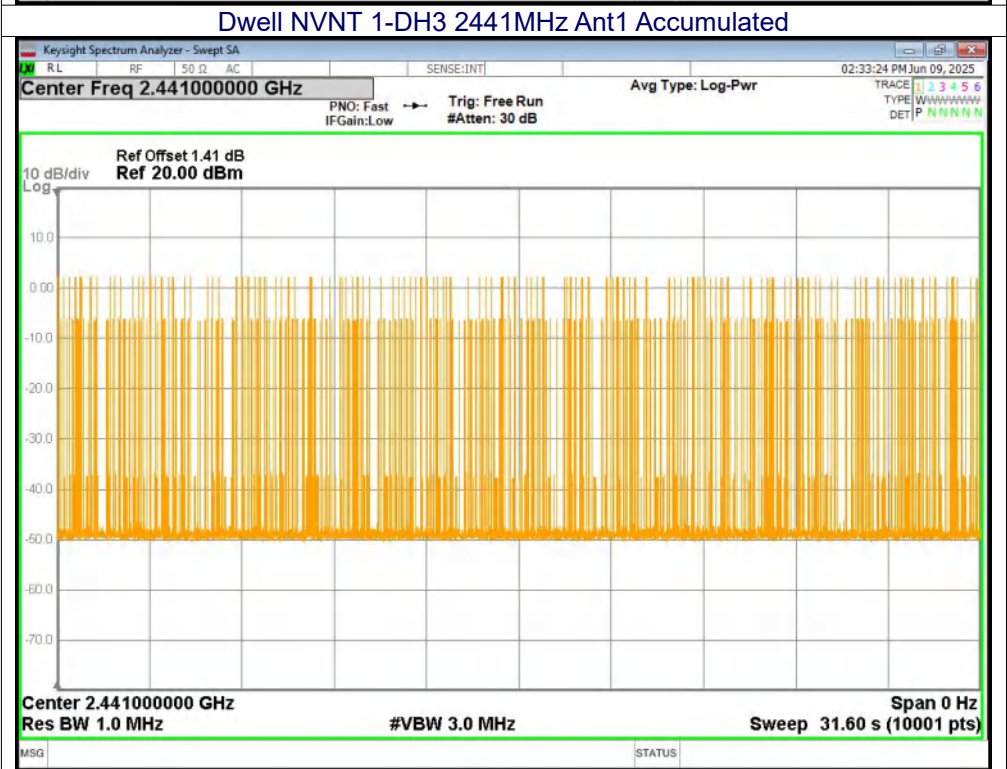
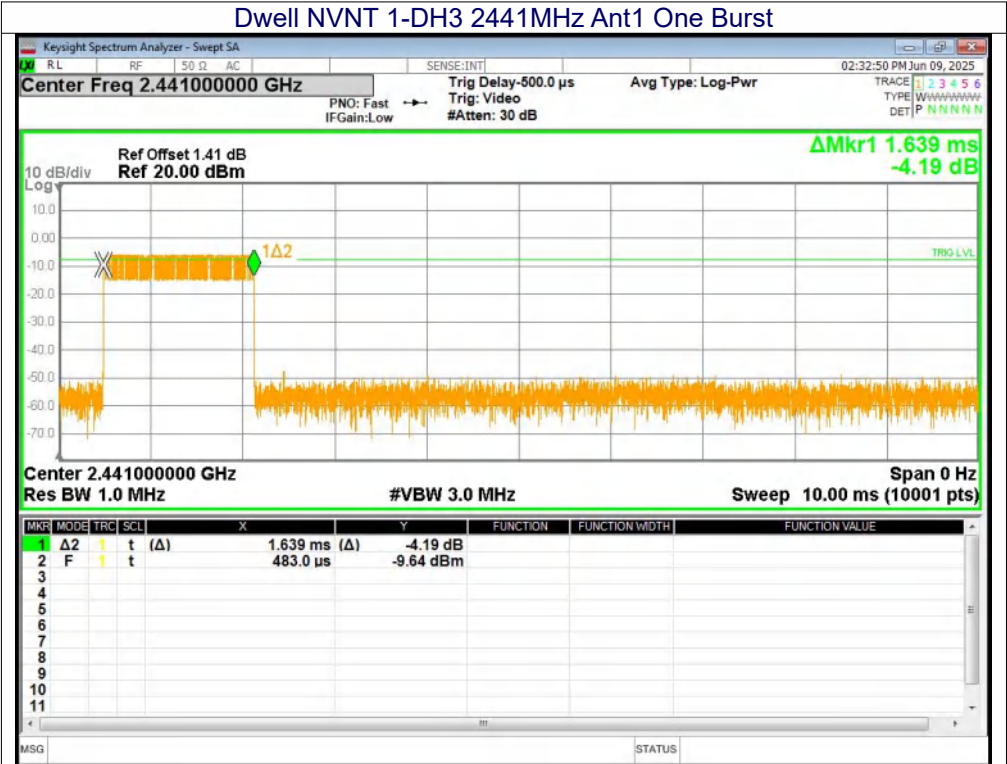




Dwell NVNT 1-DH5 2441MHz Ant1 One Burst


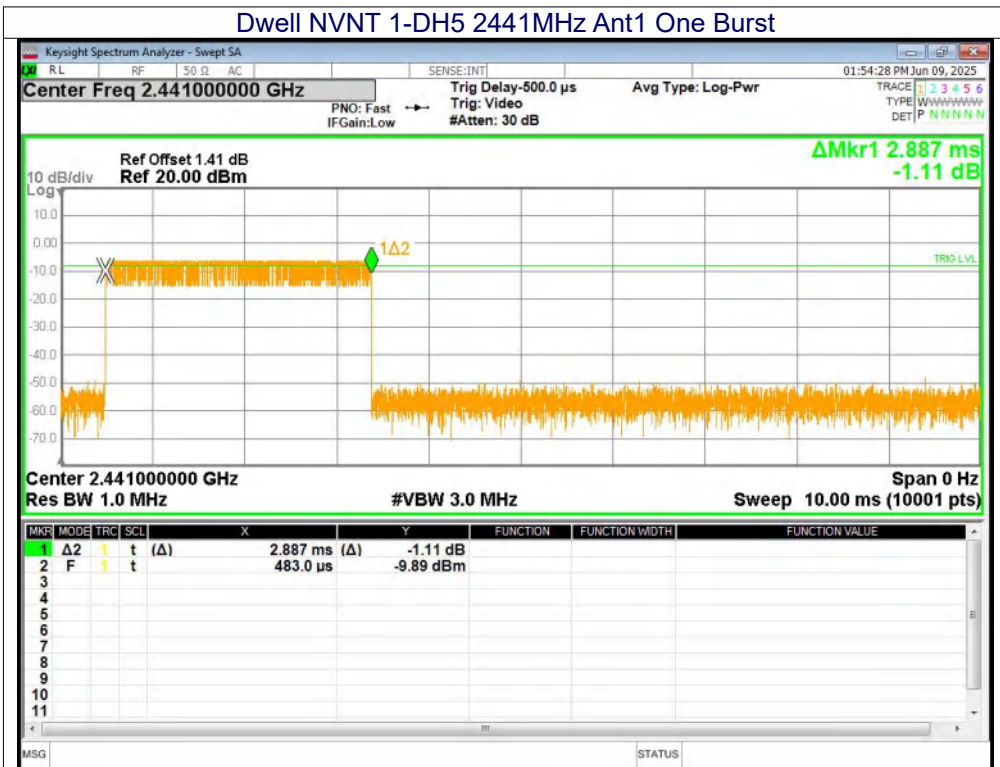


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

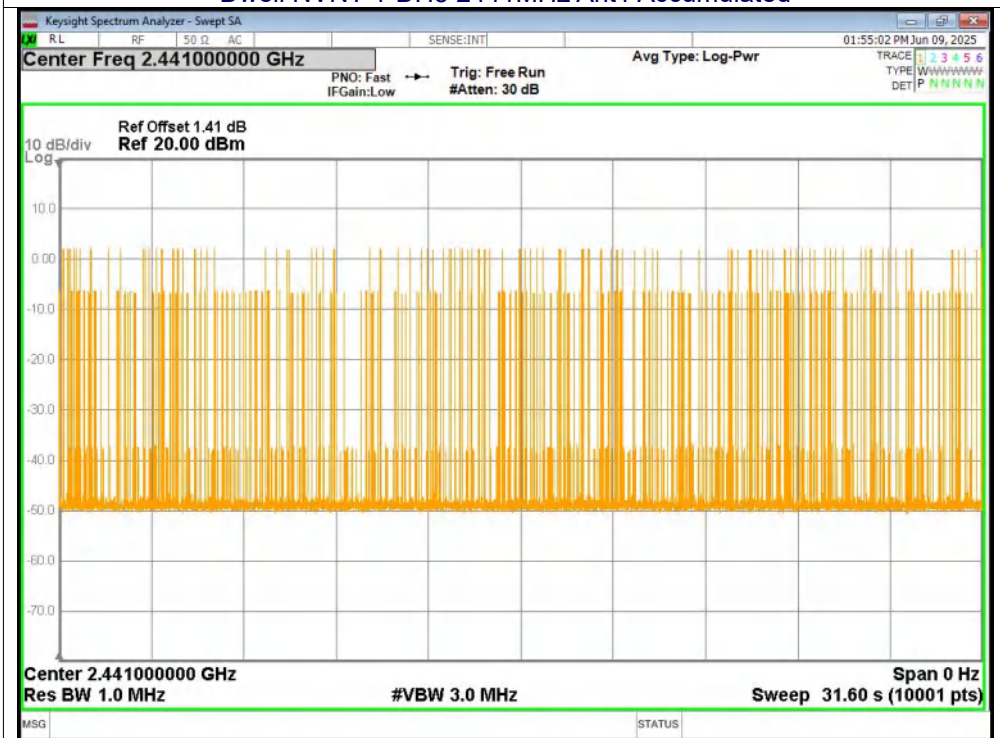


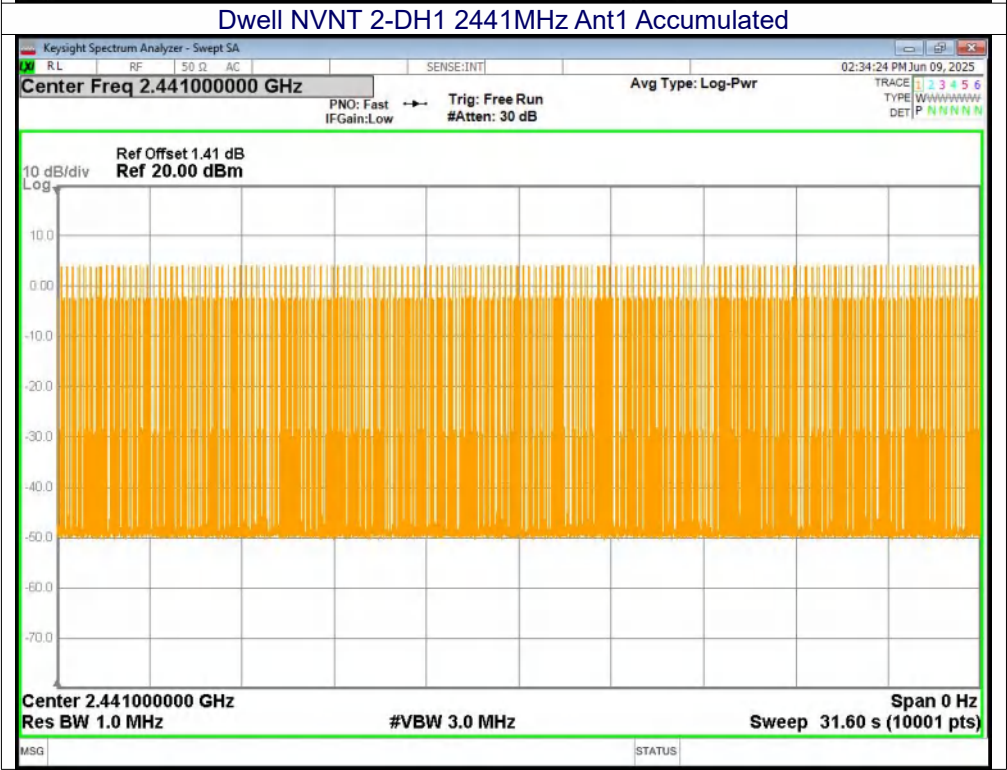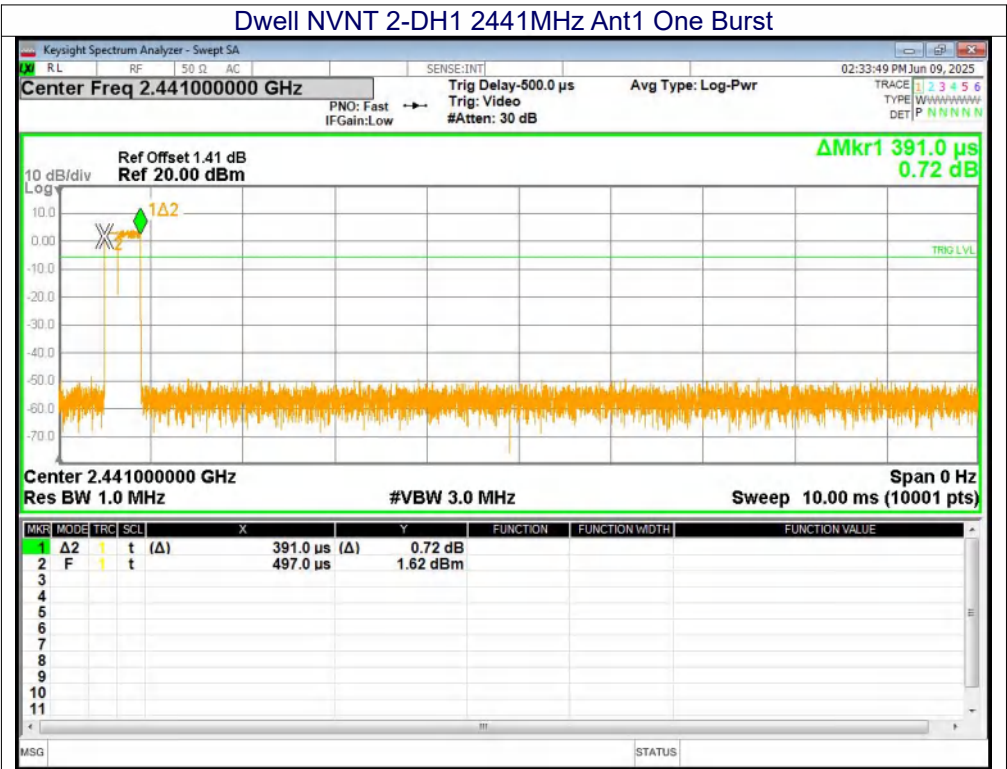

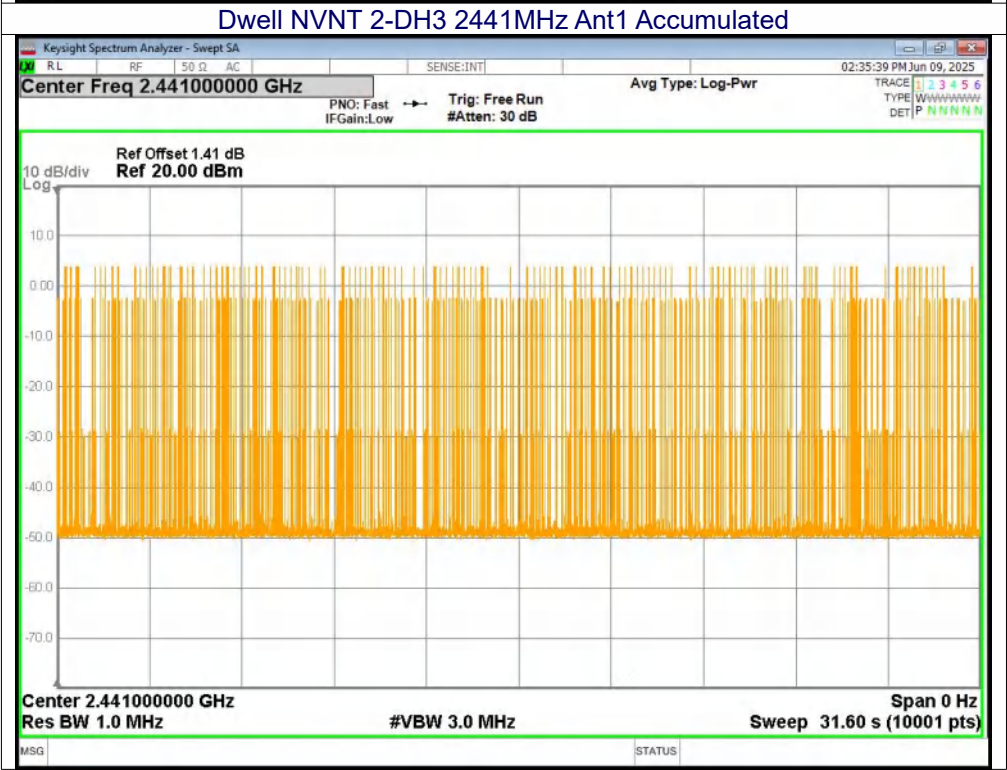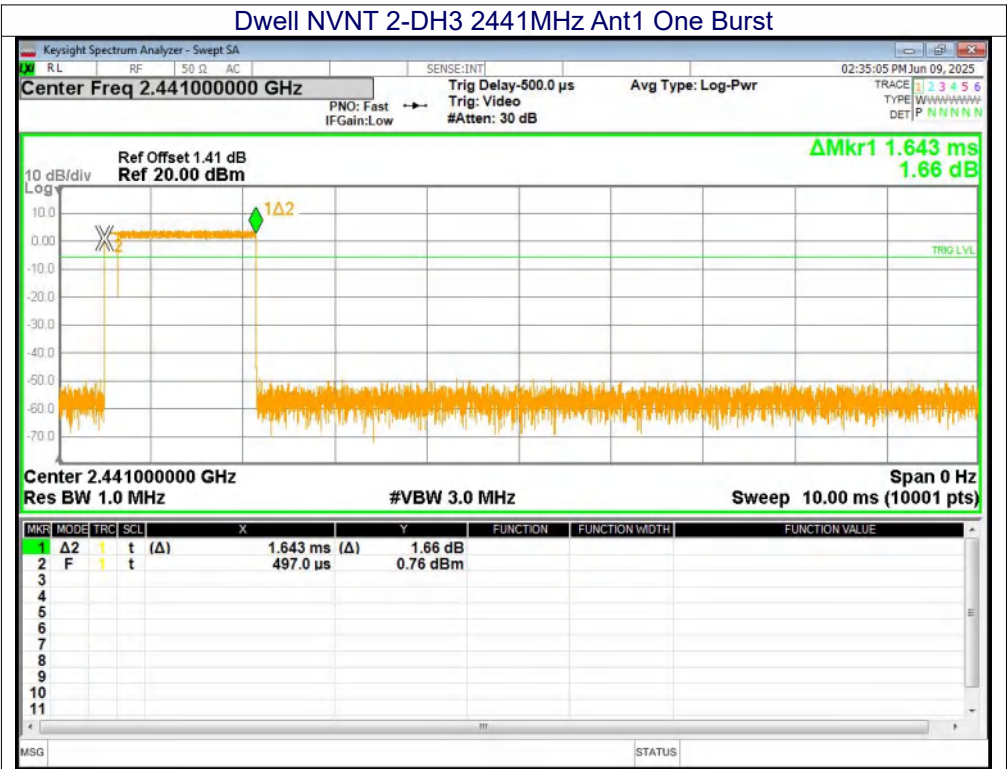


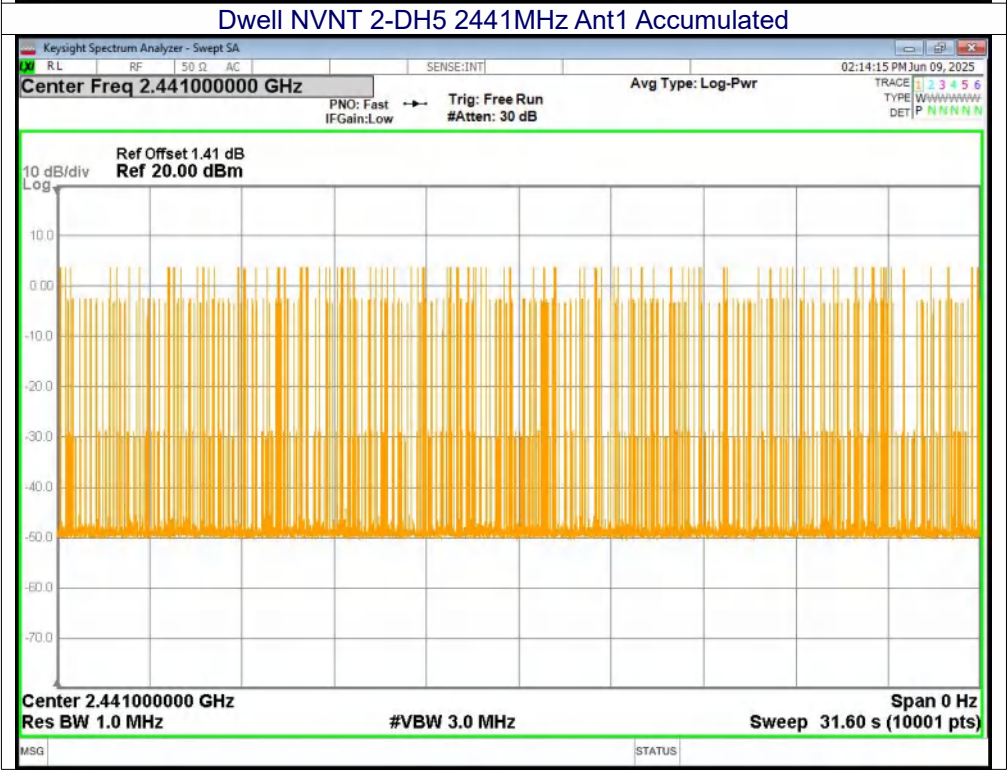
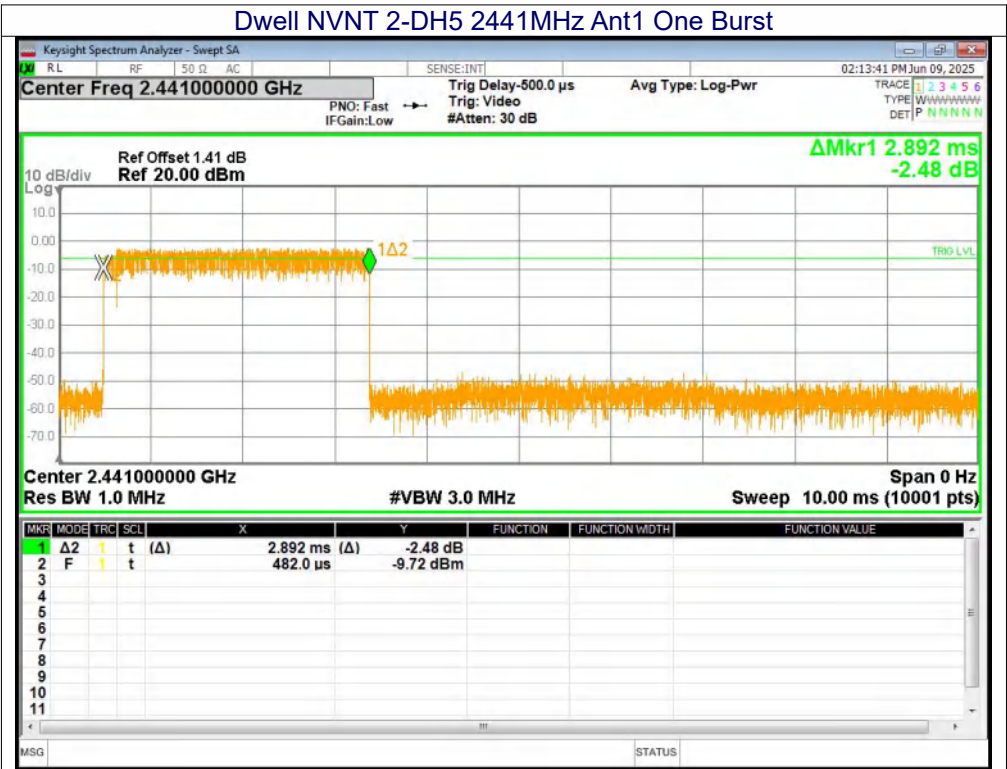




Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

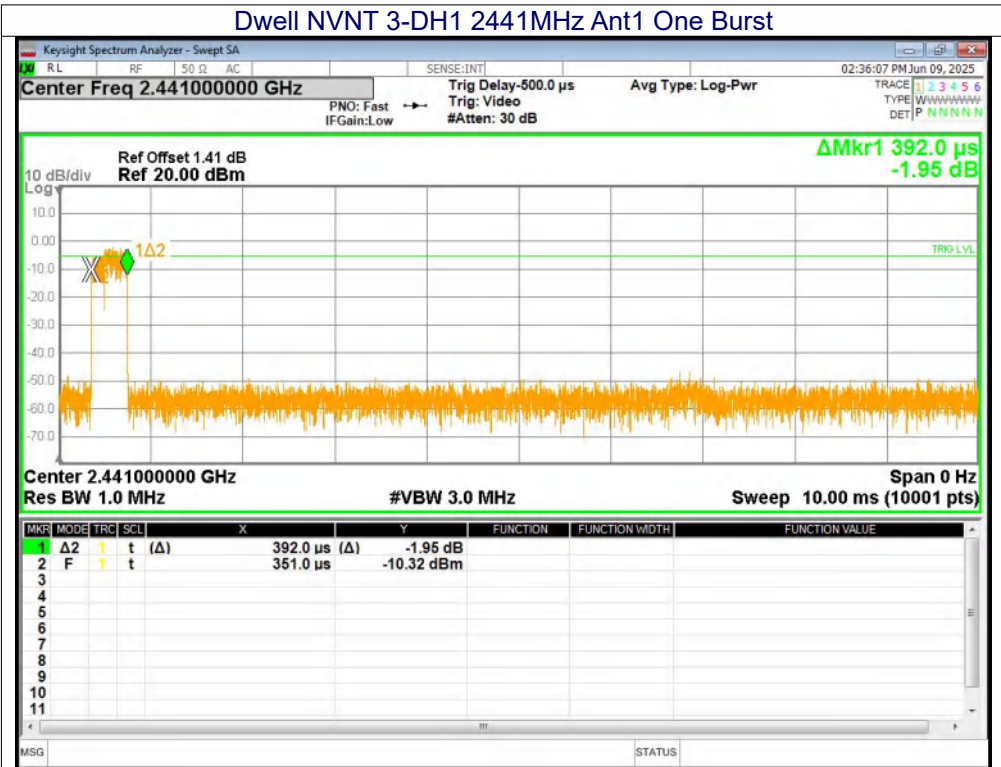

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

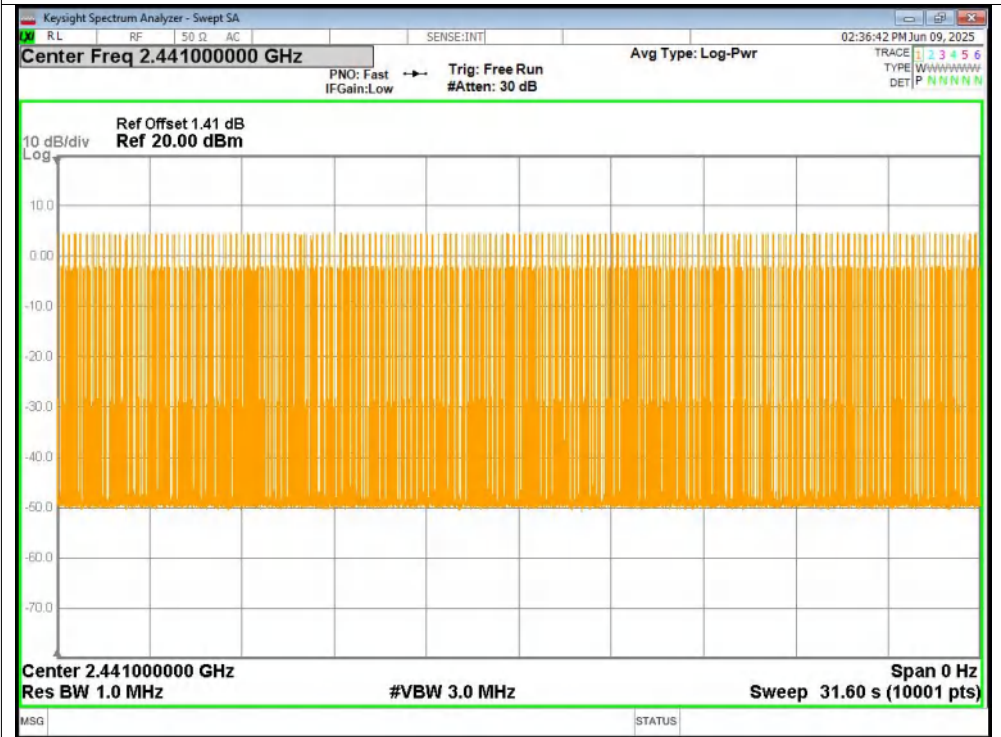

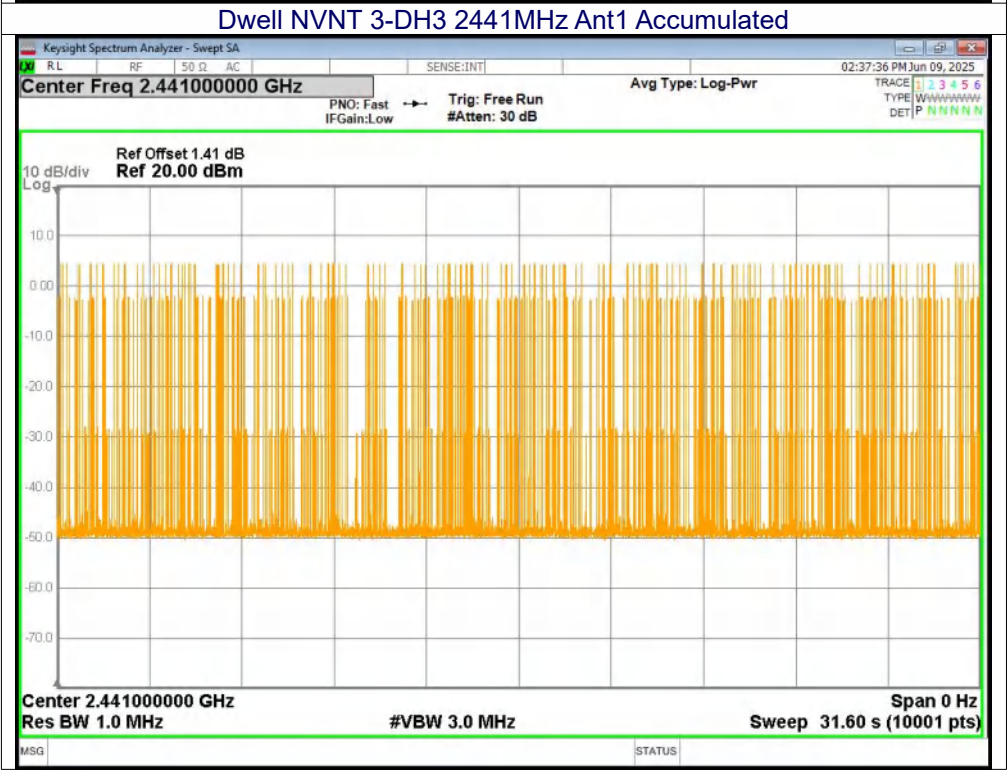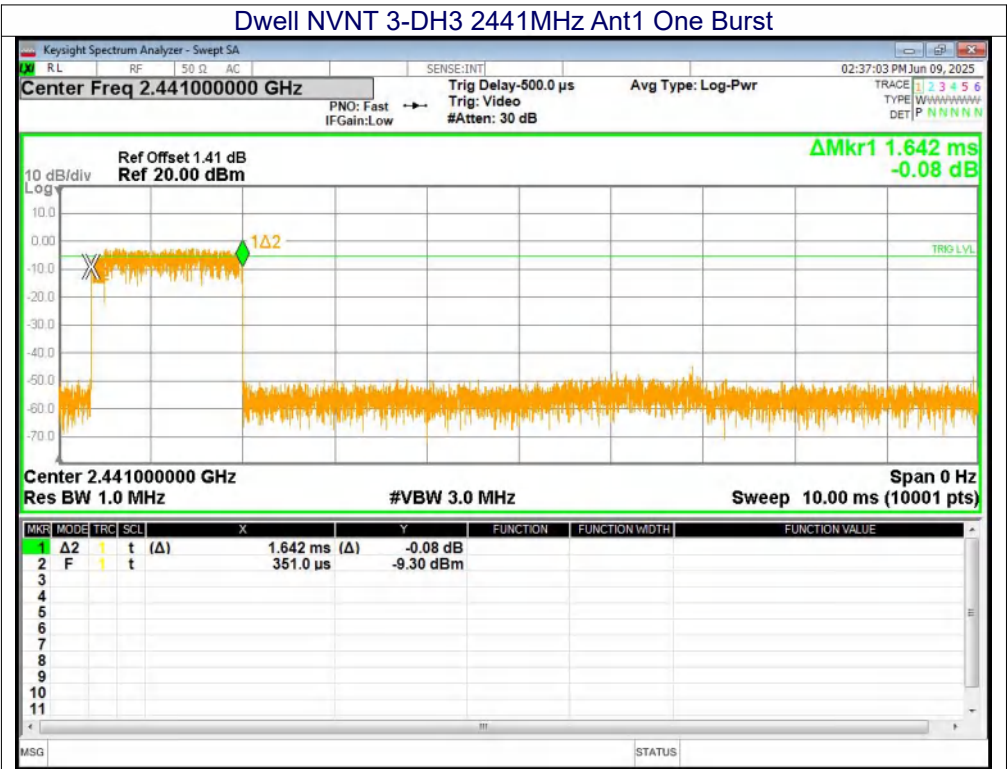

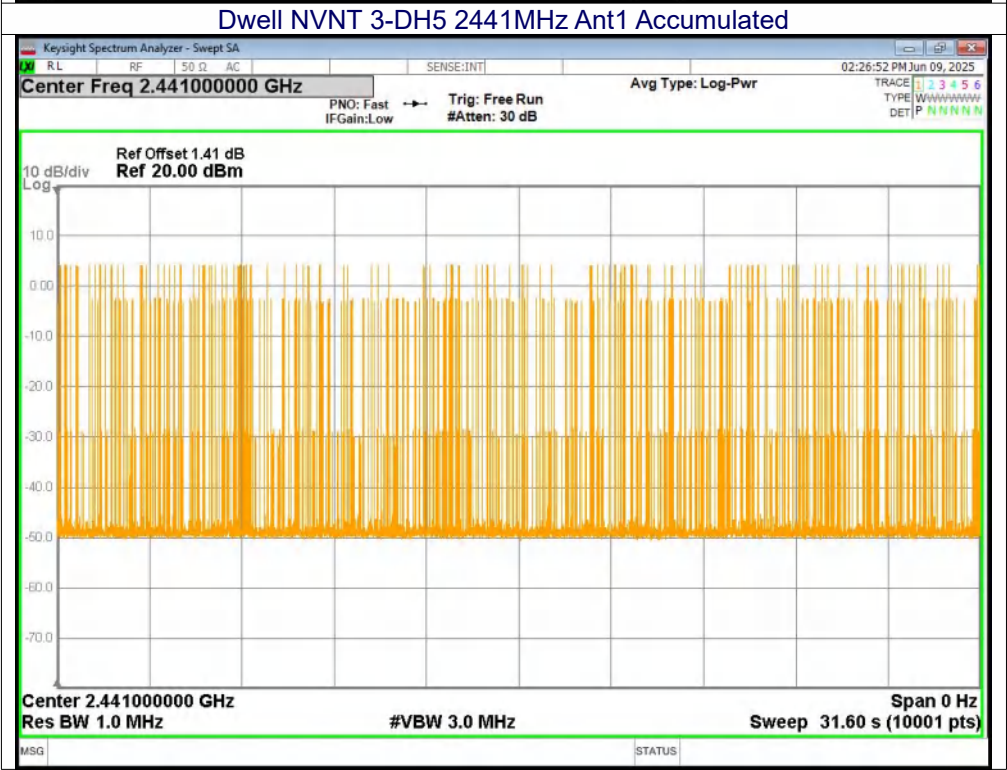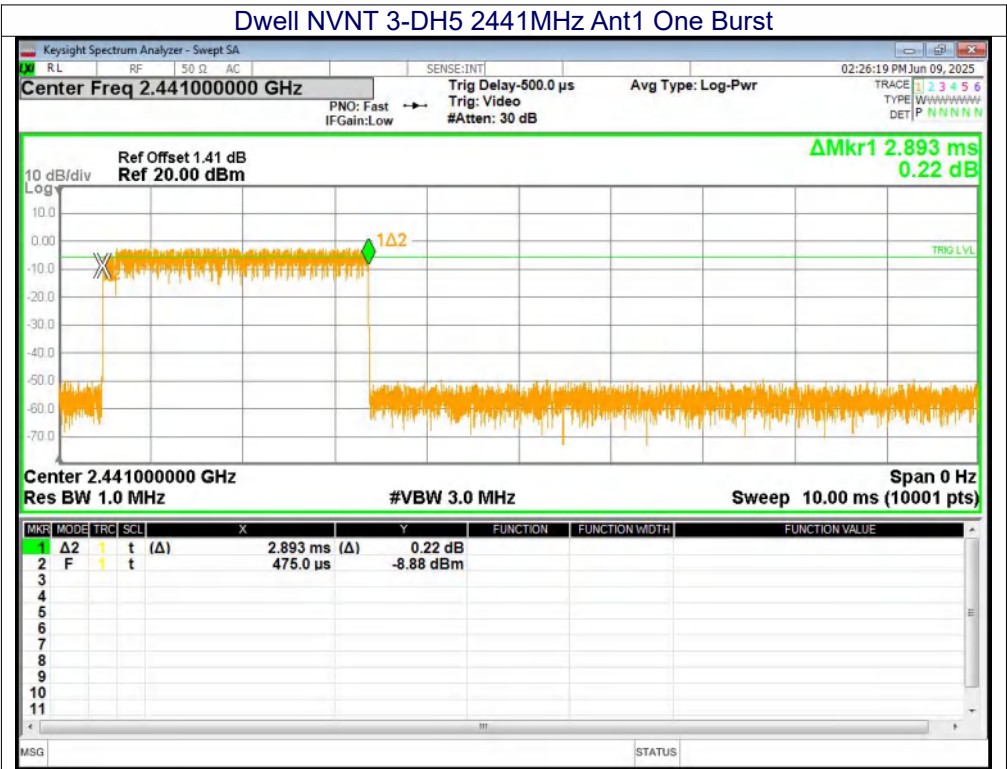

### 13. Antenna Requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | FCC Part15 C Section 15.203 /247(b)(4), RSS-Gen 6.8 |
| <p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:</p> <p>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (EIRP) limits specified in the applicable standard (RSS) for the licence-exempt apparatus. Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9</p> <p>When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.</p> |                                                     |
| EUT Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                     |
| The antenna is PCB antenna, the best case gain of the antennas is -0.93dBi, reference to the appendix II for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                     |



#### 14. Test Setup Photo

Reference to the appendix I for details.

#### 15. EUT Constructional Details

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*