



# Shenzhen HTT Technology Co., Ltd.

Report No.: HTT2025071250F01

Page 1 of 22

## TEST REPORT

### FCC Rules and Regulations Part PART 15.249

Report Reference No.....: HTT2025071250F01

FCC ID.....: 2BQTR-MR001

Compiled by  
( position+printed name+signature.. File administrators

Supervised by  
( position+printed name+signature.. Project Engineer

Approved by  
( position+printed name+signature.. RF Manager

Date of issue..... Aug. 18, 2025

Testing Laboratory Name ..... Shenzhen HTT Technology Co.,Ltd.

Address..... 1F, Building B, Huafeng International Robotics Industrial Park,  
Hangcheng Road,Nanchang Community, Xixiang Street, Bao'an  
District, Shenzhen, Guangdong, China

Applicant's name ..... SHENZHEN DISCOVER TECHNOLOGY CO., LTD

Address..... 4F, 4B, Haomai High-tech Park #387 Huating Rd.  
Dalang St. Longhua District,Shenzhen 518109, China.

Standard ..... FCC Rules and Regulations Part PART 15.249

**Shenzhen HTT Technology Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HTT Technology Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HTT Technology Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description ..... Remote control

Trade Mark ..... N/A

Manufacturer ..... SHENZHEN YOUYANG TECHNOLOGY CO., LTD.

Model/Type reference..... MR001

Listed Models ..... MR001A, MR001S

Modulation ..... GFSK

Frequency..... 2420-2465MHz

Ratings..... DC 3.0V From Battery

Result..... PASS

Heber He

Bruce Zhu

Kevin Yang



## TEST REPORT

Equipment under Test : Remote control

Model /Type : MR001

Listed Models : MR001A, MR001S

**Applicant** : **SHENZHEN DISCOVER TECHNOLOGY CO., LTD**

Address : 4F, 4B, Haomai High-tech Park #387 Huating Rd.  
Dalang St. Longhua District, Shenzhen 518109, China.

**Manufacturer** : SHENZHEN YOUYANG TECHNOLOGY CO., LTD.

Address : 4F, 4B, Haomai High-tech Park #387 Huating Rd.  
Dalang St. Longhua District, Shenzhen 518109, China.

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                                                                |           |
|----------------------------------------------------------------|-----------|
| <b>1. TEST STANDARDS .....</b>                                 | <b>4</b>  |
| <b>2. SUMMARY .....</b>                                        | <b>5</b>  |
| 2.1. General Remarks .....                                     | 5         |
| 2.2. Product Description .....                                 | 5         |
| 2.3. Equipment Under Test .....                                | 5         |
| 2.4. Short description of the Equipment under Test (EUT) ..... | 5         |
| 2.5. EUT operation mode .....                                  | 5         |
| 2.6. Block Diagram of Test Setup .....                         | 6         |
| 2.7. Modifications .....                                       | 6         |
| <b>3. TEST ENVIRONMENT .....</b>                               | <b>7</b>  |
| 3.1. Address of the test laboratory .....                      | 7         |
| 3.2. Test Facility .....                                       | 7         |
| 3.3. Environmental conditions .....                            | 7         |
| 3.4. Summary of measurement results .....                      | 8         |
| 3.5. Statement of the measurement uncertainty .....            | 8         |
| 3.6. Equipments Used during the Test .....                     | 8         |
| <b>4. TEST CONDITIONS AND RESULTS .....</b>                    | <b>10</b> |
| 4.1. AC Power Conducted Emission.....                          | 10        |
| 4.2. Radiated Emission and Band Edges .....                    | 11        |
| 4.3. 20dB Bandwidth Measurement .....                          | 19        |
| 4.4. Antenna Requirement .....                                 | 21        |
| <b>5. TEST SETUP PHOTOS OF THE EUT .....</b>                   | <b>22</b> |
| <b>6. TEST PHOTOS OF THE EUT .....</b>                         | <b>22</b> |

## **1. TEST STANDARDS**

The tests were performed according to following standards:

**FCC Rules Part 15.249:** Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

**ANSI C63.10:2013 :** American National Standard for Testing Unlicensed Wireless Devices

**ANSI C63.4: 2014:** –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz  
Range of 9 kHz to 40GHz

## 2. SUMMARY

### 2.1. General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Jul. 30, 2025 |
|                                |   |               |
| Testing commenced on           | : | Jul. 30, 2025 |
|                                |   |               |
| Testing concluded on           | : | Aug. 18, 2025 |

### 2.2. Product Description

|                     |                                                                      |
|---------------------|----------------------------------------------------------------------|
| Name of EUT         | Remote control                                                       |
| Model Number        | MR001                                                                |
| List Model:         | MR001A, MR001S                                                       |
| Power Rating        | DC 3.0V From Battery                                                 |
| Sample ID:          | HTT2025071250-1#(Engineer sample)<br>HTT2025071250-2#(Normal sample) |
| Operation frequency | 2420-2465MHz                                                         |
| Modulation          | GFSK                                                                 |
| Antenna Type        | PCB antenna                                                          |
| Antenna Gain        | 1.50 dBi                                                             |

### 2.3. Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 3.0V From Battery

### 2.4. Short description of the Equipment under Test (EUT)

This is a Remote control

For more details, refer to the user's manual of the EUT.

### 2.5. EUT operation mode


The Applicant use Key to control the EUT for staying in continuous transmitting and receiving mode for testing .There is 3 channels provided to the EUT. Channel Low,Mid and High was selected to test.

| Channel | Frequency(MHz) |
|---------|----------------|
| 1       | 2420           |
| 2       | 2440           |
| 3       | 2465           |

Test frequency:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low     | 2420            |
| Mid     | 2440            |
| High    | 2465            |

## 2.6. Block Diagram of Test Setup



## 2.7. Modifications

No modifications were implemented to meet testing criteria.

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

**Shenzhen HTT Technology Co.,Ltd.**

1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road,Nanchang Community,  
Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 779513 Designation Number: CN1319**

Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**A2LA-Lab Cert. No.: 6435.01**

Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### **3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 23 ° C       |
|                       |              |
| Humidity:             | 48 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

AC Main Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

### 3.4. Summary of measurement results

| FCC PART 15.249    |                               |      |
|--------------------|-------------------------------|------|
| FCC Part 15.249(a) | Field Strength of Fundamental | PASS |
| FCC Part 15.209    | Spurious Emission             | PASS |
| FCC Part 15.209    | Band edge                     | PASS |
| FCC Part 15.215(c) | 20dB bandwidth                | PASS |
| FCC Part 15.207    | Conducted Emission            | N/A  |
| FCC Part 15.203    | Antenna Requirement           | PASS |

### 3.5. Statement of the measurement uncertainty

| Test Item             | Frequency Range | Measurement Uncertainty | Notes |
|-----------------------|-----------------|-------------------------|-------|
| Radiated Emission     | 9KHz~30MHz      | 3.12 dB                 | (1)   |
| Radiated Emission     | 30~1000MHz      | 4.37 dB                 | (1)   |
| Radiated Emission     | 1~18GHz         | 5.40 dB                 | (1)   |
| Radiated Emission     | 18-40GHz        | 5.45 dB                 | (1)   |
| Conducted Disturbance | 0.15~30MHz      | 2.68 dB                 | (1)   |
| Spectrum bandwidth    | /               | 1.2%                    | (1)   |
| Output Peak power     | 30MHz~18GHz     | 0.57dB                  | (1)   |
| Time                  | /               | ± 10%                   | (1)   |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

### 3.6. Equipments Used during the Test

| Item | Test Equipment                  | Manufacturer                        | Model No.         | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
|------|---------------------------------|-------------------------------------|-------------------|---------------|---------------------|-------------------------|
| 1    | 3m Semi- Anechoic Chamber       | Shenzhen C.R.T technology co., LTD  | 9*6*6             | HTT-E028      | Aug. 10 2024        | Aug. 09 2027            |
| 2    | Control Room                    | Shenzhen C.R.T technology co., LTD  | 4.8*3.5*3.0       | HTT-E030      | Aug. 10 2024        | Aug. 09 2027            |
| 3    | EMI Test Receiver               | Rohde&Schwar                        | ESCI7             | HTT-E022      | Apr. 22 2025        | Apr. 21 2026            |
| 4    | Spectrum Analyzer               | Rohde&Schwar                        | FSP               | HTT-E037      | Apr. 22 2025        | Apr. 21 2026            |
| 5    | Coaxial Cable                   | ZDecl                               | ZT26-NJ-NJ-0.6M   | HTT-E018      | Apr. 22 2025        | Apr. 21 2026            |
| 6    | Coaxial Cable                   | ZDecl                               | ZT26-NJ-SMAJ-2M   | HTT-E019      | Apr. 22 2025        | Apr. 21 2026            |
| 7    | Coaxial Cable                   | ZDecl                               | ZT26-NJ-SMAJ-0.6M | HTT-E020      | Apr. 22 2025        | Apr. 21 2026            |
| 8    | Coaxial Cable                   | ZDecl                               | ZT26-NJ-SMAJ-8.5M | HTT-E021      | Apr. 22 2025        | Apr. 21 2026            |
| 9    | Composite logarithmic antenna   | Schwarzbeck                         | VULB 9168         | HTT-E017      | Apr. 19 2025        | Apr. 18 2026            |
| 10   | Horn Antenna                    | Schwarzbeck                         | BBHA9120D         | HTT-E016      | Apr. 19 2025        | Apr. 18 2026            |
| 11   | Loop Antenna                    | Zhinan                              | ZN30900C          | HTT-E039      | Apr. 19 2025        | Apr. 18 2026            |
| 12   | Horn Antenna                    | Beijing Hangwei Dayang              | OBH100400         | HTT-E040      | Apr. 19 2025        | Apr. 18 2026            |
| 13   | low frequency Amplifier         | Sonoma Instrument                   | 310               | HTT-E015      | Apr. 22 2025        | Apr. 21 2026            |
| 14   | high-frequency Amplifier        | HP                                  | 8449B             | HTT-E014      | Apr. 22 2025        | Apr. 21 2026            |
| 15   | Variable frequency power supply | Shenzhen Anbiao Instrument Co., Ltd | ANB-10VA          | HTT-082       | Apr. 22 2025        | Apr. 21 2026            |
| 16   | EMI Test Receiver               | Rohde & Schwarz                     | ESCI3             | HTT-E043      | Apr. 22 2025        | Apr. 21 2026            |




|    |                                  |                                     |                    |          |              |              |
|----|----------------------------------|-------------------------------------|--------------------|----------|--------------|--------------|
| 17 | Artificial Mains                 | Rohde & Schwarz                     | ESH3-Z5            | HTT-E006 | Apr. 22 2025 | Apr. 21 2026 |
| 18 | Artificial Mains                 | Rohde & Schwarz                     | ENV-216            | HTT-E038 | Apr. 22 2025 | Apr. 21 2026 |
| 19 | Cable Line                       | Robinson                            | Z302S-NJ-BNCJ-1.5M | HTT-E001 | Apr. 22 2025 | Apr. 21 2026 |
| 20 | Attenuator                       | Rohde & Schwarz                     | ESH3-Z2            | HTT-E045 | Sep. 20 2024 | Sep. 19 2025 |
| 21 | Variable frequency power supply  | Shenzhen Yanghong Electric Co., Ltd | YF-650 (5KVA)      | HTT-E032 | Apr. 22 2025 | Apr. 21 2026 |
| 22 | Control Room                     | Shenzhen C.R.T technology co., LTD  | 8*4*3.5            | HTT-E029 | Aug. 10 2024 | Aug. 09 2027 |
| 23 | DC power supply                  | Agilent                             | E3632A             | HTT-E023 | Apr. 22 2025 | Apr. 21 2026 |
| 24 | EMI Test Receiver                | Agilent                             | N9020A             | HTT-E024 | Apr. 22 2025 | Apr. 21 2026 |
| 25 | Analog signal generator          | Agilent                             | N5181A             | HTT-E025 | Apr. 22 2025 | Apr. 21 2026 |
| 26 | Vector signal generator          | Agilent                             | N5182A             | HTT-E026 | Apr. 22 2025 | Apr. 21 2026 |
| 27 | RF Switch box                    | Keysight                            | Switchbox          | HTT-E047 | Sep. 20 2024 | Sep. 19 2025 |
| 28 | Temperature and humidity meter   | Shenzhen Anbiao Instrument Co., Ltd | TH10R              | HTT-074  | Apr. 21 2025 | Apr. 20 2026 |
| 29 | Radiated Emission Test Software  | Farad                               | EZ-EMC             | N/A      | N/A          | N/A          |
| 30 | Conducted Emission Test Software | Farad                               | EZ-EMC             | N/A      | N/A          | N/A          |
| 31 | RF Test Software                 | panshanrf                           | TST                | N/A      | N/A          | N/A          |

Note: The Cal.Interval was one year.

## 4. TEST CONDITIONS AND RESULTS

### 4.1. AC Power Conducted Emission

#### TEST CONFIGURATION

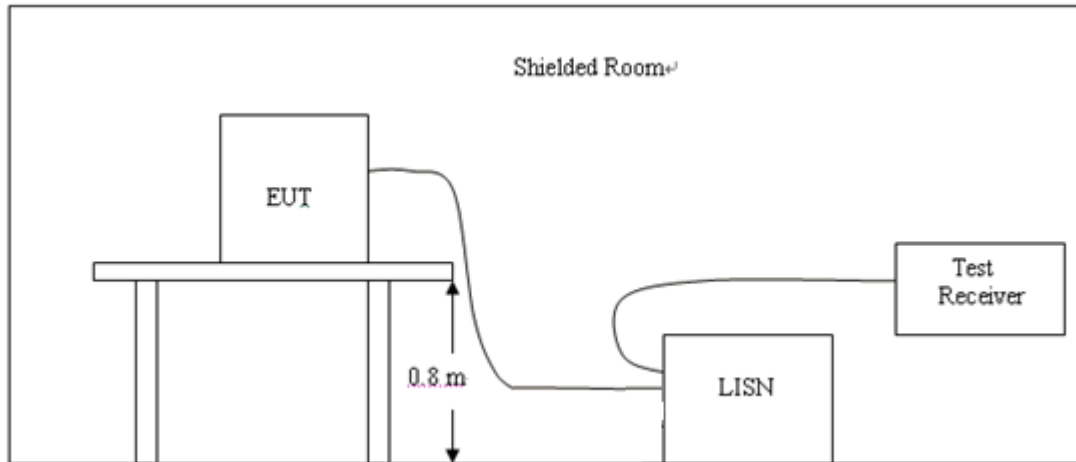

#### TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.


#### TEST RESULTS

N/A


## 4.2. Radiated Emission and Band Edges

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

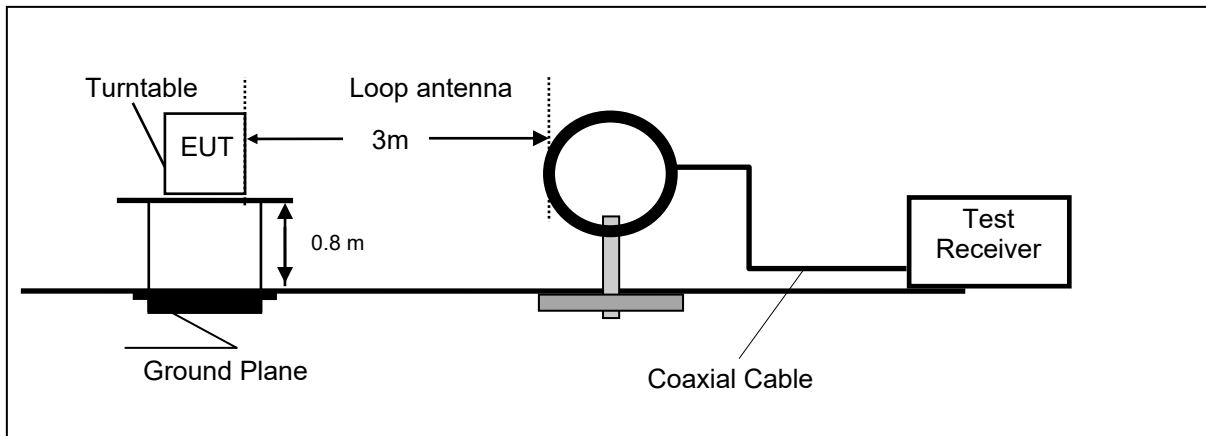


Frequency range 30MHz – 1000MHz

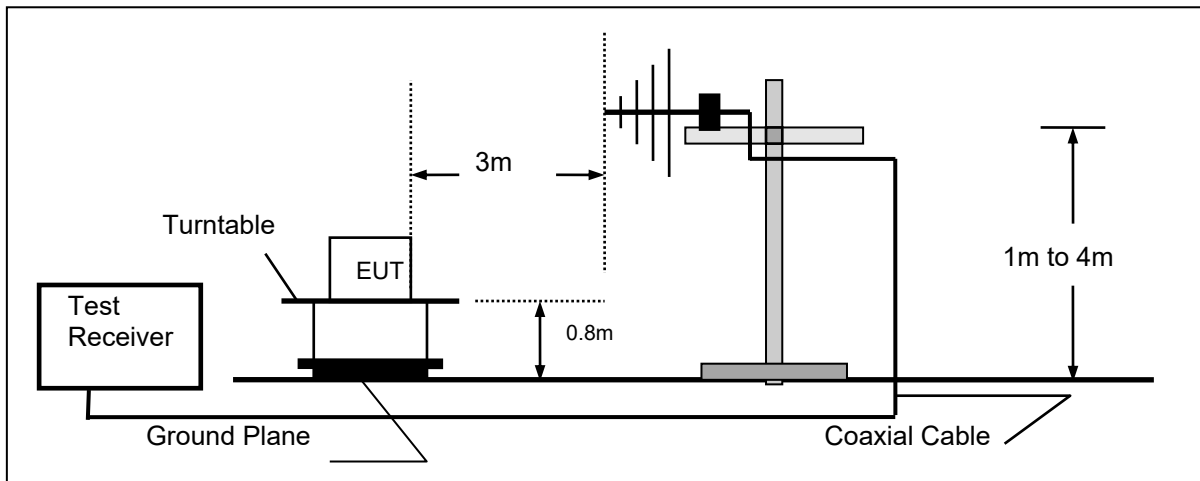

Frequency range above 1GHz-25GHz

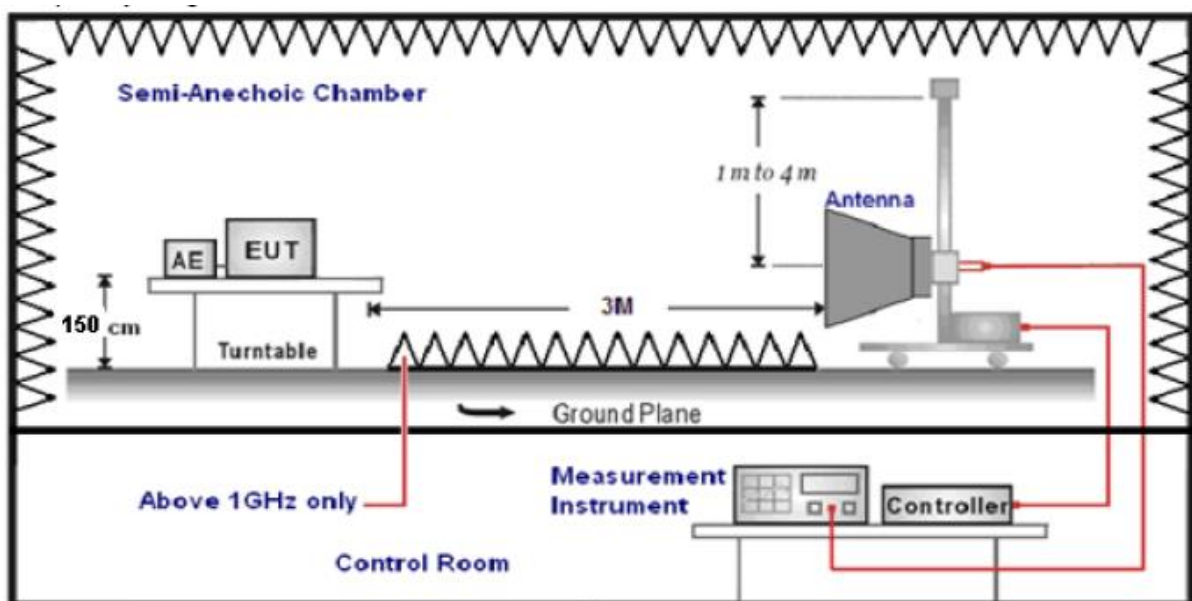

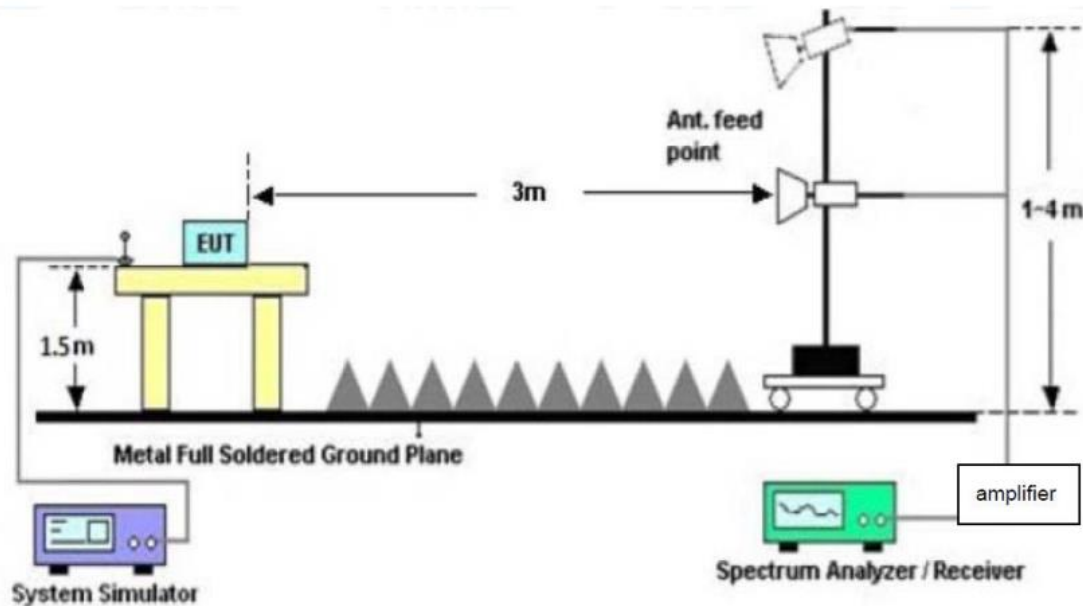

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 26MHz and maximum operation frequency was 1910MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz,Sweep time=Auto                                                                        | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz,Sweep time=Auto                                                                       | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz,Sweep time=Auto                                                                    | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

$$Transd=AF +CL-AG$$

### RADIATION LIMIT

According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dBμV/m (50mV/m):

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |


### **TEST RESULTS**

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. Both modes of GFSK were tested at Low, Middle, and High channel and recorded worst mode at GFSK
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.


For 30MHz-1GHz

Horizontal

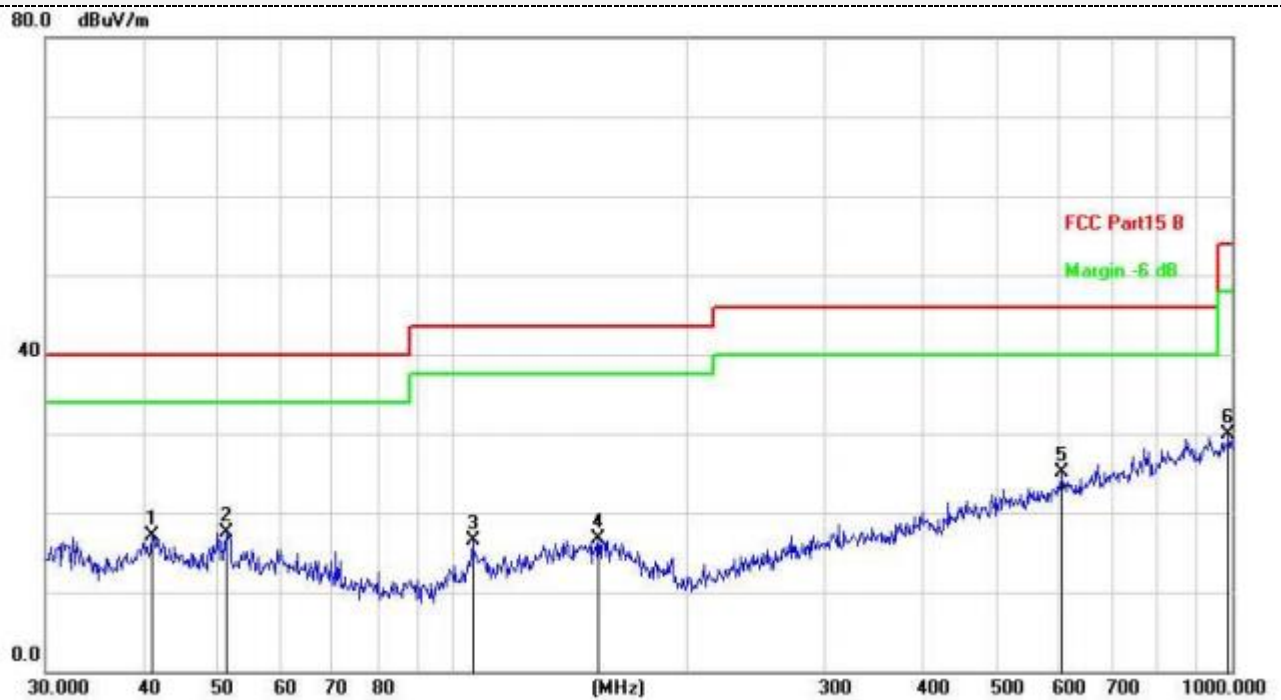

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   |
|-----|-----|----------|---------|---------|----------|-------|--------|
|     |     | MHz      | Level   | Factor  | ment     |       |        |
|     |     |          | dBuV    | dB/m    | dBuV/m   | dB/m  | dB     |
| 1   |     | 41.1320  | 28.50   | -11.46  | 17.04    | 40.00 | -22.96 |
| 2   |     | 51.3005  | 28.87   | -11.30  | 17.57    | 40.00 | -22.43 |
| 3   |     | 106.0126 | 30.81   | -14.27  | 16.54    | 43.50 | -26.96 |
| 4   |     | 153.7385 | 26.72   | -9.94   | 16.78    | 43.50 | -26.72 |
| 5   | *   | 603.5392 | 28.47   | -3.43   | 25.04    | 46.00 | -20.96 |
| 6   |     | 989.5355 | 27.33   | 2.58    | 29.91    | 54.00 | -24.09 |

Final Level = Receiver Read level + Correct Factor

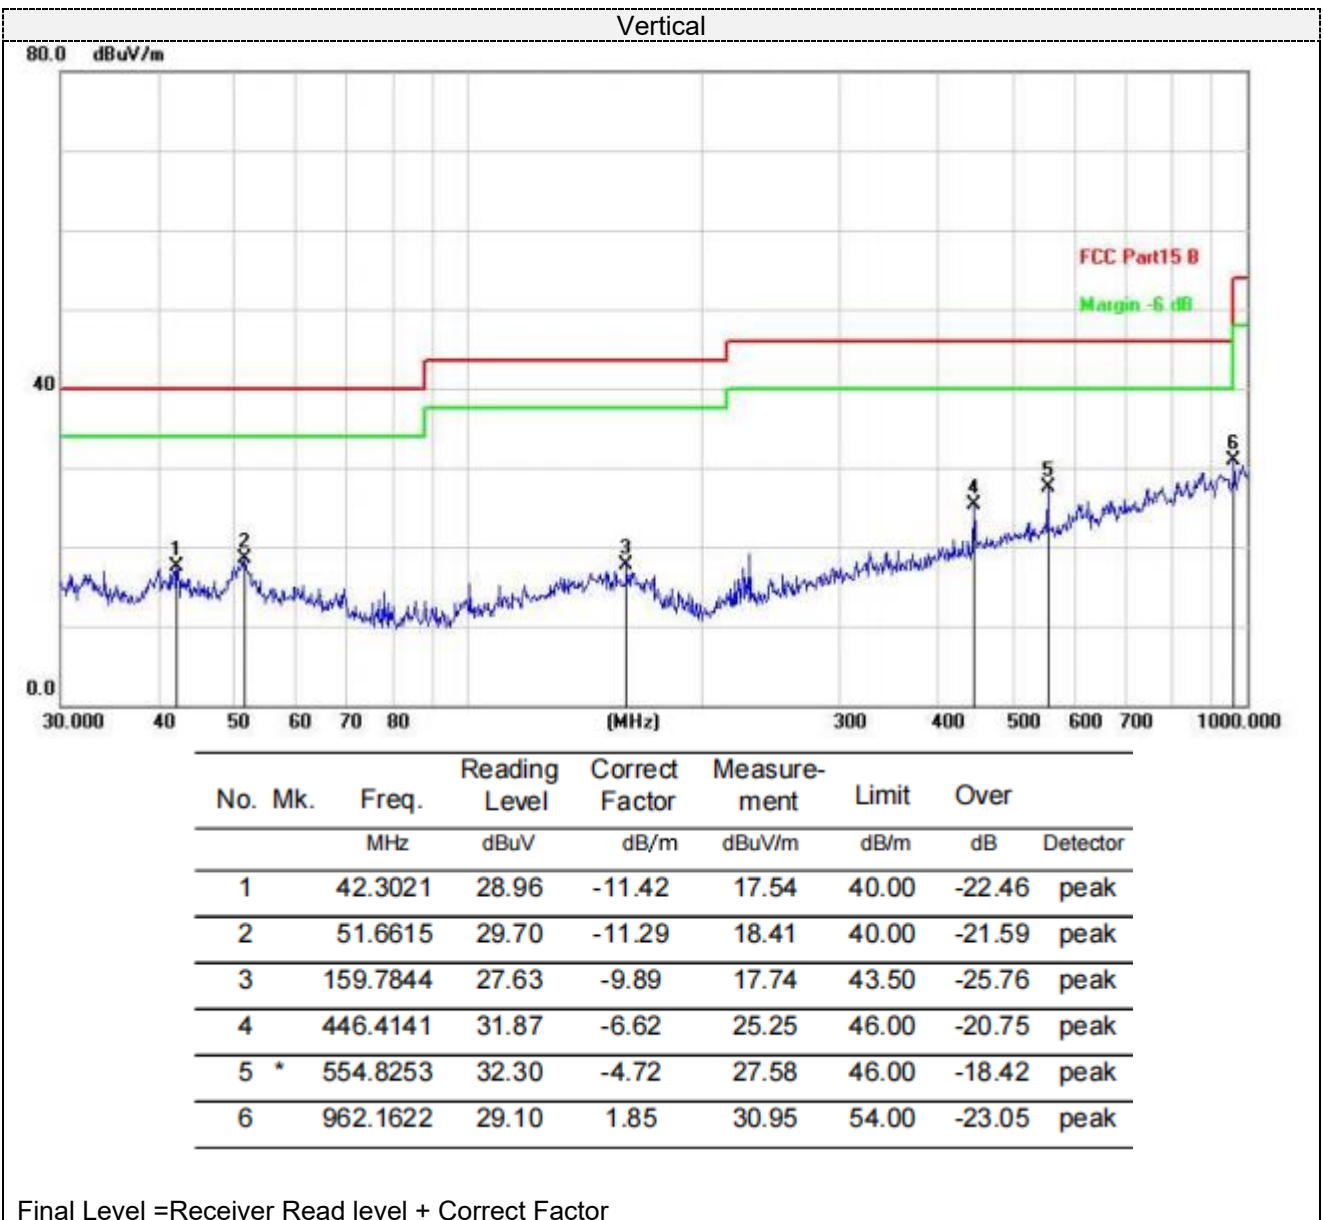

For 1GHz to 25GHz

| Frequency(MHz): |                         |    | 2420           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2420.00         | 88.91                   | PK | 114            | 25.09       | 89.06            | 27.45                 | 5.05              | 32.65              | -0.15                    |
| 2420.00         | 75.70                   | AV | 94             | 18.30       | 75.85            | 27.45                 | 5.05              | 32.65              | -0.15                    |
| 4840.00         | 60.60                   | PK | 74             | 13.40       | 54.65            | 31.1                  | 6.57              | 31.72              | 5.95                     |
| 4840.00         | 45.10                   | AV | 54             | 8.90        | 39.15            | 31.1                  | 6.57              | 31.72              | 5.95                     |
| 7260.00         | 54.16                   | PK | 74             | 19.84       | 41.35            | 36.1                  | 8.2               | 31.49              | 12.81                    |
| 7260.00         | 43.17                   | AV | 54             | 10.83       | 30.36            | 36.1                  | 8.2               | 31.49              | 12.81                    |

| Frequency(MHz): |                         |    | 2420           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2420.00         | 87.42                   | PK | 114            | 26.58       | 87.57            | 27.45                 | 5.05              | 32.65              | -0.15                    |
| 2420.00         | 76.42                   | AV | 94             | 17.58       | 76.57            | 27.45                 | 5.05              | 32.65              | -0.15                    |
| 4840.00         | 59.44                   | PK | 74             | 14.56       | 53.49            | 31.1                  | 6.57              | 31.72              | 5.95                     |
| 4840.00         | 44.67                   | AV | 54             | 9.33        | 38.72            | 31.1                  | 6.57              | 31.72              | 5.95                     |
| 7260.00         | 53.88                   | PK | 74             | 20.12       | 41.07            | 36.1                  | 8.2               | 31.49              | 12.81                    |
| 7260.00         | 44.77                   | AV | 54             | 9.23        | 31.96            | 36.1                  | 8.2               | 31.49              | 12.81                    |

| Frequency(MHz): |                         |    | 2440           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2440.00         | 87.49                   | PK | 114            | 26.51       | 87.44            | 27.55                 | 5.1               | 32.6               | 0.05                     |
| 2440.00         | 76.65                   | AV | 94             | 17.35       | 76.60            | 27.55                 | 5.1               | 32.6               | 0.05                     |
| 4880.00         | 60.47                   | PK | 74             | 13.53       | 54.31            | 31.2                  | 6.61              | 31.65              | 6.16                     |
| 4880.00         | 44.21                   | AV | 54             | 9.79        | 38.05            | 31.2                  | 6.61              | 31.65              | 6.16                     |
| 7320.00         | 53.18                   | PK | 74             | 20.82       | 40.23            | 36.2                  | 8.23              | 31.48              | 12.95                    |
| 7320.00         | 44.99                   | AV | 54             | 9.01        | 32.04            | 36.2                  | 8.23              | 31.48              | 12.95                    |

| Frequency(MHz): |                         |    | 2440           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2440.00         | 88.91                   | PK | 114            | 25.09       | 88.86            | 27.55                 | 5.1               | 32.6               | 0.05                     |
| 2440.00         | 77.67                   | AV | 94             | 16.33       | 77.62            | 27.55                 | 5.1               | 32.6               | 0.05                     |
| 4880.00         | 62.23                   | PK | 74             | 11.77       | 56.07            | 31.2                  | 6.61              | 31.65              | 6.16                     |
| 4880.00         | 43.19                   | AV | 54             | 10.81       | 37.03            | 31.2                  | 6.61              | 31.65              | 6.16                     |
| 7320.00         | 55.66                   | PK | 74             | 18.34       | 42.71            | 36.2                  | 8.23              | 31.48              | 12.95                    |
| 7320.00         | 44.44                   | AV | 54             | 9.56        | 31.49            | 36.2                  | 8.23              | 31.48              | 12.95                    |



| Frequency(MHz): |                         |    | 2465           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2465.00         | 88.63                   | PK | 114            | 25.37       | 88.48            | 27.58                 | 5.12              | 32.55              | 0.15                     |
| 2465.00         | 47.84                   | AV | 94             | 46.16       | 47.69            | 27.58                 | 5.12              | 32.55              | 0.15                     |
| 4930.00         | 62.33                   | PK | 74             | 11.67       | 55.93            | 31.3                  | 6.7               | 31.6               | 6.4                      |
| 4930.00         | 42.63                   | AV | 54             | 11.37       | 36.23            | 31.3                  | 6.7               | 31.6               | 6.4                      |
| 7395.00         | 54.73                   | PK | 74             | 19.27       | 41.55            | 36.3                  | 8.3               | 31.42              | 13.18                    |
| 7395.00         | 46.09                   | AV | 54             | 7.91        | 32.91            | 36.3                  | 8.3               | 31.42              | 13.18                    |

| Frequency(MHz): |                         |    | 2465           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2465.00         | 90.54                   | PK | 114            | 23.46       | 90.39            | 27.58                 | 5.12              | 32.55              | 0.15                     |
| 2465.00         | 77.66                   | AV | 94             | 16.34       | 77.51            | 27.58                 | 5.12              | 32.55              | 0.15                     |
| 4930.00         | 63.84                   | PK | 74             | 10.16       | 57.44            | 31.3                  | 6.7               | 31.6               | 6.4                      |
| 4930.00         | 42.99                   | AV | 54             | 11.01       | 36.59            | 31.3                  | 6.7               | 31.6               | 6.4                      |
| 7395.00         | 55.73                   | PK | 74             | 18.27       | 42.55            | 36.3                  | 8.3               | 31.42              | 13.18                    |
| 7395.00         | 47.02                   | AV | 54             | 6.98        | 33.84            | 36.3                  | 8.3               | 31.42              | 13.18                    |

**Remark:**

(1) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.


**Results of Band Edges Test (Radiated)**

Operation Mode: GFSK

| Frequency(MHz): |                         |    | 2420           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 59.49                   | PK | 74             | 14.51       | 60.88            | 27.2                  | 4.31              | 32.9               | -1.39                    |
| 2390.00         | 44.30                   | AV | 54             | 9.70        | 45.69            | 27.2                  | 4.31              | 32.9               | -1.39                    |
| Frequency(MHz): |                         |    | 2420           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 59.00                   | PK | 74             | 15.00       | 60.39            | 27.2                  | 4.31              | 32.9               | -1.39                    |
| 2390.00         | 46.73                   | AV | 54             | 7.27        | 48.12            | 27.2                  | 4.31              | 32.9               | -1.39                    |
| Frequency(MHz): |                         |    | 2465           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 55.62                   | PK | 74             | 18.38       | 56.55            | 27.4                  | 4.47              | 32.8               | -0.93                    |
| 2483.50         | 45.39                   | AV | 54             | 8.61        | 46.32            | 27.4                  | 4.47              | 32.8               | -0.93                    |
| Frequency(MHz): |                         |    | 2465           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 54.41                   | PK | 74             | 19.59       | 55.34            | 27.4                  | 4.47              | 32.8               | -0.93                    |
| 2483.50         | 43.28                   | AV | 54             | 10.72       | 44.21            | 27.4                  | 4.47              | 32.8               | -0.93                    |

### 4.3. 20dB Bandwidth Measurement

#### TEST CONFIGURATION



#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30KHz RBW and 300KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### LIMIT


N/A

#### TEST RESULTS


| Modulation | Channel | 20dB bandwidth (MHz) | Result |
|------------|---------|----------------------|--------|
| GFSK       | Low     | 4.803                | PASS   |
|            | Mid     | 6.546                |        |
|            | High    | 3.608                |        |

Note: 1.The test results including the cable lose.


GFSK

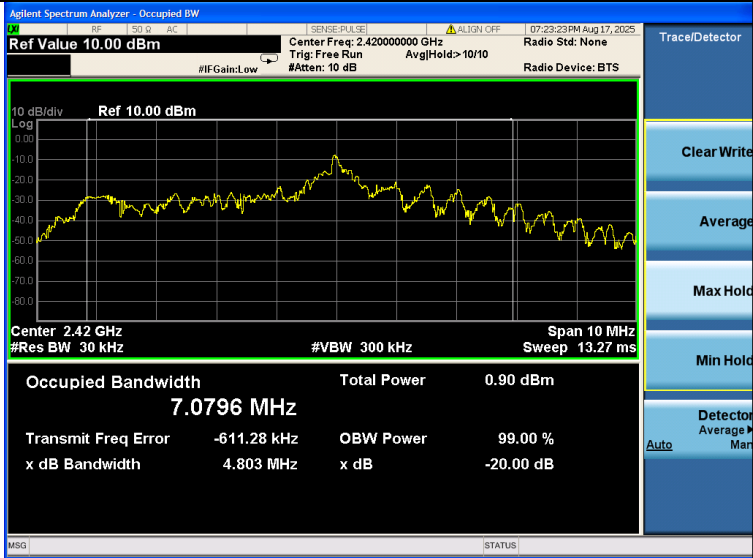

Low

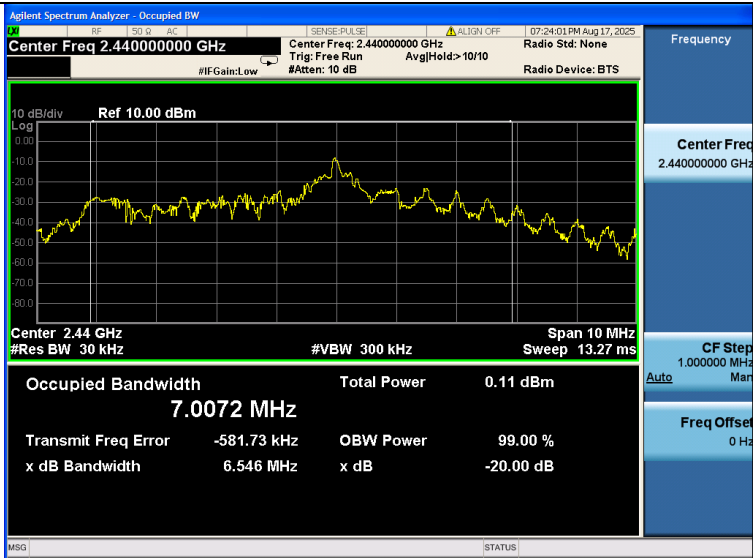

Mid

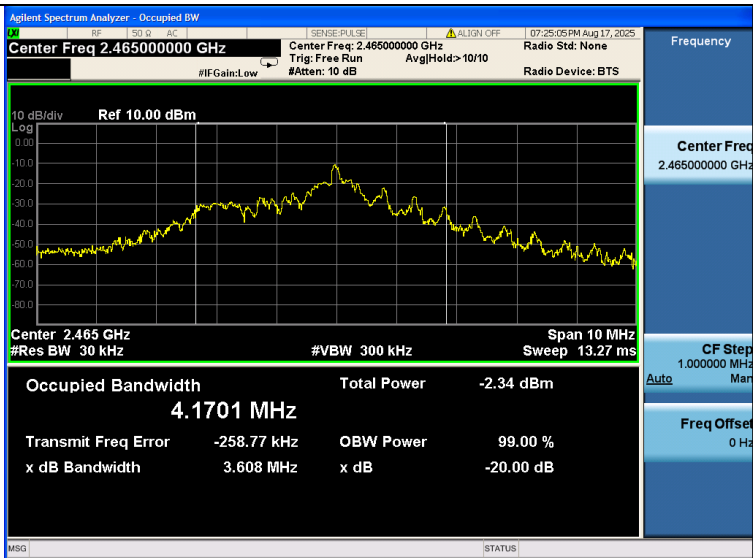

High

#### **4.4. Antenna Requirement**

##### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

##### **Antenna Information**

The maximum gain of antenna was 1.50 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen HTT Technology Co., Ltd. does not assume any responsibility.

## **5. Test Setup Photos of the EUT**

Reference to the **appendix I** for details

## **6. Test Photos of the EUT**

Reference to the **appendix II** for details.

.....**End of Report**.....