



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

RF Exposure-WPT

Report Reference No.....: CTA25062300202

FCC ID.....: 2BQUY-CS31

Compiled by

(position+printed name+signature) .: File administrators Zoey Cao

Supervised by

(position+printed name+signature) .: Project Engineer Ace Chai

Approved by

(position+printed name+signature) .: RF Manager Eric Wang

Date of issue: Jun. 30, 2025

Testing Laboratory Name.....: Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: Shenzhen Yiteng Technology Co., Ltd.

Address.....: 8th Floor, 8D, Yi'an Zhi Fu Building, Longcheng Street, Longgang District, Shenzhen, China

Test specification: FCC CFR 47 PART 1, § 1.1310

Standard.....: KDB 680106 D01 Wireless Power Transfer v04

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: CS31 4-in-1 Wireless Charger

Manufacturer: Guangdong Wei Lian Electronic Technology Co., Ltd.

Trade Mark: N/A

Model/Type reference: CS31

Listed Models: CS32, CS33, CS34, CS35, CS36, CS37, CS38

Modulation Type: ASK

Operation Frequency.....: From 110KHz~205KHz

Rating: Input: DC 9V/2A, 9V/3A

Mobile phone output: 5W/7.5W/10W/15W

Earphone output: 3W Max

Apple Watch output: 2.5W Max

Result: PASS

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST REPORT

Equipment under Test : CS31 4-in-1 Wireless Charger

Model /Type : CS31

Listed Models : CS32, CS33, CS34, CS35, CS36, CS37, CS38

Model difference : The PCB board, circuit, structure and internal of these models are the same, Only model number and colour is different for these model.

Applicant : **Shenzhen Yiteng Technology Co., Ltd.**

Address : 8th Floor, 8D, Yi'an Zhi Fu Building, Longcheng Street, Longgang District, Shenzhen, China

Manufacturer : **Guangdong Wei Lian Electronic Technology Co., Ltd.**

Address : Room 301, No. 8, Lu Di Pu Industrial Zone, Humi Town, Dongguan City, Guangdong Province, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	TEST STANDARDS	4
2	SUMMARY	5
2.1	General Remarks.....	5
2.2	Product Description	5
2.3	Description of the test mode	5
2.4	Special Accessories.....	5
2.5	Modifications	6
3	TEST ENVIRONMENT	6
3.1	Address of the test laboratory.....	6
3.2	Test Facility.....	6
3.3	Statement of the measurement uncertainty.....	6
3.4	Equipments Used during the Test	6
4	Test limit.....	7
4.1	Requirement	7
4.2	Test setup	8
4.3	Test Procedures.....	9
4.4	Equipment Approval Considerations of KDB 680106 D01v04	9
4.5	Test results	9
4.6	Conclusion	9
5	Photographs of the Test Setup	10

1 TEST STANDARDS

The tests were performed according to following standards:

[680106 D01 Wireless Power Transfer v04](#): EQUIPMENT AUTHORIZATION OF WIRELESS POWER TRANSFER DEVICES.

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jun. 23, 2025
Testing commenced on	:	Jun. 23, 2025
Testing concluded on	:	Jun. 30, 2025

2.2 Product Description

Product Name:	CS31 4-in-1 Wireless Charger
Model/Type reference:	CS31
Hardware version:	V1.0
Software version:	V1.0
Test samples ID:	CTA250623002-1# (Engineer sample) CTA250623002-2# (Normal sample)
Power supply:	Input: DC 9V/2A, 9V/3A Mobile phone output: 5W/7.5W/10W/15W Earphone output: 3W Max Apple Watch output: 2.5W Max
Operation frequency:	110KHz - 205KHz
Modulation type:	ASK
Antenna type:	Loop coil antenna
ANT Gain:	0dBi

2.3 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes:		
Mode 1	AC/DC Adapter (9V/3A) + EUT + (Phone Coil +Earphone Coil +watch Coil)full load	Record
Mode 2	AC/DC Adapter (9V/3A) + EUT + (Phone Coil +Earphone Coil)full load	Pre-tested
Mode 3	AC/DC Adapter (9V/3A) + EUT + (Phone Coil +Watch Coil)full load	Pre-tested
Mode 4	AC/DC Adapter (9V/3A) + EUT + (Earphone Coil +Watch Coil)full load	Pre-tested
Mode 5	AC/DC Adapter (9V/3A) + EUT + Phone Coil full load	Pre-tested
Mode 6	AC/DC Adapter (9V/3A) + EUT + Earphone Coil full load	Pre-tested
Mode 7	AC/DC Adapter (9V/3A) + EUT + Watch Coil full load	Pre-tested
Mode 8	Standby	Pre-tested
Note1: All test modes were pre-tested, but we only recorded the worst case in this report.		
Note2:Load info was refer to section 2.4 accessories Intelligent wireless charging full function test module.		

2.4 Special Accessories

The following is the EUT test of the auxiliary equipment provided by the laboratory:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
Adapter	/	/	Input: AC 100-240V 50/60Hz Output: DC 9V 3A, 12V 3A	/	/

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

Intelligent wireless charging full function test module	/	/	15W/10W/7.5W/5W/3W/2.5W	/	Lab
---	---	---	-------------------------	---	-----

2.5 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Statement of the measurement uncertainty

Test	Measurement Uncertainty	Notes
Magnetic field measurement (9kHz~30MHz)	$\pm 7.8 \%$	(1)
Electric field measurements (9kHz~ 30MHz)	$\pm 7.8 \%$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	CTA-352	2025/5/18	2026/5/17
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	CTA-353	2025/5/18	2026/5/17

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

4 Test limit

4.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz


* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

4.2 Test setup

For mobile exposure conditions:

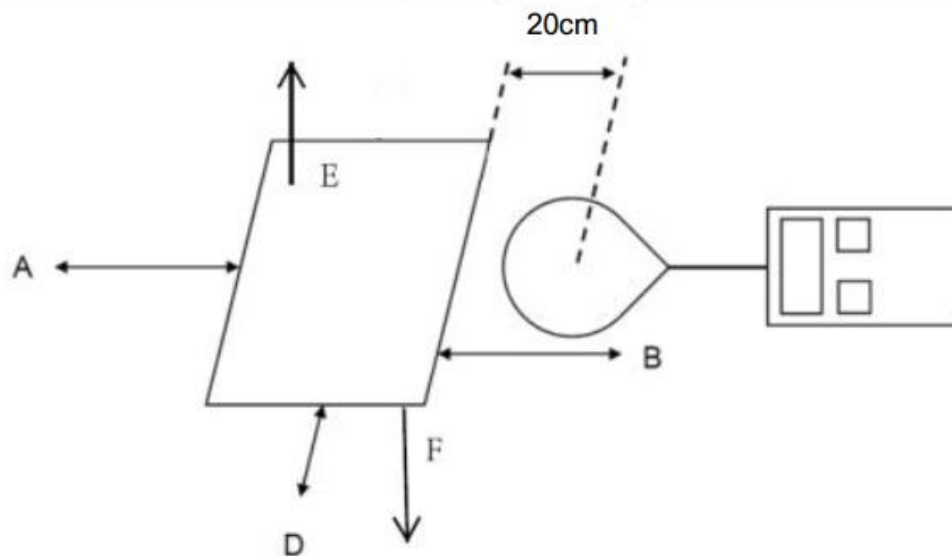

Note: The distance of the points A/B/C/D/E is 20cm.

4.3 Test Procedures

For mobile exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 20 cm surrounding the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

4.4 Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Yes / No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 110KHz - 205KHz
RF Exposure compliance may be ensured only for a minimum separation distance that is greater than 20 cm, while use conditions at smaller distances can still be considered unlikely.	Yes	The EUT H-field strengths at 20 cm surrounding the device.

4.5 Test results

H-Field Strength at 20 cm from the edges surrounding the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)					FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	
1%	uT	0.125	0.545	0.559	0.549	0.535	0.536	--
1%	A/m	0.125	0.436	0.447	0.439	0.428	0.429	1.63
50%	uT	0.125	0.443	0.440	0.434	0.433	0.424	--
50%	A/m	0.125	0.354	0.352	0.347	0.346	0.339	1.63
99%	uT	0.125	0.219	0.216	0.226	0.230	0.234	--
99%	A/m	0.125	0.175	0.173	0.181	0.184	0.187	1.63

Note:1. $A/m = uT/1.25$

Note: 2. During test the frequencies less than 1 MHz and E/H ratio less than 1/10 of the 377-ohm free space wave impedance, only record H-field measurements result.

4.6 Conclusion

A minimum safety distance of 20 cm to the antenna is required when the device is charging a smart phone for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106 and confirmed by the FCC according to KDB Inquire..

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

5 Photographs of the Test Setup



***** End of Report *****