

FCC Test Report

Report No.: AGC00688250702FR02

FCC ID : 2BQVU-BM1

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Smart Security Camera

BRAND NAME : VNOZ

BM1-500W, J7T-300W, J6-300W, DU1-500W, DU1-800W,

MODEL NAME DU1C-500W, DU1C-800W, BQ7-500W, BQ7-800W,

BM7-500W, P10-500W, DU1-500LTE, DU1-800LTE,

BM7-500LTE, DB4C-300W, DB4C-500W

APPLICANT : Vnoz Innovations Limited

DATE OF ISSUE : Aug. 15, 2025

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 80


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Aug. 15, 2025	Valid	Initial Release




Table of Contents

1. General Information	
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	8
2.4 Related Submittal(S) / Grant (S)	9
2.5 Test Methodology	9
2.6 Special Accessories	9
2.7 Equipment Modifications	9
2.8 Antenna Requirement	9
2.9 Description of Test Software	10
3. Test Environment	11
3.1 Address of The Test Laboratory	1
3.2 Test Facility	1
3.3 Environmental Conditions	12
3.4 Measurement Uncertainty	12
3.5 List of Equipment Used	13
4.System Test Configuration	
4.1 EUT Configuration	15
4.2 EUT Exercise	15
4.3 Configuration of Tested System	15
4.4 Equipment Used in Tested System	16
4.5 Summary of Test Results	17
5. Description of Test Modes	18
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	23
8.1 Provisions Applicable	23
8.2 Measurement Procedure	23
8.3 Measurement Setup (Block Diagram of Configuration)	23
8.4 Measurement Result	24
9. Power Spectral Density Measurement	35





9.1 Provisions Applicable	35
9.2 Measurement Procedure	35
9.3 Measurement Setup (Block Diagram of Configuration)	36
9.4 Measurement Result	36
10. Conducted Band Edge and Out-of-Band Emissions	42
10.1 Provisions Applicable	42
10.2 Measurement Procedure	42
10.3 Measurement Setup (Block Diagram of Configuration)	42
10.4 Measurement Result	43
11. Radiated Spurious Emission	54
11.1 Measurement Limits	54
11.2 Measurement Procedure	54
11.3 Measurement Setup (Block Diagram of Configuration)	57
11.4 Measurement Result	58
12. AC Power Line Conducted Emission	75
12.1 Measurement Limits	75
12.2 Block Diagram of Line Conducted Emission Test	75
12.3 Preliminary Procedure of Line Conducted Emission Test	76
12.4 Final Procedure of Line Conducted Emission Test	76
12.5 Test Result of Line Conducted Emission Test	76
Appendix I: Photographs of Test Setup	79
Appendix II: Photographs of Test EUT	79





1. General Information

Vnoz Innovations Limited	
109B, Floor 1, Building 2, Zaimao Industrial Park, No. 12 Baoji Road, Xiangjiaotang Community, Bantian, Longgang District, Shenzhen, Guangdong Province, China	
Vnoz Innovations Limited	
109B, Floor 1, Building 2, Zaimao Industrial Park, No. 12 Baoji Road, Xiangjiaotang Community, Bantian, Longgang District, Shenzhen, Guangdong Province, China	
Dongguan Brovotech Co., Ltd	
601, Building 3, Changxingzhigu Industrial Park, No. 16 Xinfeng Road, Changlong, Huangjiang, Dongguan	
Smart Security Camera	
VNOZ	
BM1-500W	
J7T-300W, J6-300W, DU1-500W, DU1-800W, DU1C-500W, DU1C-800W, BQ7-500W, BQ7-800W, BM7-500W, P10-500W, DU1-500LTE, DU1-800LTE, BM7-500LTE, DB4C-300W, DB4C-500W	
All the series models are the same as the test model except for the model names.	
Jul. 16, 2025	
Jul. 16, 2025 to Aug. 15, 2025	
No any deviation from the test method	
ole Normal	
Pass	
AGCER-FCC-2.4GWLAN-V1	

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Coli	
	Cici Li (Project Engineer)	Aug. 15, 2025
Reviewed By	Bibo zhang	
	Bibo Zhang (Reviewer)	Aug. 15, 2025
Approved By	Angole li	
	Angela Li (Authorized Officer)	Aug. 15, 2025



Page 6 of 80

2. Product Information

2.1 Product Technical Description

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b:12.98dBm; IEEE 802.11g:11.49dBm;
Output Fower (Average)	IEEE 802.11n(HT20):11.06dBm
Output Power (Peak)	IEEE 802.11b:15.20dBm; IEEE 802.11g:19.25dBm;
Output I ower (I eak)	IEEE 802.11n(HT20):19.16dBm
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS
Wiodulation	802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM
	802.11b:1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 72.2Mbps
Number of channels	11
Hardware Version	M1413
Software Version	V7.00.47.250510
Antenna Designation	FPC Antenna
Antenna Gain	4.12dBi
Power Supply	DC 5V by adapter or DC 3.7V by battery or DC 5V by Solar Panel



Page 7 of 80

2.2 Table of Carrier Frequency

For 2412-2462MHz:

11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		



Page 8 of 80

2.3 IEEE 802.11n Modulation Scheme

MOO					N _{CBPS}		N _{DBPS}		Data Rate(Mbps)		
MCS Index	Nss	Modulation	R	N _{BPSC}	N _{BPSC}	INC	BPS	ואט	BPS	800	nsGl
macx					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5	
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 9 of 80

2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BQVU-BM1**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.5 Test Methodology

The tests were performed according to following standards:

	·	
No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

2.6 Special Accessories

Refer to section 4.4.

2.7 Equipment Modifications

Not available for this EUT intended for grant.

2.8 Antenna Requirement

Standard Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 4.12 dBi.






2.9 Description of Test Software

For IEEE 802.11 mode:

The test utility software used during testing was "SecureCRT", and the version was "6.6.1".

Software Setting Diagram

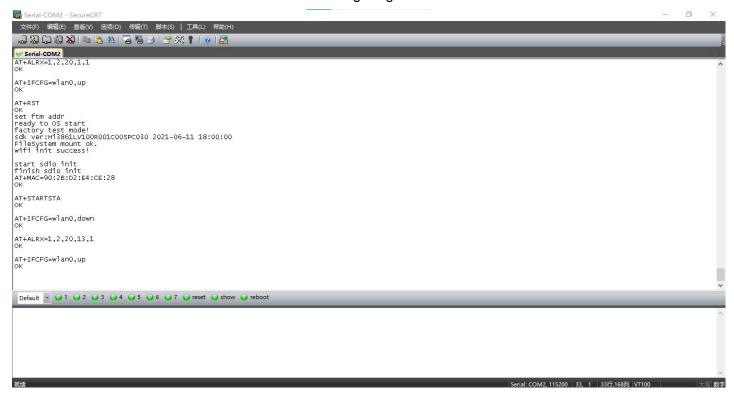

Test Mode	Channel	Power Index
802.11b	L/M/H	Default
802.11g	L/M/H	Default
802.11n-HT20	L/M/H	Default



Page 11 of 80

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 12 of 80

3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	U _c = ±2 %		
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %		
Uncertainty of Dwell Time	U _c = ±2 %		



Page 13 of 80

3.5 List of Equipment Used

• F	RF Conducted Test System									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2025-05-08	2026-05-07			
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2025-05-08	2026-05-07			
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2025-05-08	2026-05-07			
\boxtimes	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29			
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2025-05-21	2026-05-20			
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A			
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A			

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	100096	2025-01-14	2026-01-13		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2025-05-08	2026-05-07		
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2025-05-08	2026-05-07		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2025-03-14	2027-03-13		
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-03-27	2026-03-26		
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23		
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2025-05-16	2026-05-15		
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2025-05-16	2027-05-15		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2025-05-16	2027-05-15		

• A	AC Power Line Conducted Emission									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
	AGC-EM-E116	Test Receiver	R&S	ESCI	100034	2025-05-08	2026-05-07			
	AGC-EM-A171	Attenuator	Mini-Circuits	UNAT-10A+	N/A	2024-02-01	2026-01-31			
	AGC-EM-E023	AMN	R&S	ESH2-Z5	100086	2025-05-08	2026-05-07			





• Te	Test Software								
Used	ed Equipment No. Test Equipment		uipment No. Test Equipment Manufacturer Mode		Version Information				
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A				
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6				
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.


4.3 Configuration of Tested System

Conducted Emission Configure:



Radiated Emission Configure:



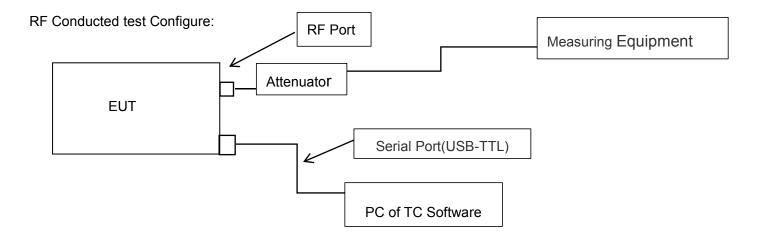



Page 16 of 80

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	!	HQPCB-2		
2	Adapter	Xiaomi	MDY-16-EA		
3	Redmi Notebook PC	Redmi	XMA2002-AB		

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	USB cable				1.5m unshielded



Page 17 of 80

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



Page 18 of 80

5. Description of Test Modes

	Summary table of Test Cases
Toot Itom	Data Rate / Modulation
Test Item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM)
	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps(Battery powered or AC/DC adapter or Solar Panel)
Radiated Test Cases	Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps(Battery powered or AC/DC adapter or Solar Panel)
	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps(Powered-by Control Box)
	Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps(Powered-by Control Box)
	Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps(Powered-by Control Box)
RF Conducted	Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps(Powered-by Control Box)
Test Cases	Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps(Powered-by Control Box)
	Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps(Powered-by Control Box)
	Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps(Powered-by Control Box)
	Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps(Powered-by Control Box) Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps(Powered-by Control Box)
	Wode 9. 002. THE TIZO_TA CITTI_2402 WITZ_WC30 WIDPS(FOWERED-DY CONTROL BOX)
AC Conducted Emission	Mode 1: 2.4G WLAN Link + Battery + USB Cable (Charging from AC Adapter)

Note:

- The battery is full-charged during the test.
- 2. The 802.11ax mode is only tested and evaluated at Full RU bandwidth.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- The manufacturer of RF external cable claims that the cable loss is 0.5dB, and the cable loss and attenuator have been compensated into the Corrections Configuration of measuring equipment.
- 6. Input correction factor includes external cable loss and attenuator amplitude compensation. The formula is: Input compensation coefficient (dB) = Cable Loss (dB) + Attenuator attenuation value (dB)



Page 19 of 80


6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)
IEEE 802.11b	1	100	
IEEE 802.11g	6	100	
IEEE 802.11n-HT20	MCS0	100	


Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the Middle channel measurement value.





The test plots as follows:

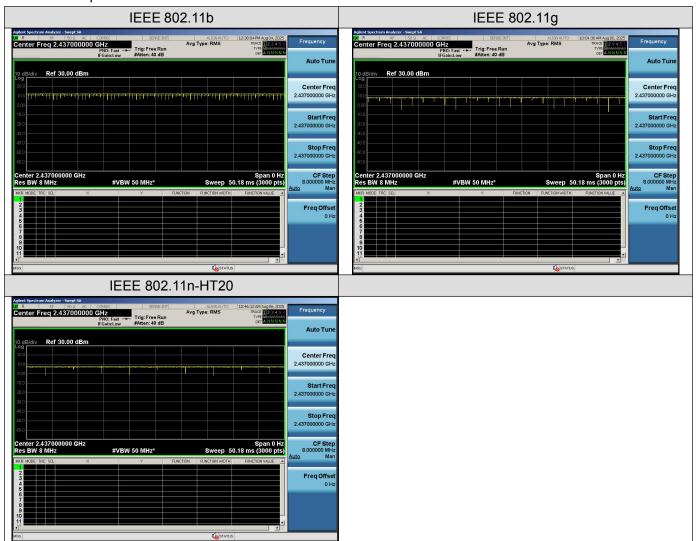



Page 21 of 80

7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure


☑ Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

☑ Method PM is Measurement using an RF AV power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 Measurement Setup (Block Diagram of Configuration)

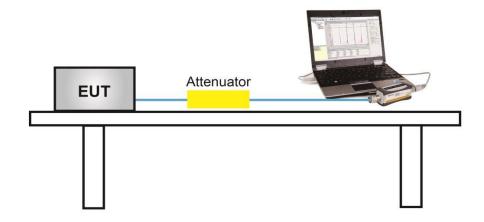



Page 22 of 80

7.4 Measurement Result

Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Result		
	2412	12.29	14.78	≤30	Pass		
802.11b	2437	12.98	15.20	≤30	Pass		
	2462	12.11	14.58	≤30	Pass		
	2412	11.17	18.94	≤30	Pass		
802.11g	2437	11.49	19.25	≤30	Pass		
	2462	11.49	19.24	≤30	Pass		
	2412	11.06	19.16	≤30	Pass		
802.11n20	2437	11.00	19.09	≤30	Pass		
	2462	10.72	18.89	≤30	Pass		



Page 23 of 80

8. 6dB Bandwidth Measurement


8.1 Provisions Applicable

The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- 4. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

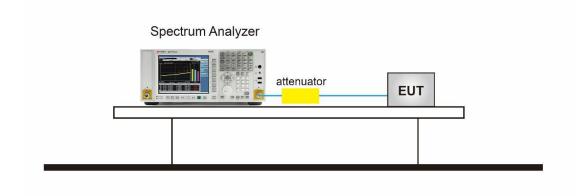




Page 24 of 80


8.4 Measurement Result

	Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Result			
	2412	13.028	8.068	≥0.5	Pass			
802.11b	2437	13.021	7.146	≥0.5	Pass			
	2462	13.238	8.108	≥0.5	Pass			
	2412	16.318	16.326	≥0.5	Pass			
802.11g	2437	16.352	16.338	≥0.5	Pass			
	2462	16.339	16.337	≥0.5	Pass			
	2412	17.535	17.571	≥0.5	Pass			
802.11n20	2437	17.529	17.590	≥0.5	Pass			
	2462	17.534	17.317	≥0.5	Pass			






Test Graphs of Occupied Bandwidth

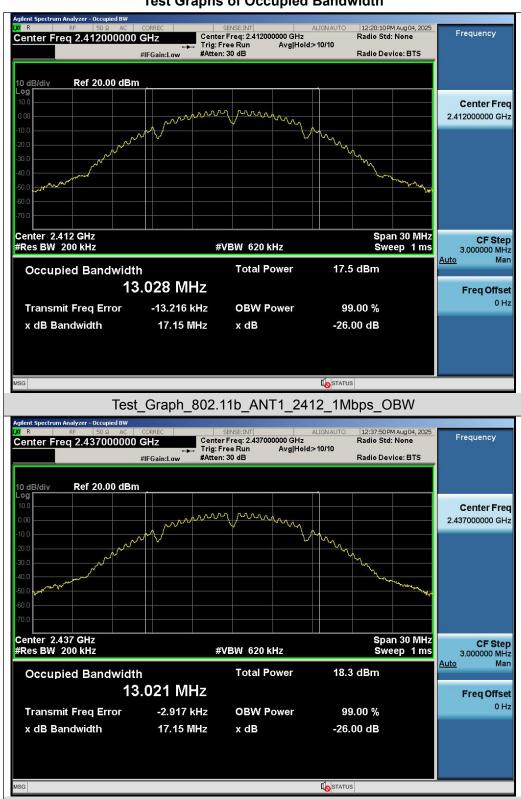



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11b_ANT1_2437_1Mbps_OBW







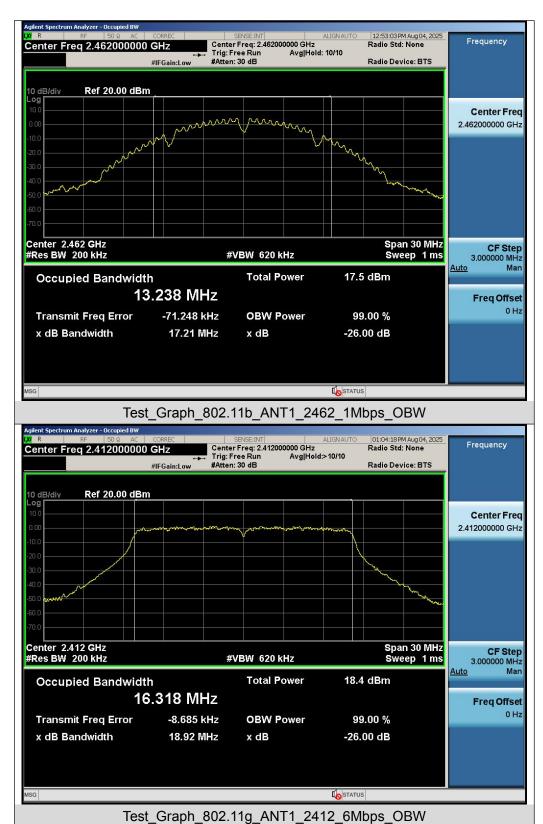







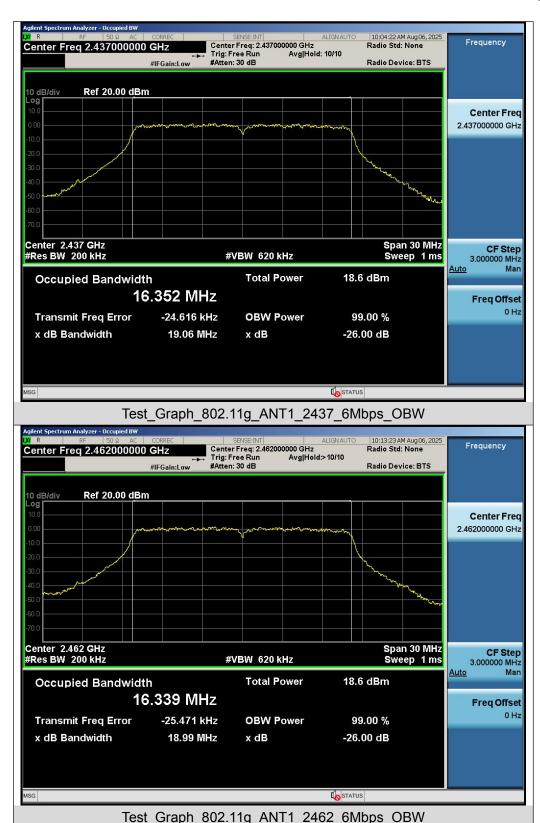







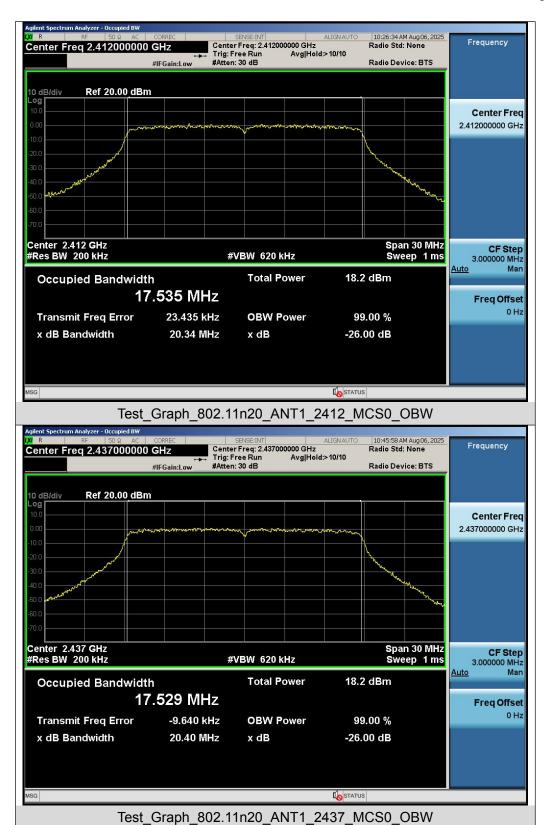





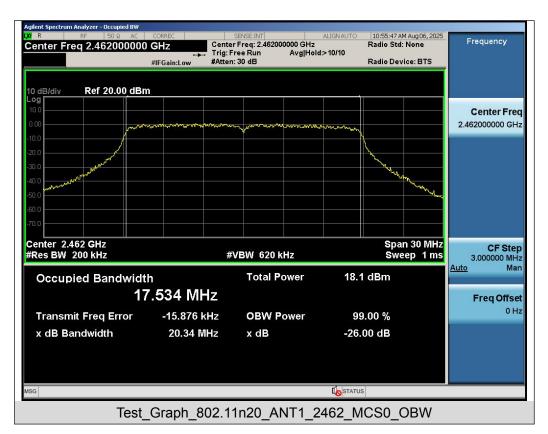








Test Graphs of DTS Bandwidth









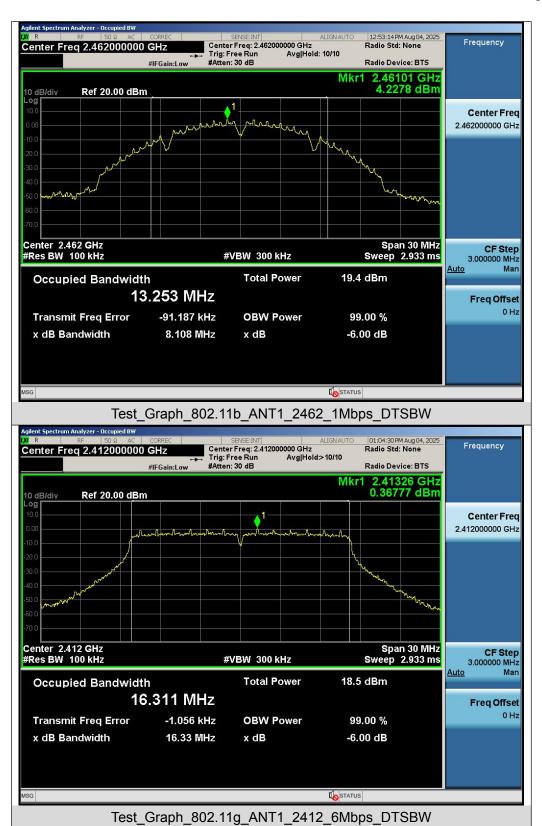







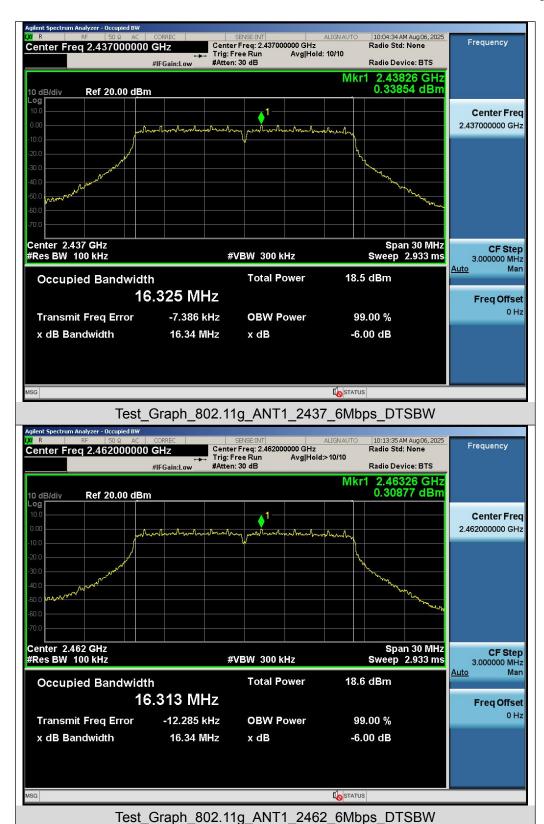






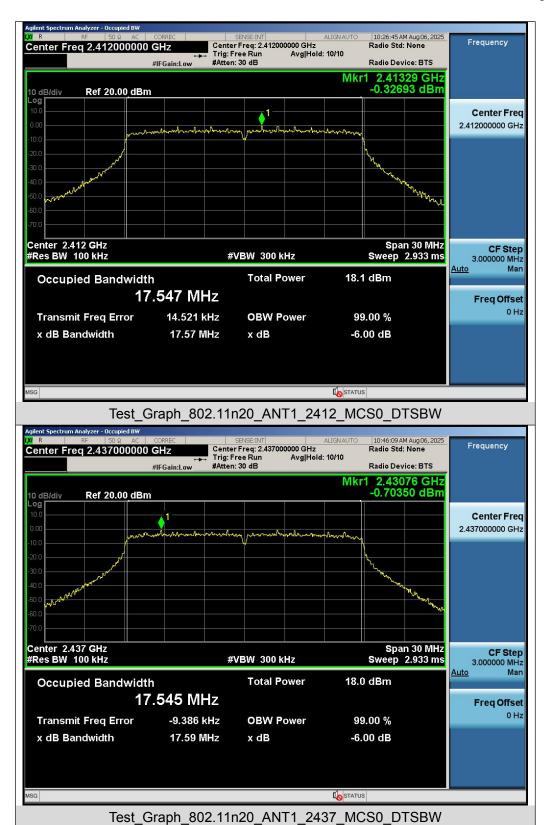





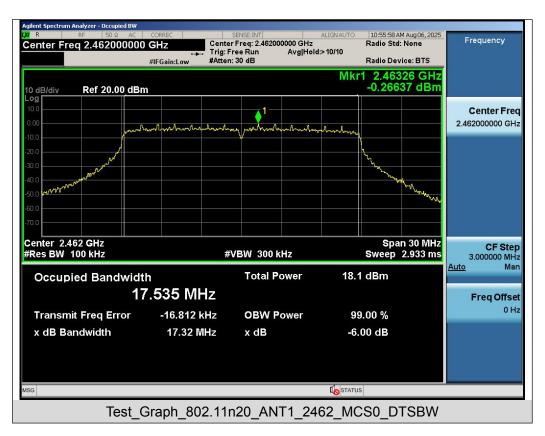



Page 35 of 80

9. Power Spectral Density Measurement

9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

□ For Peak power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW ≥ [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- 9. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of 10*log(3kHz/20kHz) = -8.23 dB is added to the measurement result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.


☐ For Average power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz ≤ RBW ≤ 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of 10*log(3kHz/20kHz) = -8.23 dB is added to the measurement result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.




Page 36 of 80

9.3 Measurement Setup (Block Diagram of Configuration)

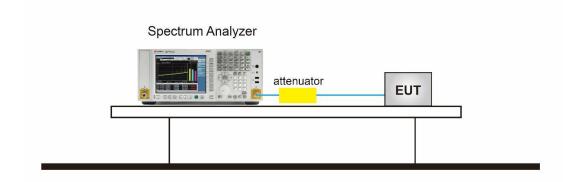


9.4 Measurement Result


Test Data of Conducted Output Power Spectral Density				
Test Mode	Test Frequency (MHz)	Power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	2412	-10.402	≪8	Pass
	2437	-10.291	≪8	Pass
	2462	-10.980	≤8	Pass
802.11g	2412	-14.178	≤8	Pass
	2437	-14.856	≤8	Pass
	2462	-14.296	≪8	Pass
802.11n20	2412	-13.878	≪8	Pass
	2437	-12.501	≤8	Pass
	2462	-13.121	≤8	Pass







Test Graphs of Conducted Output Power Spectral Density

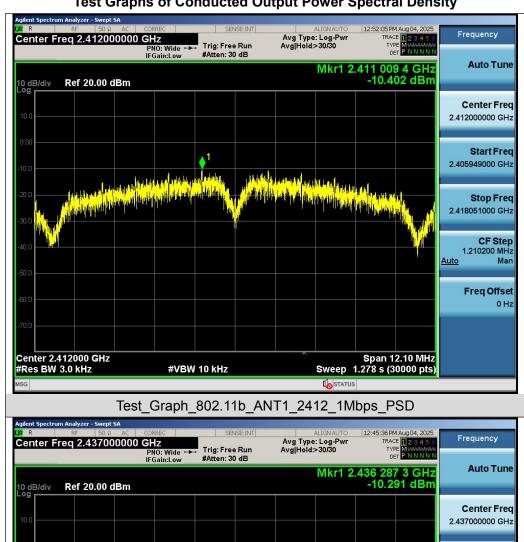


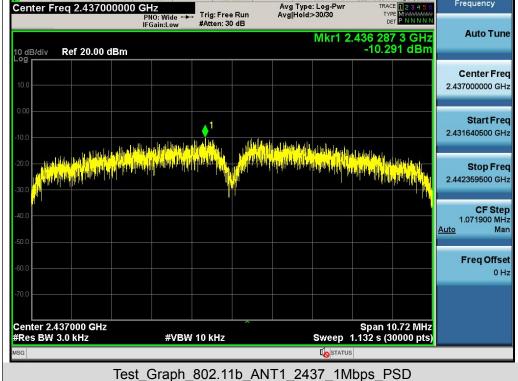







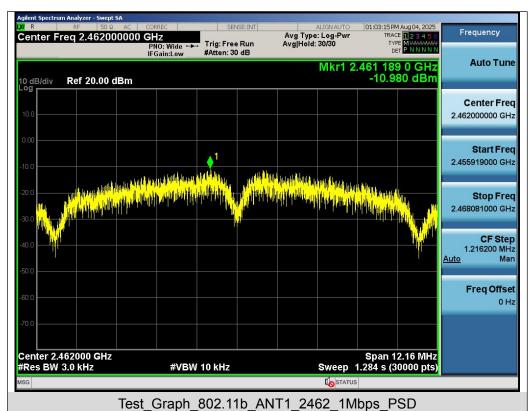

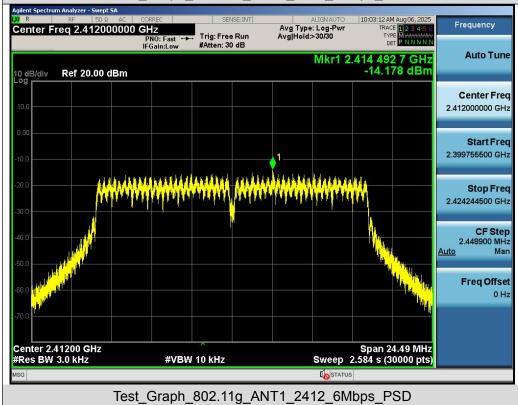






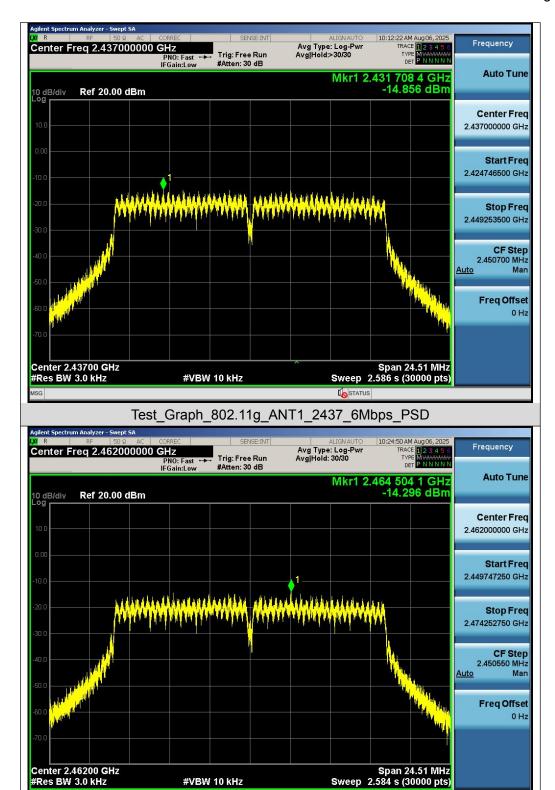


Test_Graph_802.11g_ANT1_2462_6Mbps_PSD


#VBW 10 kHz





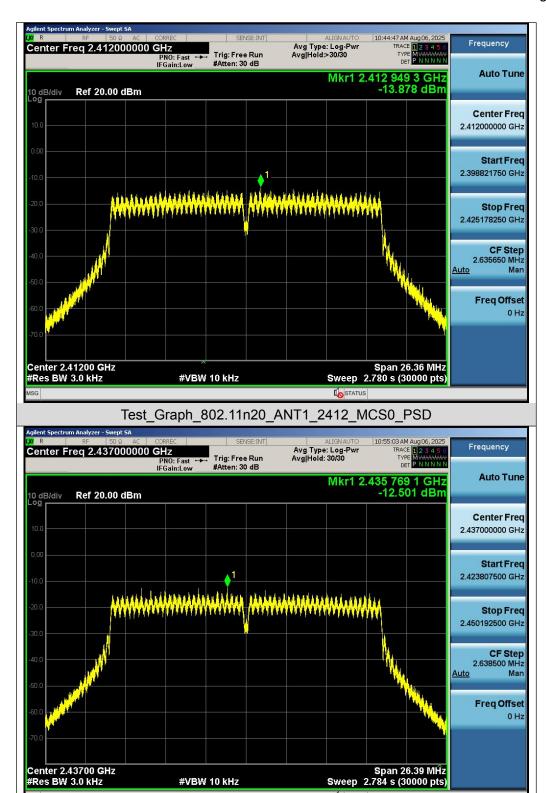

Test_Graph_802.11n20_ANT1_2437_MCS0_PSD









10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

10.2 Measurement Procedure


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
 - 1. Set instrument center frequency to DTS channel center frequency.
 - 2. Set the span to \geq 1.5 times the DTS bandwidth.
 - 3. Set the RBW = 100 kHz.
 - 4. Set the VBW \geq 3 x RBW.
 - 5. Detector = peak.
 - 6. Sweep time = auto couple.
 - 7. Trace mode = max hold.
 - 8. Allow trace to fully stabilize.
 - Use the peak marker function to determine the maximum PSD level.
 - Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
 - 11. For reference level values, please refer to DTS bandwidth test.
- Step 2: Measurement Procedure Out of Band Emission
 - 1. Set RBW = 100 kHz.
 - 2. Set VBW ≥ 300 kHz.
 - 3. Detector = peak.
 - 4. Sweep = auto couple.
 - 5. Trace Mode = max hold.
 - 6. Allow trace to fully stabilize.
 - 7. Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.3 Measurement Setup (Block Diagram of Configuration)

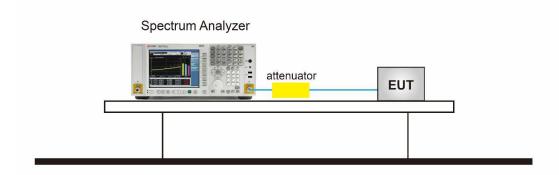

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



10.4 Measurement Result

Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

