


2.250000000 GHz

Freq Offset 0 Hz

Auto

Span 22.50 GHz Sweep 2.152 s (30000 pts)



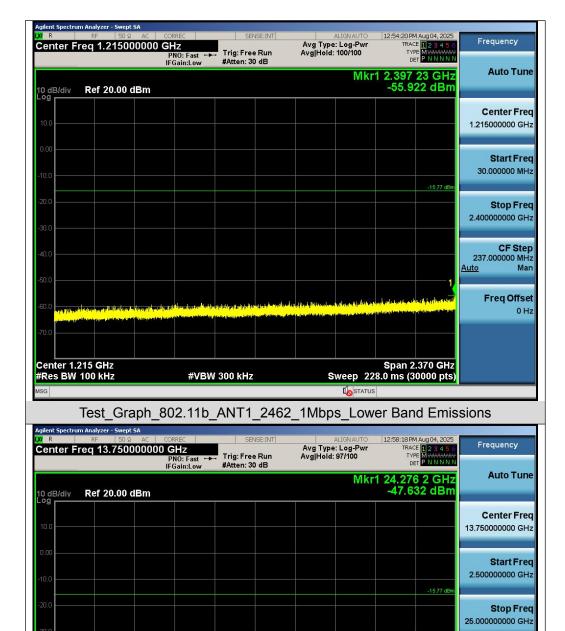


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11b\_ANT1\_2462\_1Mbps\_Higher Band Emissions


**#VBW 300 kHz** 


Center 13.75 GHz #Res BW 100 kHz







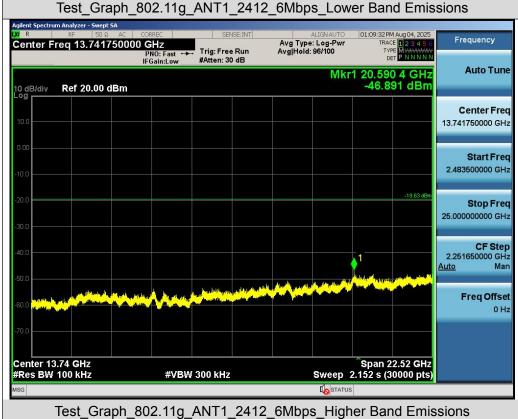

















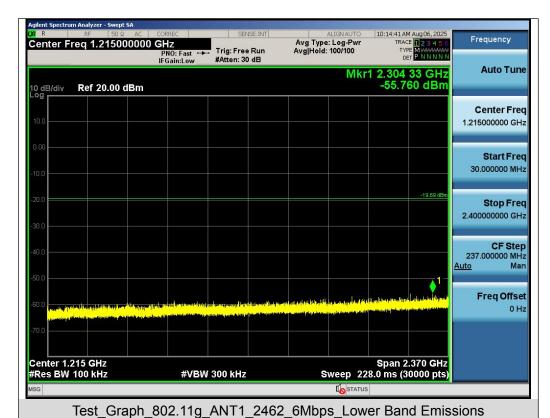








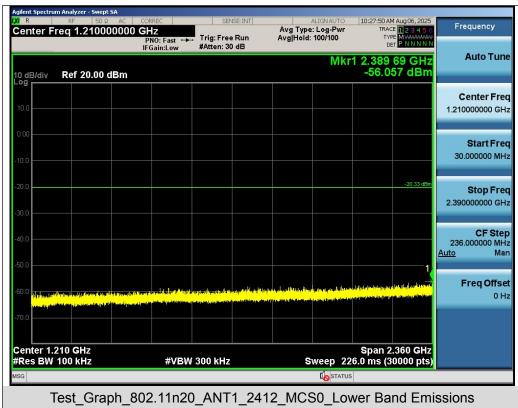

















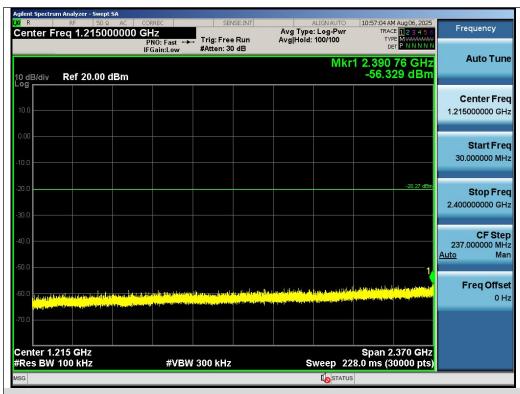








### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




Test\_Graph\_802.11b\_ANT1\_2412\_1Mbps\_Lower Band Edge Emissions







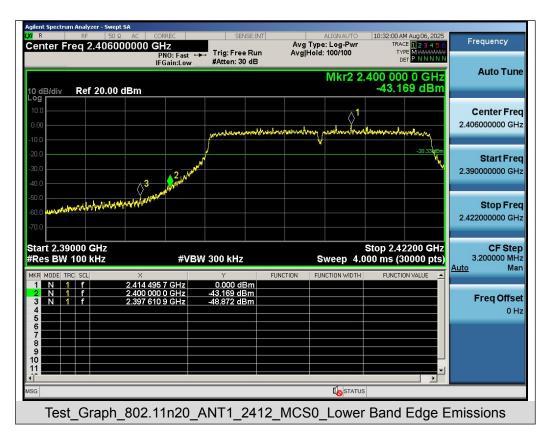



Page 54 of 80

## 11. Radiated Spurious Emission

#### 11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the



Page 55 of 80

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- ◆ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Page 56 of 80

### Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


## Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




## 11.3 Measurement Setup (Block Diagram of Configuration)


## Radiated Emission Test Setup 9kHz-30MHz

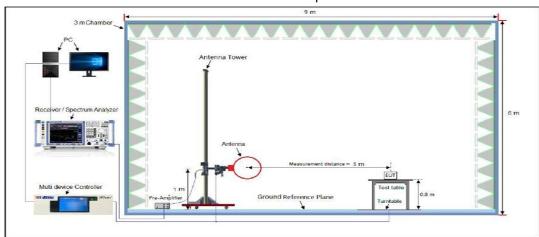

Radiated Emission Test Setup 30MHz-1000MHz

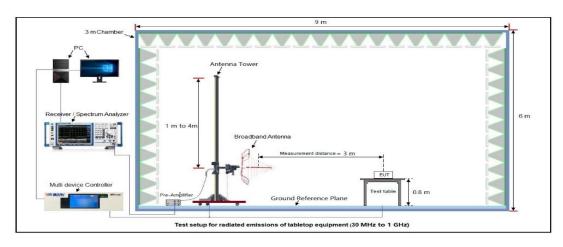

## Radiated Emission Test Setup Above 1000MHz

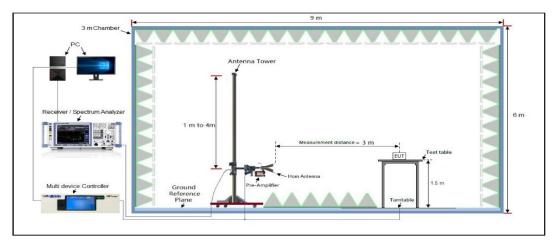




#### 11.4 Measurement Result

#### Radiated Emission at 9kHz-30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Smart Security Camera	Model Name	BM1-500W			
Temperature	22.7℃	Relative Humidity	56.1 %			
Pressure	960hPa	Test Voltage	DC 5V by adapter			
Test Mode	Mode 5	Antenna Polarity	Horizontal			

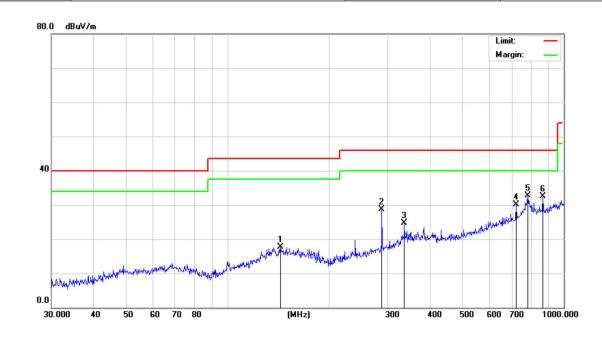

Final D	Final Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	143.8294	17.69	-20.85	43.50	25.81	100	100	Horizontal	
2	287.9904	28.71	-19.83	46.00	17.29	100	120	Horizontal	
3	336.0351	24.67	-18.56	46.00	21.33	100	90	Horizontal	
4	721.7259	30.05	-11.49	46.00	15.95	100	230	Horizontal	
5	782.3452	32.63	-10.11	46.00	13.37	100	150	Horizontal	
6	866.0878	32.44	-9.37	46.00	13.56	100	90	Horizontal	



Radiated Emission Test Results at 30MHz-1GHz						
EUT Name Smart Security Camera Model Name BM1-500W						
Temperature	22.7℃	Relative Humidity	56.1 %			
Pressure	960hPa	Test Voltage	DC 5V by adapter			
Test Mode	Mode 5	Antenna Polarity	Vertical			

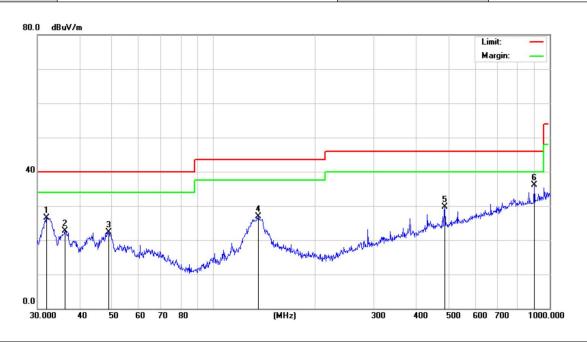

Final D	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	31.9546	26.60	-23.25	40.00	13.4	100	120	Vertical
2	36.2541	22.64	-22.69	40.00	17.36	100	180	Vertical
3	48.8429	22.36	-21.19	40.00	17.64	100	200	Vertical
4	135.9822	26.82	-20.62	43.50	16.68	100	160	Vertical
5	487.3151	29.73	-14.51	46.00	16.27	100	100	Vertical
6	900.1474	36.16	-6.79	46.00	9.84	100	80	Vertical

## **RESULT: Pass**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 5 is the worst case and recorded in the report.



Page 60 of 80

#### Radiated Emissions Test Results above 1 GHz

EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	22.7℃	Relative Humidity	56.1 %
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.17	0.08	46.25	74	-27.75	peak
4824.000	37.39	0.08	37.47	54	-16.53	AVG
7236.000	41.44	2.21	43.65	74	-30.35	peak
7236.000	32.72	2.21	34.93	54	-19.07	AVG

## Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	22.7℃	Relative Humidity	56.1 %
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.01	0.08	46.09	74	-27.91	peak
4824.000	37.99	0.08	38.07	54	-15.93	AVG
7236.000	41.81	2.21	44.02	74	-29.98	peak
7236.000	32.42	2.21	34.63	54	-19.37	AVG
Domork:	•					•

#### Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## **RESULT: Pass**



Page 61 of 80

## **Radiated Emissions Test Results above 1GHz**

EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	22.7℃	Relative Humidity	56.1 %
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value rype
4874.000	46.54	0.08	46.62	74	-27.38	peak
4874.000	37.57	0.08	37.65	54	-16.35	AVG
7311.000	41.40	2.21	43.61	74	-30.39	peak
7311.000	32.73	2.21	34.94	54	-19.06	AVG
		-				

## Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	22.7℃	Relative Humidity	56.1 %
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	46.80	0.08	46.88	74	-27.12	peak
4874.000	37.53	0.08	37.61	54	-16.39	AVG
7311.000	41.67	2.21	43.88	74	-30.12	peak
7311.000	32.11	2.21	34.32	54	-19.68	AVG
		-				

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

## **RESULT: Pass**



Page 62 of 80

#### Radiated Emissions Test Results above 1GHz

EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	22.7℃	Relative Humidity	56.1 %
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.55	0.08	46.63	74	-27.37	peak
4924.000	37.34	0.08	37.42	54	-16.58	AVG
7386.000	41.32	2.21	43.53	74	-30.47	peak
7386.000	32.03	2.21	34.24	54	-19.76	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	22.7℃	Relative Humidity	56.1 %
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.93	0.08	47.01	74	-26.99	peak
4924.000	37.78	0.08	37.86	54	-16.14	AVG
7386.000	41.90	2.21	44.11	74	-29.89	peak
7386.000	32.94	2.21	35.15	54	-18.85	AVG

### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

## **RESULT: Pass**

#### Note:

- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All test modes had been pre-tested. The 802.11g is the worst case and recorded in the report.




EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 1	Antenna Polarity	Horizontal

# Test Graph for Peak Measurement



Test Graph for Average Measurement

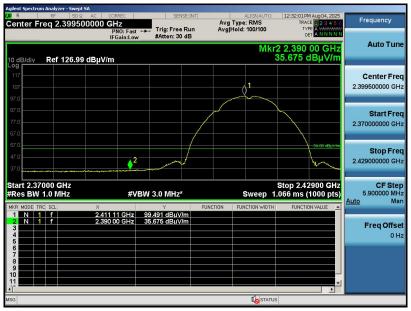

## **RESULT: Pass**




EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 1	Antenna Polarity	Vertical

# Test Graph for Peak Measurement



Test Graph for Average Measurement

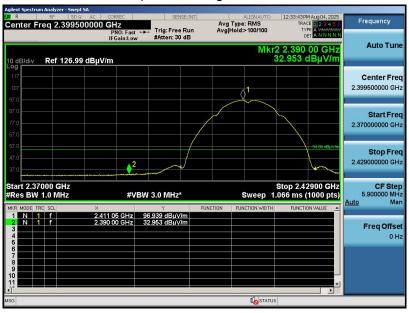

## **RESULT: Pass**



EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 3	Antenna Polarity	Horizontal

# Test Graph for Peak Measurement



Test Graph for Average Measurement



## **RESULT: Pass**




EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 3	Antenna Polarity	Vertical

# Test Graph for Peak Measurement



Test Graph for Average Measurement

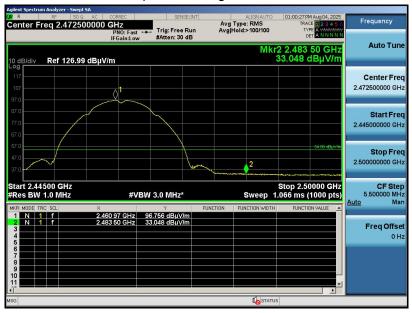

## **RESULT: Pass**




EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 4	Antenna Polarity	Horizontal

# Test Graph for Peak Measurement



Test Graph for Average Measurement

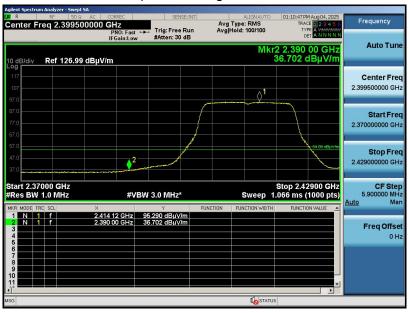

## **RESULT: Pass**




EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 4	Antenna Polarity	Vertical

# Test Graph for Peak Measurement



Test Graph for Average Measurement

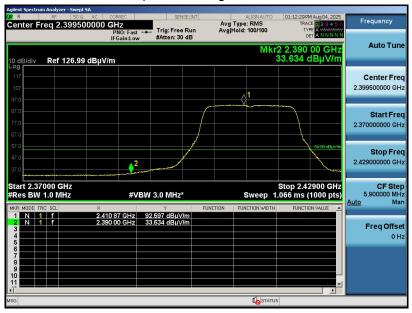

## **RESULT: Pass**




EUT Name	Smart Security Camera	Model Name	BM1-500W
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 6	Antenna Polarity	Horizontal

# Test Graph for Peak Measurement



Test Graph for Average Measurement

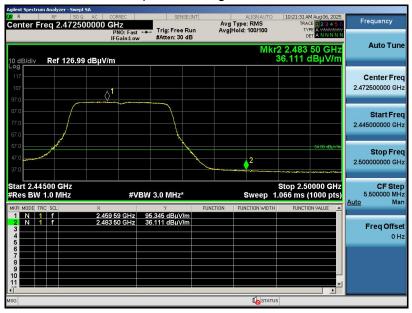

## **RESULT: Pass**