




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 230 of 275

802.11n40_Channel 03

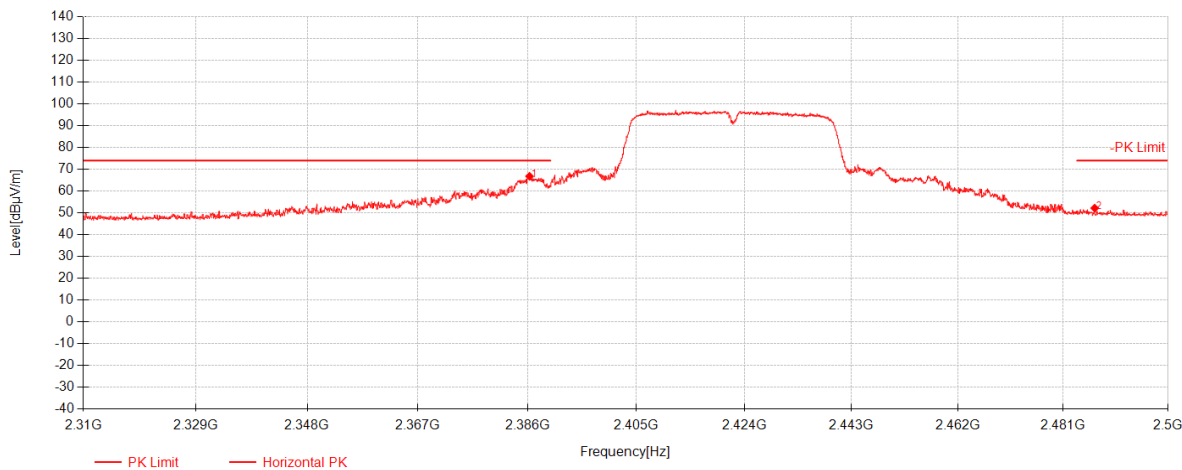


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.3533	63.42	26.97	-23.57	66.82	74.00	7.18	Horizontal
2	2486.68	48.57	27.17	-23.54	52.20	74.00	21.80	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 231 of 275

802.11n40_Channel 03

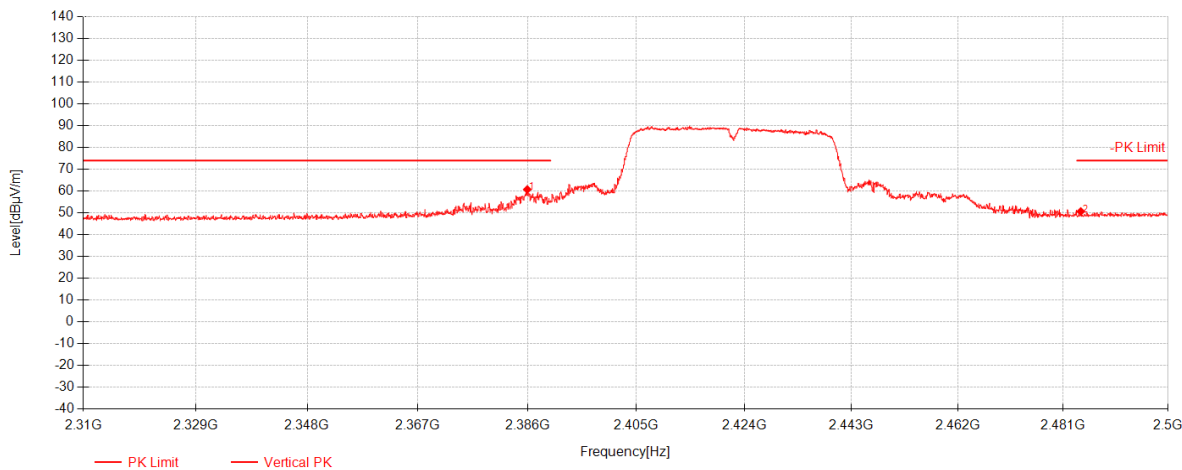


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.9633	57.34	26.97	-23.57	60.74	74.00	13.26	Vertical
2	2484.16	47.03	27.17	-23.54	50.65	74.00	23.35	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 232 of 275

802.11n40_Channel 09

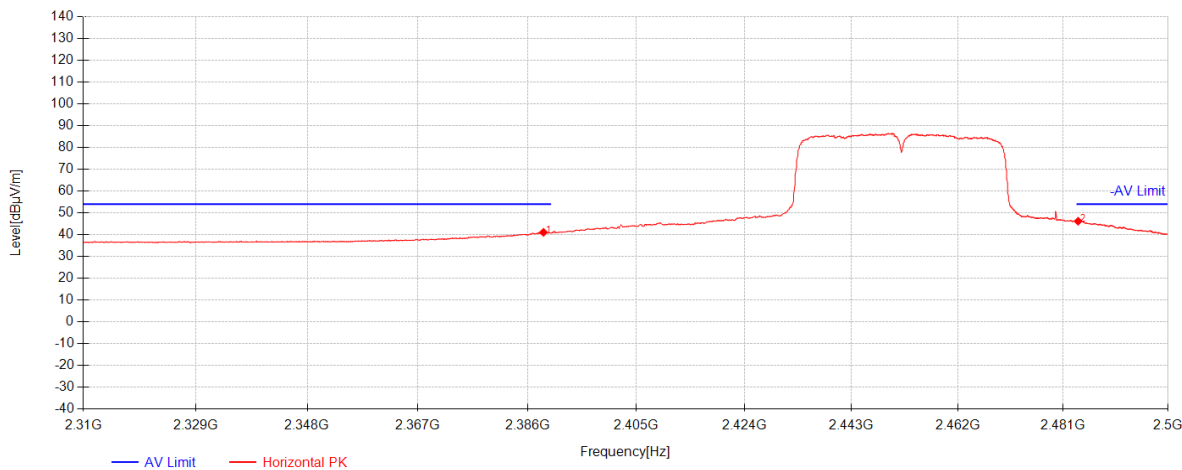


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.78	37.66	26.98	-23.57	41.07	54.00	12.93	Horizontal
2	2483.68	42.57	27.17	-23.54	46.19	54.00	7.81	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 233 of 275

802.11n40_Channel 09

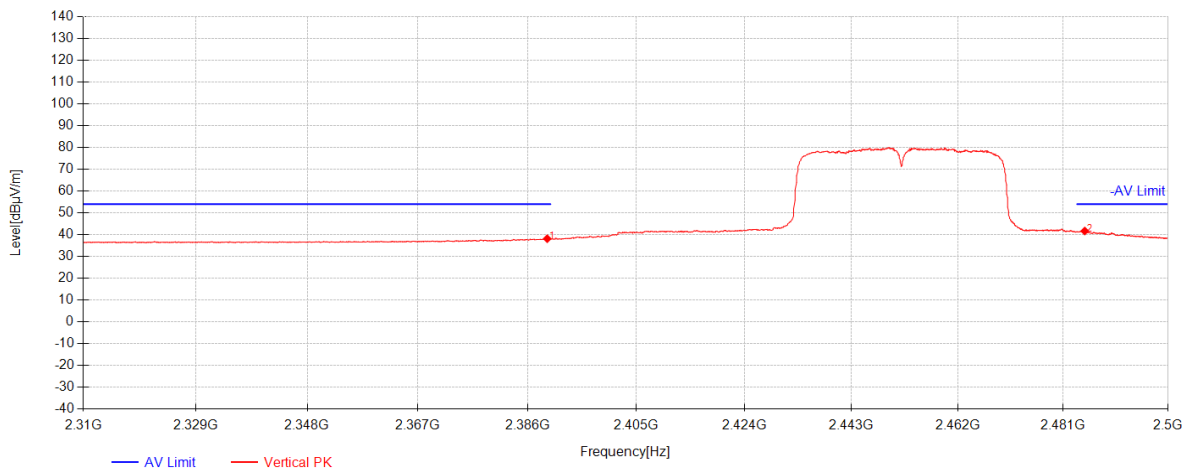


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.43	34.73	26.98	-23.57	38.14	54.00	15.86	Vertical
2	2484.88	38.06	27.17	-23.54	41.69	54.00	12.31	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 234 of 275

802.11n40_Channel 09

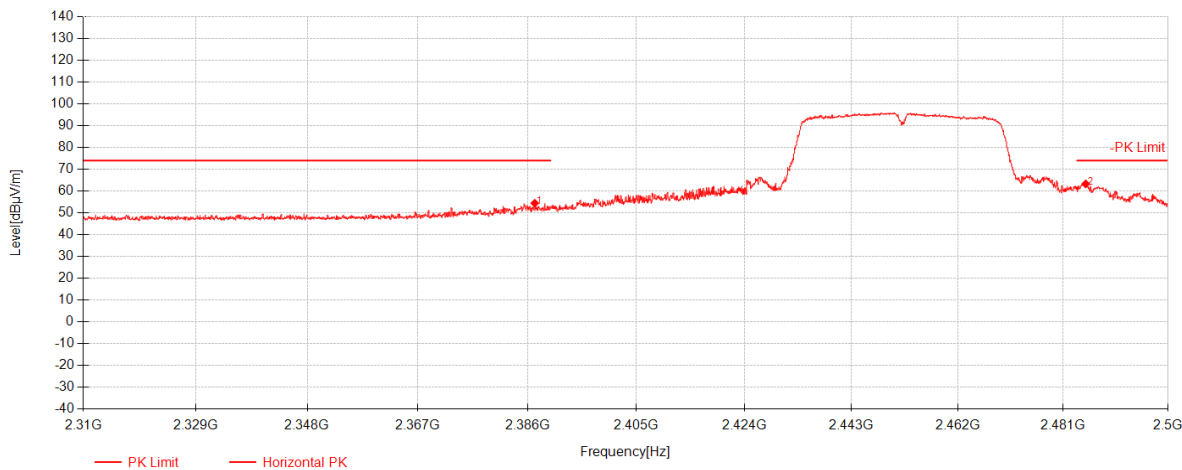


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.2633	51.04	26.97	-23.57	54.44	74.00	19.56	Horizontal
2	2485.06	59.69	27.17	-23.54	63.32	74.00	10.68	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 235 of 275

802.11n40_Channel 09

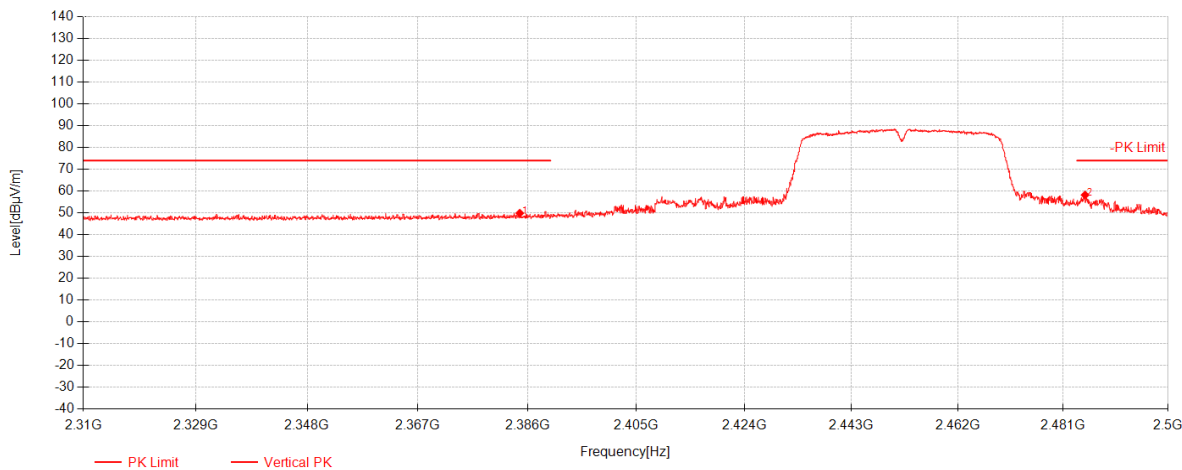


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.6633	46.48	26.97	-23.57	49.88	74.00	24.12	Vertical
2	2484.94	54.60	27.17	-23.54	58.23	74.00	15.77	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 236 of 275

802.11ax20_Channel 01

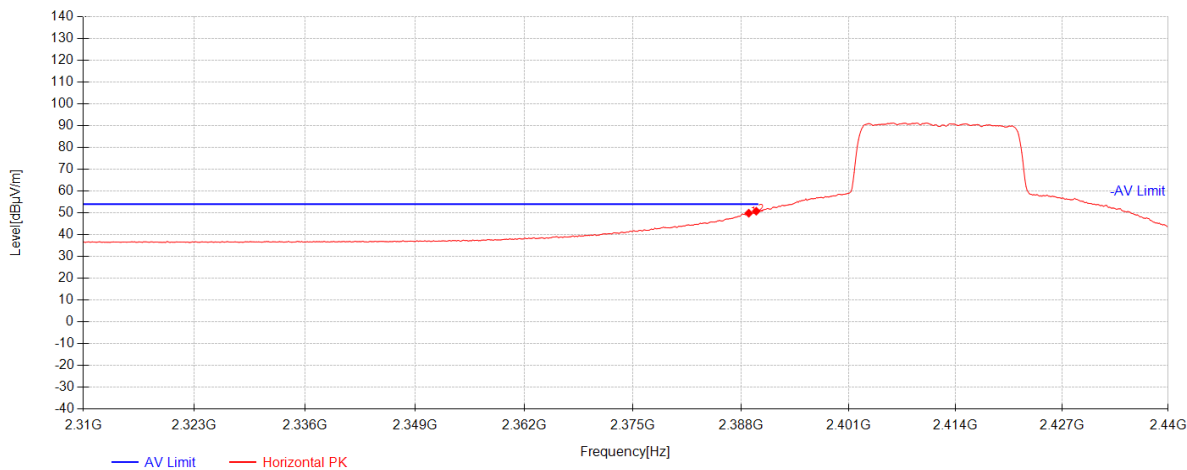


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.91	46.44	26.98	-23.57	49.85	54.00	4.15	Horizontal
2	2389.82	47.37	26.98	-23.57	50.78	54.00	3.22	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 237 of 275

802.11ax20_Channel 01

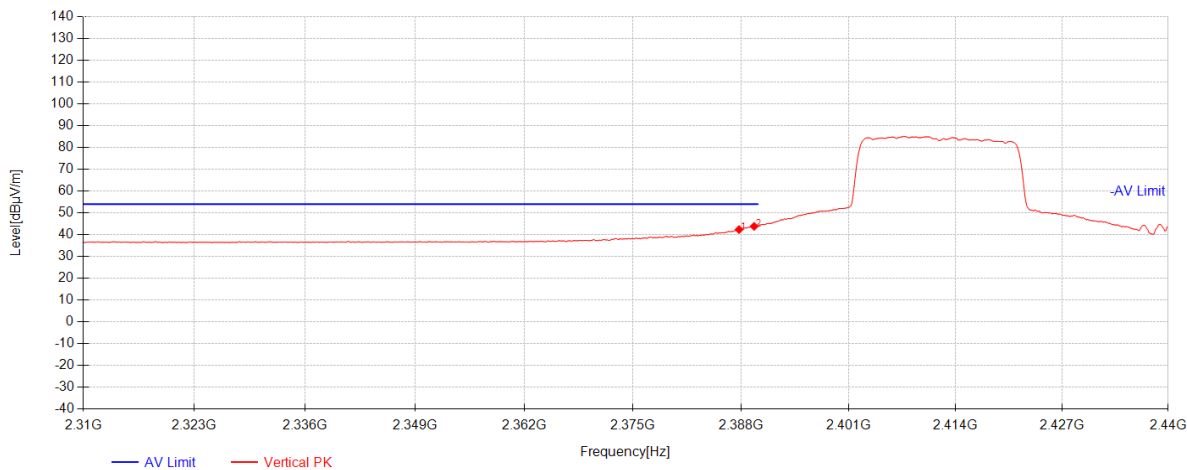


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.74	38.95	26.98	-23.57	42.35	54.00	11.65	Vertical
2	2389.56	40.41	26.98	-23.57	43.82	54.00	10.18	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 238 of 275

802.11ax20_Channel 01

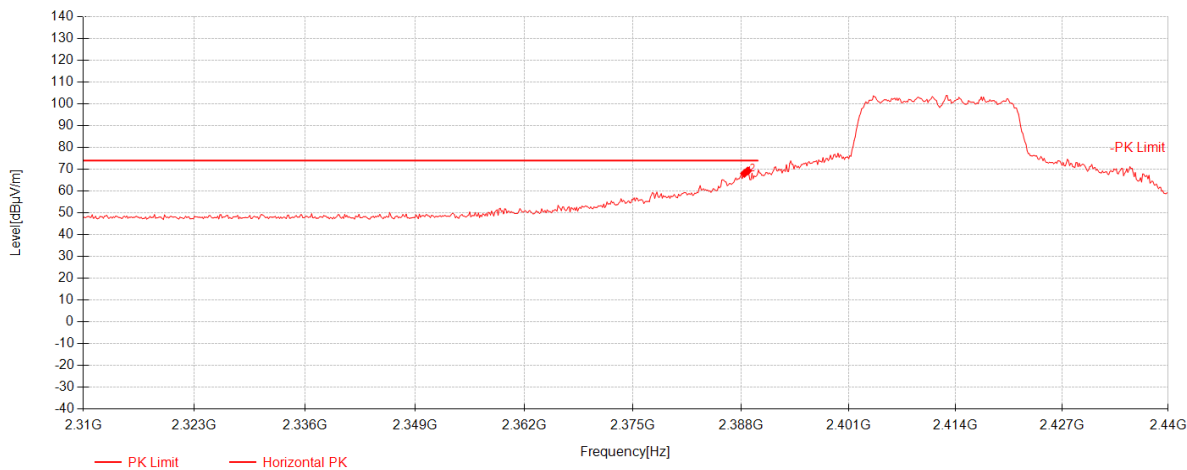


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.39	64.70	26.98	-23.57	68.11	74.00	5.89	Horizontal
2	2388.78	65.88	26.98	-23.57	69.29	74.00	4.71	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 239 of 275

802.11ax20_Channel 01

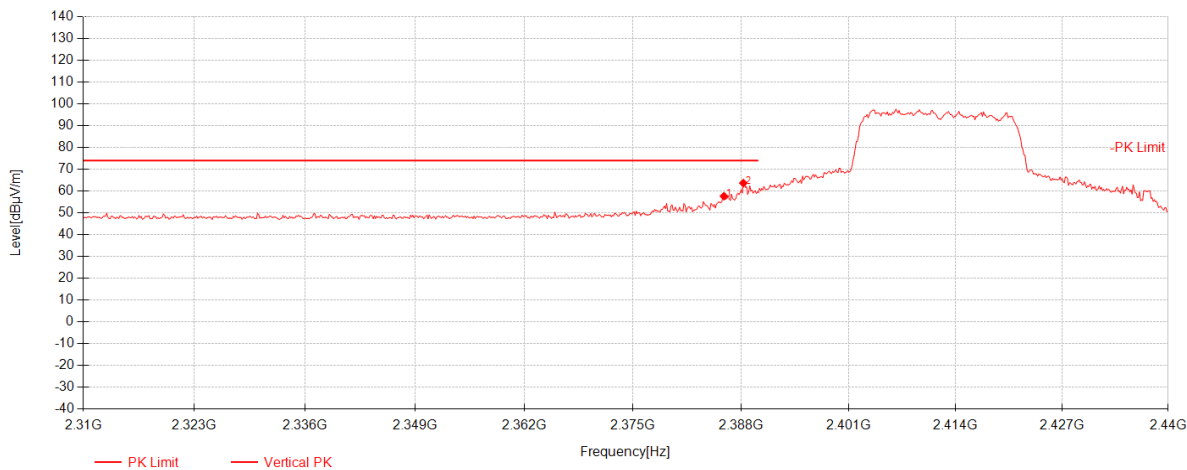


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.92	54.27	26.97	-23.57	57.67	74.00	16.33	Vertical
2	2388.26	60.28	26.98	-23.57	63.69	74.00	10.31	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 240 of 275

802.11ax20_Channel 11

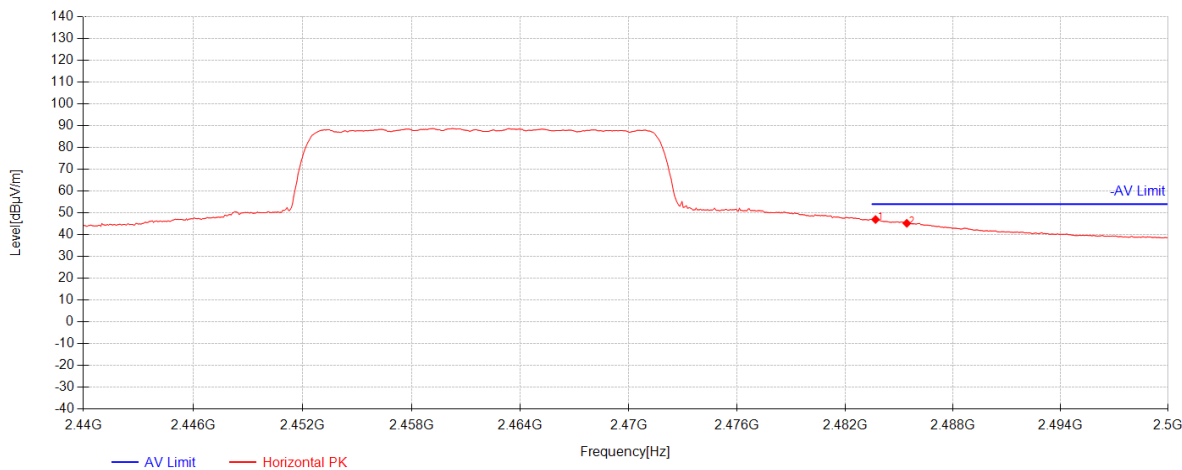


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	43.35	27.17	-23.54	46.97	54.00	7.03	Horizontal
2	2485.42	41.58	27.17	-23.54	45.21	54.00	8.79	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 241 of 275

802.11ax20_Channel 11

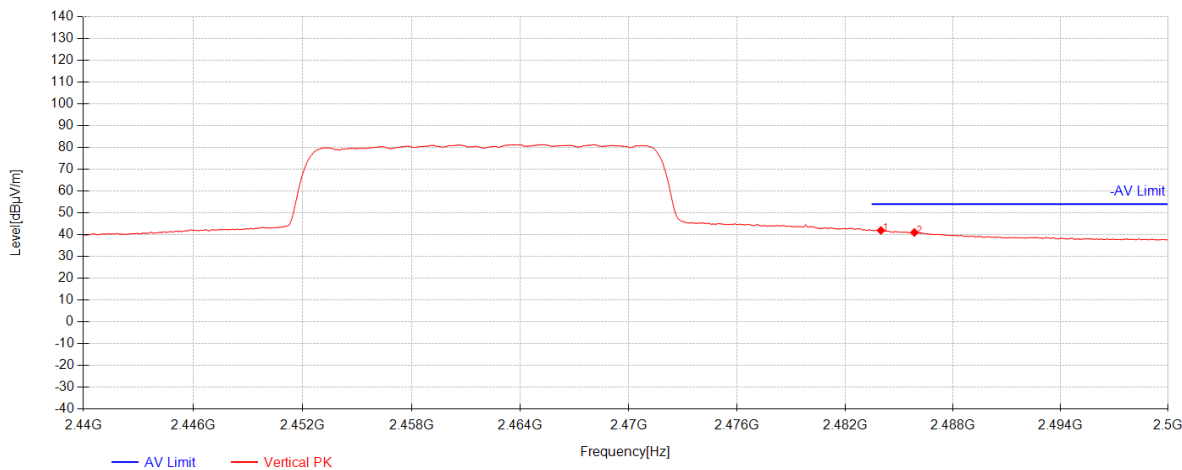


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.98	38.33	27.17	-23.54	41.95	54.00	12.05	Vertical
2	2485.84	37.39	27.17	-23.54	41.02	54.00	12.98	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 242 of 275

802.11ax20_Channel 11

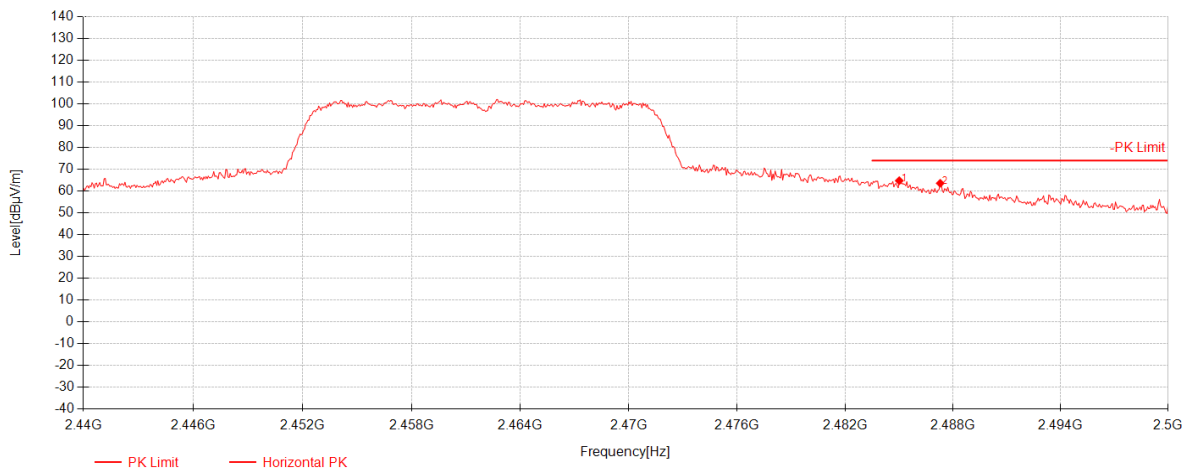


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485	61.16	27.17	-23.54	64.79	74.00	9.21	Horizontal
2	2487.28	59.98	27.17	-23.54	63.61	74.00	10.39	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 243 of 275

802.11ax20_Channel 11

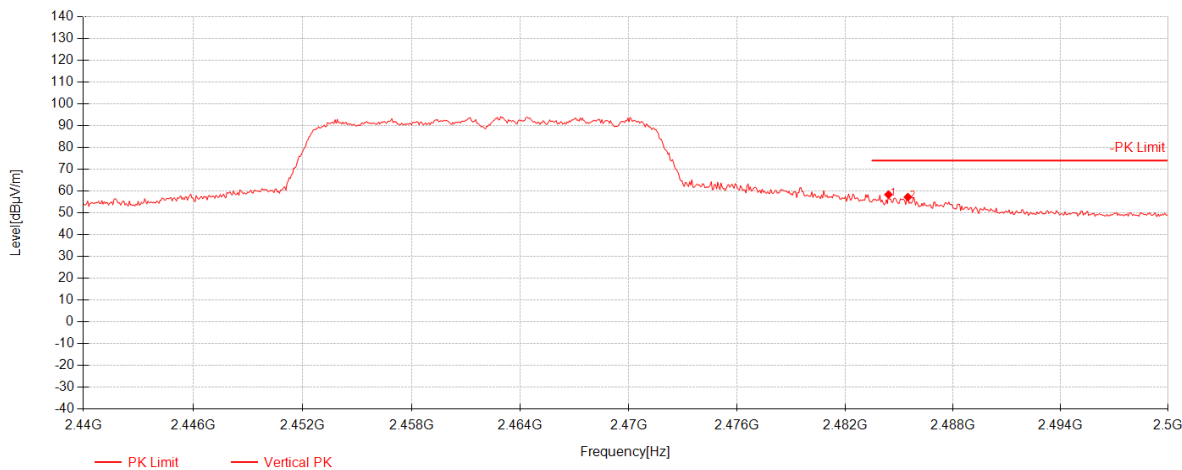


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.4	54.78	27.17	-23.54	58.40	74.00	15.60	Vertical
2	2485.48	53.61	27.17	-23.54	57.24	74.00	16.76	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 244 of 275

802.11ax40_Channel 03

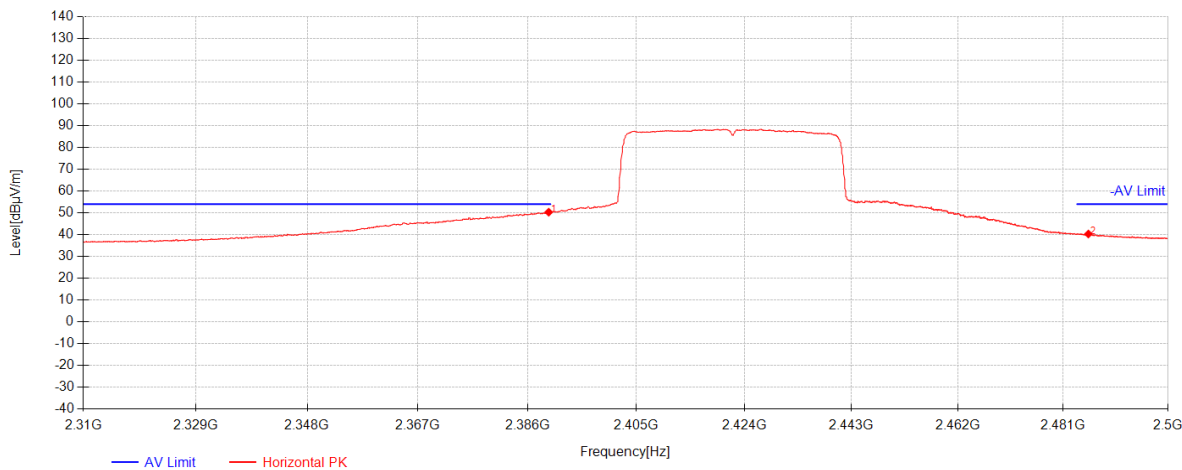


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.69	46.92	26.98	-23.57	50.33	54.00	3.67	Horizontal
2	2485.54	36.69	27.17	-23.54	40.32	54.00	13.68	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 245 of 275

802.11ax40_Channel 03

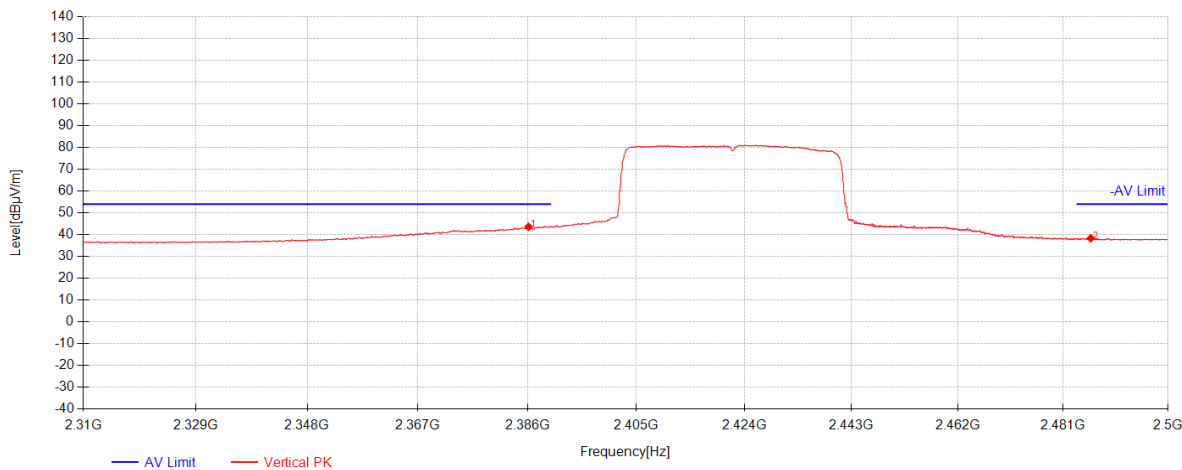


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.18	40.21	26.97	-23.57	43.61	54.00	10.39	Vertical
2	2485.96	34.72	27.17	-23.54	38.35	54.00	15.65	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 246 of 275

802.11ax40_Channel 03

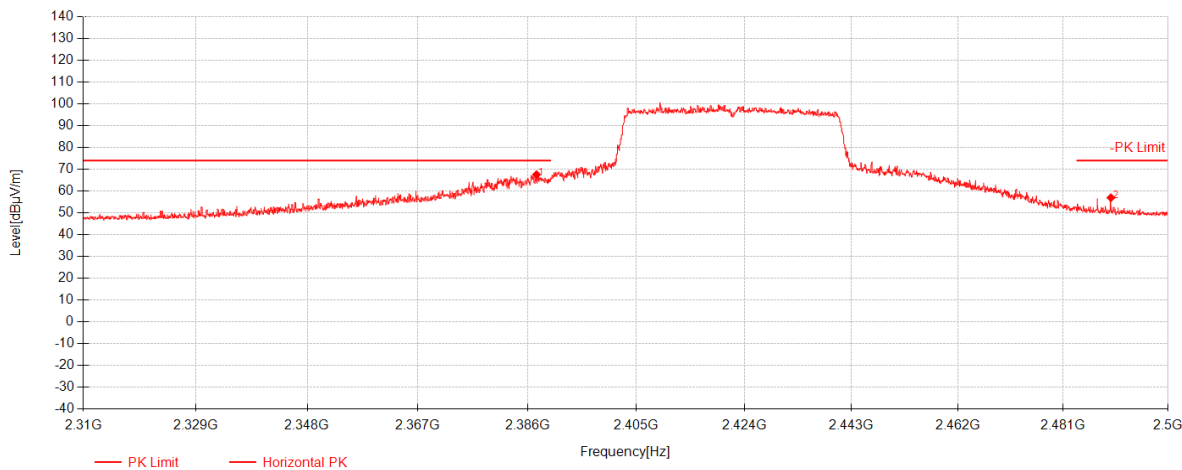


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.5667	64.18	26.98	-23.57	67.58	74.00	6.42	Horizontal
2	2489.62	53.33	27.18	-23.54	56.97	74.00	17.03	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 247 of 275

802.11ax40_Channel 03

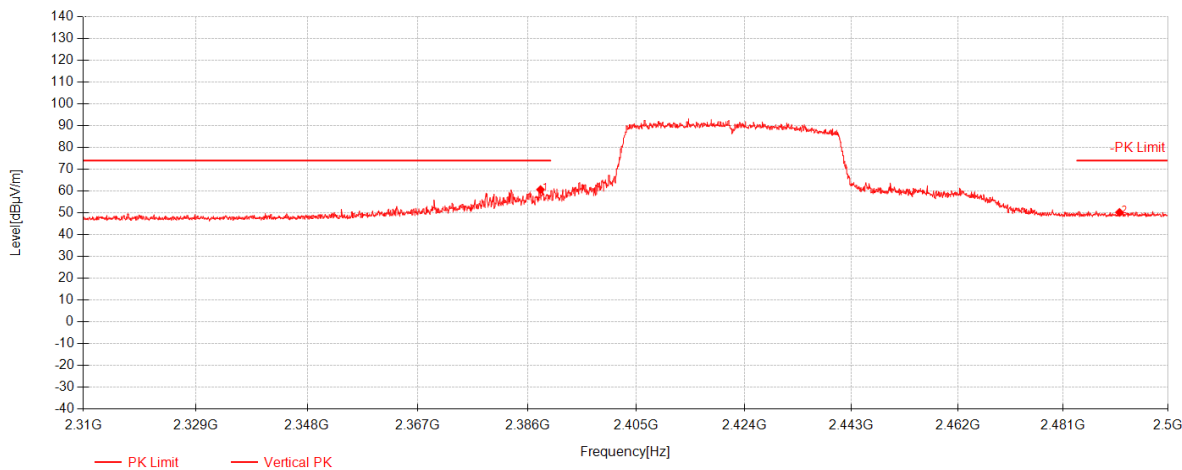


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.26	57.30	26.98	-23.57	60.71	74.00	13.29	Vertical
2	2491.18	46.59	27.18	-23.54	50.23	74.00	23.77	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 248 of 275

802.11ax40_Channel 09

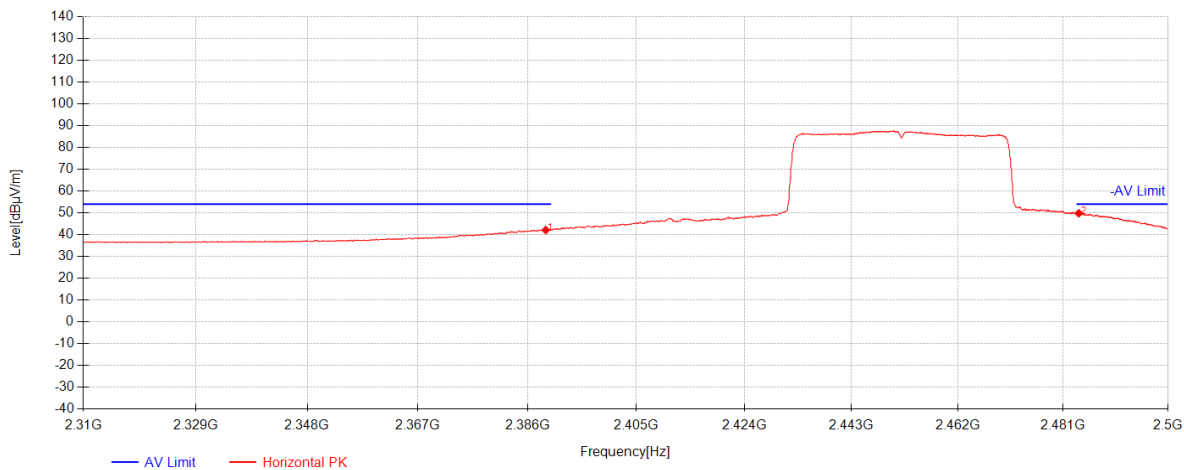


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2389.17	38.73	26.98	-23.57	42.14	54.00	11.86	Horizontal
2	2483.8	46.20	27.17	-23.54	49.82	54.00	4.18	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 249 of 275

802.11ax40_Channel 09

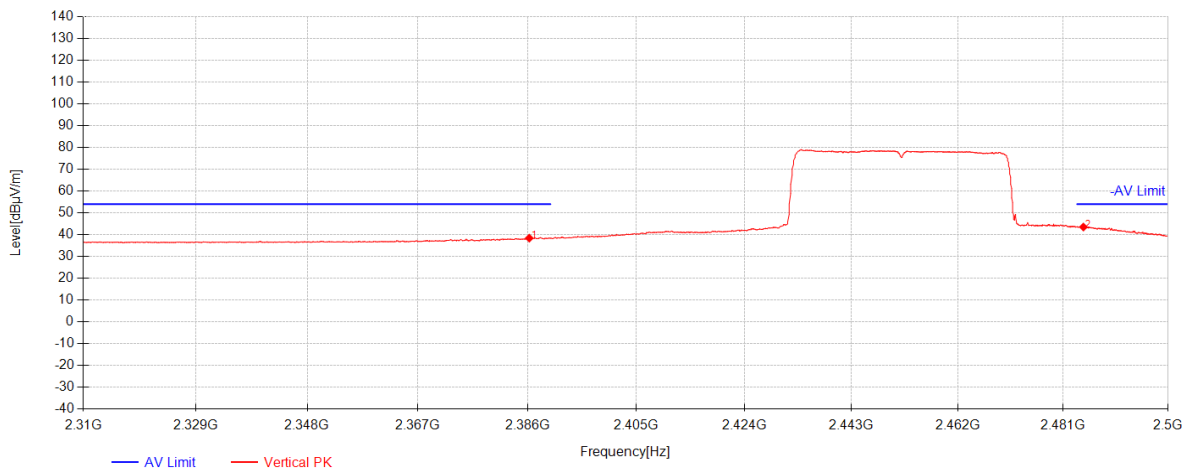


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.31	35.01	26.97	-23.57	38.41	54.00	15.59	Vertical
2	2484.64	39.90	27.17	-23.54	43.52	54.00	10.48	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 250 of 275

802.11ax40_Channel 09

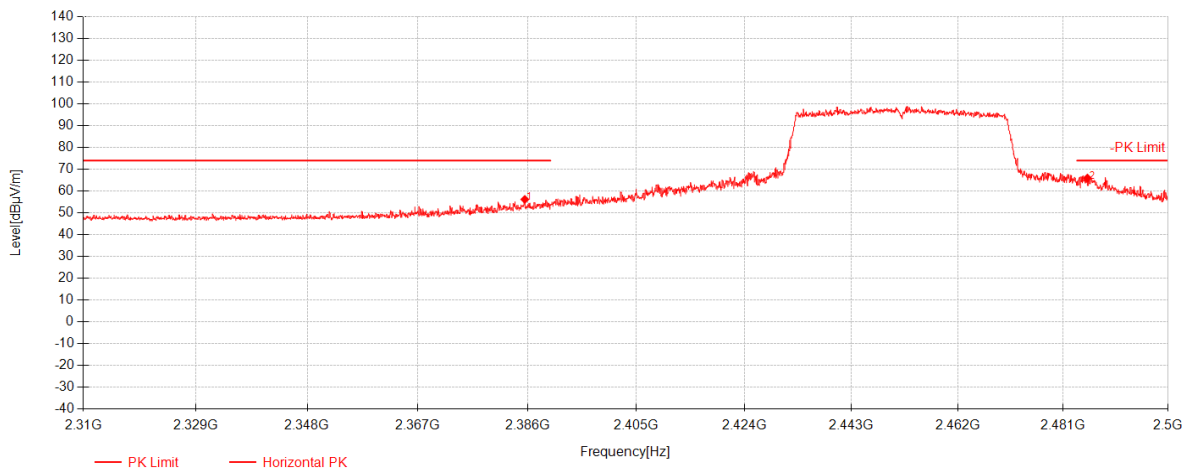


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.53	52.79	26.97	-23.57	56.19	74.00	17.81	Horizontal
2	2485.36	62.39	27.17	-23.54	66.02	74.00	7.98	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 251 of 275

802.11ax40_Channel 09

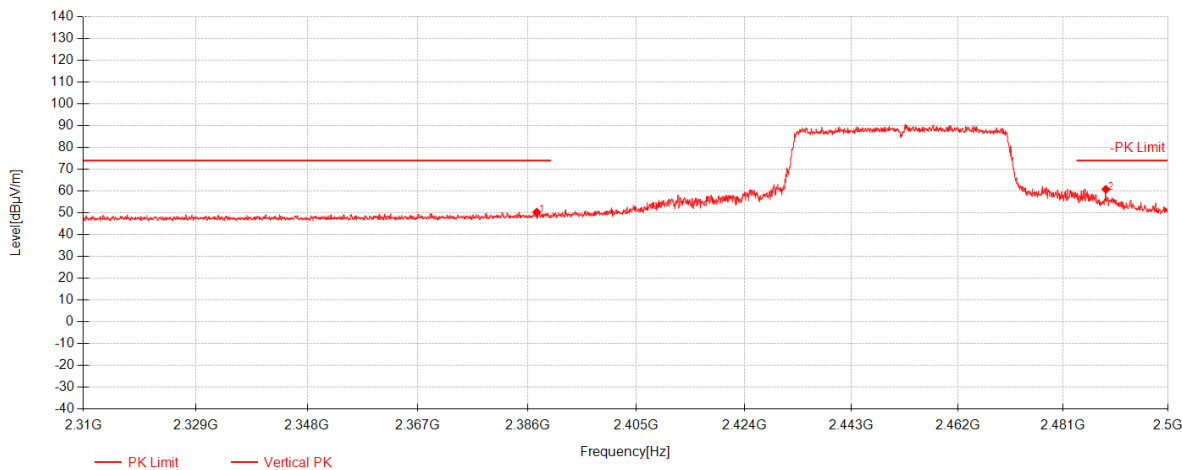


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.61	46.98	26.98	-23.57	50.38	74.00	23.62	Vertical
2	2488.72	57.21	27.18	-23.54	60.84	74.00	13.16	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 252 of 275

802.11ax20 26RU_LEFT_Channel 01

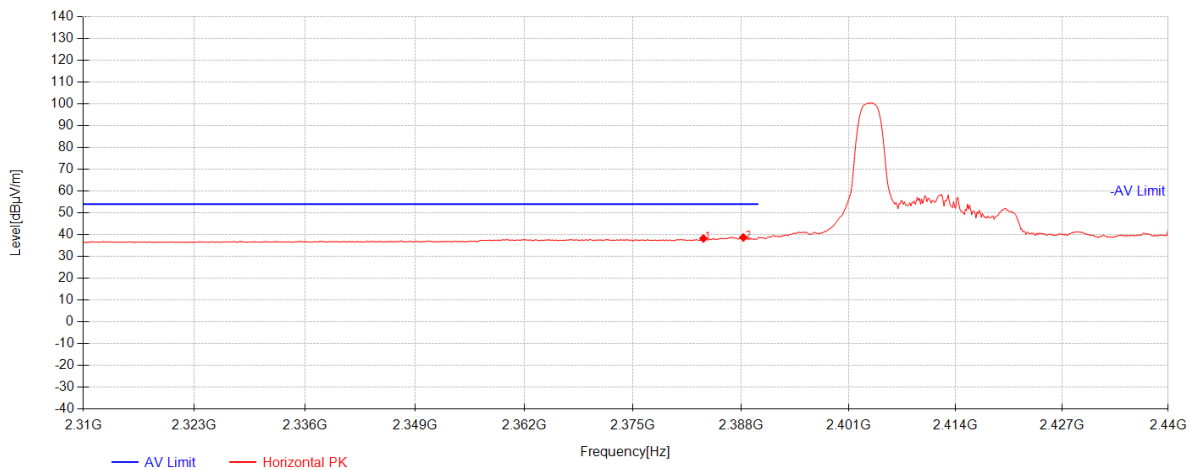


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.45	34.85	26.97	-23.57	38.25	54.00	15.75	Horizontal
2	2388.26	35.32	26.98	-23.57	38.73	54.00	15.27	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 253 of 275

802.11ax20 26RU_LEFT_Channel 01

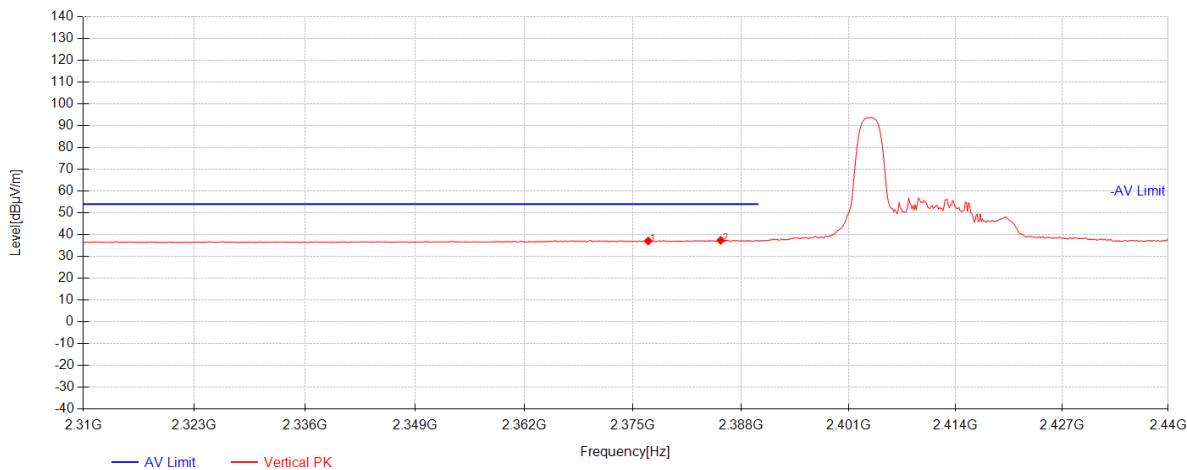


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2376.82	33.71	26.95	-23.57	37.09	54.00	16.91	Vertical
2	2385.53	33.99	26.97	-23.57	37.39	54.00	16.61	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 254 of 275

802.11ax20 26RU_LEFT_Channel 01

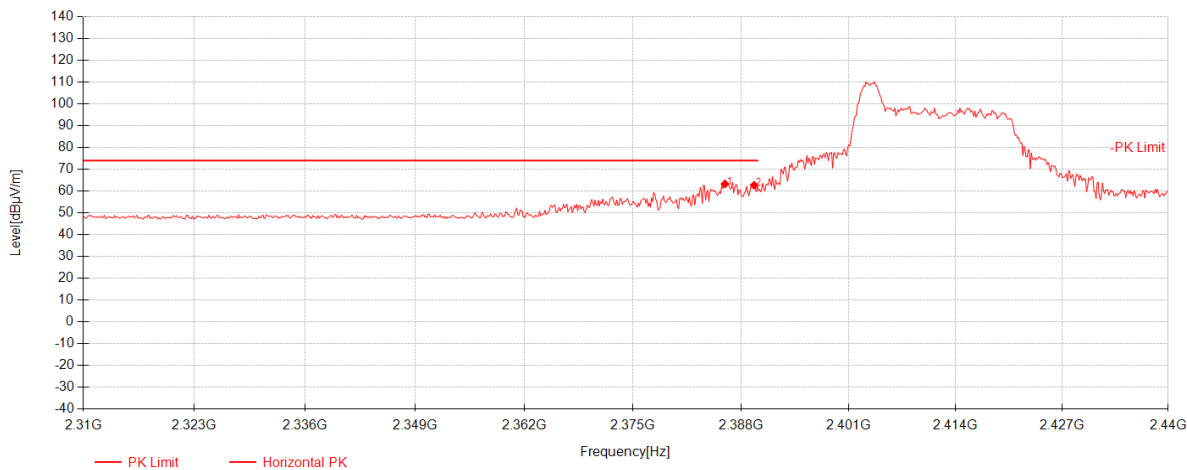


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.05	59.93	26.97	-23.57	63.33	74.00	10.67	Horizontal
2	2389.56	59.32	26.98	-23.57	62.73	74.00	11.27	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 255 of 275

802.11ax20 26RU_LEFT_Channel 01

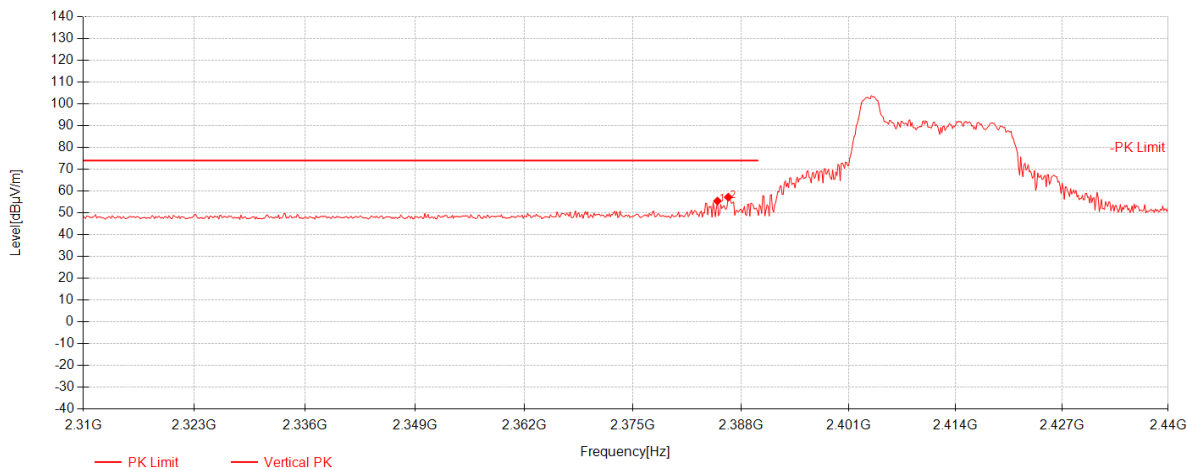


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.14	52.05	26.97	-23.57	55.45	74.00	18.55	Vertical
2	2386.44	53.80	26.97	-23.57	57.20	74.00	16.80	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 256 of 275

802.11ax20 26RU_RIGHT_Channel 11

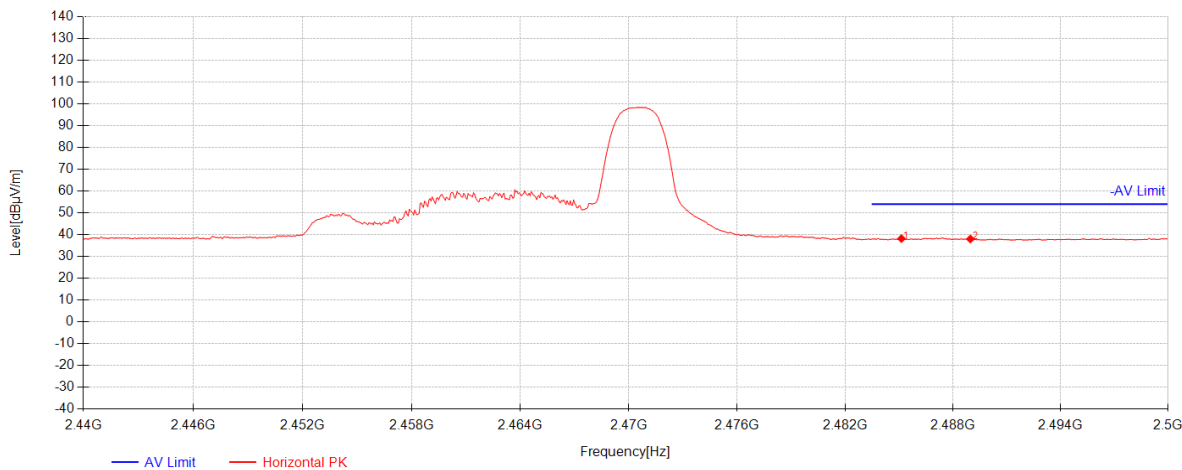


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485.12	34.55	27.17	-23.54	38.18	54.00	15.82	Horizontal
2	2488.96	34.38	27.18	-23.54	38.01	54.00	15.99	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 257 of 275

802.11ax20 26RU_RIGHT_Channel 11

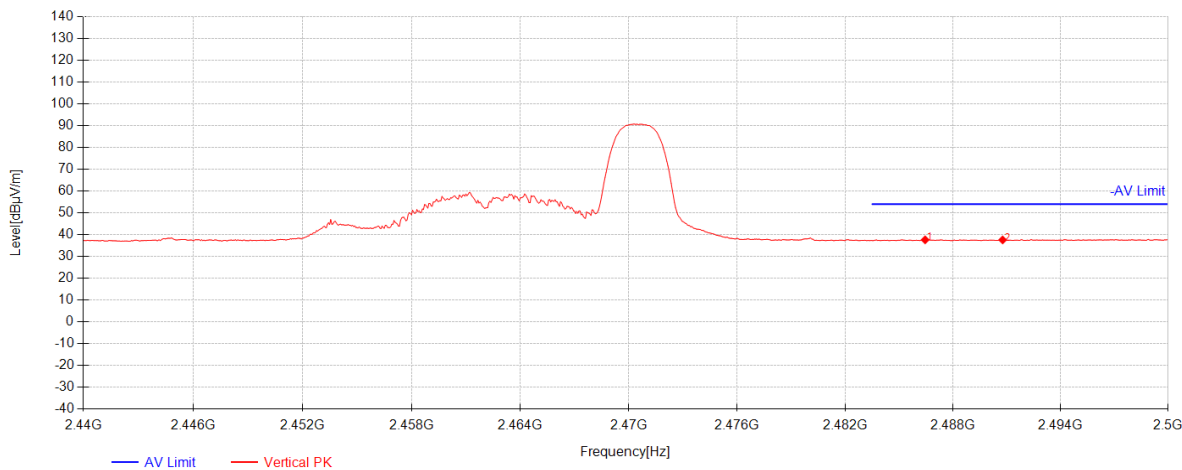


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2486.44	33.99	27.17	-23.54	37.62	54.00	16.38	Vertical
2	2490.76	33.95	27.18	-23.54	37.59	54.00	16.41	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 258 of 275

802.11ax20 26RU_RIGHT_Channel 11

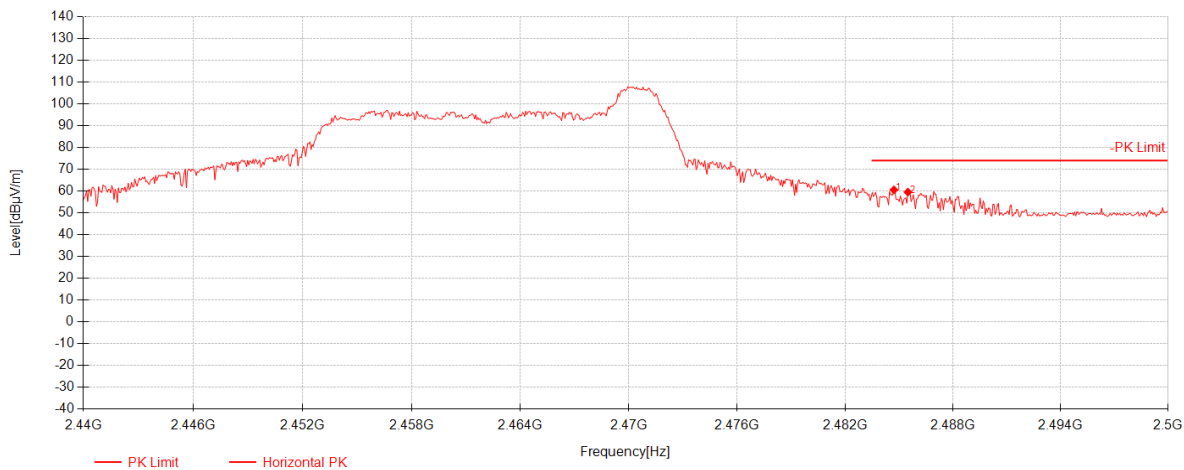


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.7	56.96	27.17	-23.54	60.58	74.00	13.42	Horizontal
2	2485.48	55.91	27.17	-23.54	59.54	74.00	14.46	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 259 of 275

802.11ax20 26RU_RIGHT_Channel 11

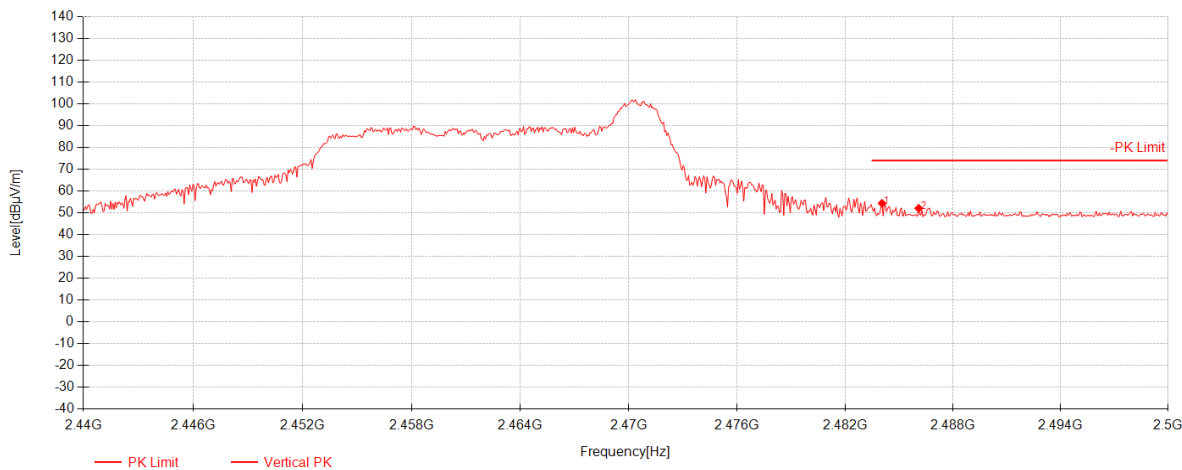


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.04	50.79	27.17	-23.54	54.41	74.00	19.59	Vertical
2	2486.08	48.48	27.17	-23.54	52.11	74.00	21.89	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 260 of 275

802.11ax20 52RU_LEFT_Channel 01

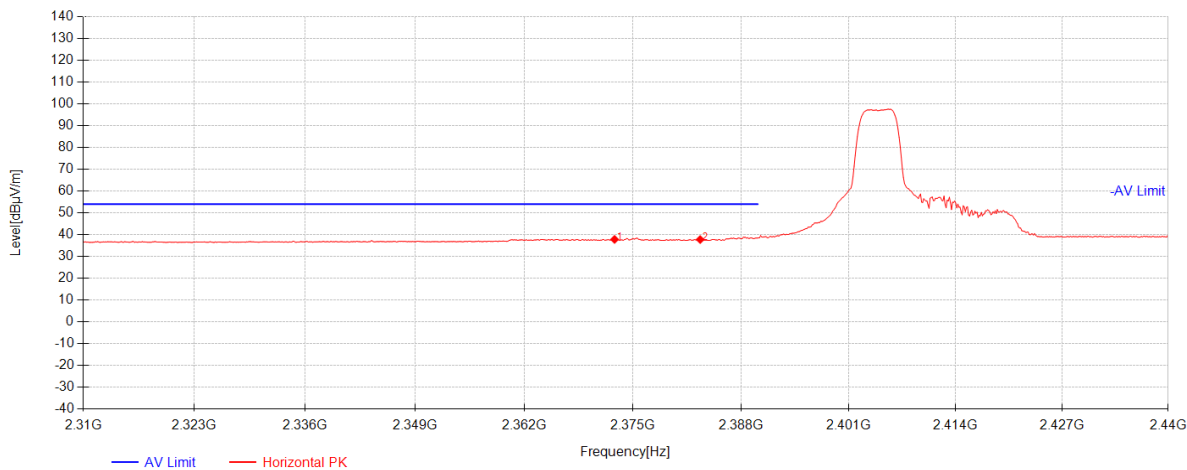


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2372.79	34.45	26.95	-23.57	37.82	54.00	16.18	Horizontal
2	2383.06	34.38	26.97	-23.57	37.77	54.00	16.23	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 261 of 275

802.11ax20 52RU_LEFT_Channel 01

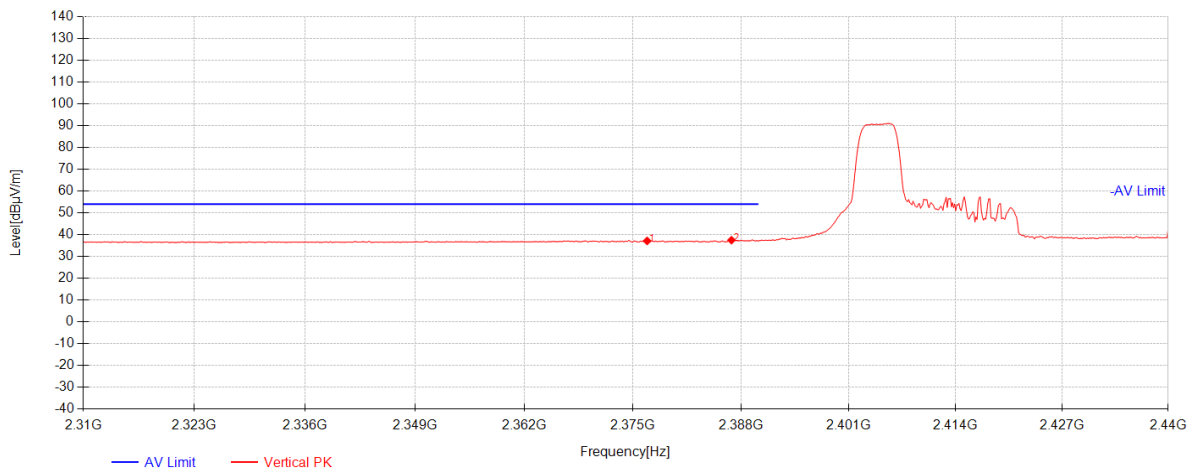


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2376.69	33.75	26.95	-23.57	37.13	54.00	16.87	Vertical
2	2386.83	34.09	26.97	-23.57	37.49	54.00	16.51	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 262 of 275

802.11ax20 52RU_LEFT_Channel 01

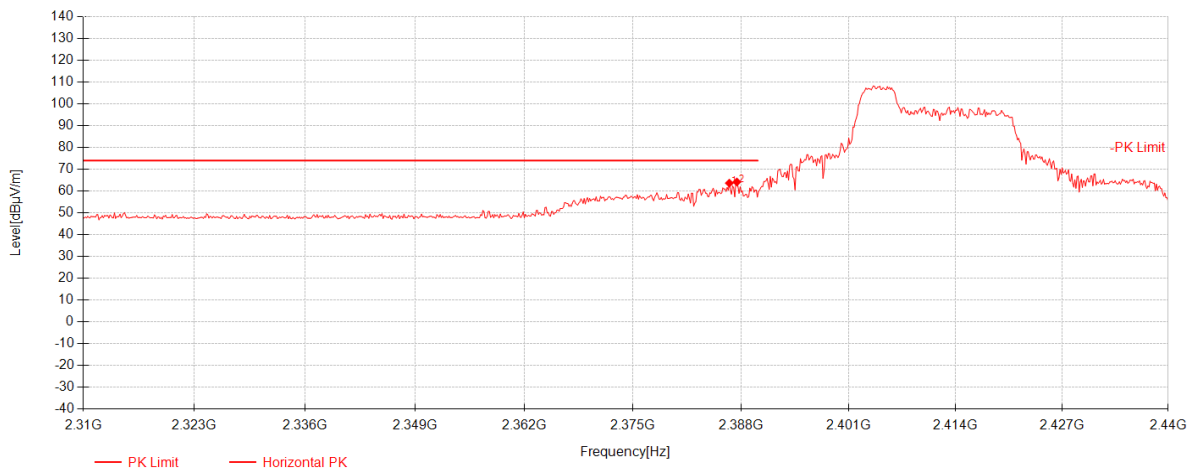


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.57	60.27	26.97	-23.57	63.67	74.00	10.33	Horizontal
2	2387.48	60.82	26.97	-23.57	64.22	74.00	9.78	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 263 of 275

802.11ax20 52RU_LEFT_Channel 01

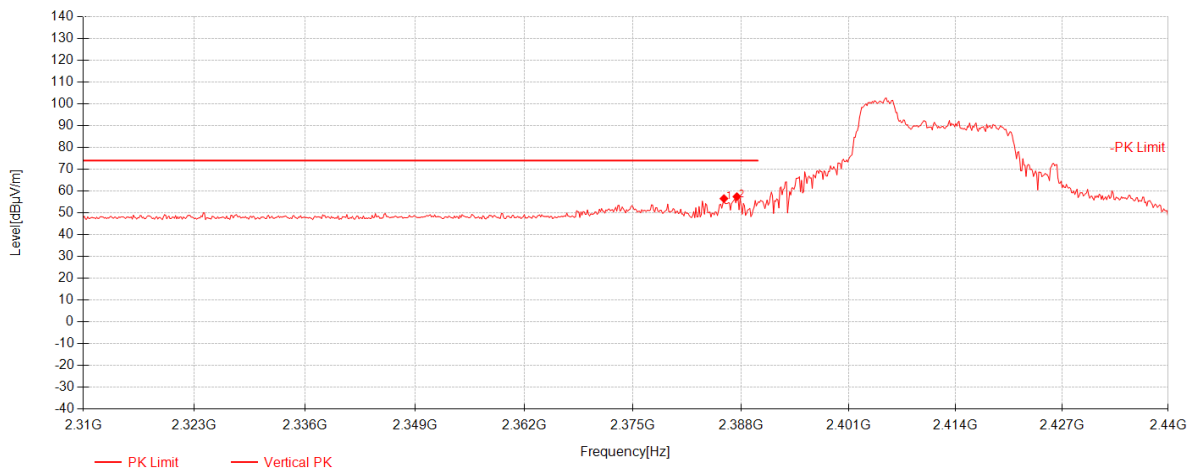


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.92	53.17	26.97	-23.57	56.57	74.00	17.43	Vertical
2	2387.48	54.07	26.97	-23.57	57.47	74.00	16.53	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 264 of 275

802.11ax20 52RU_RIGHT_Channel 11

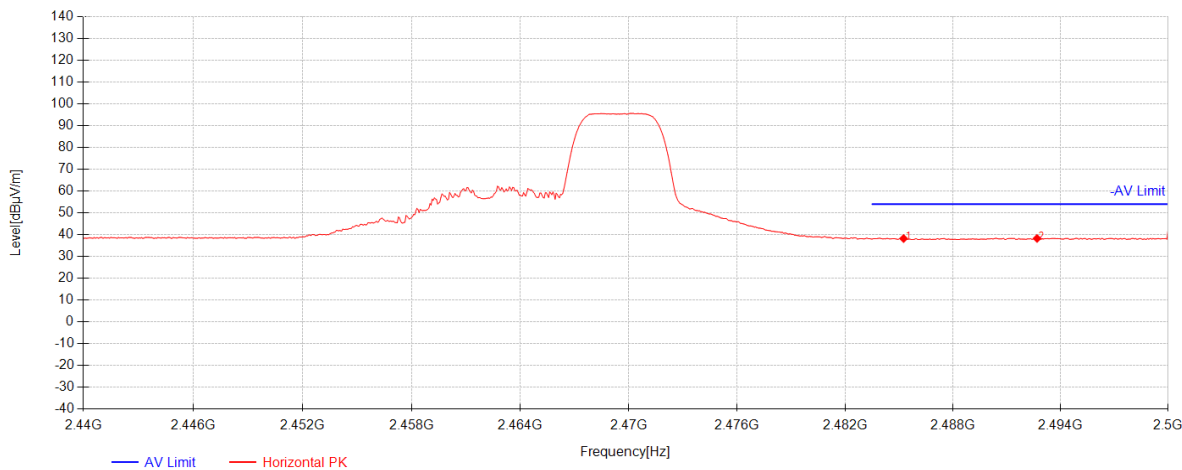


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485.24	34.60	27.17	-23.54	38.23	54.00	15.77	Horizontal
2	2492.68	34.62	27.19	-23.54	38.26	54.00	15.74	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 265 of 275

802.11ax20 52RU_RIGHT_Channel 11

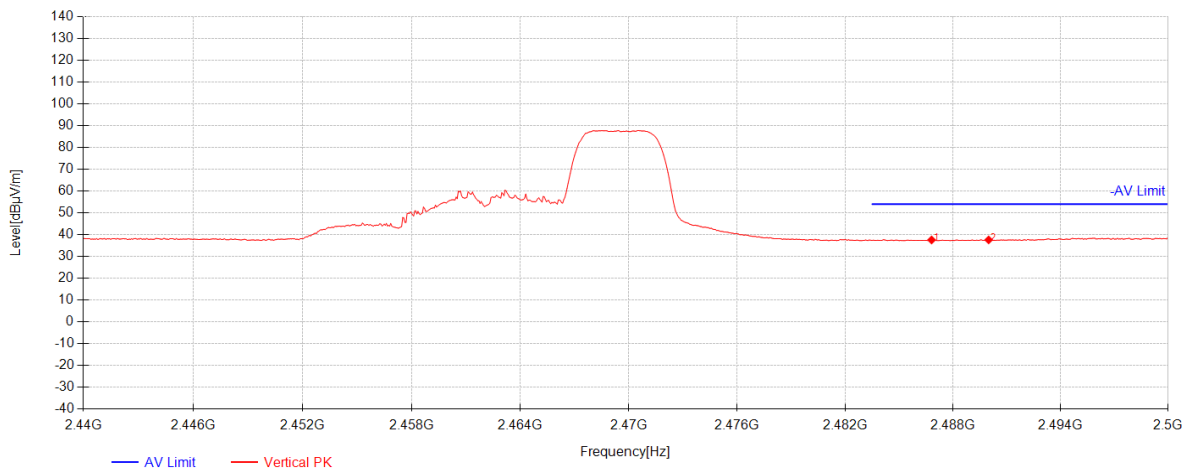


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2486.8	33.94	27.17	-23.54	37.57	54.00	16.43	Vertical
2	2489.98	33.96	27.18	-23.54	37.60	54.00	16.40	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 266 of 275

802.11ax20 52RU_RIGHT_Channel 11

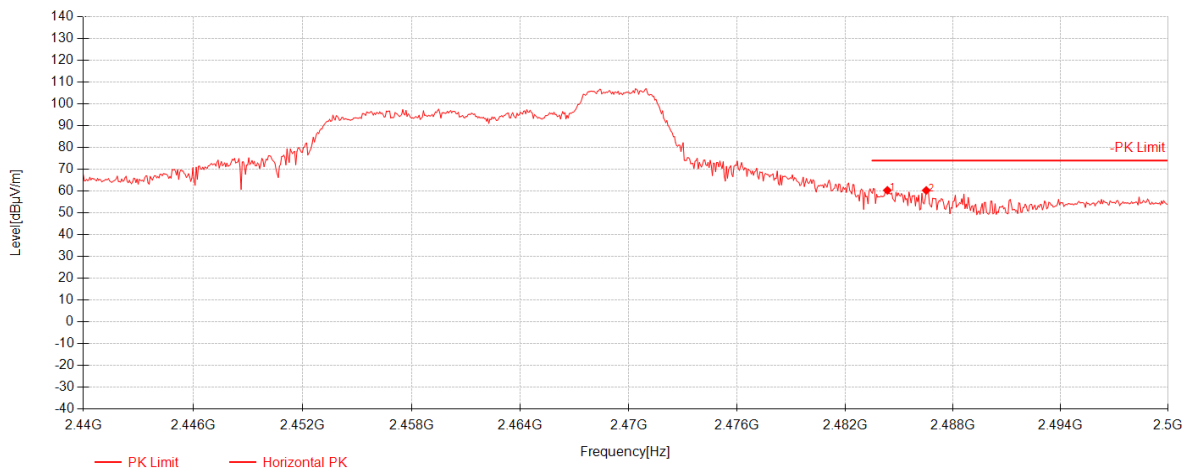


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.34	56.73	27.17	-23.54	60.35	74.00	13.65	Horizontal
2	2486.5	56.69	27.17	-23.54	60.32	74.00	13.68	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 267 of 275

802.11ax20 52RU_RIGHT_Channel 11

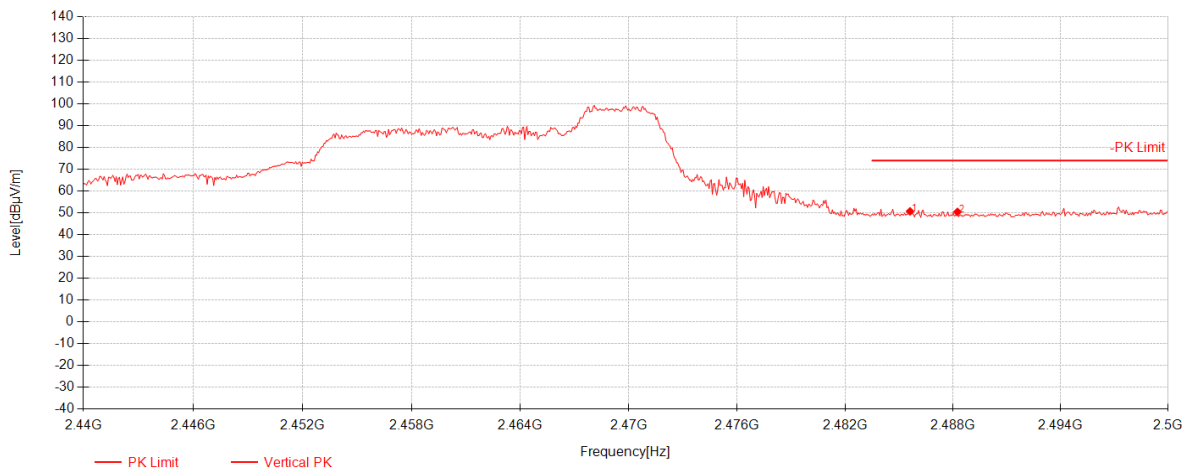


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485.6	47.08	27.17	-23.54	50.71	74.00	23.29	Vertical
2	2488.24	46.84	27.18	-23.54	50.47	74.00	23.53	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 268 of 275

802.11ax20 106RU_LEFT_Channel 01

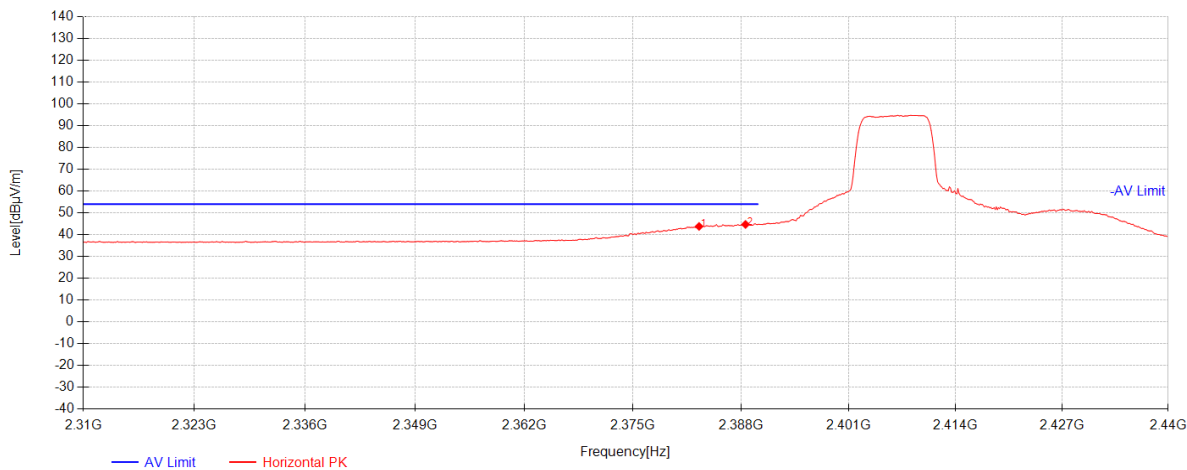


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2382.93	40.40	26.97	-23.57	43.79	54.00	10.21	Horizontal
2	2388.52	41.28	26.98	-23.57	44.69	54.00	9.31	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 269 of 275

802.11ax20 106RU_LEFT_Channel 01

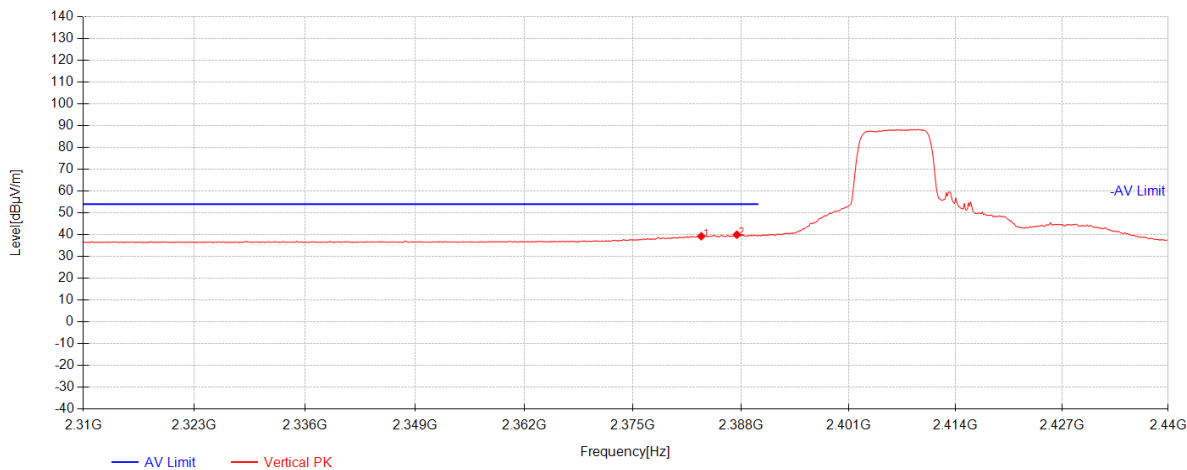


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.19	35.91	26.97	-23.57	39.30	54.00	14.70	Vertical
2	2387.48	36.58	26.97	-23.57	39.98	54.00	14.02	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 270 of 275

802.11ax20 106RU_LEFT_Channel 01

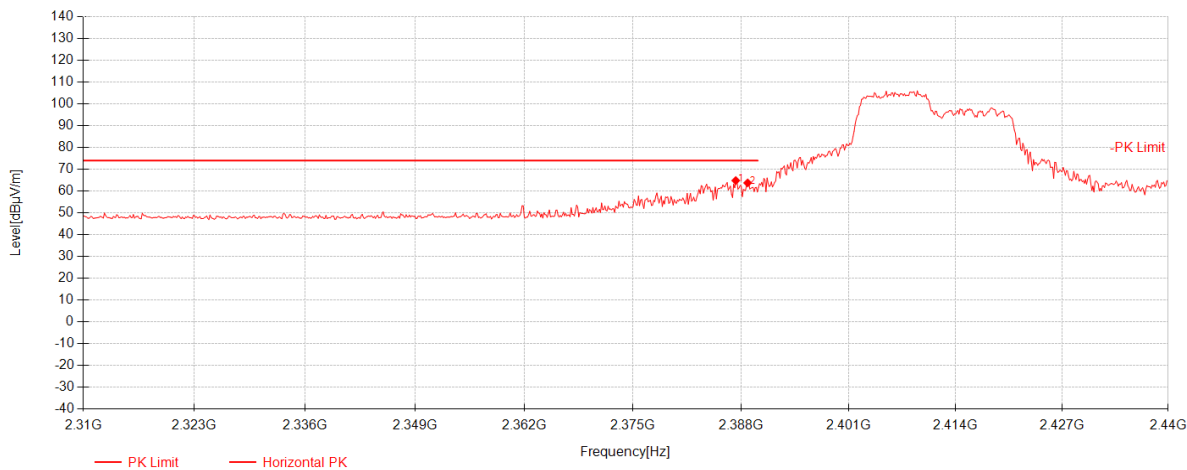


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.35	61.46	26.97	-23.57	64.86	74.00	9.14	Horizontal
2	2388.78	60.37	26.98	-23.57	63.78	74.00	10.22	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 271 of 275

802.11ax20 106RU_LEFT_Channel 01

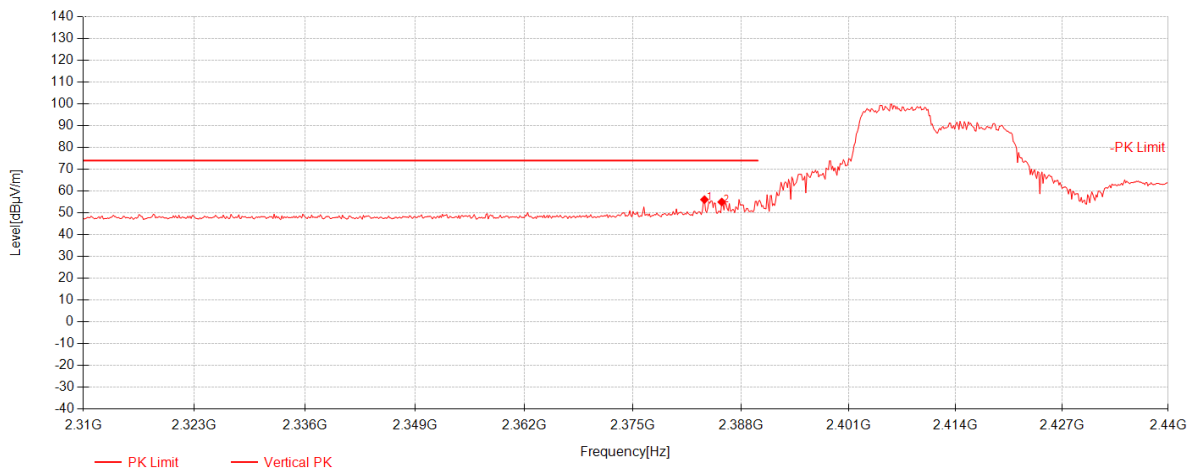


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.58	52.71	26.97	-23.57	56.11	74.00	17.89	Vertical
2	2385.66	51.59	26.97	-23.57	54.99	74.00	19.01	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 272 of 275

802.11ax20 106RU_RIGHT_Channel 11

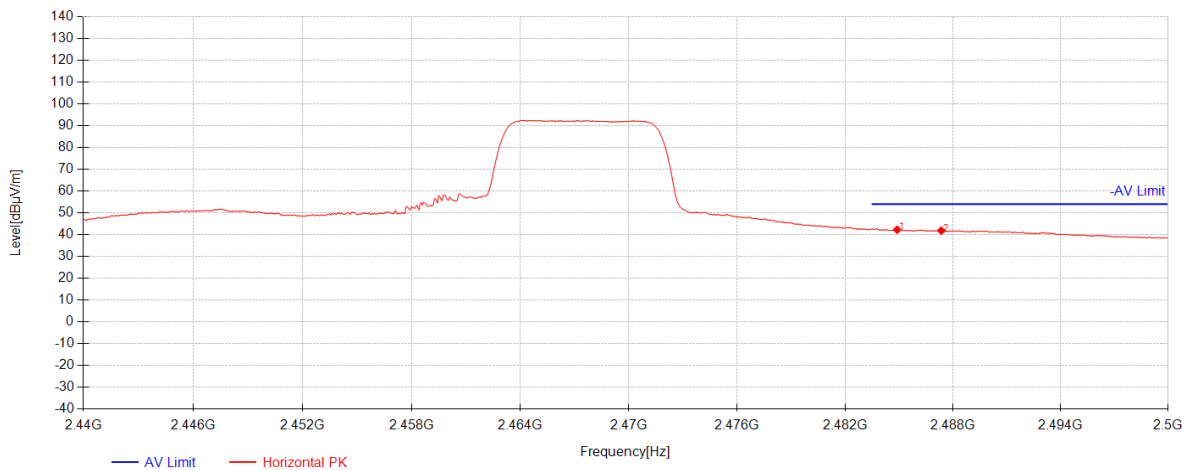


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.88	38.63	27.17	-23.54	42.26	54.00	11.74	Horizontal
2	2487.34	38.22	27.17	-23.54	41.85	54.00	12.15	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 273 of 275

802.11ax20 106RU_RIGHT_Channel 11

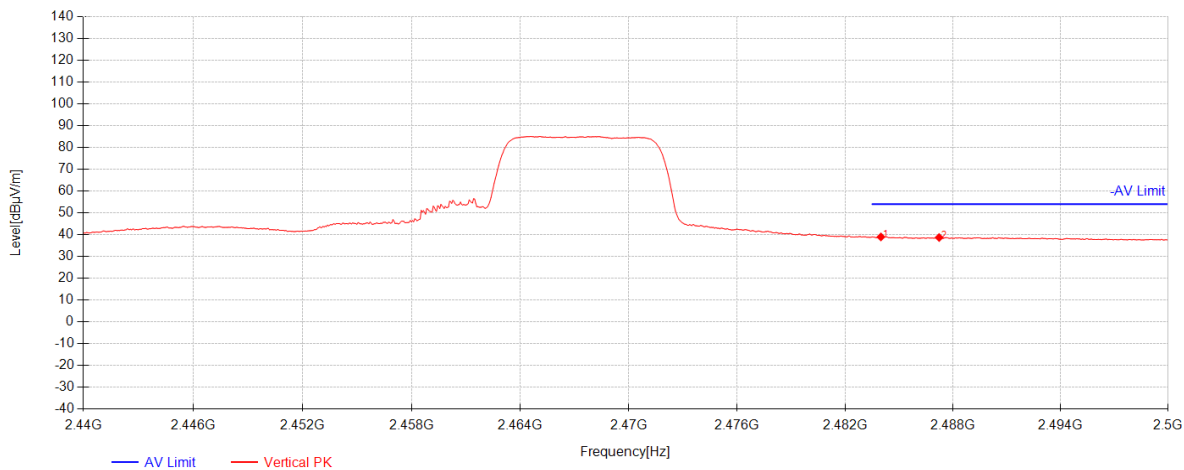


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.98	35.35	27.17	-23.54	38.97	54.00	15.03	Vertical
2	2487.22	35.07	27.17	-23.54	38.70	54.00	15.30	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503
Rev.: 01
Page: 274 of 275

802.11ax20 106RU_RIGHT_Channel 11

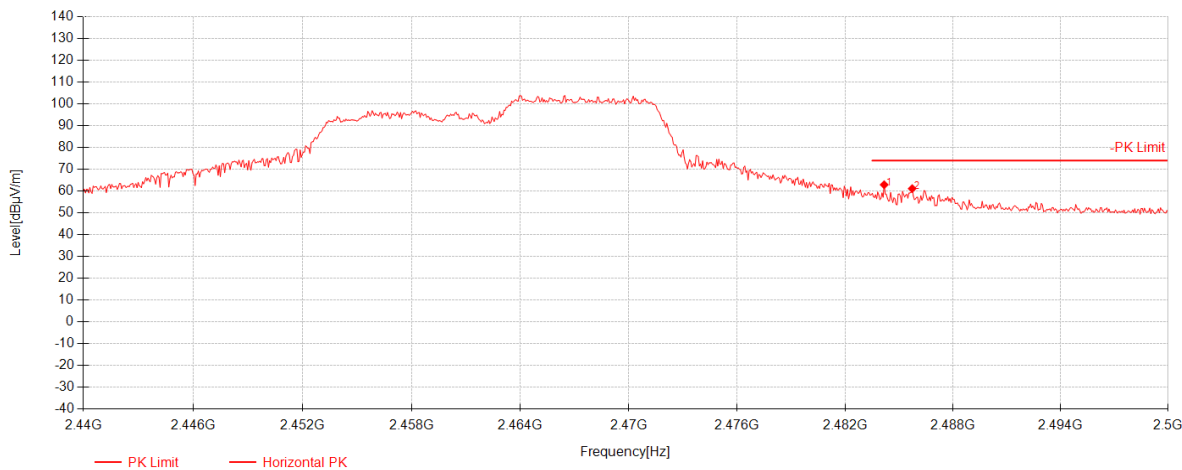

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.16	59.31	27.17	-23.54	62.93	74.00	11.07	Horizontal
2	2485.72	57.53	27.17	-23.54	61.16	74.00	12.84	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400035503

Rev.: 01

Page: 275 of 275

802.11ax20 106RU_RIGHT_Channel 11

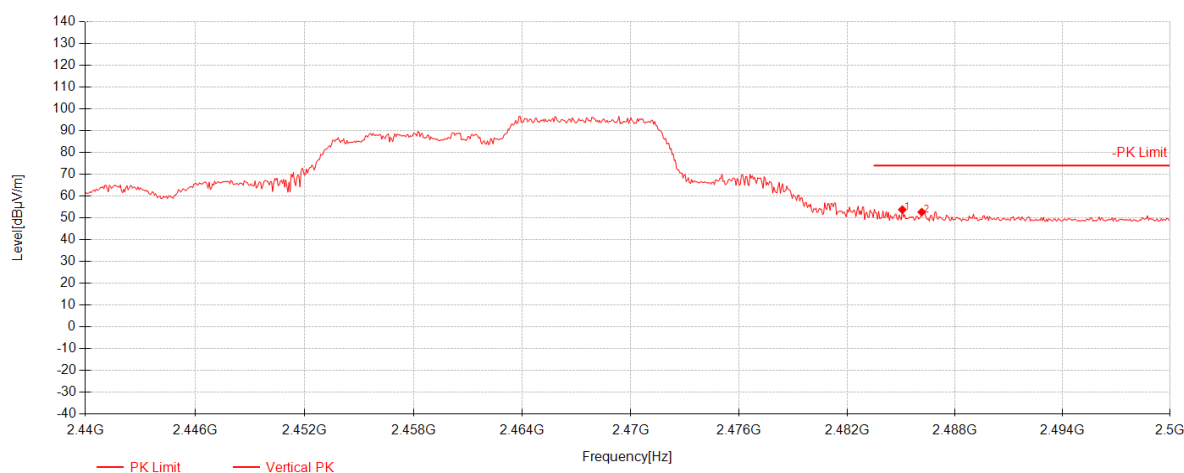

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485.06	50.16	27.17	-23.54	53.79	74.00	20.21	Vertical
2	2486.14	49.04	27.17	-23.54	52.67	74.00	21.33	Vertical

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading(dBμV) + AF(dB/m) + Factor(dB):

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit(dBμV/m) – Level(dBμV/m)

- 2) Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---