

# TEST REPORT

**Applicant:** Shantou Xinshuo Technology Co., Ltd

**Address of Applicant:** 4th Floor, Jinrongda Industrial Building, Chengjiang Road, Chenghai District, Shantou City, Guangdong Province, China

**Manufacturer:** Shantou Xinshuo Technology Co., Ltd

**Address of Manufacturer:** 4th Floor, Jinrongda Industrial Building, Chengjiang Road, Chenghai District, Shantou City, Guangdong Province, China

**Equipment Under Test (EUT)**

Product Name: RC Boat

Model No.: See section 5.1

**FCC ID:** 2BQYYTX6268694

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249

**Date of sample receipt:** August 05, 2025

**Date of Test:** August 06-15, 2025

**Date of report issued:** August 15, 2025

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

**Robinson Luo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	August 15, 2025	Original

Tested By:




Date:

August 15, 2025

Test Engineer

Prepared By:




Date:

August 15, 2025

Project Engineer

Check By:

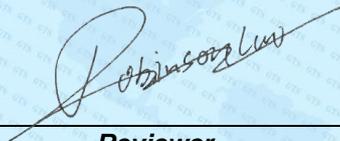

Date:

August 15, 2025

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 DESCRIPTION OF SUPPORT UNITS.....	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5.6 TEST FACILITY.....	7
5.7 TEST LOCATION.....	7
5.8 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST.....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT.....	10
7.2 RADIATED EMISSION METHOD.....	11
7.2.1 <i>Field Strength of The Fundamental Signal</i> .....	13
7.2.2 <i>Spurious emissions</i> .....	14
7.2.3 <i>Bandedge emissions</i> .....	22
7.3 20dB OCCUPY BANDWIDTH.....	26
8 TEST SETUP PHOTO.....	28
9 EUT CONSTRUCTIONAL DETAILS.....	28

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

**Remarks:**

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.
3. N/A: not applicable

### 4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
	Humidity test	$\pm 3\%$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

## 5 General Information

### 5.1 General Description of EUT

Product Name:	RC Boat
Model No.:	TX626, TX687, TX688, TX668, TX627, TX672, TX619, TX662, TX676, TX678, TX686, TX682, TX691, TX677, TX693, TX694, TX622, TX613, TX614, TX699, TX725, TX727, TX731, TX762, TX714, TX722, TX733, TX739, TX788, TX749, TX768, TX767, TX776, TX766, TX739, TX728, TX714, TX787, TX811, TX813, TX814, TX822, TX866, TX867, TX868, TX877, TX876, TX888, TX927, TX949, TX922, TX966, TX967, TX968, TX986, TX919, TX993, TX988, TX1167, TX1168, TX1186, TX1188, TX6626, TX6627, TX6628, TX6686, TX226, TX227, TX228, TX266, TX8868, TX8867, TX8876, TX8878, TX8886, TX8887, TX8888, TX8899
Test Model No.:	TX626
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color, packing and model name for commercial purpose.	
Serial No.:	20250216
Test sample(s) ID:	GTS2025080044-1
Sample(s) Status	Engineered sample
Operation Frequency:	2418MHz~2465MHz
Channel Numbers:	48
Modulation Type:	GFSK
Antenna Type:	Wire Antenna
Antenna gain:	0.17dBi(declare by applicant)
Power supply:	DC 3V(2*1.5V Size“AA” Battery)

**Disclaimer statement:**

1. Antenna gain information provided by the customer, and the laboratory is not responsible for its authenticity.
2. The information in this section is provided by the applicant or manufacturer, GTS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2418	13	2430	25	2442	37	2454
2	2419	14	2431	26	2443	38	2455
3	2420	15	2432	27	2444	39	2456
4	2421	16	2433	28	2445	40	2457
5	2422	17	2434	29	2446	41	2458
6	2423	18	2435	30	2447	42	2459
7	2424	19	2436	31	2448	43	2460
8	2425	20	2437	32	2449	44	2461
9	2426	21	2438	33	2450	45	2462
10	2427	22	2439	34	2451	46	2463
11	2428	23	2440	35	2452	47	2464
12	2429	24	2441	36	2453	48	2465

The test frequencies are below:

Channel	Frequency
The lowest channel	2418MHz
The middle channel	2444MHz
The Highest channel	2465MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: New battery is used during all test.	

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report (Only show the worst case:Y axis) and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	92.66	93.70	91.54

## 5.3 Description of Support Units

None.
-------

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC—Registration No.: 381383</b> Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.</li> <li>● <b>ISED—Registration No.: 9079A</b> CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).</li> </ul>
--

## 5.7 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

## 5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 11, 2025	Apr. 10, 2026
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 12, 2025	Apr. 11, 2026
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 12, 2025	Apr. 11, 2026
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 01, 2025	Jun. 30, 2026
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.16, 2024	Nov.15, 2025
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2025	Apr. 10, 2026
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2025	Apr. 10, 2026
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2025	Apr. 10, 2026
11	FSV-Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 11, 2025	Mar. 10, 2026
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2025	Apr. 10, 2026
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 13, 2024	Nov. 12, 2025
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2025	Apr. 10, 2026
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 15, 2025	Apr. 14, 2026
16	RE cable 1	GTS	N/A	GTS675	Jul. 11, 2025	Jul. 10, 2026
17	RE cable 2	GTS	N/A	GTS676	Jul. 11, 2025	Jul. 10, 2026
18	RE cable 3	GTS	N/A	GTS677	Jul. 11, 2025	Jul. 10, 2026
19	RE cable 4	GTS	N/A	GTS678	Jul. 11, 2025	Jul. 10, 2026
20	RE cable 5	GTS	N/A	GTS679	Jul. 11, 2025	Jul. 10, 2026
21	RE cable 6	GTS	N/A	GTS680	Jul. 11, 2025	Jul. 10, 2026
22	RE cable 7	GTS	N/A	GTS681	Jul. 11, 2025	Jul. 10, 2026
23	RE cable 8	GTS	N/A	GTS682	Jul. 11, 2025	Jul. 10, 2026
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

<b>RF Conducted Test:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal.Date (mm-dd-yy)</b>	<b>Cal.Due date (mm-dd-yy)</b>
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 11, 2025	Apr. 10, 2026
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 11, 2025	Apr. 10, 2026
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 11, 2025	Apr. 10, 2026
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Power Meter	Keysight	N1924A	GTS673	Apr. 11, 2025	Apr. 10, 2026
7	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 11, 2025	Apr. 10, 2026
8	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 11, 2025	Apr. 10, 2026
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 11, 2025	Apr. 10, 2026
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 15, 2025	Apr. 14, 2026


<b>General used equipment:</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Date (mm-dd-yy)</b>	<b>Cal.Due date (mm-dd-yy)</b>
1	Barometer	KUMAO	SF132	GTS647	Jul. 16, 2025	Jul. 15, 2026


## 7 Test results and Measurement Data

### 7.1 Antenna requirement


<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>EUT Antenna:</b>	
The antenna is wire antenna, reference to the appendix II for details.	

## 7.2 Radiated Emission Method

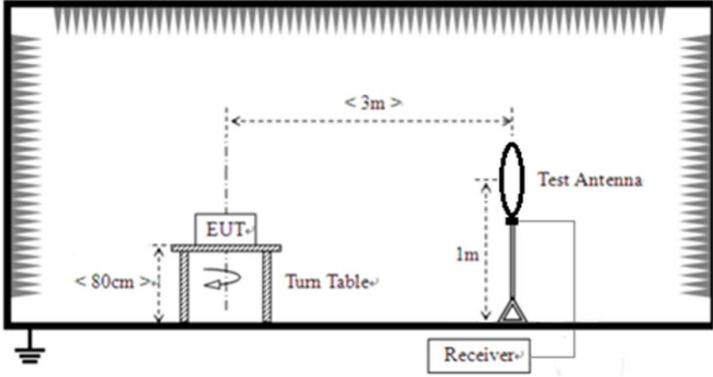Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)		Remark	
	0.009MHz-0.490MHz	2400/F(kHz) @300m		Quasi-peak Value	
	0.490MHz-1.705MHz	24000/F(kHz) @30m		Quasi-peak Value	
	1.705MHz-30.0MHz	30 @30m		Quasi-peak Value	
	30MHz-88MHz	100 @3m		Quasi-peak Value	
	88MHz-216MHz	150 @3m		Quasi-peak Value	
	216MHz-960MHz	200 @3m		Quasi-peak Value	
	960MHz-1GHz	500 @3m		Quasi-peak Value	
	Above 1GHz	500 @3m		Average Value	
5000 @3m		Peak Value			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>				

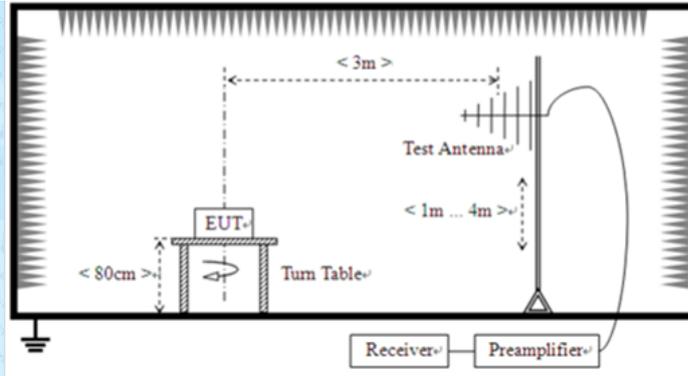

For radiated emissions above 1GHz

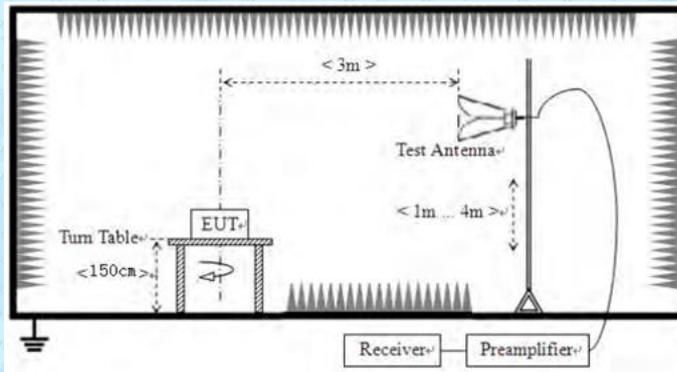

**Test Procedure:**

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 3V					
Test results:	Pass					

**Measurement data:**

**7.2.1 Field Strength of The Fundamental Signal**

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Final Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2418.00	98.42	27.14	4.16	39.40	90.32	114.00	-23.68	Vertical
2418.00	94.53	27.14	4.16	39.40	86.43	114.00	-27.57	Horizontal
2444.00	101.85	27.18	4.13	39.46	93.70	114.00	-20.30	Vertical
2444.00	94.77	27.18	4.13	39.46	86.62	114.00	-27.39	Horizontal
2465.00	101.32	27.22	4.11	39.51	93.14	114.00	-20.86	Vertical
2465.00	94.43	27.22	4.11	39.51	86.25	114.00	-27.75	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Final Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2418.00	87.99	27.14	4.16	39.40	79.89	94.00	-14.11	Vertical
2418.00	84.10	27.14	4.16	39.40	76.00	94.00	-18.00	Horizontal
2444.00	91.42	27.18	4.13	39.46	83.27	94.00	-10.73	Vertical
2444.00	84.34	27.18	4.13	39.46	76.19	94.00	-17.82	Horizontal
2465.00	90.89	27.22	4.11	39.51	82.71	94.00	-11.29	Vertical
2465.00	84.00	27.22	4.11	39.51	75.82	94.00	-18.18	Horizontal

**Note:**

1. For fundamental frequency , RBW>20dB BW, VBW>=RBW, PK detector for PK value, RMS detector for AV value
2. Final Level (dBuV/m) = Reading level (dBuV/m)+ Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier Factor (dB)


## 7.2.2 Spurious emissions

### Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


### Below 1GHz

Pre-scan all test modes, found worst case at 2418MHz, and so only show the test result of it  
Horizontal

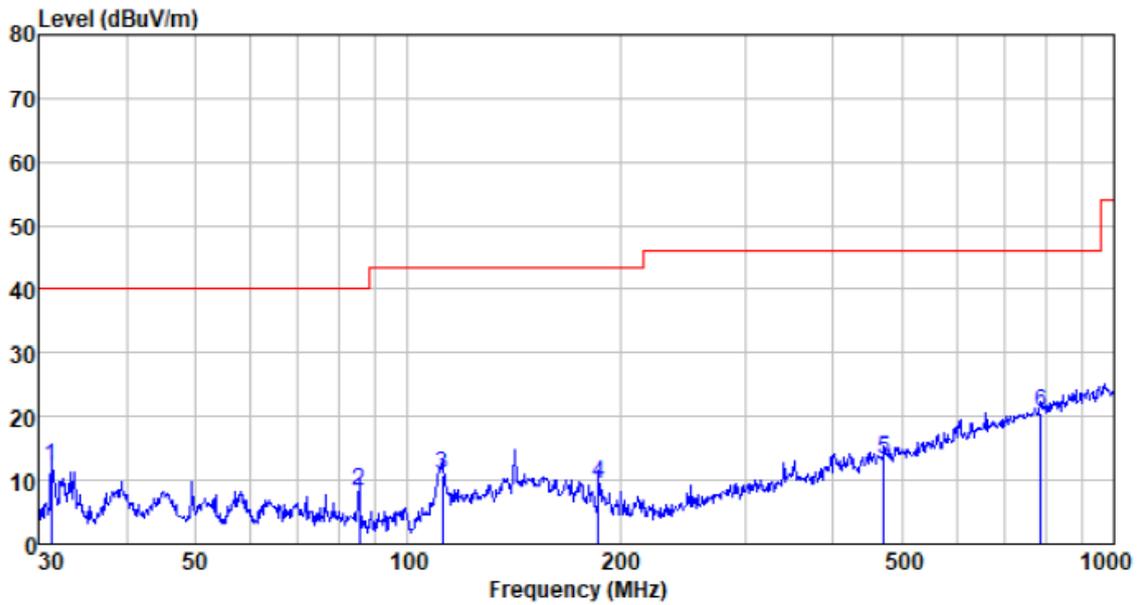

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.289	31.86	12.50	1.23	33.59	12.00	40.00	-28.00	QP
85.298	30.97	9.24	1.74	33.58	8.37	40.00	-31.63	QP
112.131	30.93	11.50	2.10	33.57	10.96	43.50	-32.54	QP
186.441	29.10	11.06	2.71	33.42	9.45	43.50	-34.05	QP
472.176	25.32	16.39	4.47	32.93	13.25	46.00	-32.75	QP
787.851	24.88	21.86	6.02	32.22	20.54	46.00	-25.46	QP


Vertical

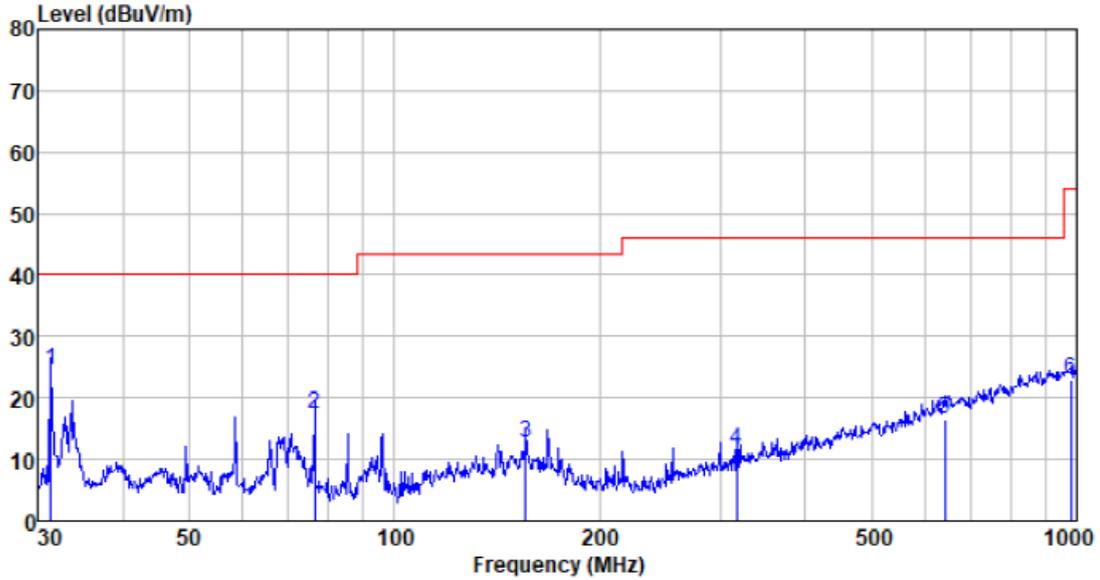


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	44.36	12.50	1.23	33.59	24.50	40.00	-15.50	QP
76.512	38.97	10.15	1.78	33.56	17.34	40.00	-22.66	QP
155.910	28.93	14.81	2.49	33.47	12.76	43.50	-30.74	QP
317.701	28.26	12.75	3.67	33.17	11.51	46.00	-34.49	QP
640.611	23.84	19.81	5.27	32.53	16.39	46.00	-29.61	QP
979.180	23.90	23.88	6.59	31.20	23.17	54.00	-30.83	QP

■ Above 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

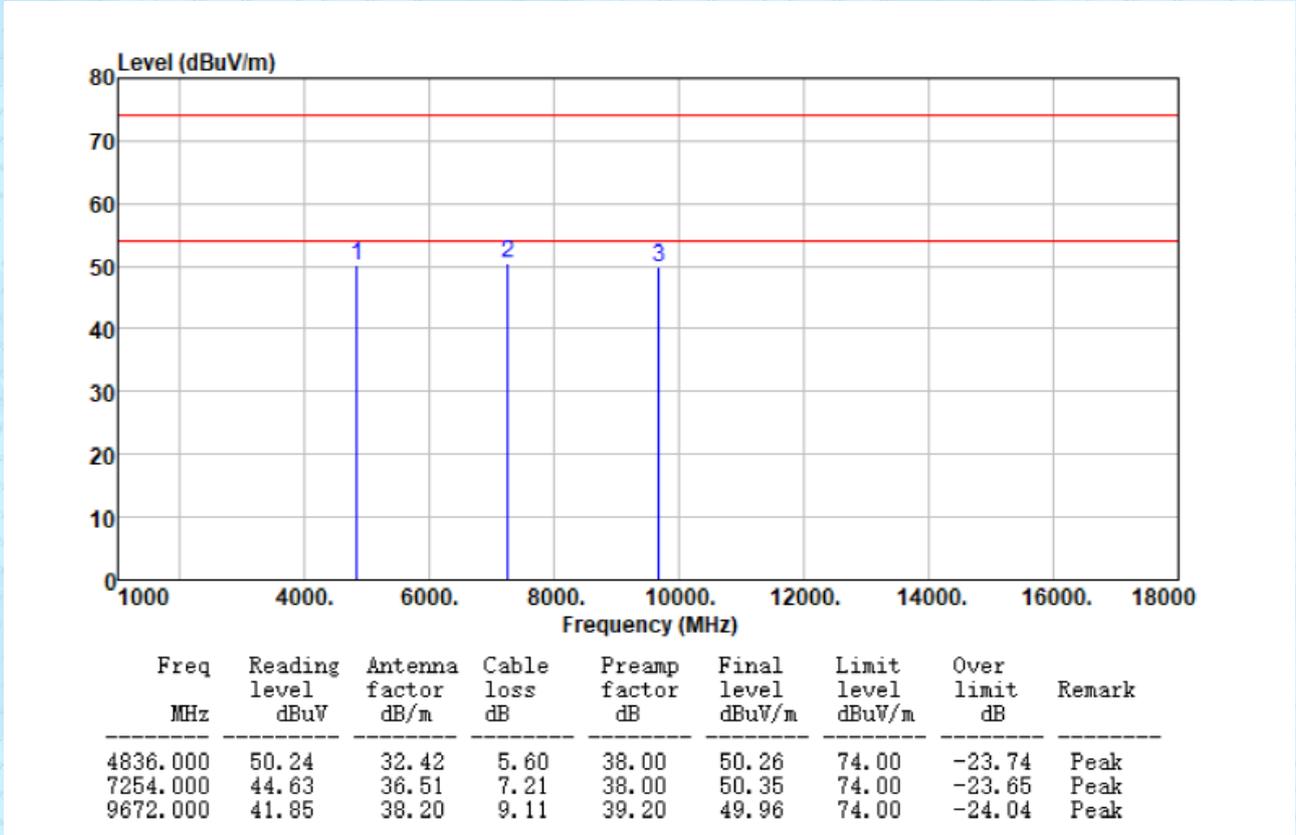


Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

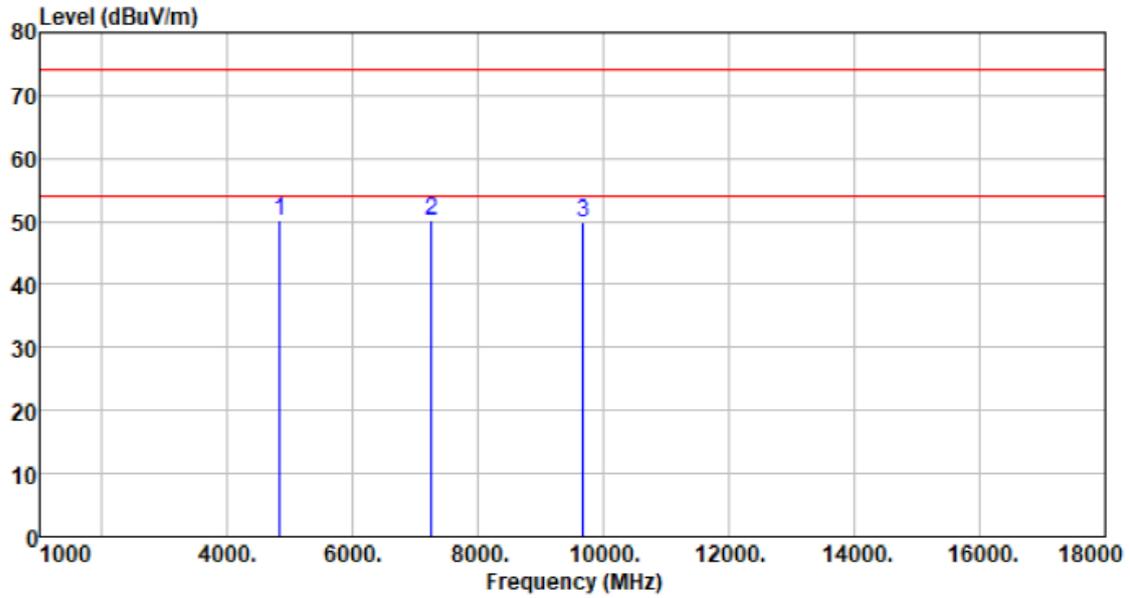


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4836.000	50.22	32.42	5.60	38.00	50.24	74.00	-23.76	Peak
7254.000	44.46	36.51	7.21	38.00	50.18	74.00	-23.82	Peak
9672.000	41.88	38.20	9.11	39.20	49.99	74.00	-24.01	Peak

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

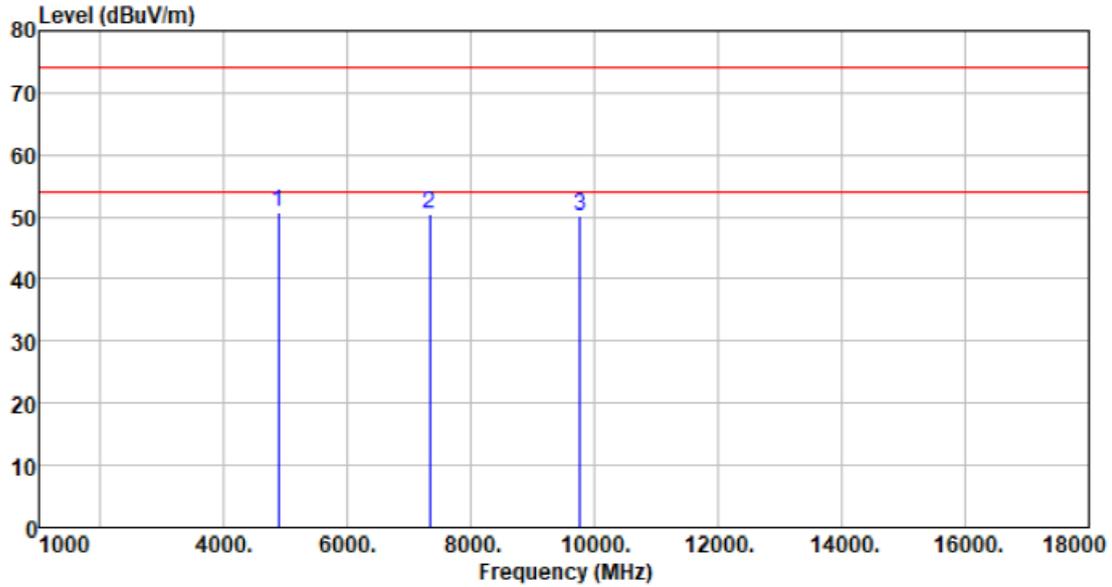


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	50.62	32.56	5.66	37.97	50.87	74.00	-23.13	Peak
7320.000	44.65	36.64	7.26	38.06	50.49	74.00	-23.51	Peak
9760.000	41.89	38.30	9.17	39.23	50.13	74.00	-23.87	Peak

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

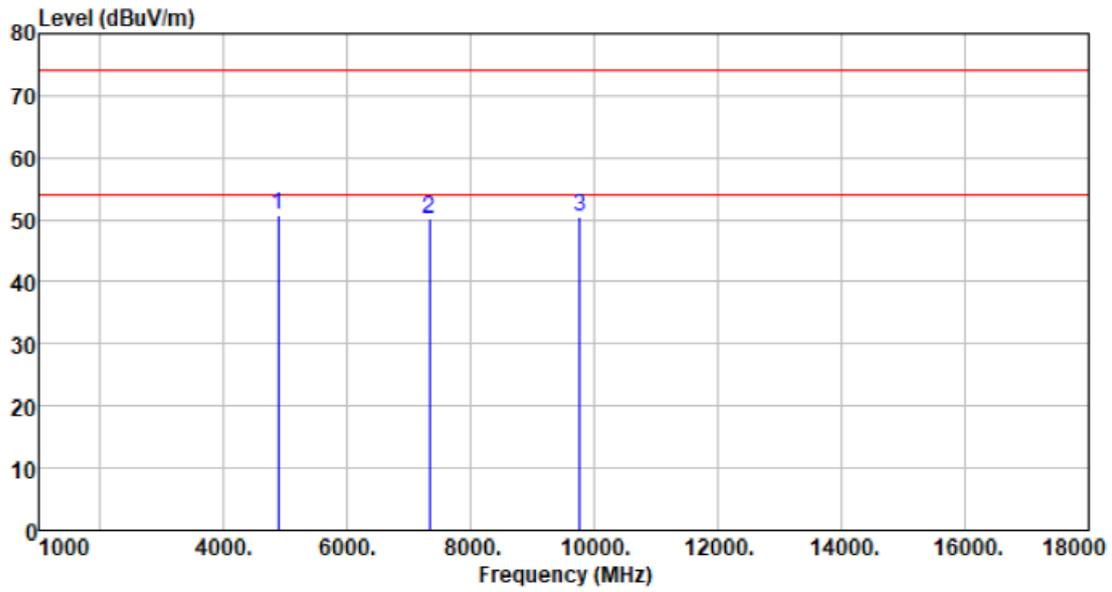


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	50.46	32.56	5.66	37.97	50.71	74.00	-23.29	Peak
7320.000	44.24	36.64	7.26	38.06	50.08	74.00	-23.92	Peak
9760.000	42.33	38.30	9.17	39.23	50.57	74.00	-23.43	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

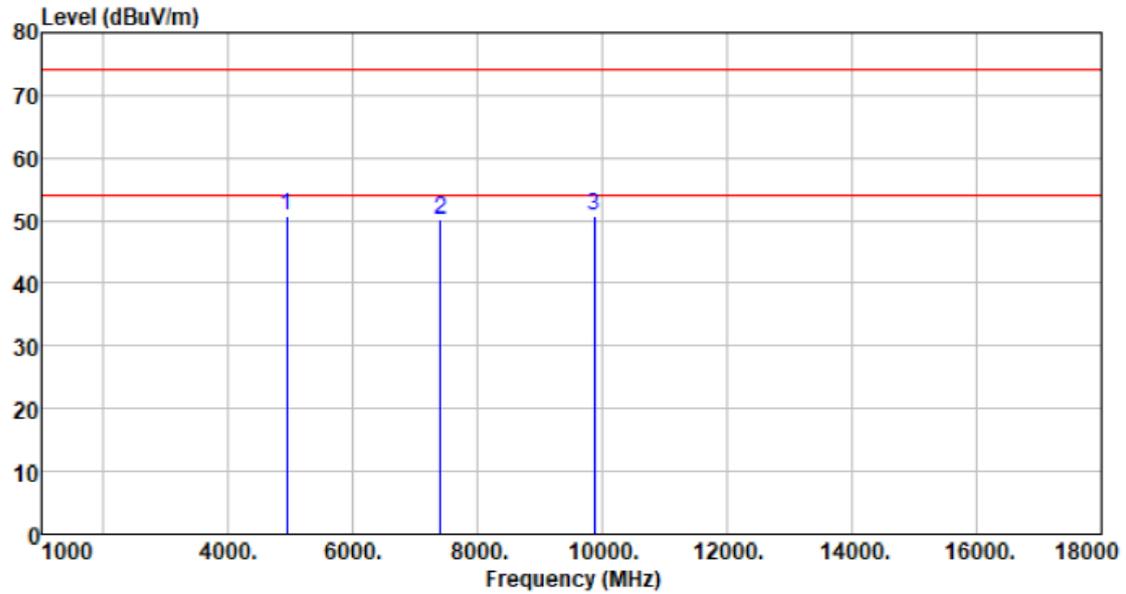

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4930.000	50.34	32.66	5.73	37.94	50.79	74.00	-23.21	Peak
7395.000	44.37	36.61	7.33	38.12	50.19	74.00	-23.81	Peak
9860.000	42.27	38.40	9.22	39.26	50.63	74.00	-23.37	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

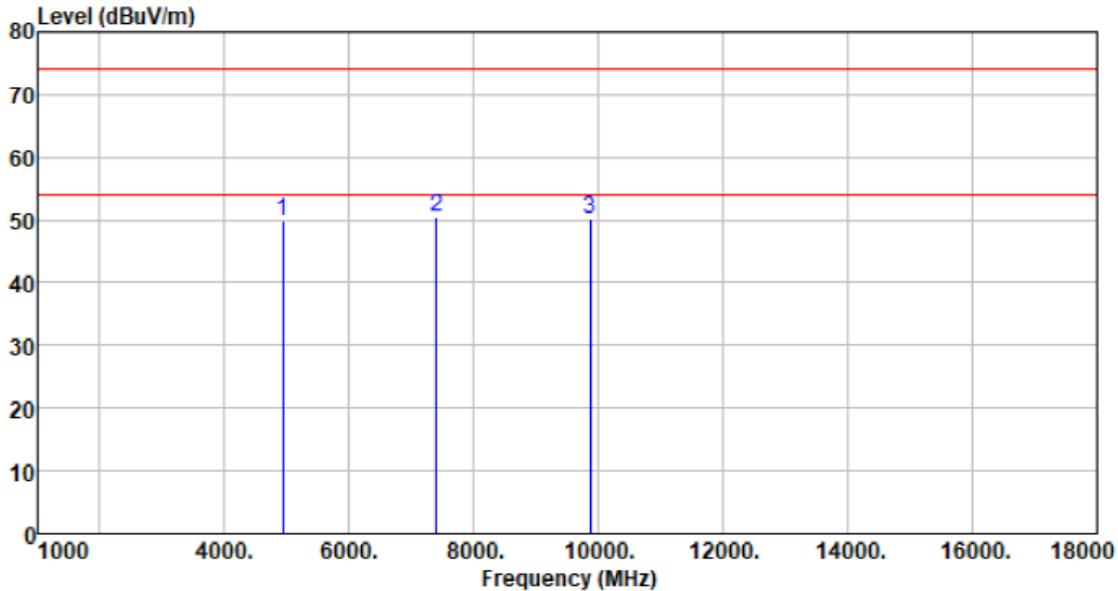

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4930.000	49.58	32.66	5.73	37.94	50.03	74.00	-23.97	Peak
7395.000	44.57	36.61	7.33	38.12	50.39	74.00	-23.61	Peak
9860.000	41.70	38.40	9.22	39.26	50.06	74.00	-23.94	Peak


**Remarks:**

1. Final Level (dBuV/m) = Reading level (dBuV/m)+ Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier Factor (dB)
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. For above 18GHz, no emission found.
4. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

## 7.2.3 Bandedge emissions


All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

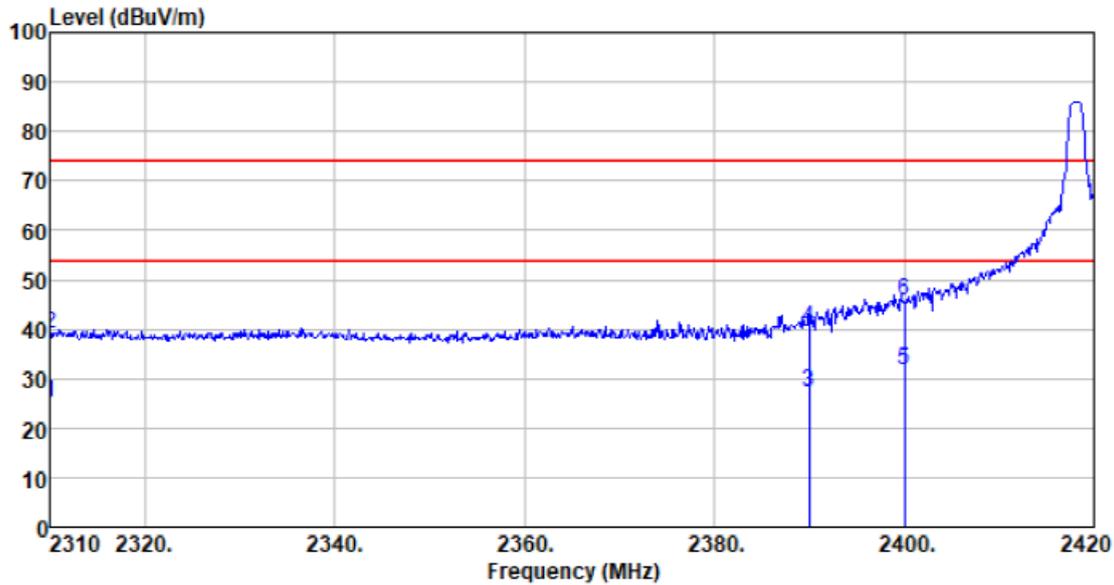


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	32.40	27.48	4.09	38.86	25.11	54.00	-28.89	Average
2310.000	46.56	27.48	4.09	38.86	39.27	74.00	-34.73	Peak
2390.000	34.81	27.32	4.11	38.88	27.36	54.00	-26.64	Average
2390.000	47.63	27.32	4.11	38.88	40.18	74.00	-33.82	Peak
2400.000	39.23	27.30	4.11	38.88	31.76	54.00	-22.24	Average
2400.000	53.19	27.30	4.11	38.88	45.72	74.00	-28.28	Peak

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

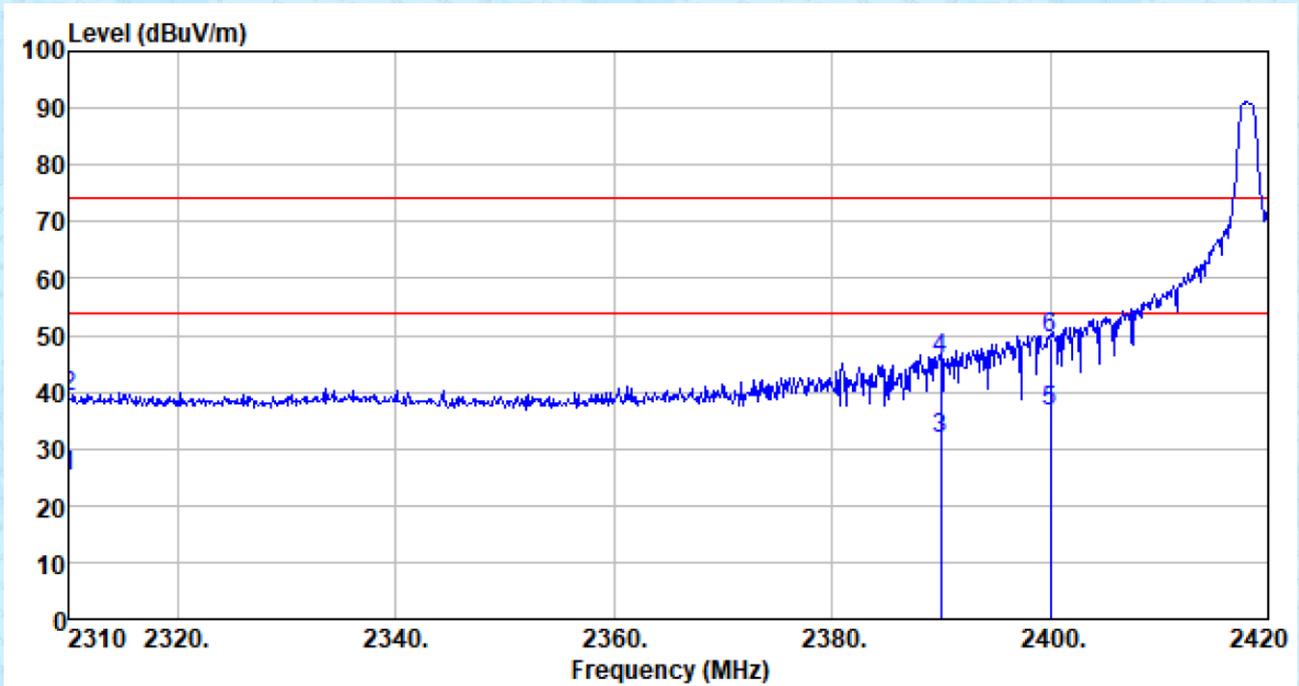


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	32.48	27.48	4.09	38.86	25.19	54.00	-28.81	Average
2310.000	46.35	27.48	4.09	38.86	39.06	74.00	-34.94	Peak
2390.000	39.25	27.32	4.11	38.88	31.80	54.00	-22.20	Average
2390.000	53.19	27.32	4.11	38.88	45.74	74.00	-28.26	Peak
2400.000	44.13	27.30	4.11	38.88	36.66	54.00	-17.34	Average
2400.000	57.02	27.30	4.11	38.88	49.55	74.00	-24.45	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

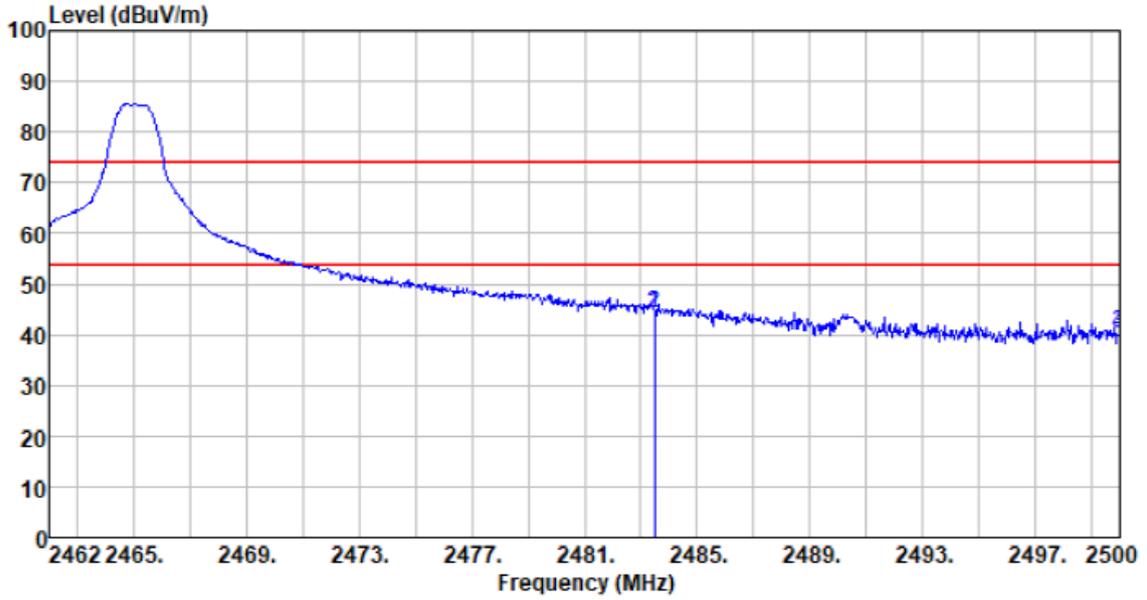

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	51.60	27.53	4.13	38.90	44.36	54.00	-9.64	Average
2483.500	51.68	27.53	4.13	38.90	44.44	74.00	-29.56	Peak
2500.000	47.42	27.60	4.14	38.90	40.26	54.00	-13.74	Average
2500.000	47.23	27.60	4.14	38.90	40.07	74.00	-33.93	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

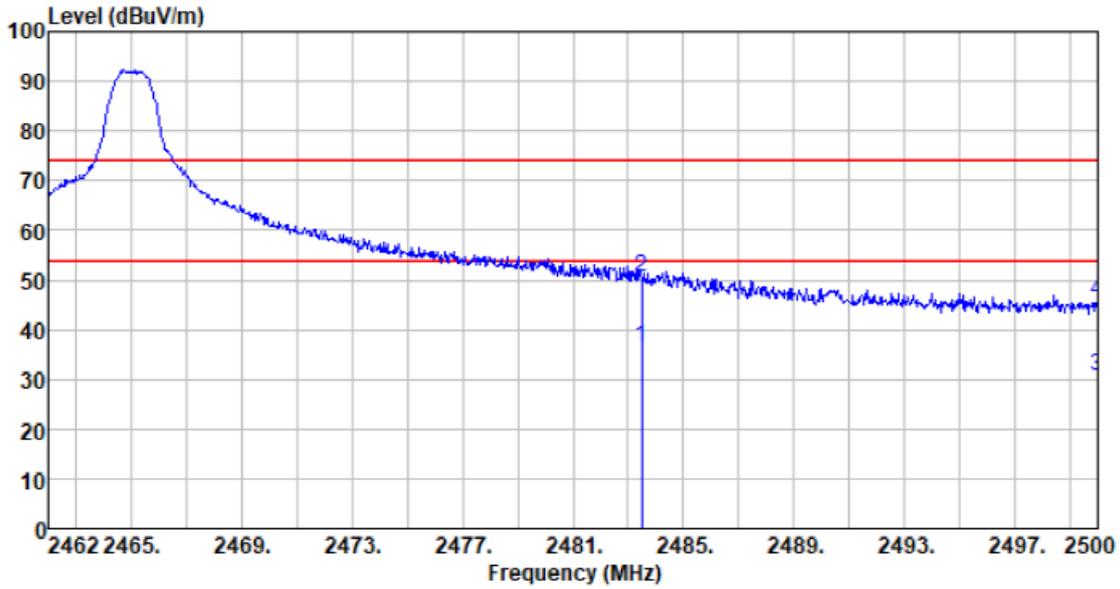


Freq MHz	Reading level dBUV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBUV/m	Limit level dBUV/m	Over limit dB	Remark
2483.500	43.83	27.53	4.13	38.90	36.59	54.00	-17.41	Average
2483.500	57.91	27.53	4.13	38.90	50.67	74.00	-23.33	Peak
2500.000	37.74	27.60	4.14	38.90	30.58	54.00	-23.42	Average
2500.000	52.96	27.60	4.14	38.90	45.80	74.00	-28.20	Peak

**Remark:**

1. Final Level (dBUV/m) = Reading level (dBUV/m)+ Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier Factor (dB)
2. For above 18GHz, no emission found

### 7.3 20dB Occupy Bandwidth

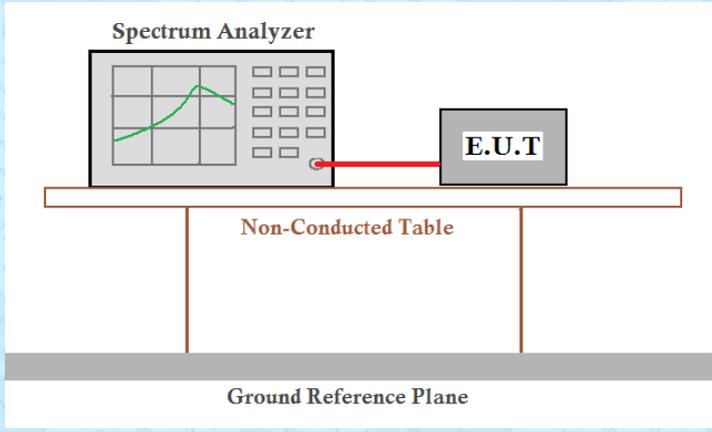Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	2.068	Pass
Middle	1.918	Pass
Highest	1.890	Pass


Test plot as follows:



Lowest channel



Middle channel

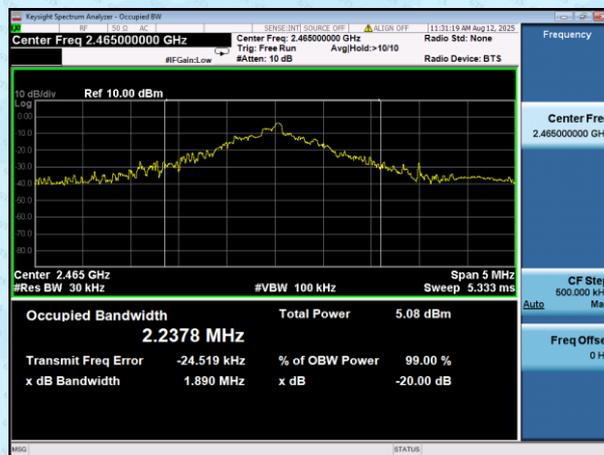

Highest channel

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----