

SPECIFICATIONS SHEET

规 格 图 面



CUSTOMER :

客户

DESCRIPTION :

品名描述

苹果手表兼容款

CUSTOMER P/N :

客户品名

PART NUMBER :

制造商料号

DATE OF APPLICATION :

提出日期

2025-7-21

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "√")

规 格 图 面 提 出 区 分

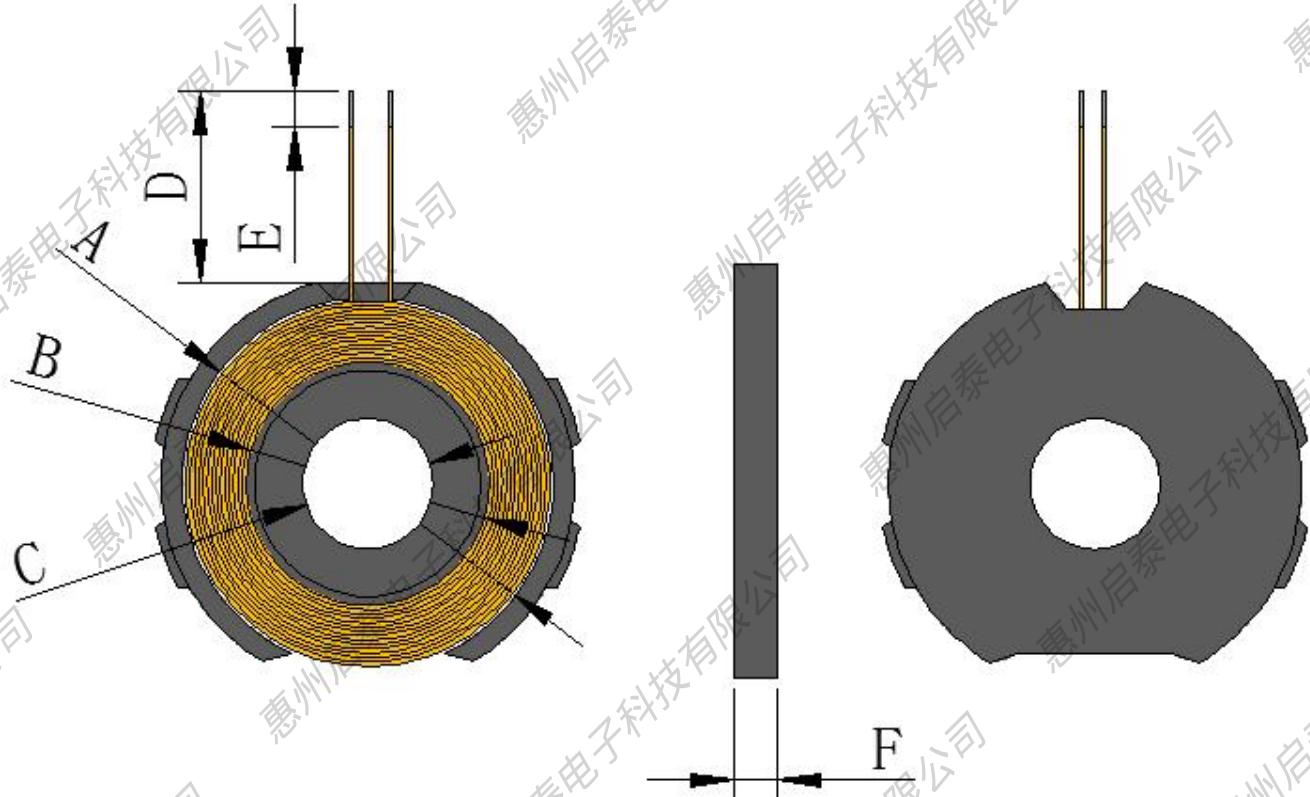
- New application 新规格
- New part is added to accepted specification 新产品规格追加记录
- Revision of accepted specification 既存规格图面变更

ACCEPTANCE STAMP (客户受领印)

ADDRESS : Huizhou Qitai Electronic Technology Co., Ltd.
3rd Floor, No. 181, Mingyue 2nd Road, Shiwan Town, Boluo County, Huizhou city

TELPHONE : 0752-6668681

E-MAIL : 839689578@qq.com

Specification 规 格 内 容	CUSTOMER P/N : 客 户 品 名									
	PART NUMBER : 制 造 商 料 号									
1. DIMENSIONS (外形尺寸) : (Unit: mm)										
单位 (Unit) : 毫米 (mm)										
										
<table border="1"> <tr> <td>Operation Frequency</td> <td>300-350KHz</td> </tr> <tr> <td>Antenna Type</td> <td>Loop coil antenna</td> </tr> <tr> <td>Antenna gain:</td> <td>0dBi</td> </tr> <tr> <td colspan="2">We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.</td></tr> </table>			Operation Frequency	300-350KHz	Antenna Type	Loop coil antenna	Antenna gain:	0dBi	We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.	
Operation Frequency	300-350KHz									
Antenna Type	Loop coil antenna									
Antenna gain:	0dBi									
We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.										
A	B	C	D	E	F					
21Max	14.5±0.5	10±0.5	11±2	2±1	2.6±1					
1. 软磁尺寸: $\phi 25\text{mm} \times 2.6\text{mm} \times 10\text{..mm}$ (内径)。										
2. 该产品不贴背胶。										
3. 该产品中心加 $\phi 10\text{mm} \times 5\text{mm}$ 的尼龙管										
4. 磁铁规格: $\phi 4.0\text{mm} \times 4.0\text{mm}$ 4200GS。										

Specification 规 格 内 容		CUSTOMER P/N : 客户品名					
		PART NUMBER : 制造商料号					
2. WINDING DETAILS(绕线详细说明)							
Coil1							
圈数 Turns	线径 Wire Dia	绕线方式疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not			
12TS	0.08*24P热风绞线 (Hot Air stranded Wire)	密绕 (Close)	逆绕	是 (Yes)			
3. 电气特性 (ELECTRICAL CHARACTERISTICS) :							
温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±10%							
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY			
Coil 1							
1.	IND	S-F	6.8uH±5%	100kHz/V			
2.	Q	S-F	20Min	100kHz/V			
3.	DCR	S-F	120Max	100kHz/V			