



## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.231

Report Reference No.....: HTT202508408F01

FCC ID.....: 2BR33-PB354011

Compiled by

( position+printed name+signature)...: File administrators

*Heber He*

Supervised by

( position+printed name+signature)...: Project Engineer

*Bruce Zhu*

Approved by

( position+printed name+signature)...: RF Manager

*Kevin Yang*



Date of issue.....: Aug. 25, 2025

Testing Laboratory Name .....: Shenzhen HTT Technology Co.,Ltd.

Address.....: 1F, Building B, Huafeng International Robotics Industrial Park,  
Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an  
District, Shenzhen, Guangdong, China

Applicant's name.....: Shenzhen Guangchuan E-Commerce Co., Ltd.

Address .....: 302, 3rd Floor, Building 2, Yunli Intelligent Park, No. 3, Changfa  
Middle Road, Yangmei Community, Bantian Street, Longgang  
District, Shenzhen

Test specification .....

Standard .....: FCC Part 15.231

**Shenzhen HTT Technology Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HTT Technology Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HTT Technology Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: Dog trainer

Trade Mark .....: N/A

Manufacturer .....: Shenzhen Guangchuan E-Commerce Co., Ltd.

Model/Type reference.....: PB354011

Listed Models .....: PB354021, PB354022, PB354023, PB354024, PB354025,  
PB354026, PB354027, PB354028

Ratings .....: DC 3.7V From Battery and DC 5V From External Circuit

Modulation .....: ASK

Frequency.....: 433.8000MHz

Result.....: PASS

## TEST REPORT

Equipment under Test : Dog trainer

Model /Type : PB354011

Listed Models : PB354021, PB354022, PB354023, PB354024, PB354025, PB354026, PB354027, PB354028

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

**Applicant** : **Shenzhen Guangchuan E-Commerce Co., Ltd.**

Address : 302, 3rd Floor, Building 2, Yunli Intelligent Park, No. 3, Changfa Middle Road, Yangmei Community, Bantian Street, Longgang District, Shenzhen

**Manufacturer** : **Shenzhen Guangchuan E-Commerce Co., Ltd.**

Address : 302, 3rd Floor, Building 2, Yunli Intelligent Park, No. 3, Changfa Middle Road, Yangmei Community, Bantian Street, Longgang District, Shenzhen

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<u>1</u>	<u>TEST STANDARDS</u>	4
<u>2</u>	<u>SUMMARY</u>	5
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	5
2.4	Short description of the Equipment under Test (EUT)	5
2.5	Block Diagram of Test Setup	5
2.6	Special Accessories	5
2.7	Related Submittal(s) / Grant (s)	6
2.8	Modifications	6
<u>3</u>	<u>TEST ENVIRONMENT</u>	7
3.1	Address of the test laboratory	7
3.2	Test Facility	7
3.3	Environmental conditions	7
3.4	Summary of measurement results	8
3.5	Statement of the measurement uncertainty	8
3.6	Equipments Used during the Test	9
<u>4</u>	<u>TEST CONDITIONS AND RESULTS</u>	10
4.1	AC Power Conducted Emission	10
4.2	Radiated Emission	13
4.3	20dB Bandwidth	19
4.4	Deactivation Time	20
4.5	Antenna Requirement	21
<u>5</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	22
<u>6</u>	<u>PHOTOS OF THE EUT</u>	22

## **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.231](#):Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.  
[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	Aug. 12, 2025
Testing commenced on	:	Aug. 12, 2025
Testing concluded on	:	Aug. 25, 2025

### 2.2 Product Description

Product Name:	Dog trainer
Model/Type reference:	PB354011
Testing sample ID:	HTT202508408-1# (Engineer sample), HTT202508408-2#(Normal sample)
Power supply:	DC 3.7V From Battery and DC 5V From External Circuit
Adapter Information (Auxiliary test provided by the lab):	Mode: GS-0500200 Input: AC100-240V, 50/60Hz, 0.3A max Output: DC 5V, 2A
Modulation:	ASK
Operation frequency:	433.8000MHz
Channel number:	1
Antenna type:	Spring Antenna
Antenna gain:	0 dBi

### 2.3 Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/>	230V / 50 Hz	<input type="radio"/>	120V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		


DC 3.7V From Battery and DC 5V From External Circuit

### 2.4 Short description of the Equipment under Test (EUT)

This is a Dog trainer.

For more details, refer to the user's manual of the EUT.

### 2.5 Block Diagram of Test Setup



### 2.6 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
/	/	/	/	/	/
/	/	/	/	/	/

## 2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

##### **Shenzhen HTT Technology Co.,Ltd.**

1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

#### **3.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **FCC-Registration No.: 779513 Designation Number: CN1319**

Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

##### **A2LA-Lab Cert. No.: 6435.01**

Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

### 3.4 Summary of measurement results

FCC and IC Requirements		
FCC Part 15.207	Conducted Emission	PASS
FCC Part 15.231(a)(2)	Automatically Deactivate	PASS
FCC Part 15.231(b)	Electric Field Strength of Fundamental Emission	PASS
FCC Part 15.205 &15.209& 15.231(b)	Electric Field Strength of Spurious Emission	PASS
FCC Part 15.231(c)	-20dB bandwidth	PASS

Remark: The measurement uncertainty is not included in the test result.

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen HTT Technology Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HTT Technology Co.,Ltd. :

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.12 dB	(1)
Radiated Emission	30~1000MHz	4.37 dB	(1)
Radiated Emission	1~18GHz	5.40 dB	(1)
Radiated Emission	18-40GHz	5.45 dB	(1)
Conducted Disturbance	0.15~30MHz	2.68 dB	(1)
Spectrum bandwidth	/	1.2%	(1)
Output Peak power	30MHz~18GHz	0.57dB	(1)
Time	/	±10%	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

### 3.6 Equipments Used during the Test


Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2024	Aug. 09 2027
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2024	Aug. 09 2027
3	EMI Test Receiver	Rohde&Schwarz	ESCI7	HTT-E022	Apr. 22 2025	Apr. 21 2026
4	Spectrum Analyzer	Rohde&Schwarz	FSP	HTT-E037	Apr. 22 2025	Apr. 21 2026
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	Apr. 22 2025	Apr. 21 2026
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	Apr. 22 2025	Apr. 21 2026
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	Apr. 22 2025	Apr. 21 2026
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	Apr. 22 2025	Apr. 21 2026
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	Apr. 19 2025	Apr. 18 2026
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	Apr. 19 2025	Apr. 18 2026
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Apr. 19 2025	Apr. 18 2026
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Apr. 19 2025	Apr. 18 2026
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	Apr. 22 2025	Apr. 21 2026
14	high-frequency Amplifier	HP	8449B	HTT-E014	Apr. 22 2025	Apr. 21 2026
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	Apr. 22 2025	Apr. 21 2026
16	EMI Test Receiver	Rohde & Schwarz	ESCI3	HTT-E043	Apr. 22 2025	Apr. 21 2026
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	Apr. 22 2025	Apr. 21 2026
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	Apr. 22 2025	Apr. 21 2026
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	Apr. 22 2025	Apr. 21 2026
20	Attenuator	Rohde & Schwarz	ESH3-Z2	HTT-E045	Sep. 20 2024	Sep. 19 2025
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	Apr. 22 2025	Apr. 21 2026
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	Aug. 10 2024	Aug. 09 2027
23	DC power supply	Agilent	E3632A	HTT-E023	Apr. 22 2025	Apr. 21 2026
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	Apr. 22 2025	Apr. 21 2026
25	Analog signal generator	Agilent	N5181A	HTT-E025	Apr. 22 2025	Apr. 21 2026
26	Vector signal generator	Agilent	N5182A	HTT-E026	Apr. 22 2025	Apr. 21 2026
27	RF Switch box	Keysight	Switchbox	HTT-E047	Sep. 20 2024	Sep. 19 2025
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	Apr. 21 2025	Apr. 20 2026
29	Radiated Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
30	Conducted Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
31	RF Test Software	panshanrf	TST	N/A	N/A	N/A

Note: The Cal.Interval was one year.

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

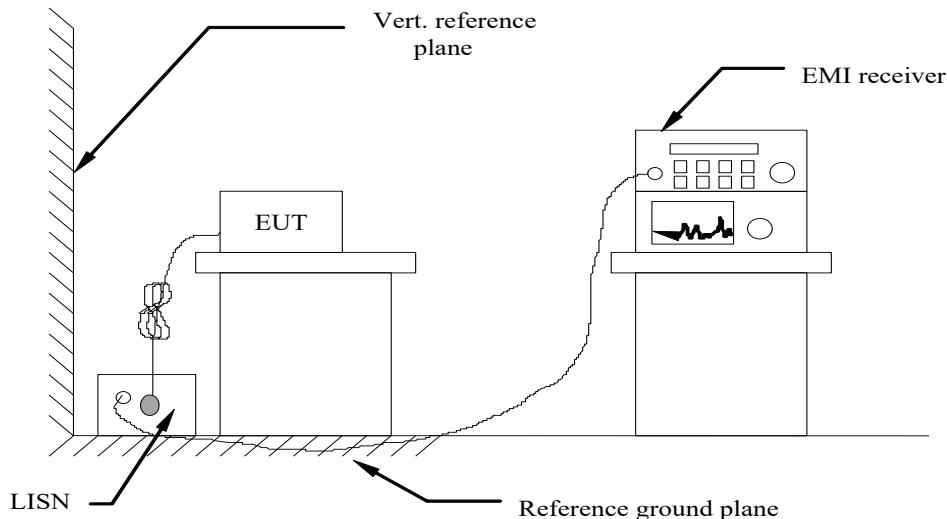

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.


#### TEST RESULTS

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

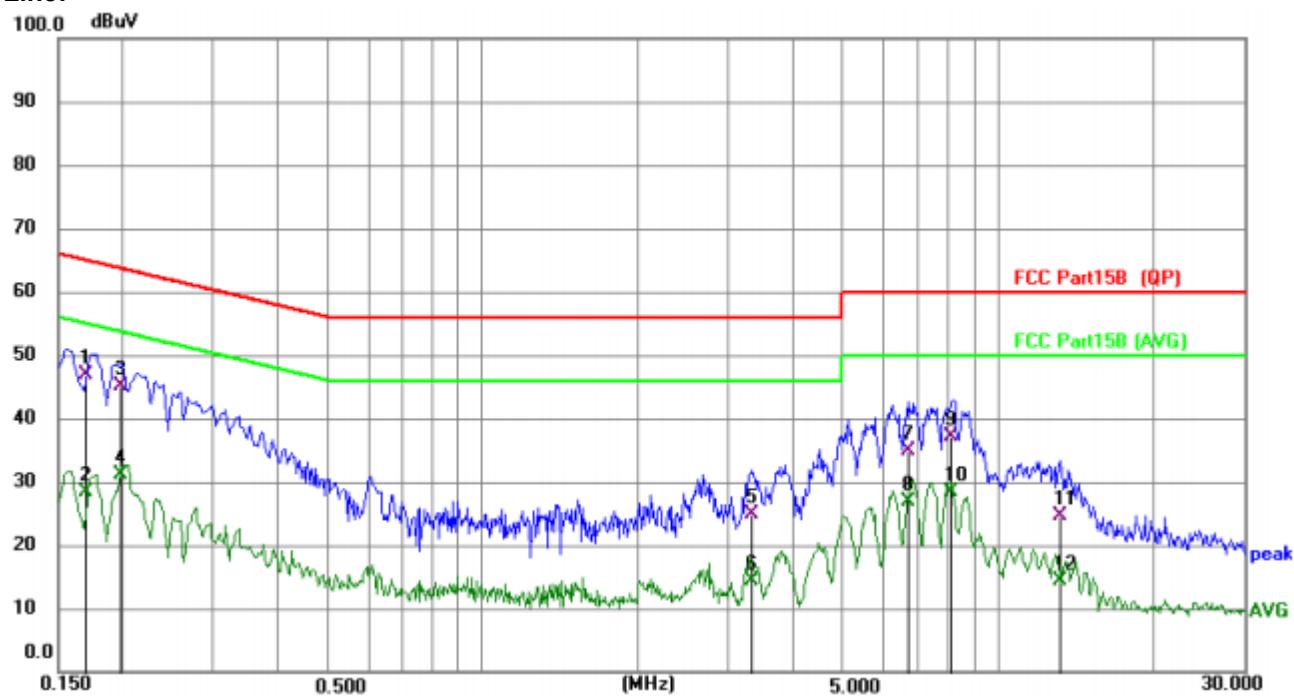**Measurement data:****Line:**

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over dB	Over Detector
1	*	0.1698	36.66	10.11	46.77	64.97	-18.20	QP
2		0.1698	18.38	10.11	28.49	54.97	-26.48	AVG
3		0.1988	34.98	10.07	45.05	63.66	-18.61	QP
4		0.1988	20.94	10.07	31.01	53.66	-22.65	AVG
5		3.3233	14.82	10.10	24.92	56.00	-31.08	QP
6		3.3233	4.32	10.10	14.42	46.00	-31.58	AVG
7		6.7115	24.64	10.19	34.83	60.00	-25.17	QP
8		6.7115	16.63	10.19	26.82	50.00	-23.18	AVG
9		8.1492	26.82	10.24	37.06	60.00	-22.94	QP
10		8.1492	18.14	10.24	28.38	50.00	-21.62	AVG
11		13.1447	13.98	10.57	24.55	60.00	-35.45	QP
12		13.1447	3.70	10.57	14.27	50.00	-35.73	AVG

## Neutral:

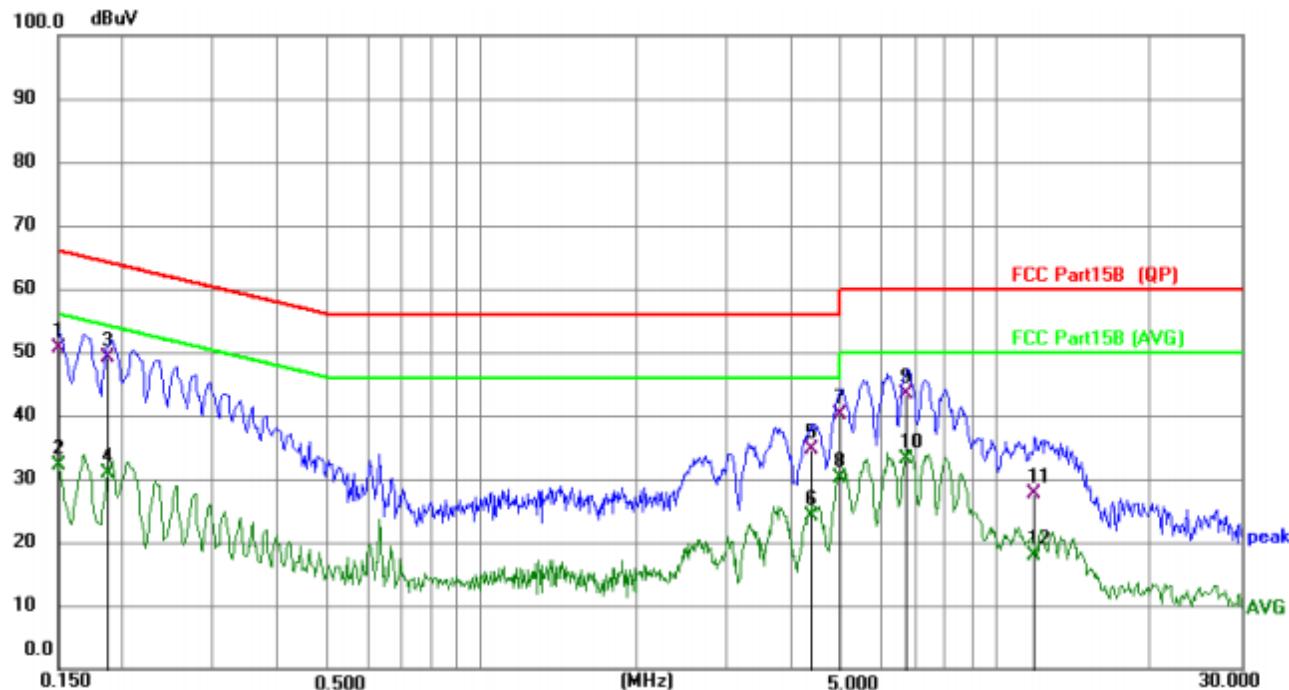

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
			MHz	dB	dBuV	dBuV	dB	Detector
1		0.1503	40.47	10.05	50.52	65.98	-15.46	QP
2		0.1503	22.09	10.05	32.14	55.98	-23.84	AVG
3	*	0.1878	39.09	10.04	49.13	64.13	-15.00	QP
4		0.1878	20.85	10.04	30.89	54.13	-23.24	AVG
5		4.3700	24.61	10.12	34.73	56.00	-21.27	QP
6		4.3700	13.95	10.12	24.07	46.00	-21.93	AVG
7		4.9975	29.92	10.13	40.05	56.00	-15.95	QP
8		4.9975	20.04	10.13	30.17	46.00	-15.83	AVG
9		6.7475	33.15	10.16	43.31	60.00	-16.69	QP
10		6.7475	23.01	10.16	33.17	50.00	-16.83	AVG
11		11.8757	17.10	10.42	27.52	60.00	-32.48	QP
12		11.8757	7.43	10.42	17.85	50.00	-32.15	AVG

## Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Los

## 4.2 Radiated Emission

### Limit

For intentional device, according to 15.209(a) the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

In addition to the provisions of 15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66–40.70	2,250 .....	225
70–130 .....	1,250 .....	125
130–174 .....	<sup>1</sup> 1,250 to 3,750 .....	<sup>1</sup> 125 to 375
174–260 .....	3,750 .....	375
260–470 .....	<sup>1</sup> 3,750 to 12,500 .....	<sup>1</sup> 375 to 1,250
Above 470	12,500 .....	1,250

<sup>1</sup> Linear interpolations.



[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz,  $20*\log(41.6667*433.890-7083.3333)=80.82\text{dBuV/m}$  The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

### TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

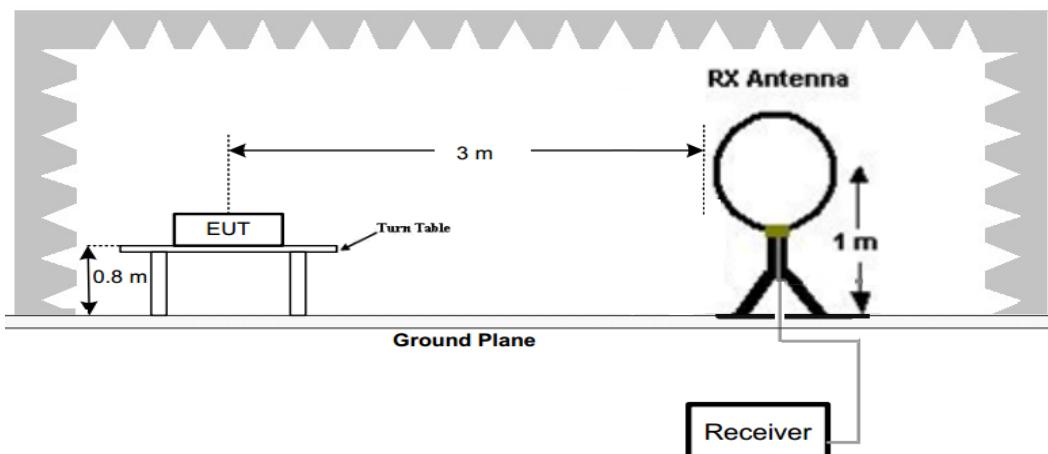

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

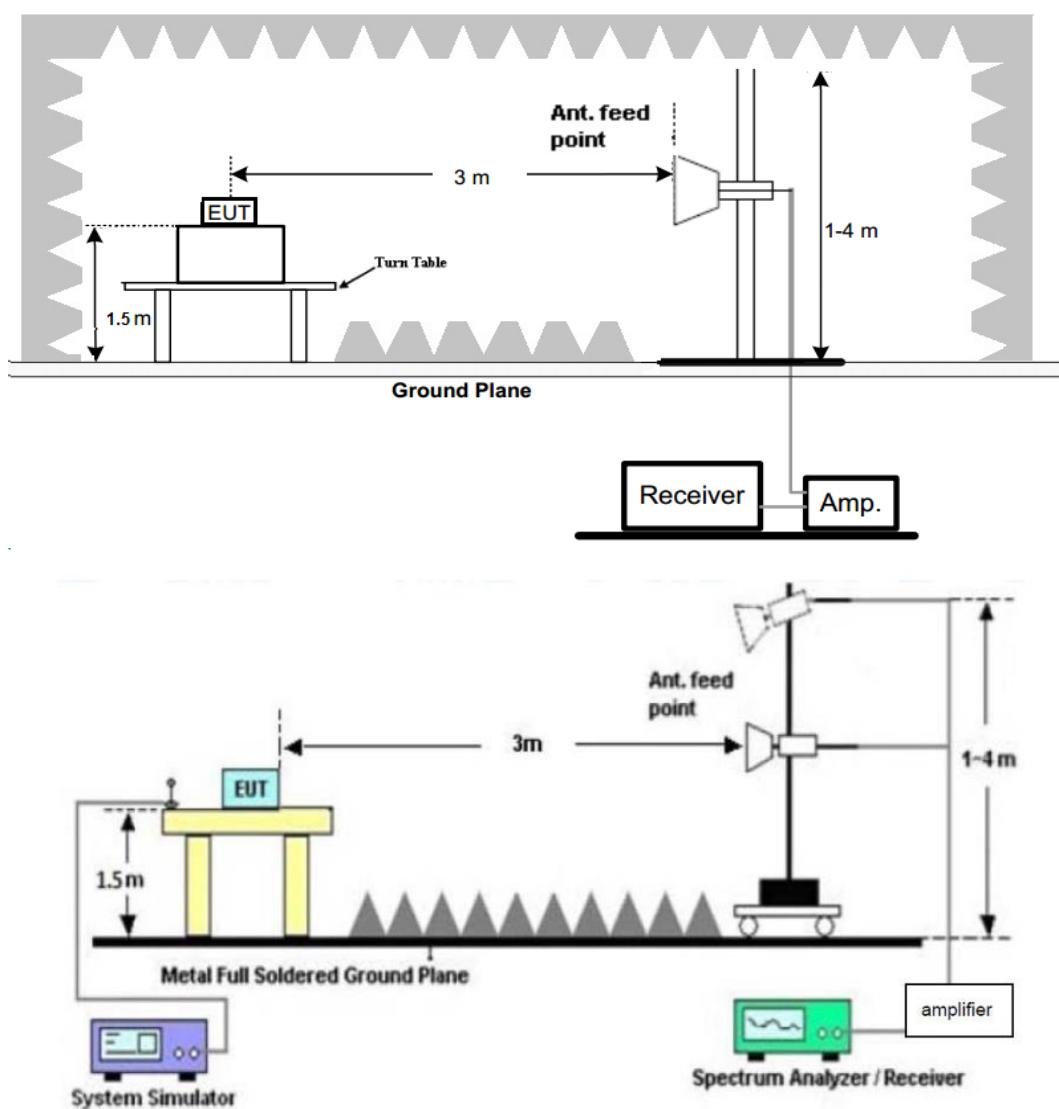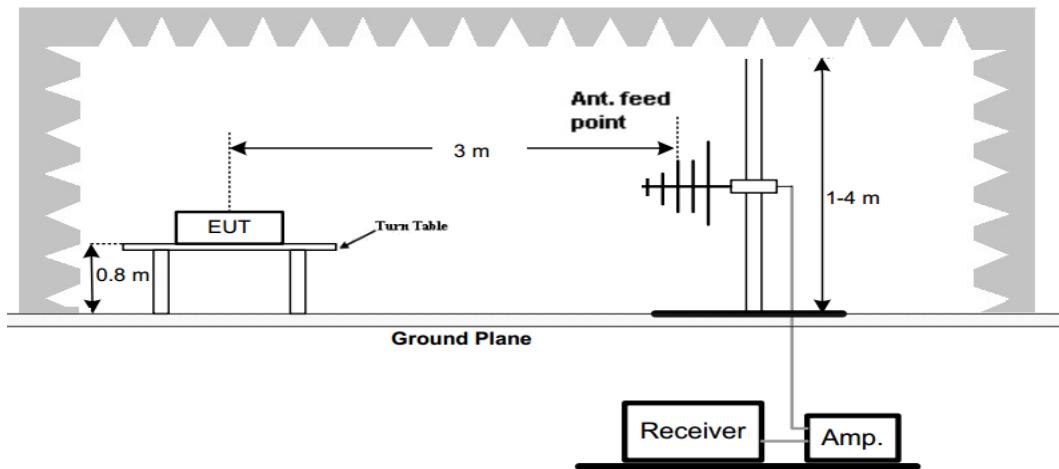

### Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both


horizontal and vertical.

4. Repeat above procedures until all frequency measurements have been completed.

#### **TEST RESULTS**

The emissions from 30MHz to 5GHz are measured peak and average level, below 1 GHz measured QP level, detailed test data please see below. Besides, we tested 3 directions and recorded the worst data.


Note: We tested all Modes and recorded the worst case as follow.

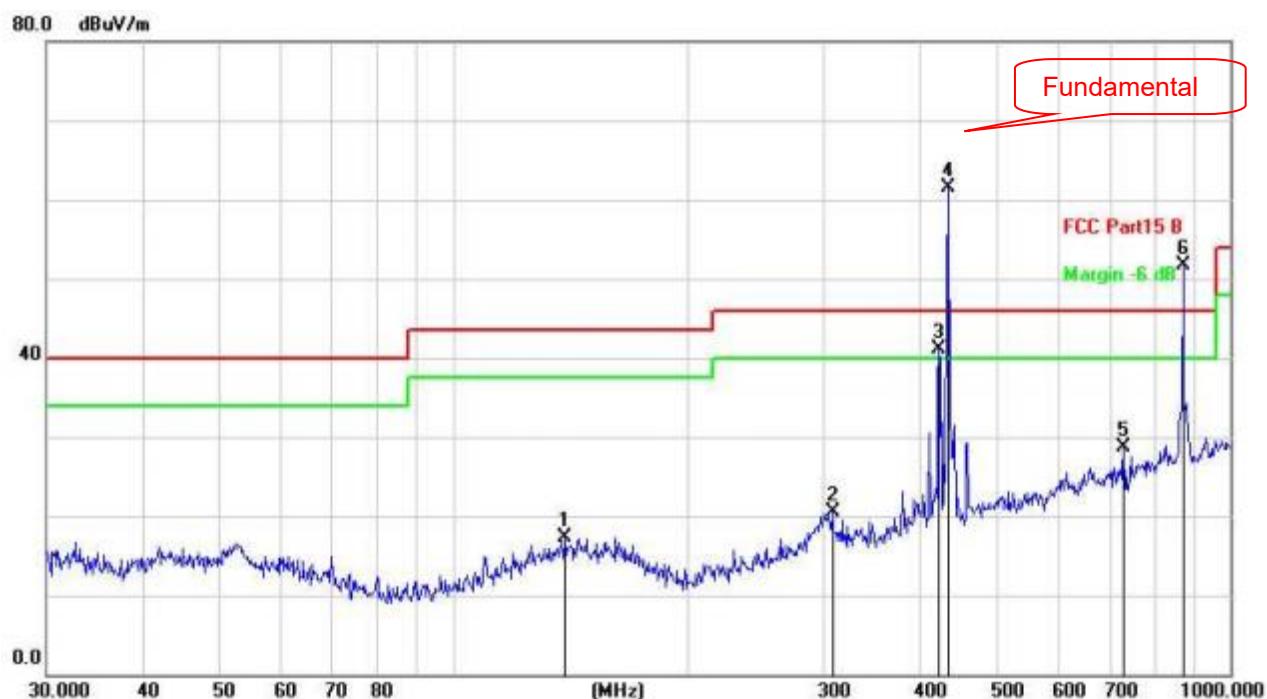

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dB/m	dB	Detector
1		139.3611	27.77	-10.49	17.28	43.50	-26.22	peak
2		307.8312	30.20	-9.66	20.54	46.00	-25.46	peak
3	!	422.0577	48.29	-7.10	41.19	46.00	-4.81	peak
4	*	433.8000	68.30	-6.84	61.46	46.00	15.46	peak
5		729.3582	30.56	-1.85	28.71	46.00	-17.29	peak
6	X	867.6000	50.97	0.67	51.64	46.00	5.64	peak

Emission Styles	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	PK Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Direction (H)
Fundamental	433.80	68.30	-6.84	61.46	100.82	39.36	PK	H
Harmonics	867.60	50.97	0.67	51.64	80.82	29.18	PK	H
Harmonics	1301.40	43.15	5.38	48.53	74.00	25.47	PK	H

Emission Styles	Frequency (MHz)	PK Level (dBuV/m)	AV Factor (dB/m)	AV Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Direction (H)
Fundamental	433.80	61.46	0.00	61.46	80.82	19.36	H
Harmonics	867.60	51.64	0.00	51.64	60.82	9.18	H
Harmonics	1301.40	48.53	0.00	48.53	54.00	5.47	H

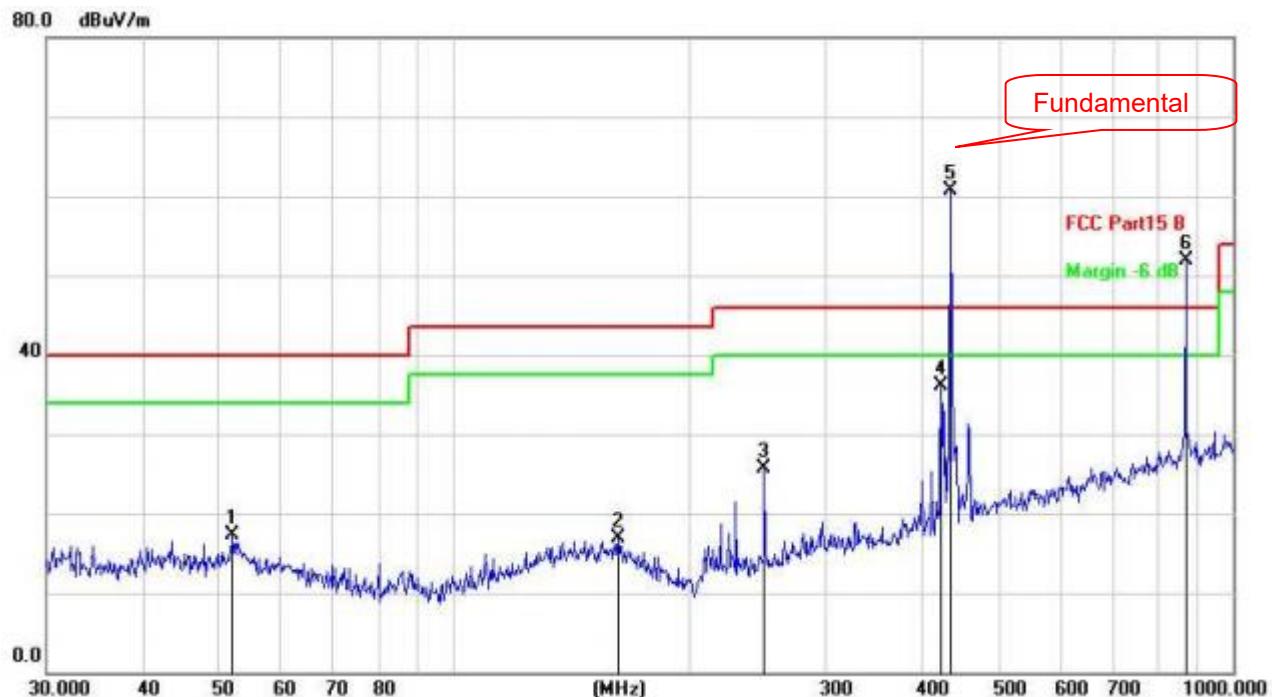

No.	Mk.	Reading		Correct Factor	Measure-ment	Limit	Over	
		Freq.	Level					
		MHz	dBuV	dB/m	dBuV/m	dB/m	dB	Detector
1	52.0251	28.61	-11.28	17.33	40.00	-22.67	peak	
2	162.6106	27.28	-10.30	16.98	43.50	-26.52	peak	
3	250.3010	37.22	-11.48	25.74	46.00	-20.26	peak	
4	422.0577	43.19	-7.10	36.09	46.00	-9.91	peak	
5 *	433.8000	67.64	-6.84	60.80	46.00	14.80	peak	
6 X	867.6000	51.24	0.67	51.91	46.00	5.91	peak	

Emission Styles	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	PK Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Direction (V)
Fundamental	433.80	67.64	-6.84	60.8	100.82	40.02	PK	V
Harmonics	867.60	51.24	0.67	51.91	80.82	28.91	PK	V
Harmonics	1301.40	42.97	5.38	48.35	74.00	25.65	PK	V


Emission Styles	Frequency (MHz)	PK Level (dBuV/m)	AV Factor (dB/m)	AV Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Direction (V)
Fundamental	433.80	60.80	0.00	60.80	80.82	20.02	V
Harmonics	867.60	51.91	0.00	51.91	60.82	8.91	V
Harmonics	1301.40	48.35	0.00	48.35	54.00	5.65	V

Note:

--: The other emission levels were very low against the limit.

1. Level (dBuV/m)= Reading (dBuV)+Factor(dB/m)
2. AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dB)
3. In a transmit cycle 100.00ms period found burst 1pcs, the Duty Cycle can calculate as below:  
Duty Cycle= (100.00)/ 100.00=1  
AV Factor=20\*log(Duty Cycle)=20\*log(1)=0

(The plot of Duty Cycle See the follow page)

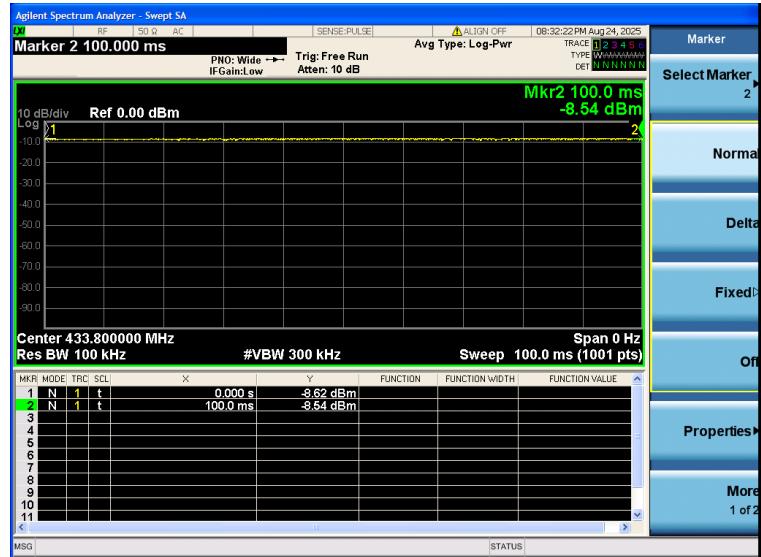


(Transmit cycle 100.00ms)

### 4.3 20dB Bandwidth

#### Limit

According to 47 CFR 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

#### Test Configuration

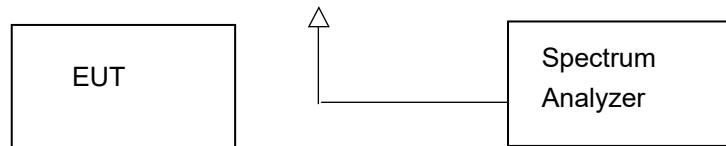

#### Test Procedure

The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

#### Test Results

Modulation	Channel Frequency (MHz)	99% OBW (KHz)	20dB bandwidth (KHz)	Limit (KHz)	Result
ASK	433.8000	297.46	46.79	0.25%*433.8000=1085	Pass

**Test plot as follows:**

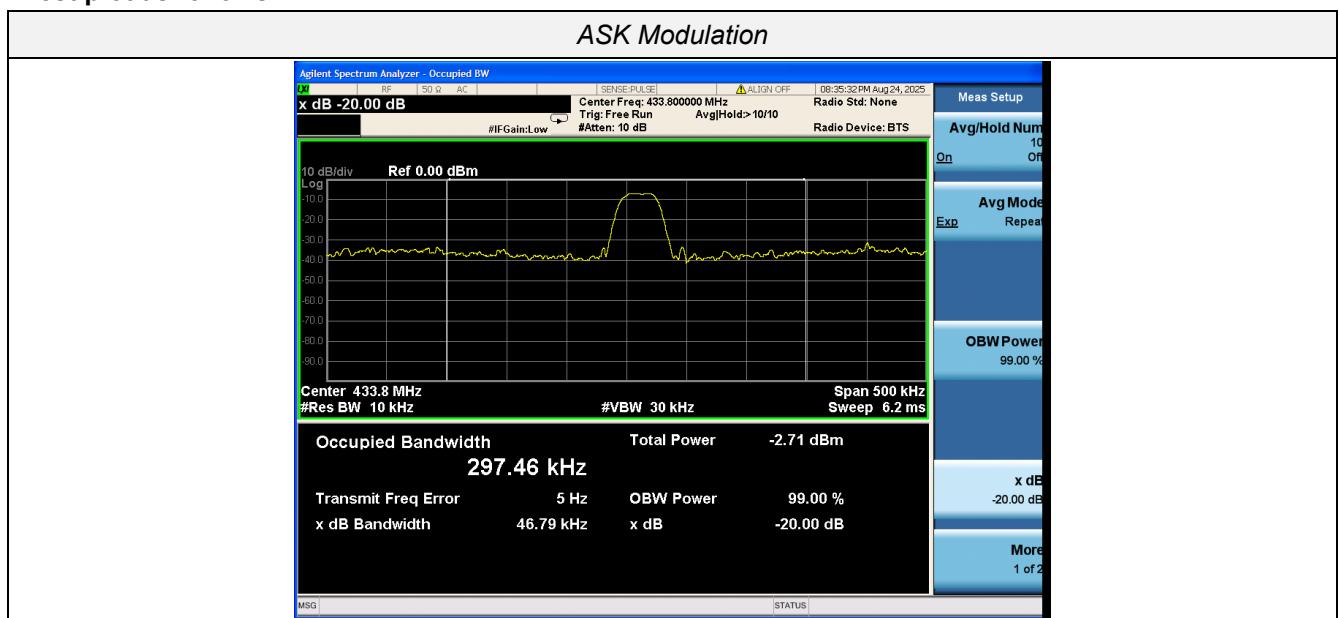


## 4.4 Deactivation Time

## Limit

According to FCC §15.231(a)(2), A transmitter activated automatically shall cease transmission within 5 seconds after activation.

## Test Configuration

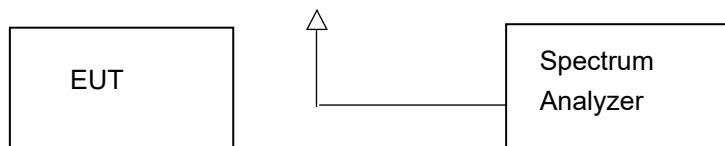


## **Test Procedure**

1. The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
2. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was set to 1 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

## **TEST RESULTS**

Note: The transmitter was automatically activated, and the carrier frequency 433.8000MHz:

Frequency (MHz)	One transmission time (S)	Limit(S)	Result
433.8000	0.550	5	Pass

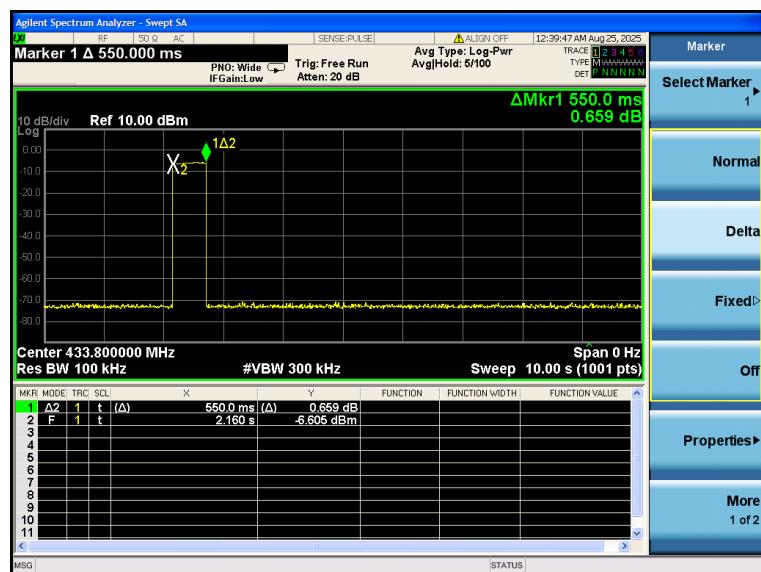

## 4.5 Antenna Requirement

### Standard Applicable

According to FCC Part 15C 15.203

- a) An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b) The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Refer to statement below for compliance.**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is an Internal Antenna, The directional gains of antenna used for transmitting is 0 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen HTT Technology Co.,Ltd. does not assume any responsibility.

## **5 Test Setup Photos of the EUT**

Reference to the **appendix I** for details

## **6 Photos of the EUT**

Reference to the **appendix II** for details.

\*\*\*\*\* **End of Report** \*\*\*\*\*