






802.11ac(VHT80)-5775

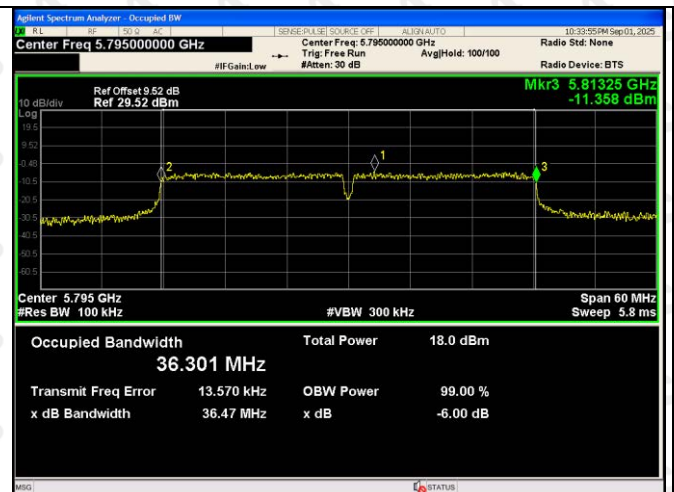

802.11n(HT20)-5745

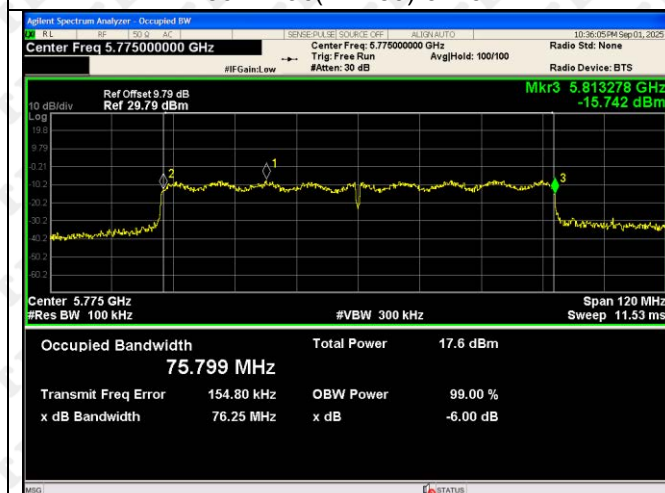


802.11ac(VHT80)-5775

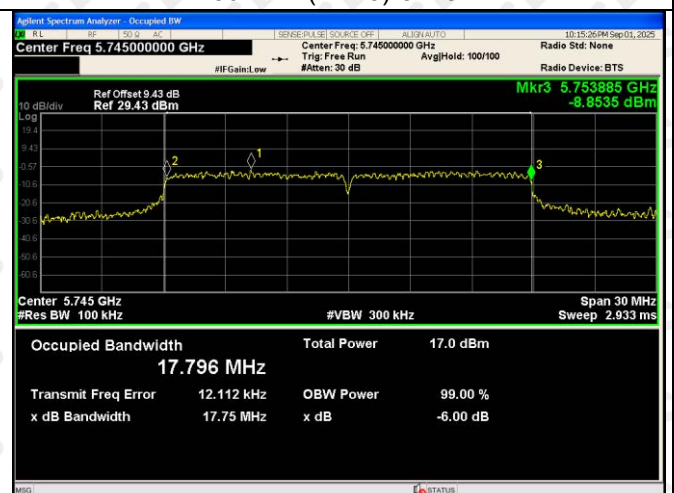

802.11n(HT20)-5745




802.11n(HT20)-5785

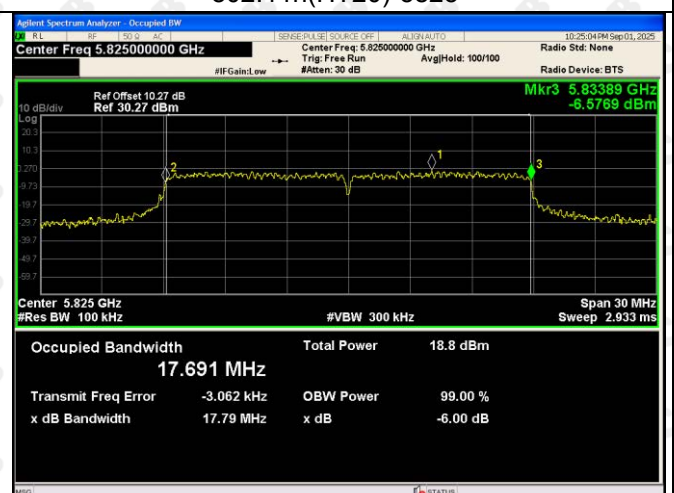



802.11n(HT20)-5825



5802.11n(HT40)-5755




802.11n(HT40)-5795

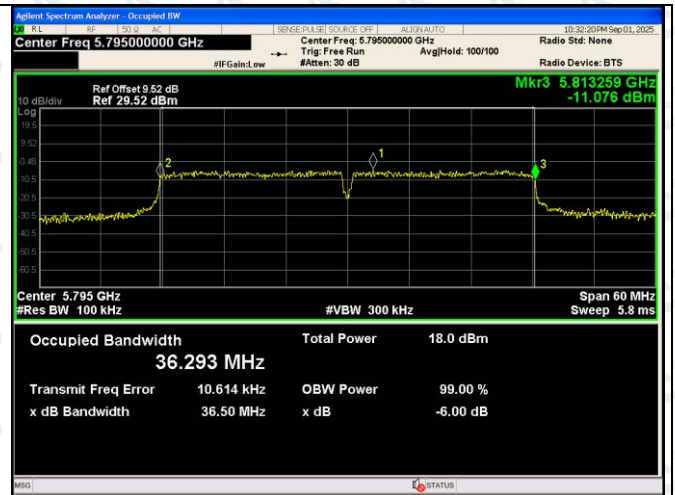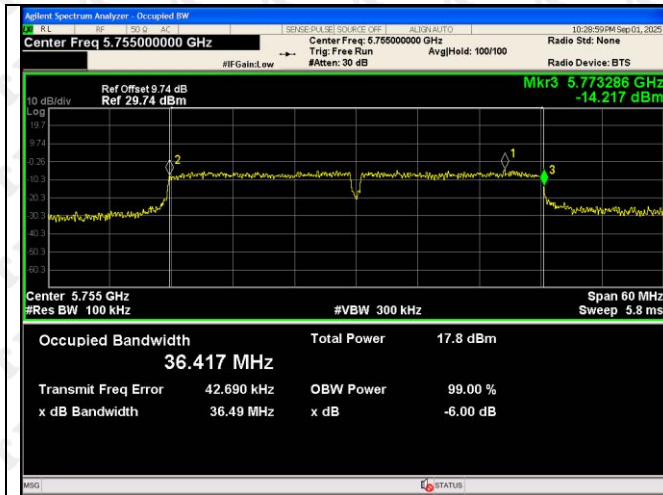


ANT2:

802.11a-5745

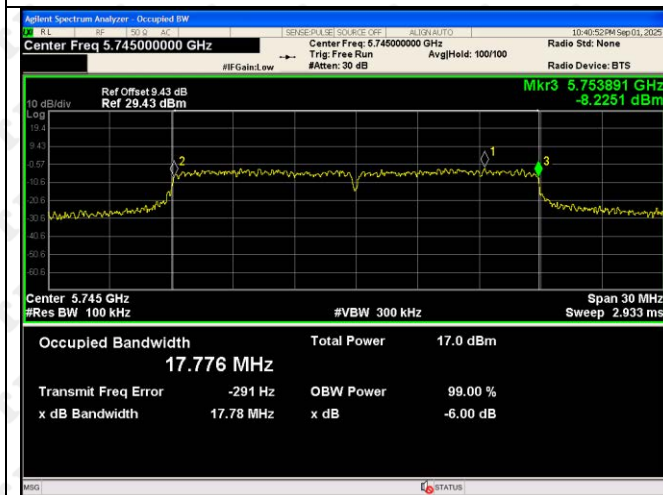


802.11a-5785

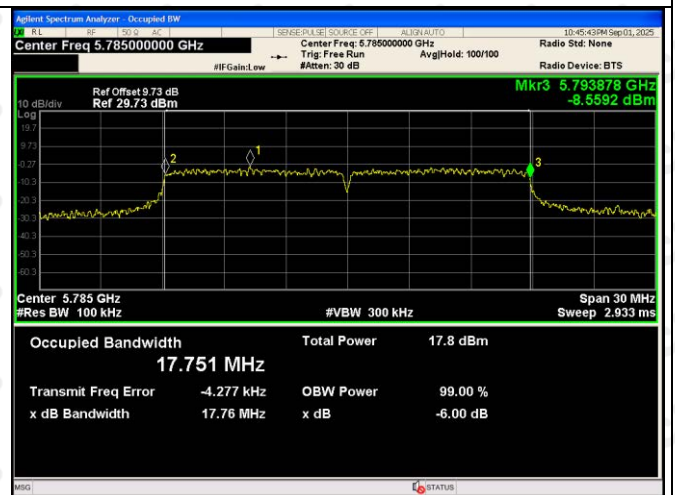

802.11a-5825




802.11ac(VHT20)-5745

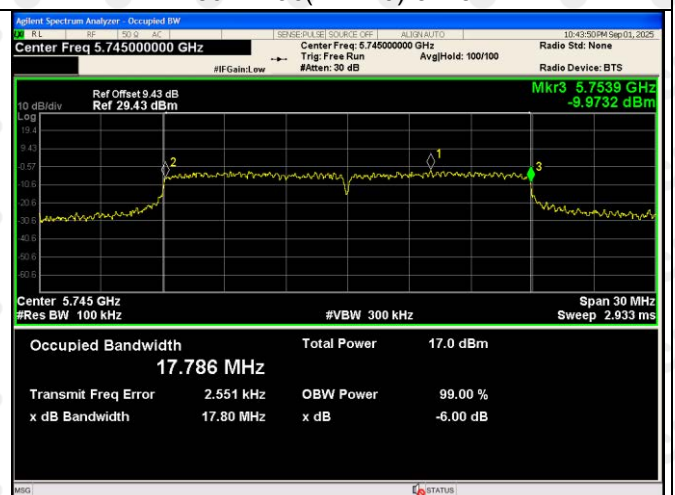


802.11ac(VHT20)-5785

802.11ac(VHT20)-5825

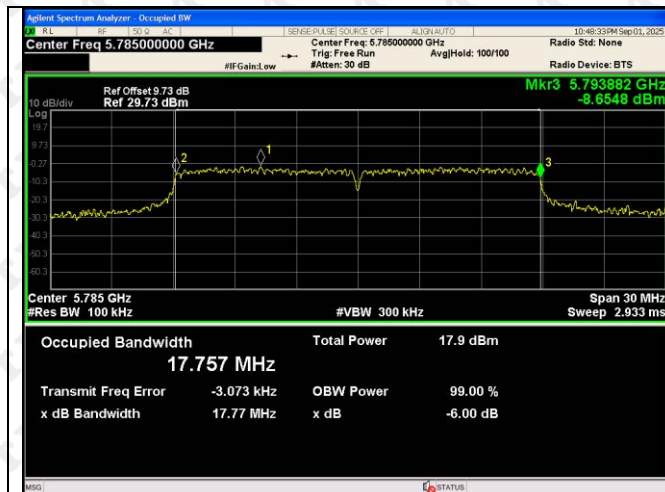


802.11ac(VHT40)-5755

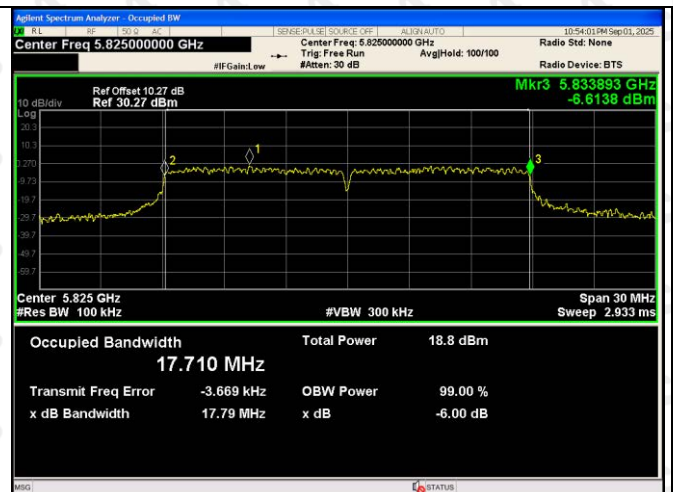

802.11ac(VHT40)-5795




802.11ac(VHT80)-5775

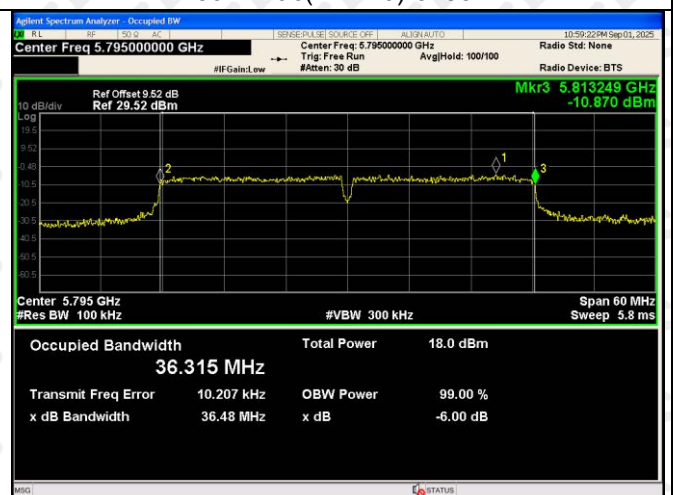


802.11n(HT20)-5745




802.11n(HT20)-5785

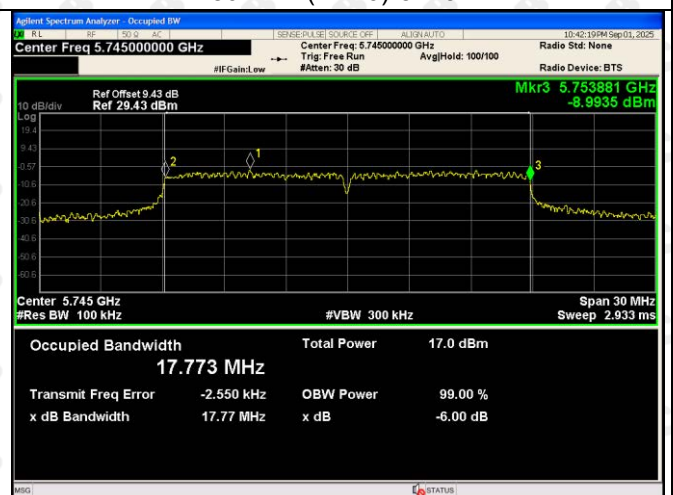


802.11n(HT20)-5825

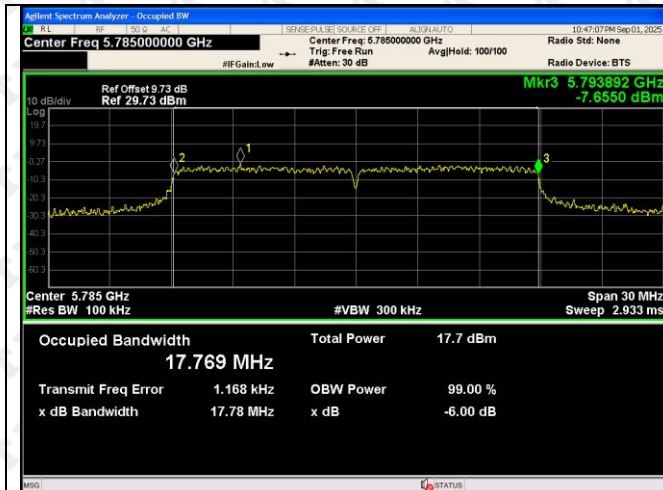

5802.11n(HT40)-5755

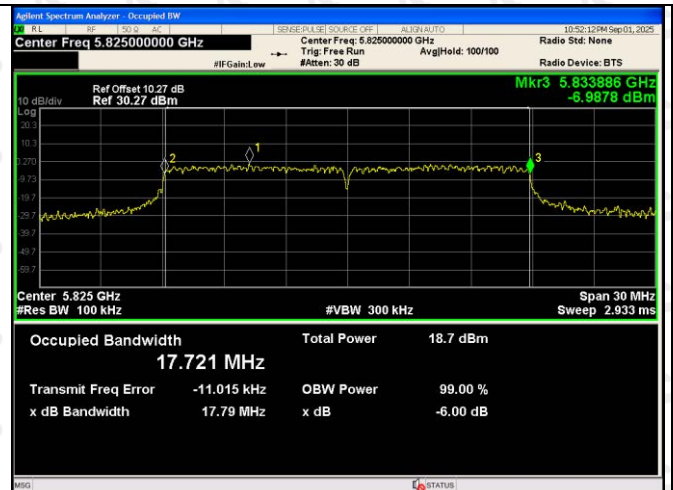


802.11n(HT40)-5795

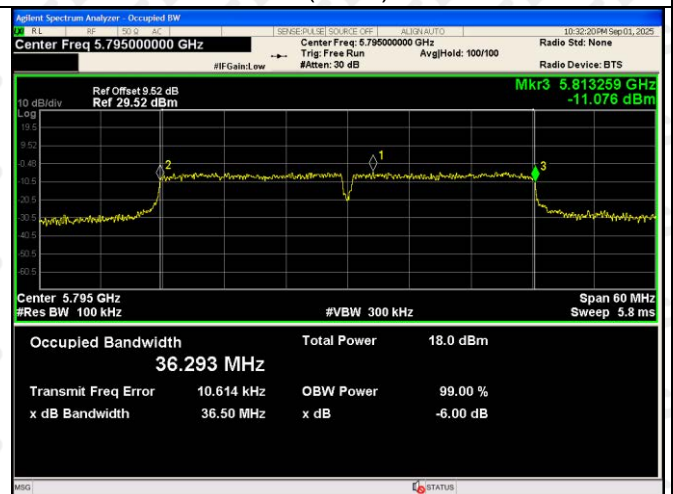

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

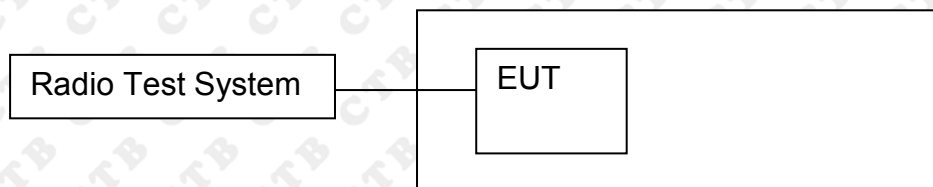

11.2 Limit

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

For devices operating in the bands 5.15–5.25 GHz, 5.25–5.35 GHz, and 5.47–5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

a) Set $\text{RBW} \geq 1/T$, where T is defined in II.B.I.a).

b) Set $\text{VBW} \geq 3 \text{ RBW}$.

c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the

measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.

e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

11.4 Test Result

ANT 1+ANT2

Test mode	Test Channel (MHz)	PSD [dBm/MHz] ANT 1	PSD [dBm/MHz] ANT 2	PSD [dBm/MHz] Total	Limit (dBm/MHz)	Result
802.11a	5180	-3.003	-2.917	/	11	Pass
	5200	-2.185	-2.11	/	11	Pass
	5240	-1.937	-1.857	/	11	Pass
802.11ac(VHT20)	5180	-2.976	-3.055	-0.005	11	Pass
	5200	-2.18	-2.175	0.833	11	Pass
	5240	-1.969	-1.908	1.072	11	Pass
802.11ac(VHT40)	5190	-5.476	-5.435	-2.445	11	Pass
	5230	-4.977	-4.947	-1.952	11	Pass
802.11n(HT20)	5180	-2.996	-3.114	-0.044	11	Pass
	5200	-2.316	-2.321	0.692	11	Pass
	5240	-1.794	-1.907	1.160	11	Pass
802.11n(HT40)	5190	-5.325	-5.28	-2.292	11	Pass
	5230	-4.936	-4.823	-1.869	11	Pass
802.11ac(VHT80)	5230	-7.951	-7.815	-4.872	11	Pass

Test mode	Test Channel (MHz)	PSD [dBm/MHz] ANT 1	PSD [dBm/MHz] ANT 2	PSD [dBm/MHz] Total	Limit (dBm)	Result
802.11a	5745	-3.656	-3.444	/	30	Pass
	5785	-2.988	-2.928	/	30	Pass
	5825	-1.94	-2.079	/	30	Pass
802.11ac(VHT20)	5745	-3.502	-3.726	-0.602	30	Pass
	5785	-2.835	-2.68	0.253	30	Pass
	5825	-1.951	-1.984	1.043	30	Pass
802.11ac(VHT40)	5755	-6.106	-6.158	-3.122	30	Pass
	5795	-6.169	-6.012	-3.079	30	Pass
802.11n(HT20)	5775	-3.696	-3.391	-0.531	30	Pass
	5745	-2.968	-2.664	0.197	30	Pass
	5785	-1.864	-2.11	1.025	30	Pass
802.11n(HT40)	5825	-6.324	-6.324	-3.314	30	Pass
	5755	-5.899	-5.899	-2.889	30	Pass
802.11ac(VHT80)	5795	-9.102	-9.175	-6.128	30	Pass


5180-5240MHz

ANT 1






802.11ac(VHT80)-5210

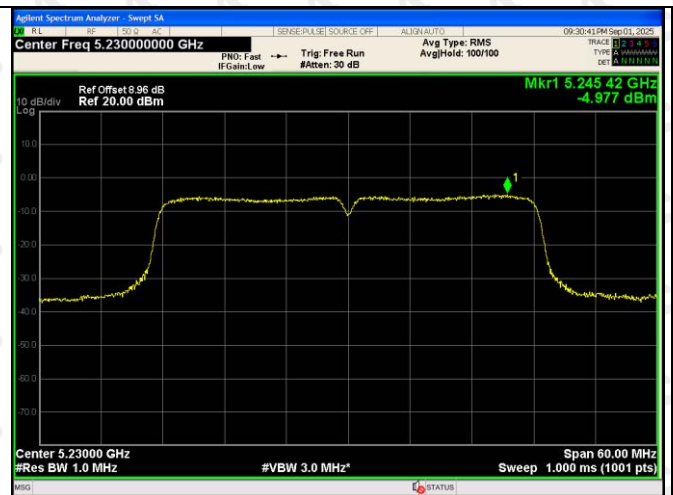

802.11n(HT20)-5180



802.11n(HT20)-5200

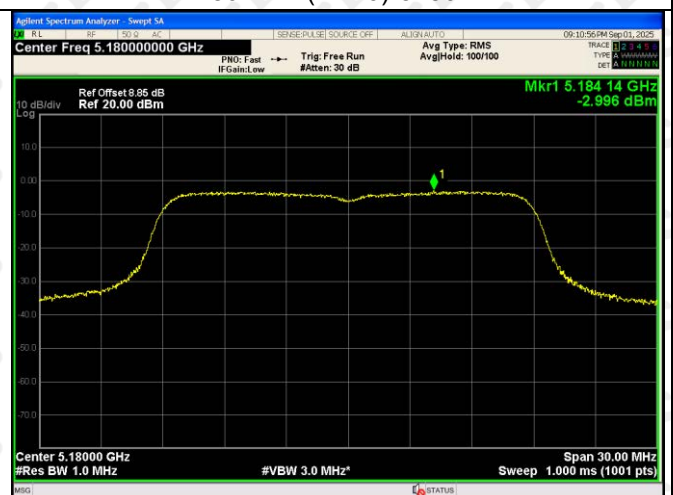


802.11n(HT20)-5240




802.11n(HT40)-5190



802.11n(HT40)-5230

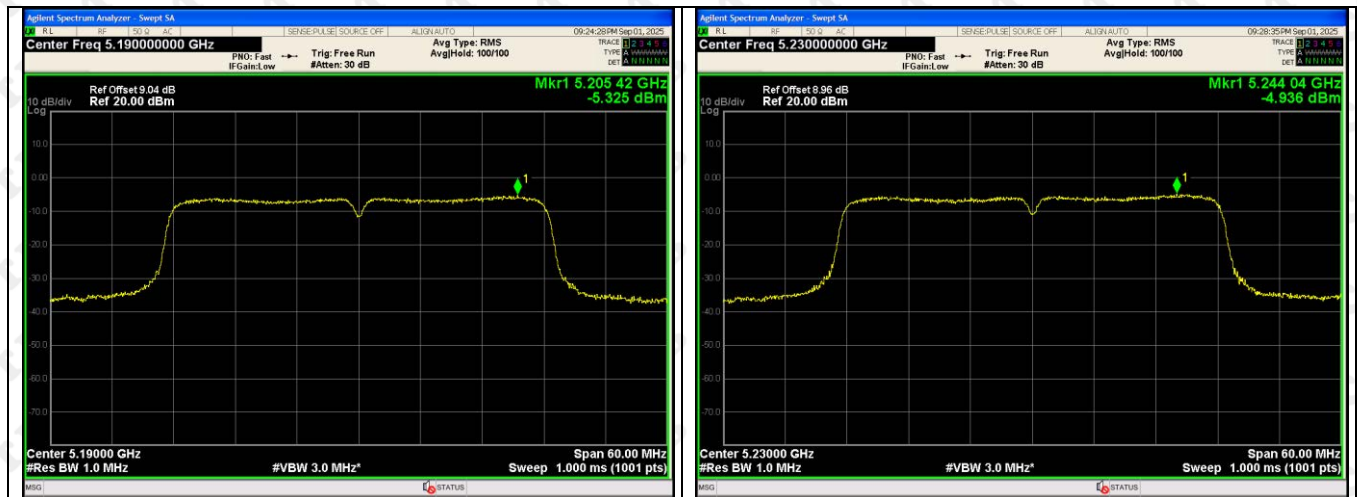

ANT2

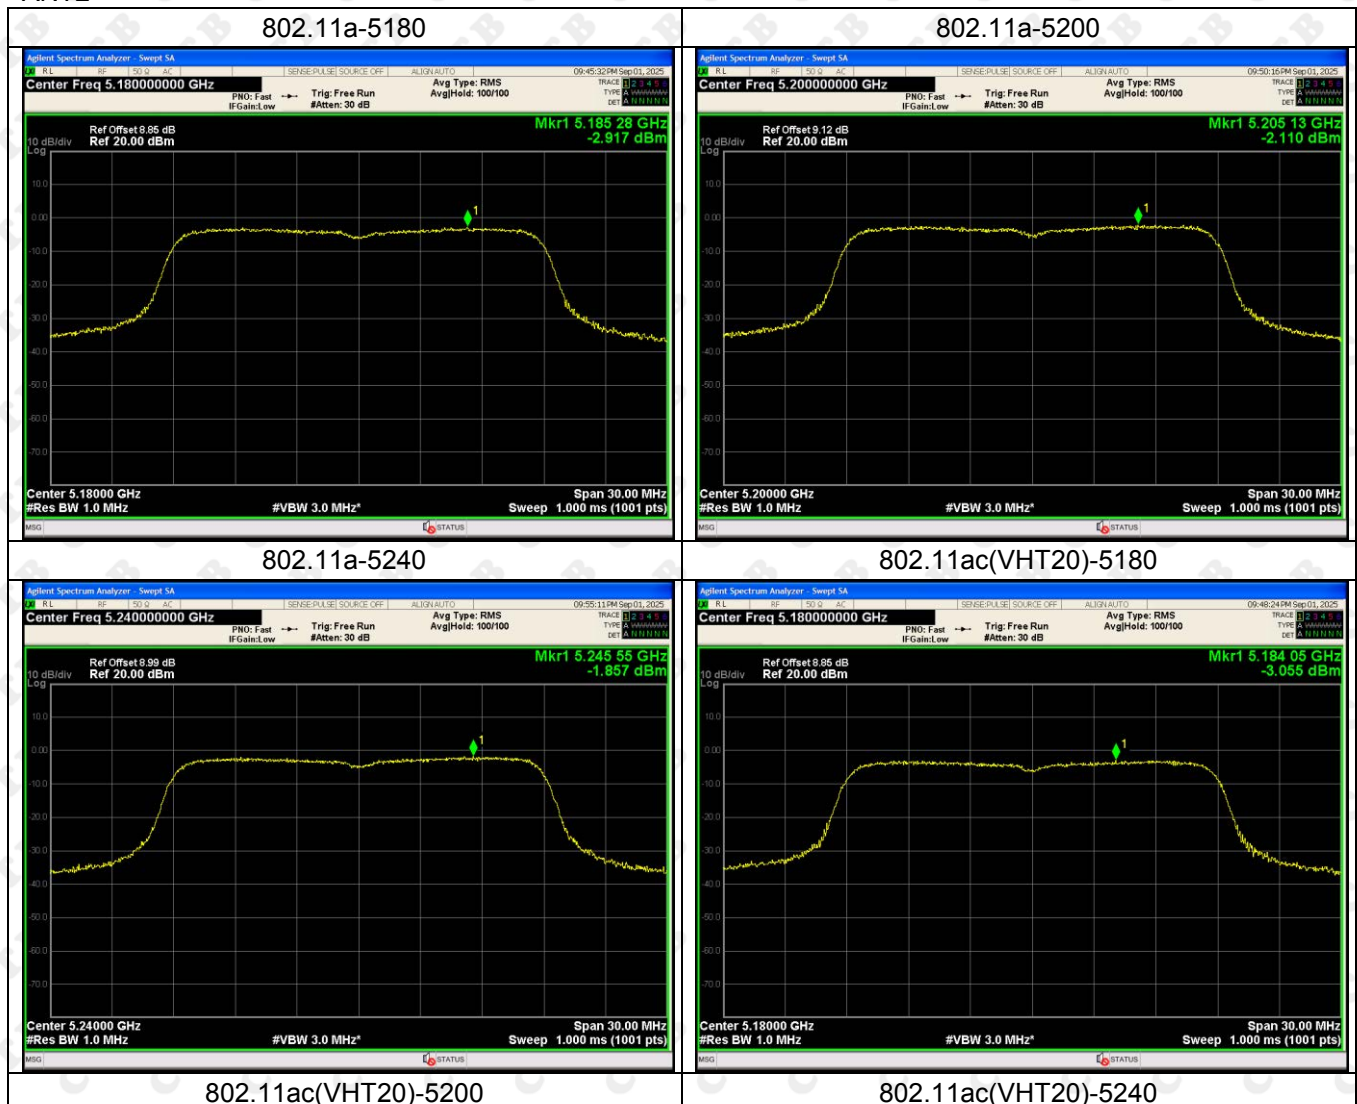



802.11ac(VHT40)-5190



802.11ac(VHT40)-5230



802.11ac(VHT80)-5210



802.11n(HT20)-5180




802.11n(HT20)-5200




802.11n(HT20)-5240



802.11n(HT40)-5190

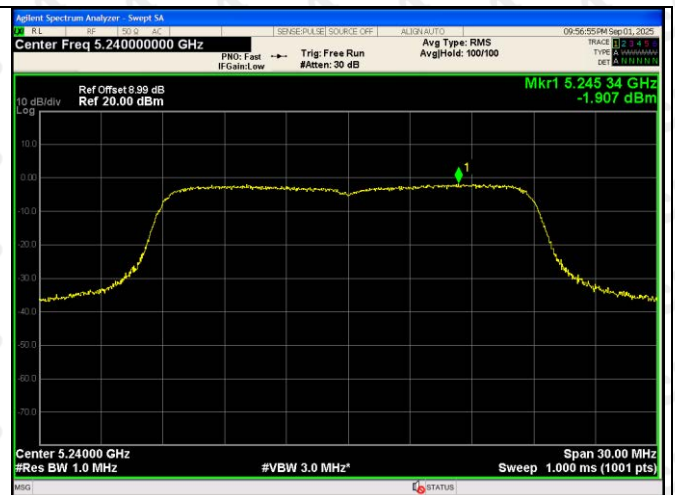

802.11n(HT40)-5230

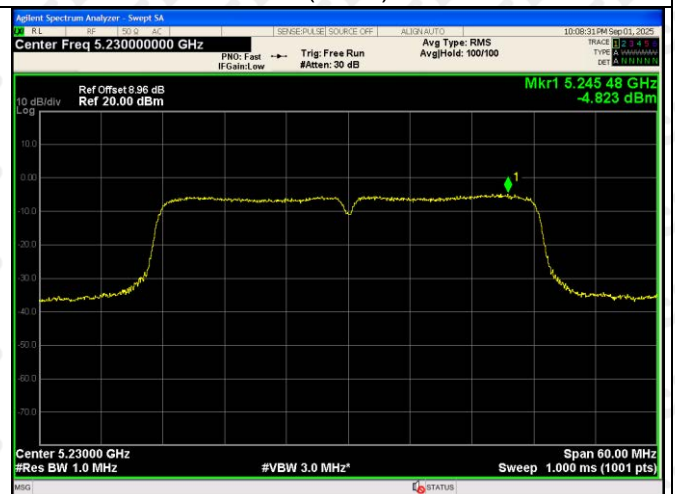

5745-5825MHz
ANT 1:





802.11ac(VHT80)-5775



802.11n(HT20)-5745



802.11n(HT20)-5785




802.11n(HT20)-5825




5802.11n(HT40)-5755



802.11n(HT40)-5795

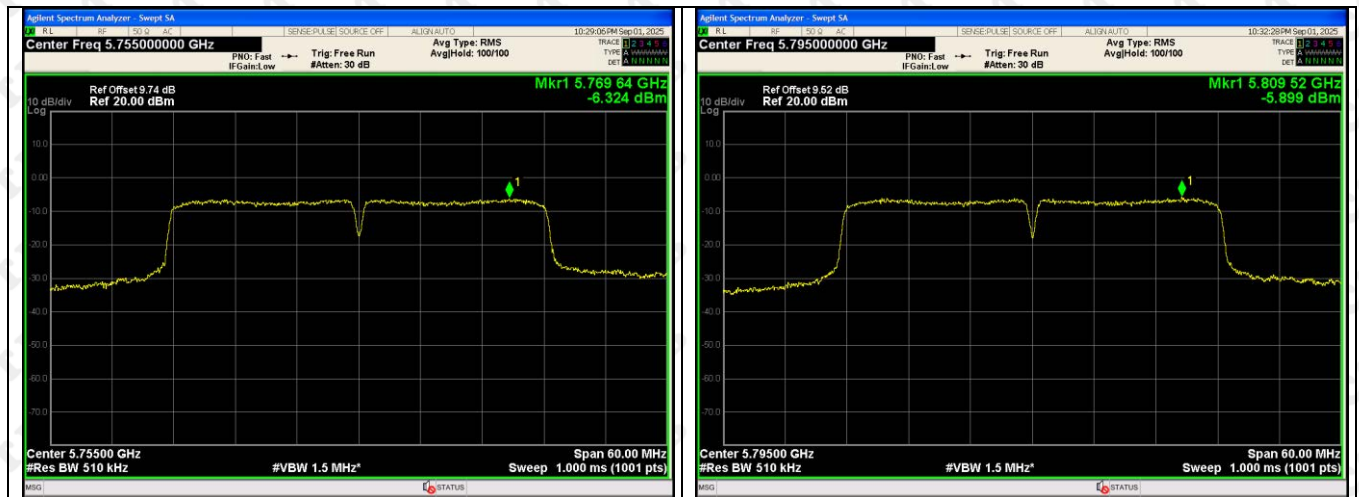


ANT2:

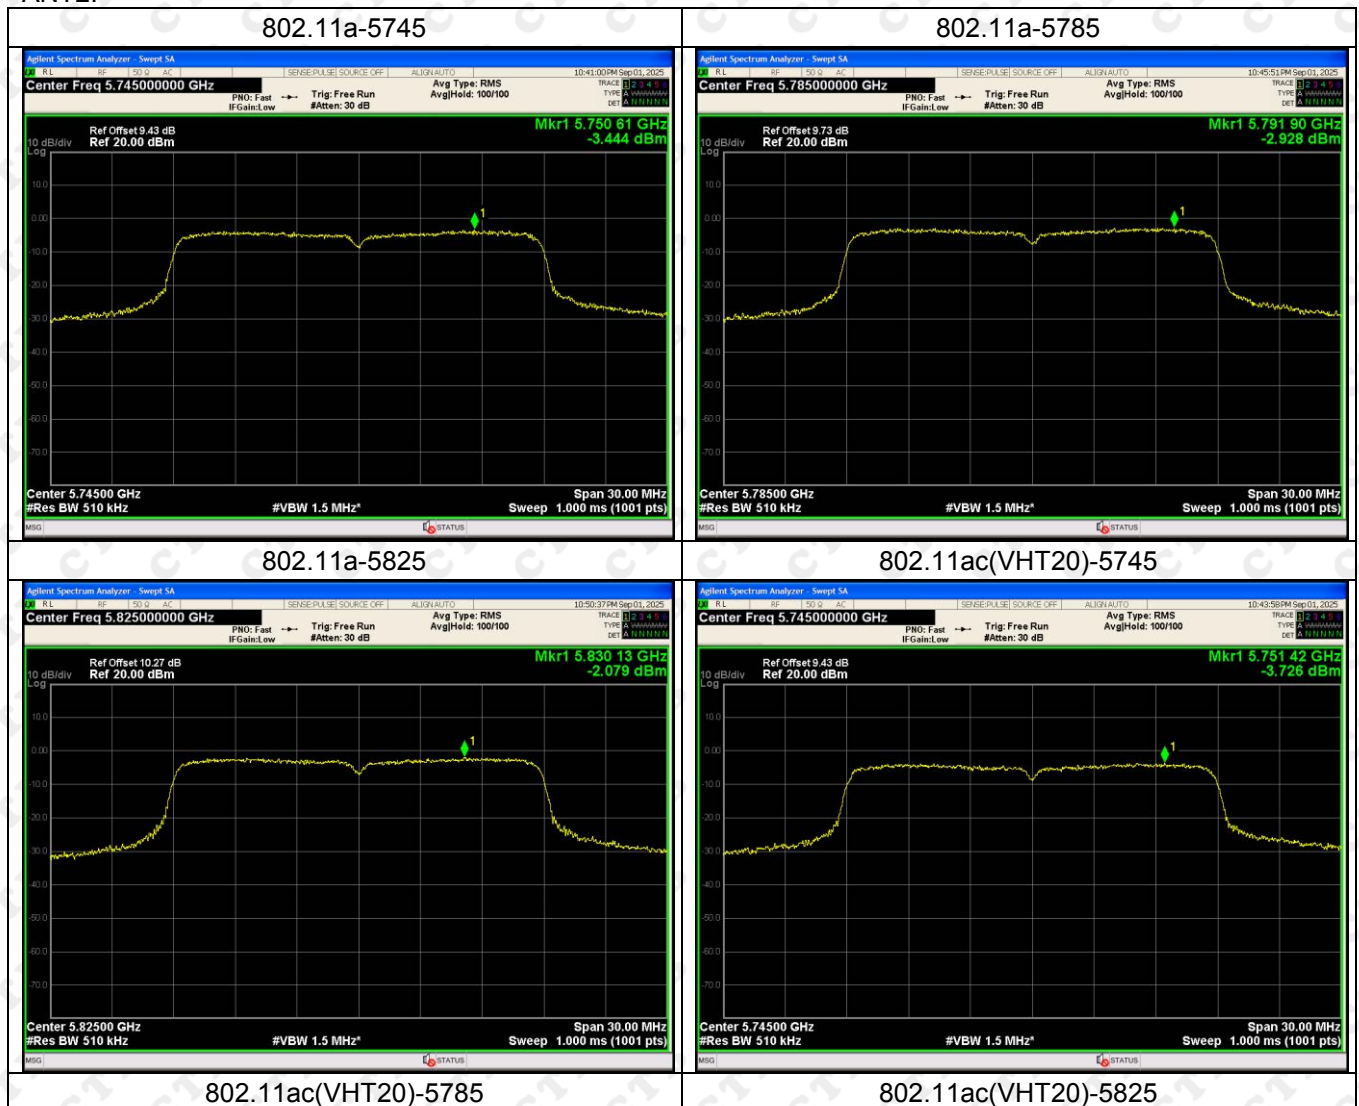



802.11ac(VHT40)-5755

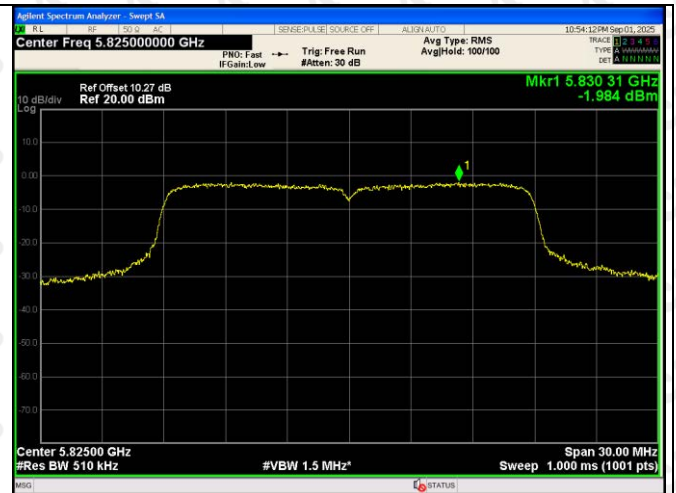

802.11ac(VHT40)-5795



802.11ac(VHT80)-5775



802.11n(HT20)-5745




802.11n(HT20)-5785



802.11n(HT20)-5825



5802.11n(HT40)-5755

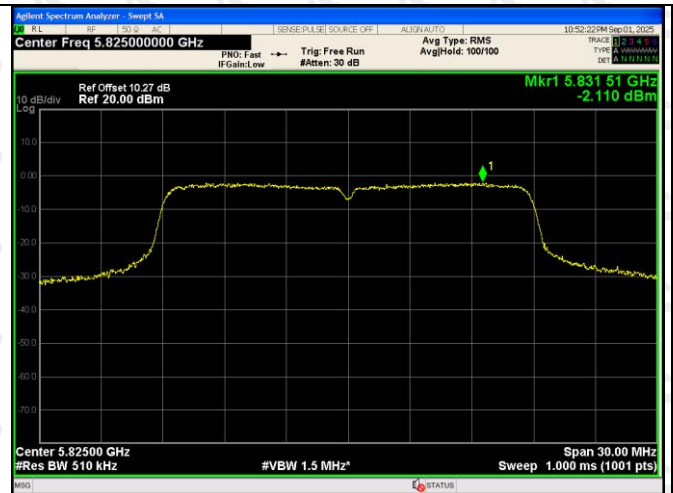


802.11n(HT40)-5795



12. FREQUENCY STABILITY

12.1 Block Diagram Of Test Setup

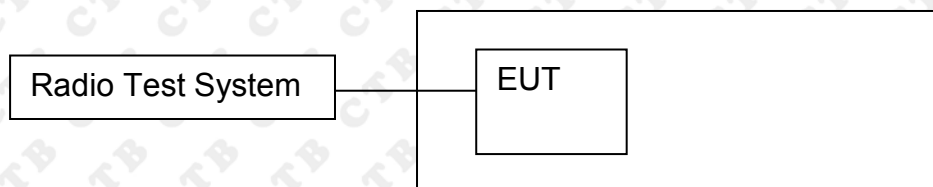

12.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

12.3 Test procedure

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

12.4 Test Result

ANT1:

TX Frequency (5150-5250MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5180.0174	5180	0.0174	3.3675
		V max (V)	132	5180.0154	5180	0.0154	2.9646
		V min (V)	108	5180.0146	5180	0.0146	2.8219
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5180.0192	5180	0.0192	3.7011
		T (°C)	10	5180.0304	5180	0.0304	5.8692
		T (°C)	20	5180.0460	5180	0.0460	8.8852
		T (°C)	30	5180.0384	5180	0.0384	7.4219
		T (°C)	40	5180.0355	5180	0.0355	6.8450
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5200.0407	5200	0.0407	7.8231
		V max (V)	132	5200.0126	5200	0.0126	2.4213
		V min (V)	108	5200.0056	5200	0.0056	1.0742
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5200.0385	5200	0.0385	7.4112
		T (°C)	10	5200.0433	5200	0.0433	8.3194
		T (°C)	20	5200.0238	5200	0.0238	4.5852
		T (°C)	30	5200.0275	5200	0.0275	5.2880
		T (°C)	40	5200.0186	5200	0.0186	3.5710
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5240.0110	5240	0.0110	2.0963
		V max (V)	132	5240.0511	5240	0.0511	9.7433
		V min (V)	108	5240.0165	5240	0.0165	3.1453
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5240.0256	5240	0.0256	4.8832
		T (°C)	10	5240.0115	5240	0.0115	2.1859
		T (°C)	20	5240.0421	5240	0.0421	8.0298
		T (°C)	30	5240.0489	5240	0.0489	9.3376
		T (°C)	40	5240.0202	5240	0.0202	3.8557
Limits				±20ppm			
Result				Complies			

ANT2:

TX Frequency (5150-5250MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5180.0116	5180	0.0116	2.2448
		V max (V)	132	5180.0463	5180	0.0463	8.9297
		V min (V)	108	5180.0267	5180	0.0267	5.1496
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5180.0806	5180	0.0806	15.5520
		T (°C)	10	5180.0674	5180	0.0674	13.0209
		T (°C)	20	5180.0657	5180	0.0657	12.6746
		T (°C)	30	5180.0640	5180	0.0640	12.3496
		T (°C)	40	5180.0757	5180	0.0757	14.6150
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5200.0820	5200	0.0820	15.7754
		V max (V)	132	5200.0016	5200	0.0016	0.3091
		V min (V)	108	5200.0252	5200	0.0252	4.8438
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5200.0610	5200	0.0610	11.7390
		T (°C)	10	5200.0076	5200	0.0076	1.4617
		T (°C)	20	5200.0926	5200	0.0926	17.8056
		T (°C)	30	5200.0263	5200	0.0263	5.0608
		T (°C)	40	5200.0387	5200	0.0387	7.4356
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5240.0840	5240	0.0840	16.0378
		V max (V)	132	5240.0878	5240	0.0878	16.7618
		V min (V)	108	5240.0207	5240	0.0207	3.9416
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5240.0730	5240	0.0730	13.9233
		T (°C)	10	5240.0664	5240	0.0664	12.6729
		T (°C)	20	5240.0561	5240	0.0561	10.7027
		T (°C)	30	5240.0480	5240	0.0480	9.1683
		T (°C)	40	5240.0090	5240	0.0090	1.7095
Limits				±20ppm			
Result				Complies			

ANT1:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5745.0429	5745	0.0429	7.4601
		V max (V)	132	5745.0457	5745	0.0457	7.9588
		V min (V)	108	5745.0429	5745	0.0429	7.4601
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5745.0846	5745	0.0846	14.7281
		T (°C)	10	5745.0317	5745	0.0317	5.5256
		T (°C)	20	5745.0102	5745	0.0102	1.7841
		T (°C)	30	5745.0531	5745	0.0531	9.2459
		T (°C)	40	5745.0369	5745	0.0369	6.4158
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5785.0079	5785	0.0079	1.3625
		V max (V)	132	5785.0829	5785	0.0829	14.3217
		V min (V)	108	5785.0326	5785	0.0326	5.6271
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5785.0804	5785	0.0804	13.8907
		T (°C)	10	5785.0442	5785	0.0442	7.6394
		T (°C)	20	5785.0595	5785	0.0595	10.2930
		T (°C)	30	5785.0072	5785	0.0072	1.2505
		T (°C)	40	5785.0739	5785	0.0739	12.7740
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5825.0479	5825	0.0479	8.2253
		V max (V)	132	5825.0262	5825	0.0262	4.5020
		V min (V)	108	5825.0525	5825	0.0525	9.0091
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5825.0372	5825	0.0372	6.3873
		T (°C)	10	5825.0413	5825	0.0413	7.0837
		T (°C)	20	5825.0493	5825	0.0493	8.4667
		T (°C)	30	5825.0852	5825	0.0852	14.6224
		T (°C)	40	5825.0834	5825	0.0834	14.3261
Limits				±20ppm			
Result				Complies			

ANT2:

TX Frequency (5725-5850MHz)

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5745.0387	5745	0.0387	6.7389
		V max (V)	132	5745.0385	5745	0.0385	6.6947
		V min (V)	108	5745.0480	5745	0.0480	8.3570
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5745.0252	5745	0.0252	4.3802
		T (°C)	10	5745.0714	5745	0.0714	12.4210
		T (°C)	20	5745.0633	5745	0.0633	11.0114
		T (°C)	30	5745.0750	5745	0.0750	13.0505
		T (°C)	40	5745.0374	5745	0.0374	6.5030
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5785.0571	5785	0.0571	9.8638
		V max (V)	132	5785.0834	5785	0.0834	14.4144
		V min (V)	108	5785.0185	5785	0.0185	3.2056
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5785.0228	5785	0.0228	3.9452
		T (°C)	10	5785.0748	5785	0.0748	12.9229
		T (°C)	20	5785.0727	5785	0.0727	12.5664
		T (°C)	30	5785.0370	5785	0.0370	6.3913
		T (°C)	40	5785.0288	5785	0.0288	4.9731
		T (°C)	50	5785.0381	5785	0.0381	6.5831
Limits				±20ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	120	5825.0213	5825	0.0213	3.6645
		V max (V)	132	5825.0568	5825	0.0568	9.7557
		V min (V)	108	5825.0573	5825	0.0573	9.8379
Limits				±20ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	120	T (°C)	0	5825.0080	5825	0.0080	1.3775
		T (°C)	10	5825.0911	5825	0.0911	15.6430
		T (°C)	20	5825.0032	5825	0.0032	0.5436
		T (°C)	30	5825.0041	5825	0.0041	0.6988
		T (°C)	40	5825.0256	5825	0.0256	4.3930
Limits				±20ppm			
Result				Complies			

13. OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT

13.1 Requirement

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signal ling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

13.2 Test Results

Operation in the absence of information to the transmit:

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is WiFi (5.2G):Ant1: 8.30dBi, Ant2: 4.94dBi, WiFi (5.8G):Ant1: 6.85dBi, Ant2: 6.87dBi

15. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

Below 1G

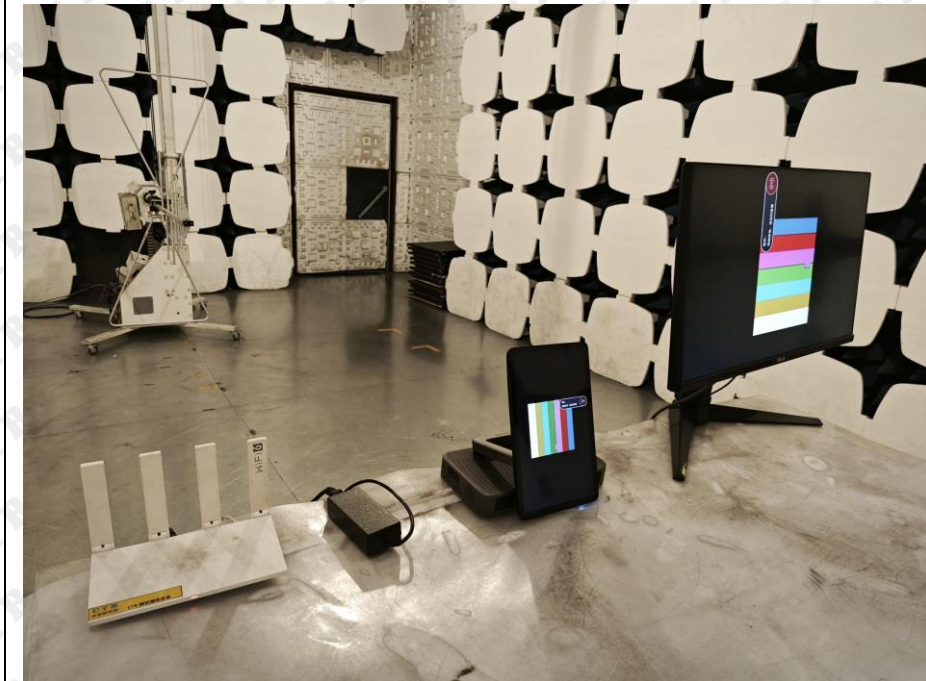

Above 1G



Conducted emission



***** END OF REPORT *****