

TEST REPORT

Application No.: SHCR2507001751HS
FCC ID: 2BR68-J50PRO
Applicant: Suzhou Ramond Aroma Technology Co., LTD
Address of Applicant: No. 6 Baoda Road, Industrial Park, Suzhou city, Jiangsu, China
Manufacturer: Suzhou Ramond Aroma Technology Co., LTD
Address of Manufacturer: No. 6 Baoda Road, Industrial Park, Suzhou city, Jiangsu, China
Factory: Suzhou Ramond Aroma Technology Co., LTD
Address of Factory: No. 6 Baoda Road, Industrial Park, Suzhou city, Jiangsu, China
Equipment Under Test (EUT):
EUT Name: SMART SCENT DIFFUSER
Model No.: J50Pro, K58Pro, K56Pro, K26Pro, K40Pro, K50Pro, K61Pro, K71Pro
Remark: Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2025-07-03
Date of Test: 2025-07-04 to 2025-07-25
Date of Issue: 2025-08-05

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Member of the SGS Group (SGS SA)



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101

Page: 2 of 84

Revision Record			
Version	Description	Date	Remark
00	Original	2025-08-05	/

Authorized for issue by:				
Tested By		Wade Zhang		
		Wade Zhang/Project Engineer		
Approved By		Parlam Zhan		
		Parlam Zhan / Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)		ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

Note: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model J50Pro was tested since their differences were the model number and appearance.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Power level setting using in test:	6
4.3 Description of Support Units	6
4.4 Measurement Uncertainty	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Peak Output Power	11
7.1.1 E.U.T. Operation	11
7.1.2 Test Mode Description	11
7.1.3 Test Setup Diagram	11
7.1.4 Measurement Procedure and Data	12
7.2 Minimum 6dB Bandwidth	13
7.2.1 E.U.T. Operation	13
7.2.2 Test Mode Description	13
7.2.3 Test Setup Diagram	13
7.2.4 Measurement Procedure and Data	13
7.3 Power Spectrum Density	14
7.3.1 E.U.T. Operation	14
7.3.2 Test Mode Description	14
7.3.3 Test Setup Diagram	14
7.3.4 Measurement Procedure and Data	14
7.4 Conducted Band Edges Measurement	15
7.4.1 E.U.T. Operation	15
7.4.2 Test Mode Description	15
7.4.3 Test Setup Diagram	15
7.4.4 Measurement Procedure and Data	15
7.5 Conducted Spurious Emissions	16
7.5.1 E.U.T. Operation	16
7.5.2 Test Mode Description	16
7.5.3 Test Setup Diagram	16
7.5.4 Measurement Procedure and Data	16
7.6 Radiated Emissions which fall in the restricted bands	17
7.6.1 E.U.T. Operation	17
7.6.2 Test Mode Description	17

7.6.3	Test Setup Diagram	18
7.6.4	Measurement Procedure and Data	18
7.7	Radiated Spurious Emissions Below 1GHz	35
7.7.1	E.U.T. Operation	35
7.7.2	Test Mode Description	35
7.7.3	Test Setup Diagram	35
7.7.4	Measurement Procedure and Data	36
7.8	Radiated Spurious Emissions Above 1GHz	39
7.8.1	E.U.T. Operation	39
7.8.2	Test Mode Description	39
7.8.3	Test Setup Diagram	39
7.8.4	Measurement Procedure and Data	40
7.9	Conducted Emissions at AC Power Line (150kHz-30MHz)	53
7.9.1	E.U.T. Operation	53
7.9.2	Test Mode Description	53
7.9.3	Test Setup Diagram	53
7.9.4	Measurement Procedure and Data	54
8	Test Setup Photo	57
9	EUT Constructional Details (EUT Photos)	57
10	Appendix	57
10.1	Appendix A: DTS Bandwidth	57
10.1.1	Test Result	57
10.1.2	Test Graphs	58
10.2	Appendix B: Occupied Channel Bandwidth	61
10.2.1	Test Result	61
10.2.2	Test Graphs	62
10.3	Appendix C: Maximum conducted output power	65
10.3.1	Test Result	65
10.3.2	Test Graphs	66
10.4	Appendix D: Maximum power spectral density	69
10.4.1	Test Result	69
10.4.2	Test Graphs	70
10.5	Appendix E: Band edge measurements	73
10.5.1	Test Result	73
10.5.2	Test Graphs	74
10.6	Appendix F: Conducted Spurious Emission	76
10.6.1	Test Result	76
10.6.2	Test Graphs	77

4 General Information

4.1 Details of E.U.T.

Power supply:	DC12V Adapter Model: KDP-AC120100U Input: AC100-240V 50/60Hz, 0.5A Output: DC12V 1A
Test voltage:	AC120V 60Hz
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-0.72 dBi (Provided by manufacturer)
Antenna Number:	1

4.2 Power level setting using in test:

Channel	Power setting
0	Default
19	Default
39	Default

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	LENOVO	L460	-
SecureCRT	VanDyke	V 6.2.0	-
Serial port adapter plate	-	Test Plate 3	-

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-6GHz)
		5.4dB (6GHz-18GHz)
10	Temperature test	1°C
11	Humidity test	3%

12	Supply voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

• **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

• **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

• **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2024-12-18	2025-12-17
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2024-12-18	2025-12-17
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2025-04-30	2026-04-29
Signal Generator	R&S	SMR20	SHEM006-1	2024-07-30	2025-07-29
Signal Generator	Agilent	N5182A	SHEM182-1	2024-07-30	2025-07-29
Communication Tester	R&S	CMW270	SHEM183-1	2025-04-30	2026-04-29
Communication Tester	R&S	CMW500	SHEM268-1	2025-04-30	2026-04-29
Power Sensor	Keysight	U2021XA * 4	SHEM293-1	2024-07-30	2025-07-29
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2024-11-05	2026-11-04
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2024-12-18	2025-12-17
DC Power Supply	HP	6010A	SHEM222-1	2024-12-18	2025-12-17
Conducted test Cable	/	RF01~RF04	/	2024-12-18	2025-12-17
Switcher	Tonscend	JS0806	SHEM293-1	2024-07-30	2025-07-29
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2024-07-30	2025-07-29
Test software	TST	TST PASS	Version: 2.0	/	/
RF Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2024-12-18	2025-12-17
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2024-12-18	2025-12-17
Communication Tester	R&S	CMW500	SHEM268-1	2025-04-30	2026-04-29
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2024-12-18	2025-12-17
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2023-09-03	2025-09-02
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2025-04-12	2027-04-11
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2024-08-05	2026-08-04
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023-09-03	2025-09-02
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2023-09-03	2025-09-02
Pre-Amplifier	HP	8447D	SHEM236-1	2024-12-18	2025-12-17
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2024-12-18	2025-12-17
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023-05-06	2026-05-05
RE test Cable	/	PT18-NMNM-10M	SHEM217-2	2024-12-18	2025-12-17
Test software	ESE	E3	Version: 6.111221a	/	/



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101

Page: 9 of 84

Conducted Emissions at Mains Power Port (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2024-12-18	2025-12-17
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2024-12-18	2025-12-17
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2024-12-18	2025-12-17
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2024-12-18	2025-12-17
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023-12-19	2026-12-18
CE test Cable	/	9kHz-30MHz	SHEM172-2	2024-12-18	2025-12-17
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB Antenna and no consideration of replacement. The best case gain of the antenna is -0.72 dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

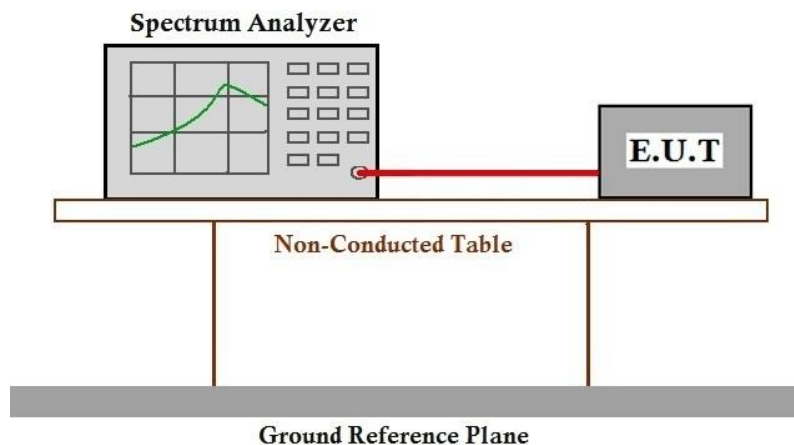



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101

Page: 12 of 84

7.1.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit:

≥500 kHz

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	00	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.2.3 Test Setup Diagram

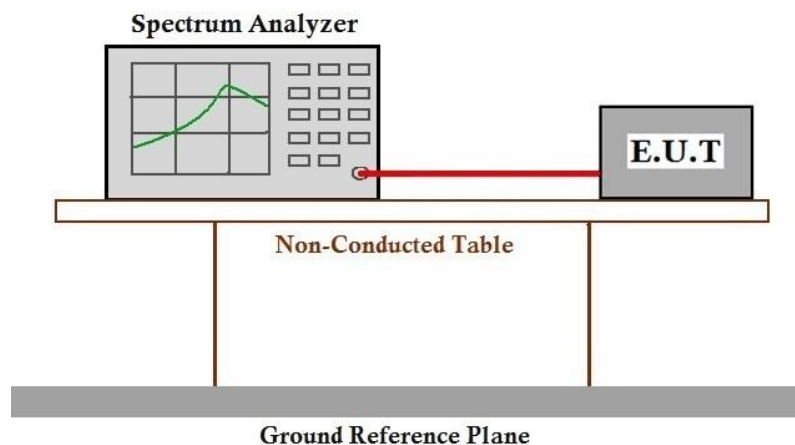

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.3.3 Test Setup Diagram

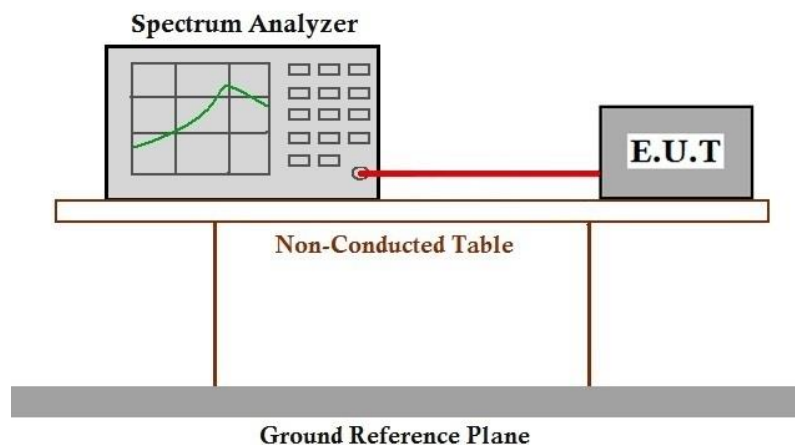

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.4.3 Test Setup Diagram

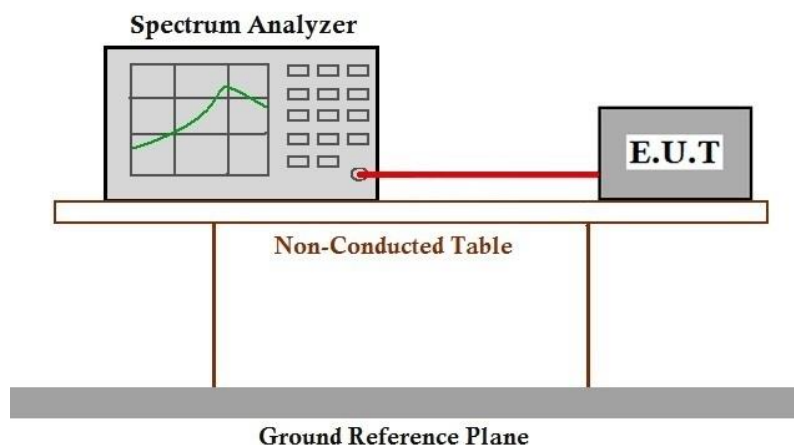

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.5.3 Test Setup Diagram

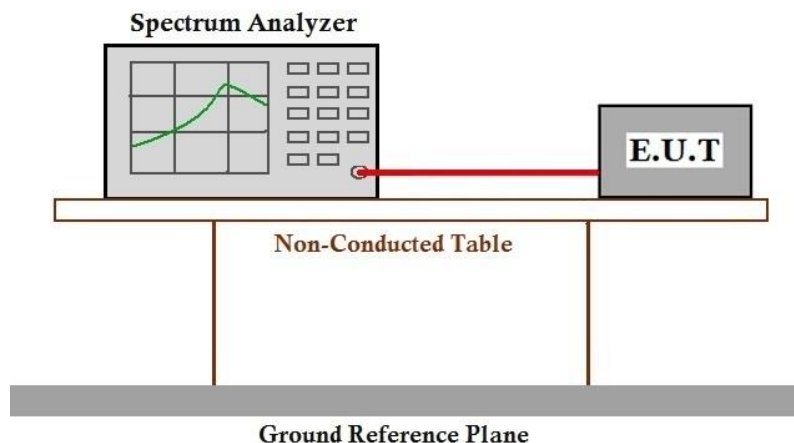

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

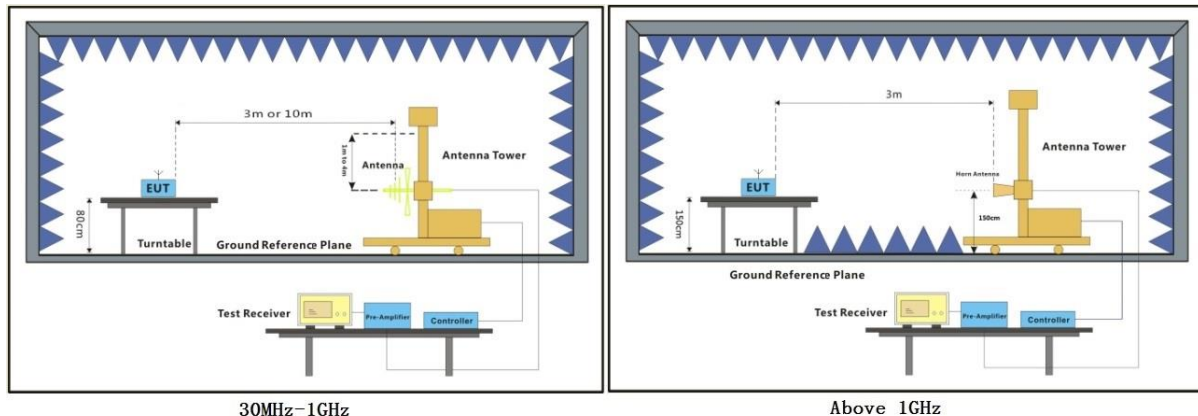

7.6.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

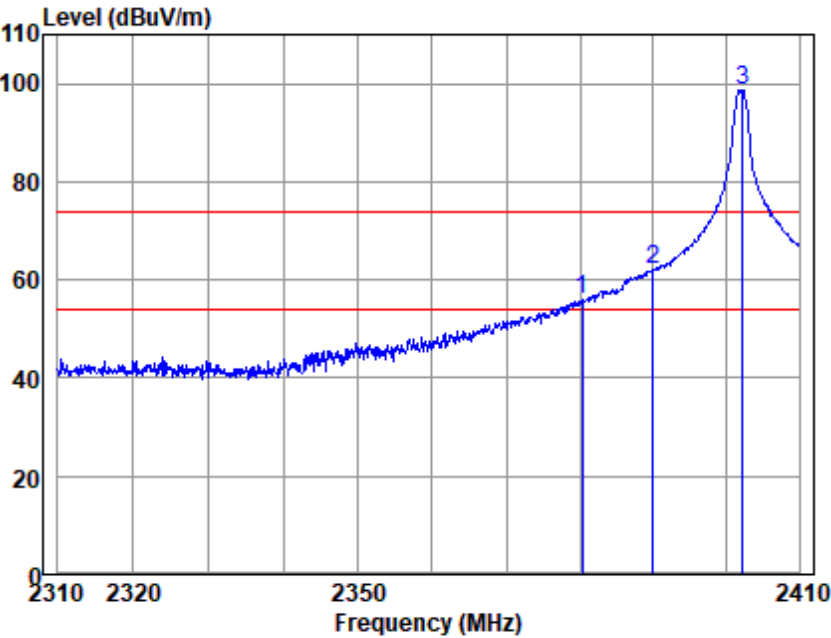


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2380.361	59.12	28.76	3.32	35.17	56.03	74.00	-17.97	Peak
2390.000	65.23	28.80	3.33	35.18	62.18	74.00	-11.82	Peak
2402.250	101.59	28.85	3.34	35.19	98.59	74.00	24.59	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

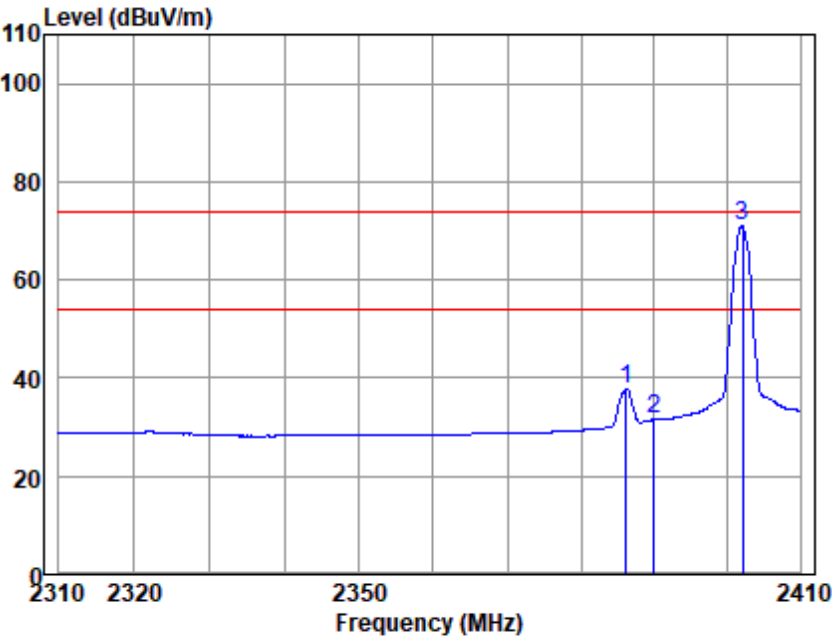


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2386.219	40.82	28.80	3.33	35.18	37.77	54.00	-16.23	Average
2390.000	34.63	28.80	3.33	35.18	31.58	54.00	-22.42	Average
2402.047	73.91	28.85	3.34	35.19	70.91	54.00	16.91	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

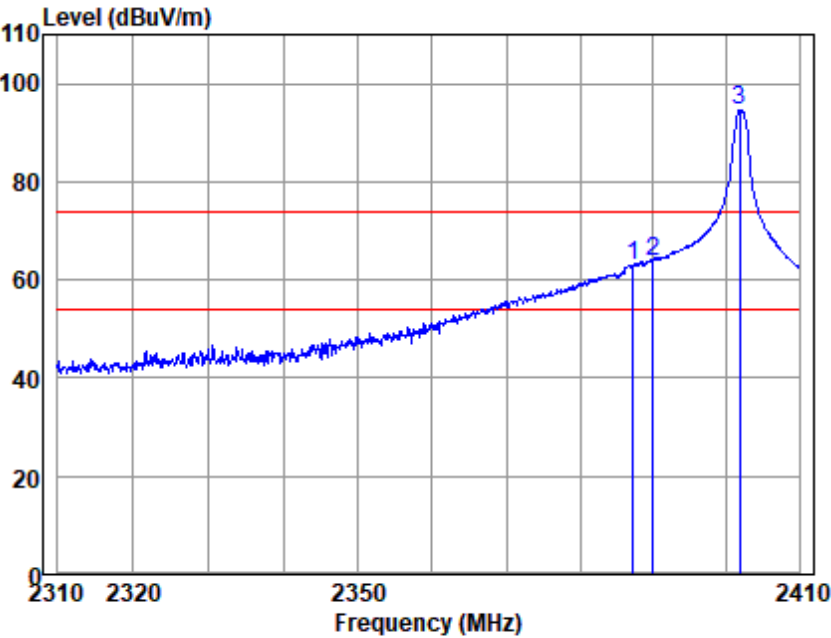


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2387.230	66.15	28.80	3.33	35.18	63.10	74.00	-10.90	Peak
2390.000	66.91	28.80	3.33	35.18	63.86	74.00	-10.14	Peak
2401.843	97.51	28.85	3.34	35.19	94.51	74.00	20.51	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

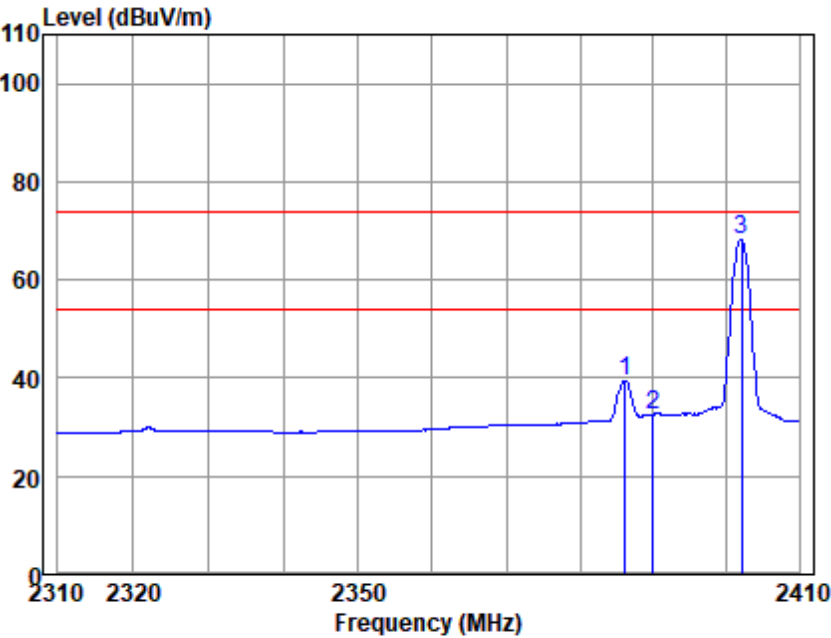


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2386.219	42.55	28.80	3.33	35.18	39.50	54.00	-14.50	Average
2390.000	35.68	28.80	3.33	35.18	32.63	54.00	-21.37	Average
2402.047	71.31	28.85	3.34	35.19	68.31	54.00	14.31	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

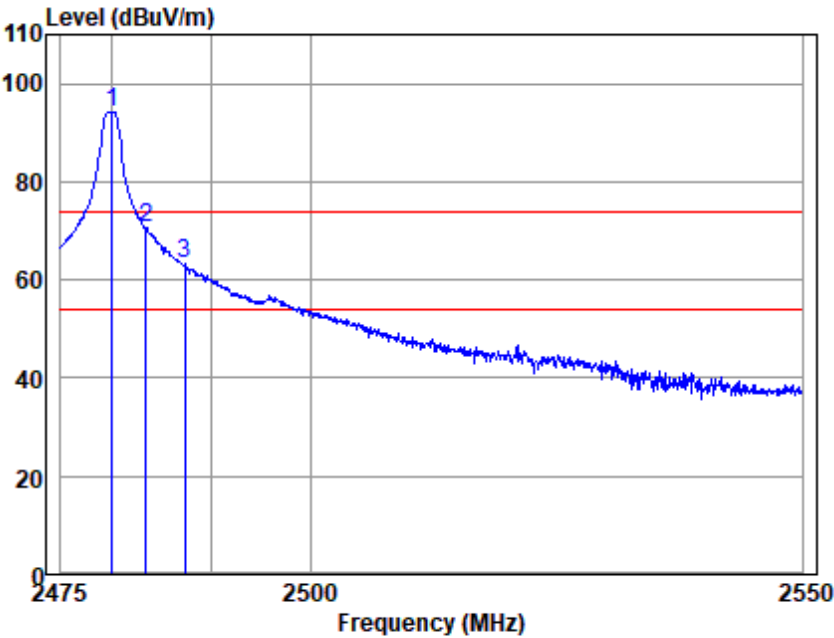


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.177	97.09	29.08	3.40	35.25	94.32	74.00	20.32	Peak
2483.500	73.29	29.09	3.41	35.26	70.53	74.00	-3.47	Peak
2487.444	65.98	29.09	3.41	35.26	63.22	74.00	-10.78	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

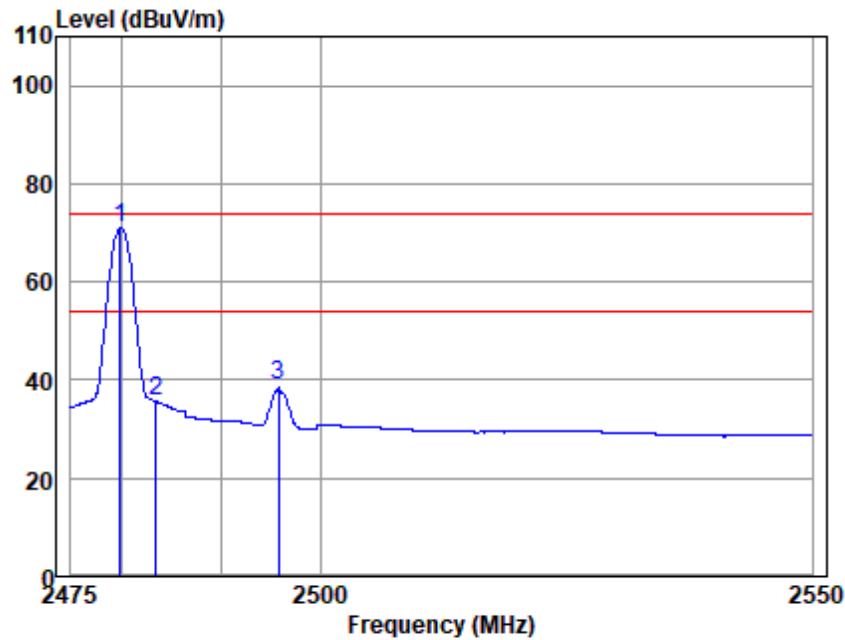


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2479.955	73.79	29.08	3.40	35.25	71.02	54.00	17.02	Average
2483.500	38.47	29.09	3.41	35.26	35.71	54.00	-18.29	Average
2495.775	41.71	29.10	3.41	35.26	38.96	54.00	-15.04	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

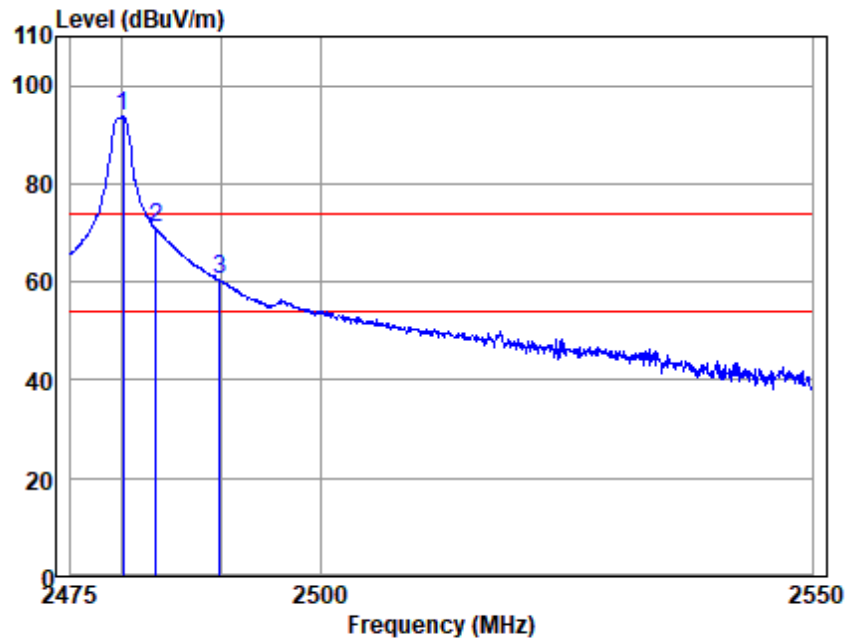


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.251	96.48	29.08	3.40	35.25	93.71	74.00	19.71	Peak
2483.500	73.62	29.09	3.41	35.26	70.86	74.00	-3.14	Peak
2489.896	63.25	29.10	3.41	35.26	60.50	74.00	-13.50	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

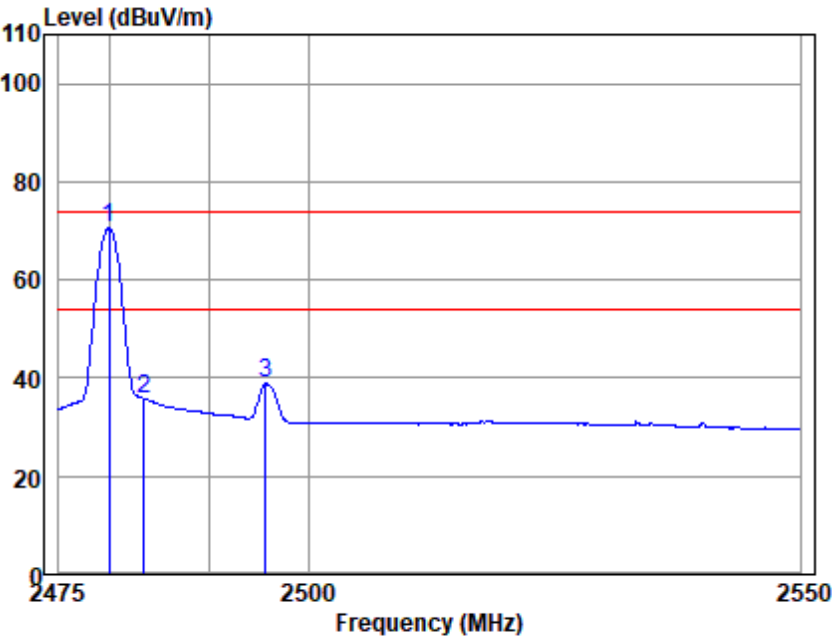


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.029	73.35	29.08	3.40	35.25	70.58	54.00	16.58	Average
2483.500	38.64	29.09	3.41	35.26	35.88	54.00	-18.12	Average
2495.700	41.58	29.10	3.41	35.26	38.83	54.00	-15.17	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

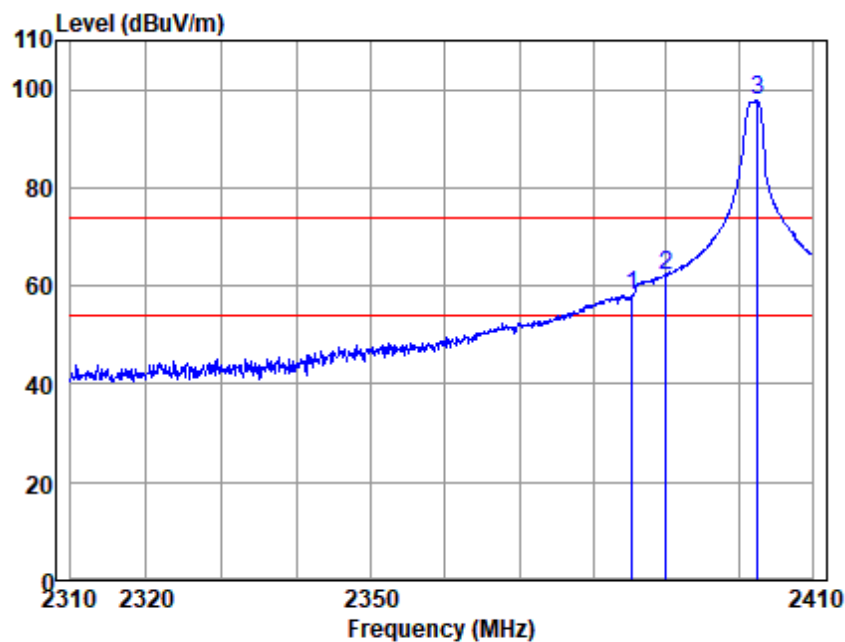


Antenna Polarity :HORIZONTAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2385.309	61.17	28.80	3.33	35.18	58.12	74.00	-15.88	Peak
2390.000	65.23	28.80	3.33	35.18	62.18	74.00	-11.82	Peak
2402.454	100.80	28.85	3.34	35.19	97.80	74.00	23.80	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

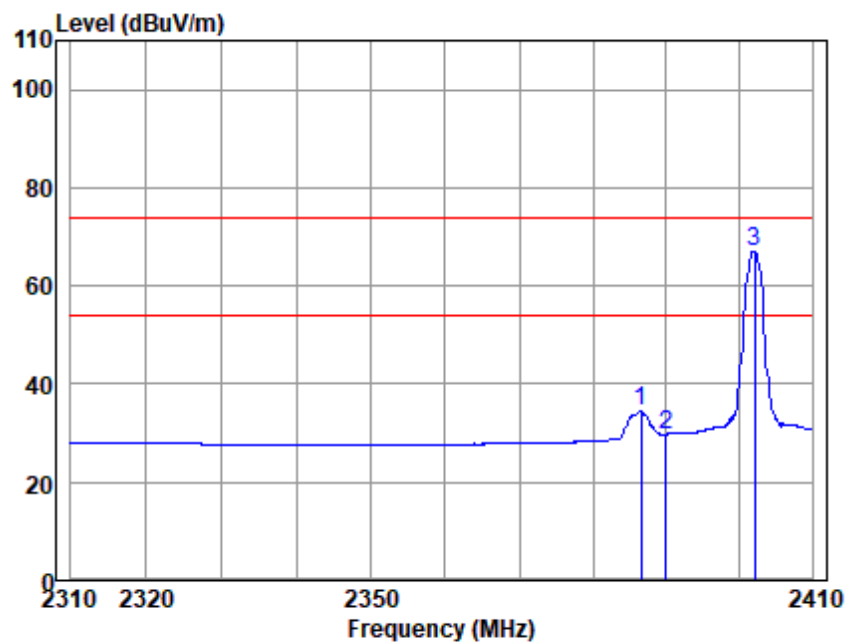


Antenna Polarity :HORIZONTAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2386.522	37.43	28.80	3.33	35.18	34.38	54.00	-19.62	Average
2390.000	32.86	28.80	3.33	35.18	29.81	54.00	-24.19	Average
2402.047	70.18	28.85	3.34	35.19	67.18	54.00	13.18	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

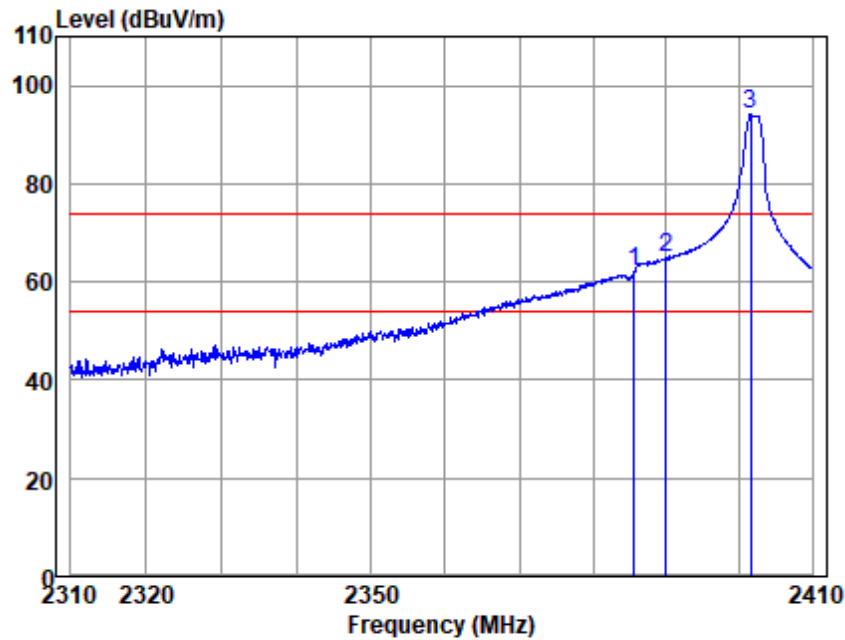


Antenna Polarity :VERTICAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2385.612	65.15	28.80	3.33	35.18	62.10	74.00	-11.90	Peak
2390.000	67.84	28.80	3.33	35.18	64.79	74.00	-9.21	Peak
2401.538	97.08	28.85	3.34	35.19	94.08	74.00	20.08	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

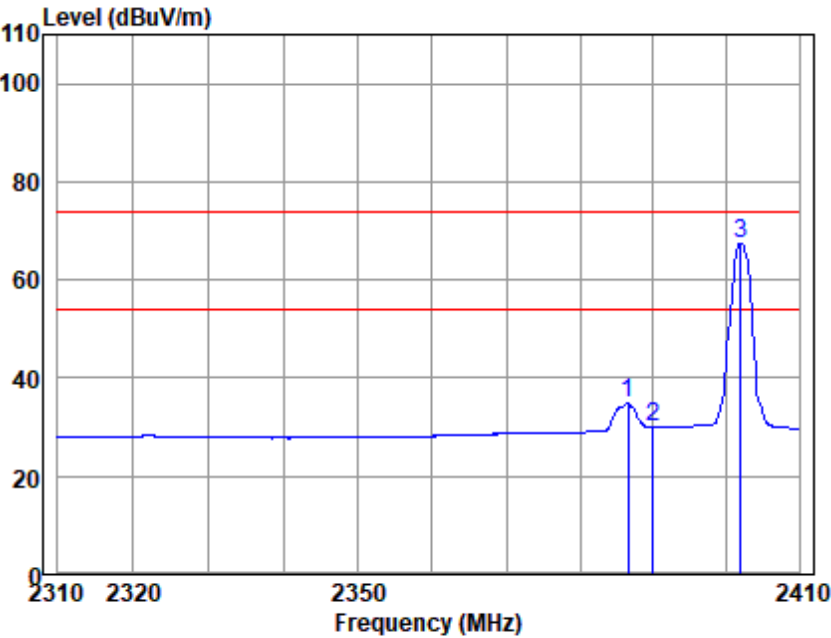


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2386.522	37.83	28.80	3.33	35.18	34.78	54.00	-19.22	Average
2390.000	32.97	28.80	3.33	35.18	29.92	54.00	-24.08	Average
2401.945	70.47	28.85	3.34	35.19	67.47	54.00	13.47	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

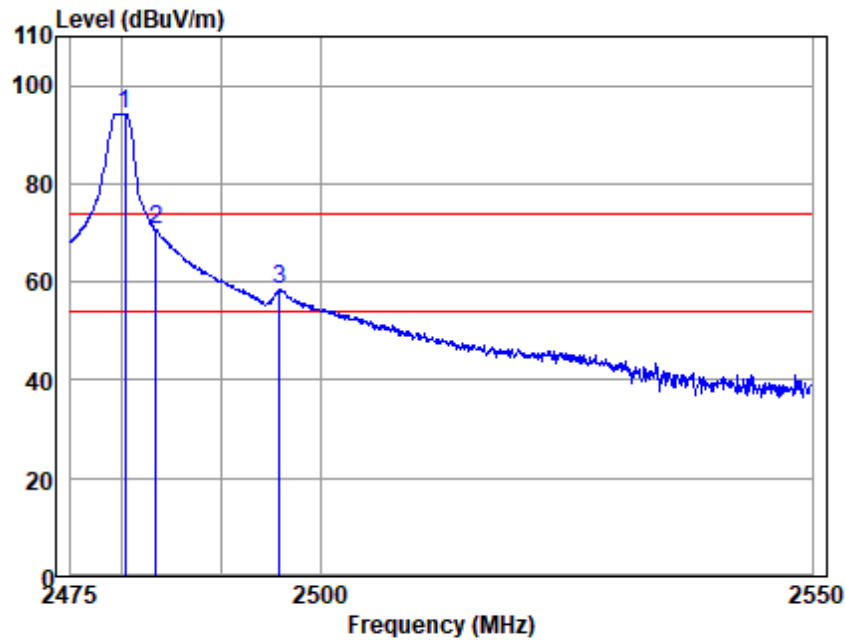


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.474	97.07	29.08	3.40	35.25	94.30	74.00	20.30	Peak
2483.500	73.55	29.09	3.41	35.26	70.79	74.00	-3.21	Peak
2495.849	61.20	29.10	3.41	35.26	58.45	74.00	-15.55	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

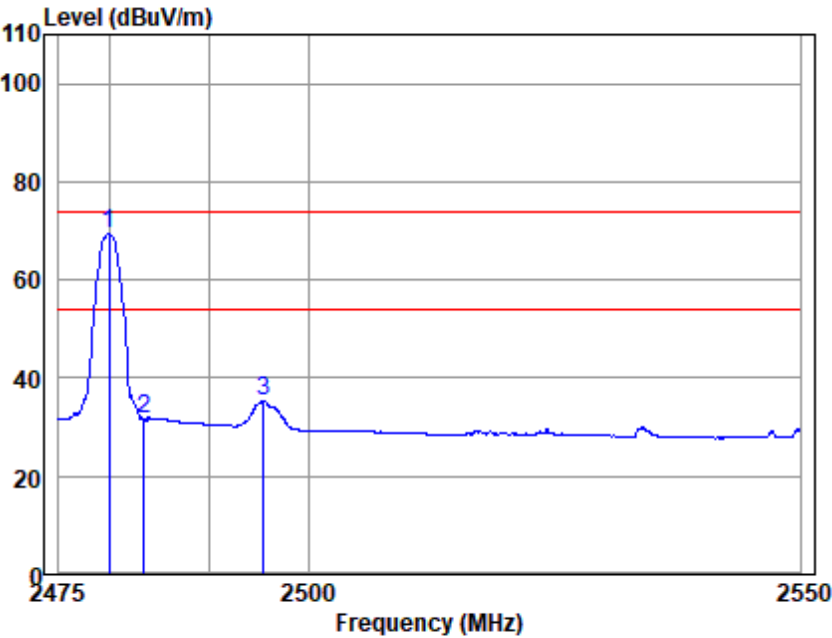


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.029	72.05	29.08	3.40	35.25	69.28	54.00	15.28	Average
2483.500	34.46	29.09	3.41	35.26	31.70	54.00	-22.30	Average
2495.477	38.07	29.10	3.41	35.26	35.32	54.00	-18.68	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

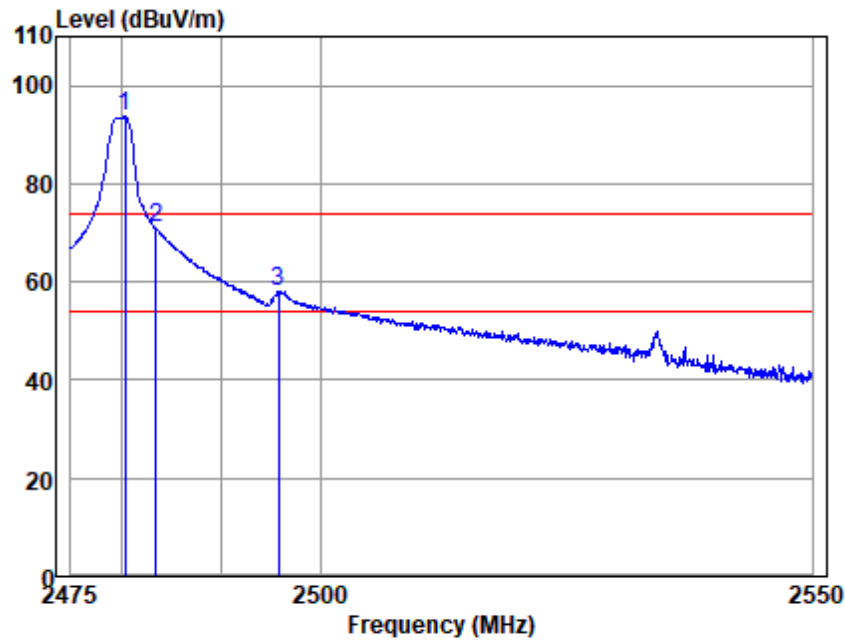


Antenna Polarity :VERTICAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.474	96.47	29.08	3.40	35.25	93.70	74.00	19.70	Peak
2483.500	73.60	29.09	3.41	35.26	70.84	74.00	-3.16	Peak
2495.775	60.90	29.10	3.41	35.26	58.15	74.00	-15.85	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

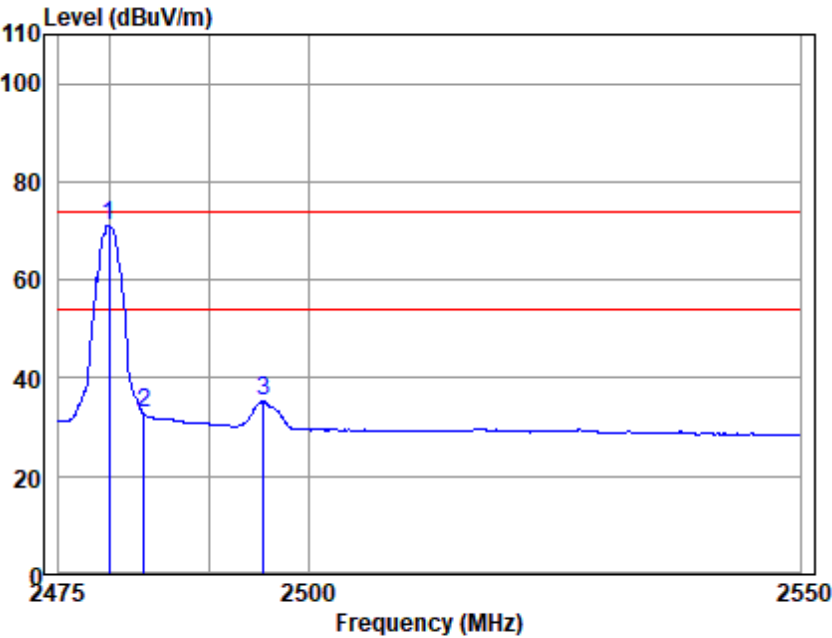

Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.029	73.80	29.08	3.40	35.25	71.03	54.00	17.03	Average
2483.500	35.47	29.09	3.41	35.26	32.71	54.00	-21.29	Average
2495.477	37.98	29.10	3.41	35.26	35.23	54.00	-18.77	Average

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.7 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

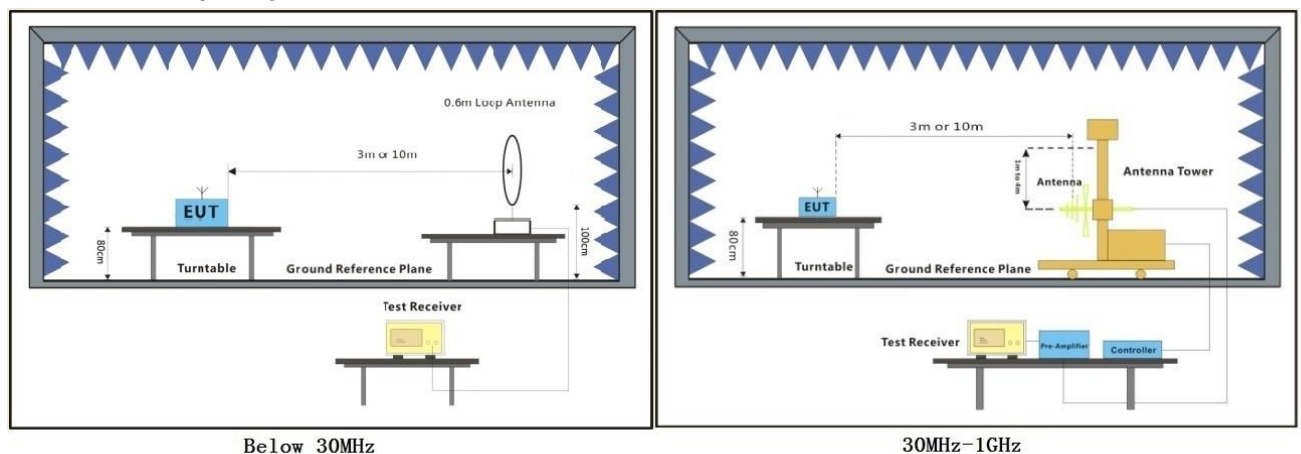


7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 00; Polarity: Horizontal

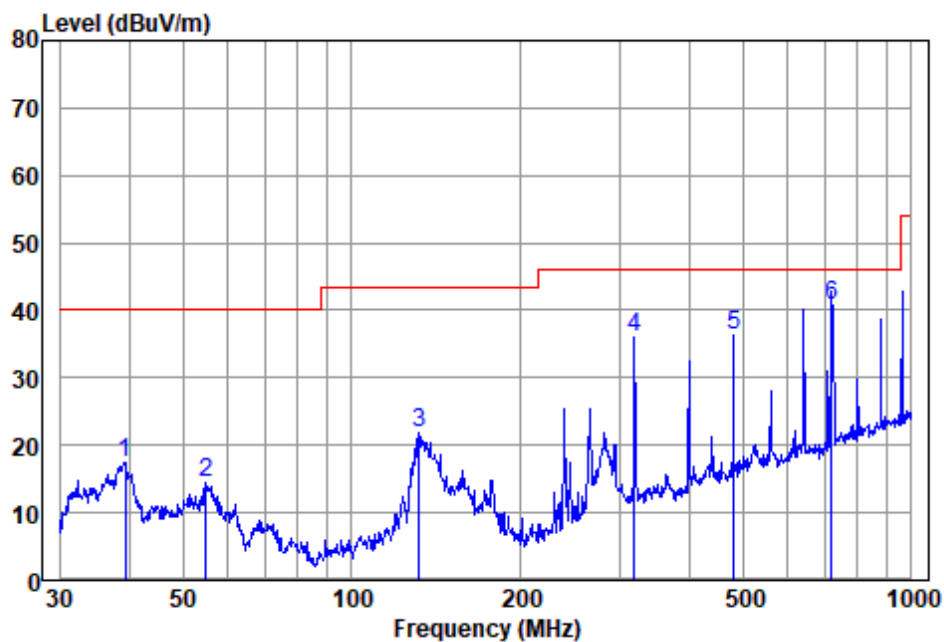

Antenna Polarity :HORIZONTAL


EUT/Project :1751HS

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	39.299	35.95	13.40	1.36	33.20	17.51	40.00	-22.49	QP
2	54.835	32.46	13.74	1.44	33.20	14.44	40.00	-25.56	QP
3	131.758	40.08	12.20	2.57	33.06	21.79	43.50	-21.71	QP
4	319.937	50.99	14.10	3.83	32.82	36.10	46.00	-9.90	QP
5	480.528	46.76	17.50	4.85	32.76	36.35	46.00	-9.65	QP
6	719.200	45.79	21.40	6.01	32.49	40.71	46.00	-5.29	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

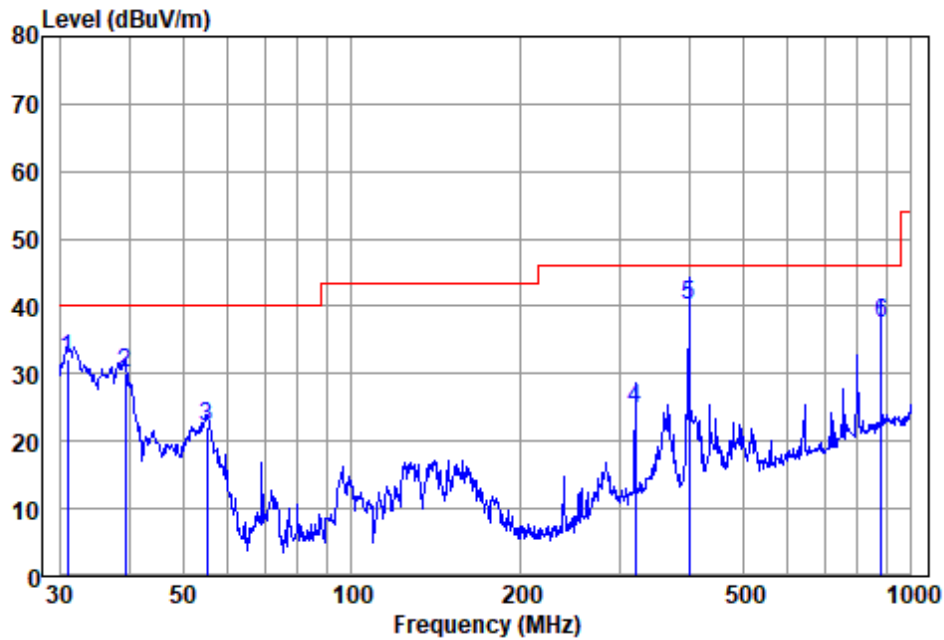

Antenna Polarity :VERTICAL

EUT/Project :1751HS

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.071	51.99	12.20	1.24	33.20	32.23	40.00	-7.77	QP
2	39.299	48.51	13.40	1.36	33.20	30.07	40.00	-9.93	QP
3	55.027	40.08	13.70	1.44	33.20	22.02	40.00	-17.98	QP
4	321.061	39.59	14.12	3.83	32.81	24.73	46.00	-21.27	QP
5	400.432	52.90	15.80	4.34	32.80	40.24	46.00	-5.76	QP
6	881.407	39.14	23.50	6.82	31.87	37.59	46.00	-8.41	QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.8 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.8.3 Test Setup Diagram

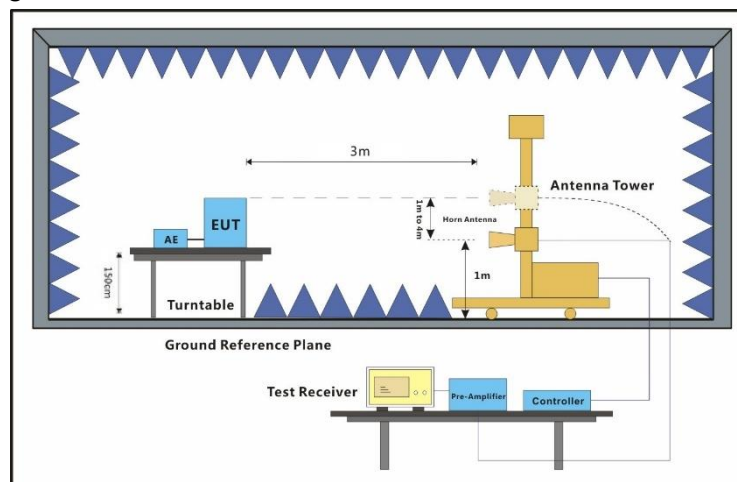


7.8.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

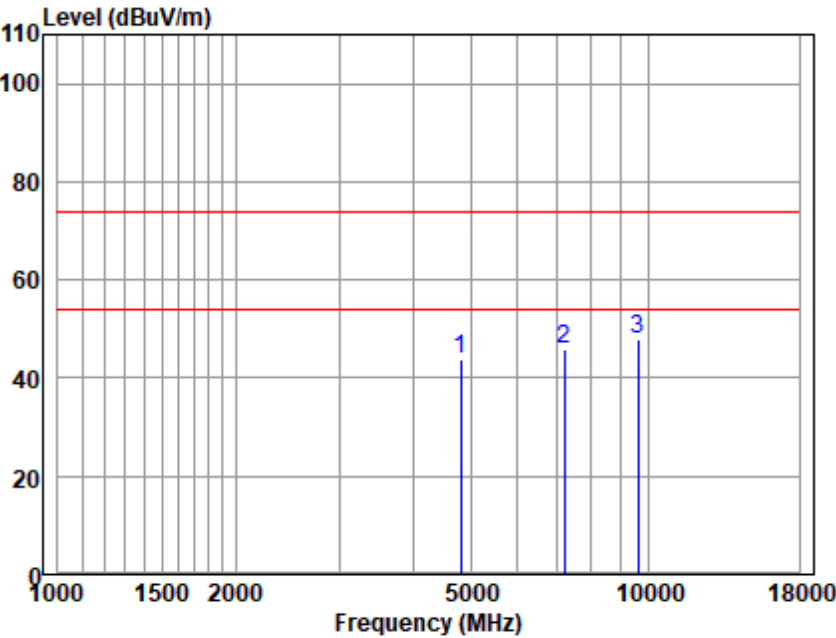


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	41.76	33.57	5.23	36.79	43.77	74.00	-30.23	Peak
7200.309	37.84	36.24	7.33	35.53	45.88	74.00	-28.12	Peak
9613.430	34.97	37.75	8.74	33.58	47.88	74.00	-26.12	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

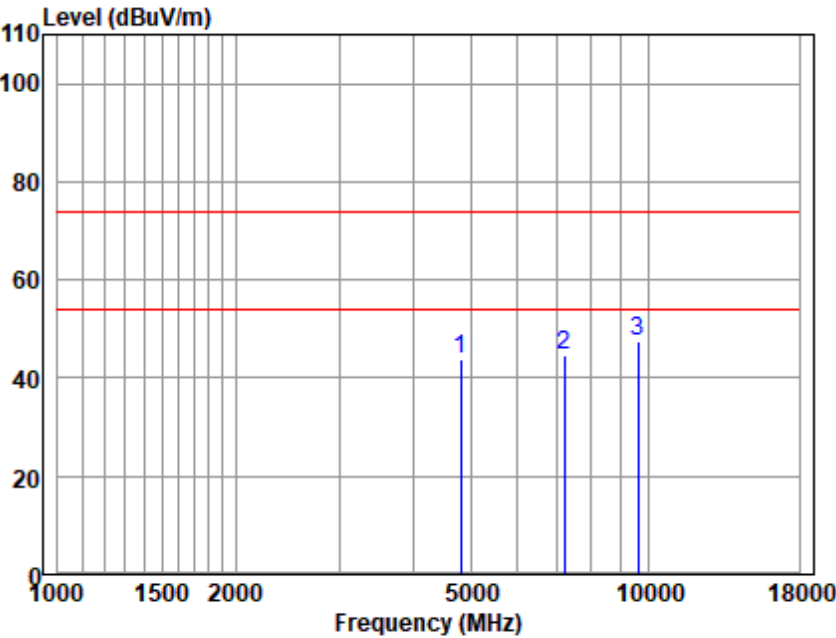


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	41.82	33.57	5.23	36.79	43.83	74.00	-30.17	Peak
7200.309	36.63	36.24	7.33	35.53	44.67	74.00	-29.33	Peak
9613.430	34.65	37.75	8.74	33.58	47.56	74.00	-26.44	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

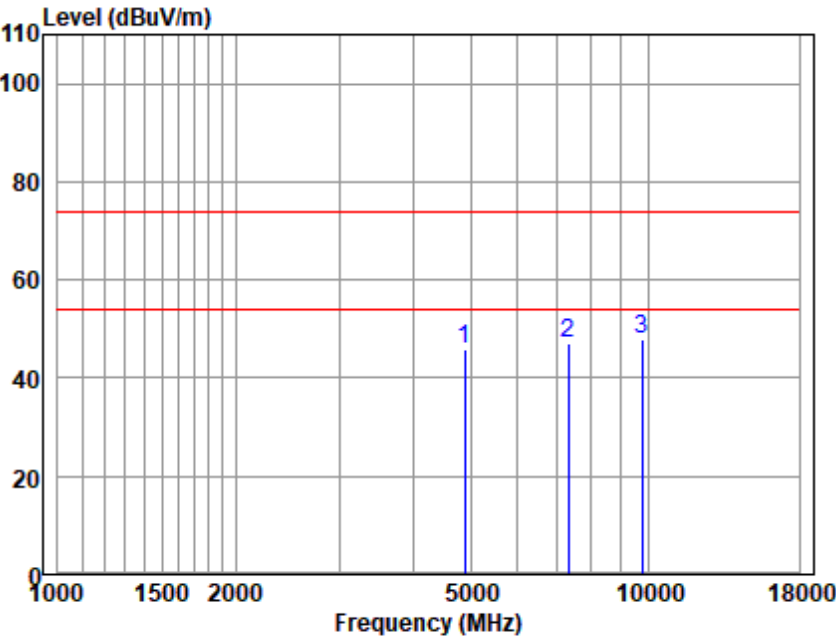


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4880.043	43.59	33.66	5.28	36.81	45.72	74.00	-28.28	Peak
7326.267	38.60	36.33	7.44	35.42	46.95	74.00	-27.05	Peak
9753.371	34.86	37.54	8.80	33.50	47.70	74.00	-26.30	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

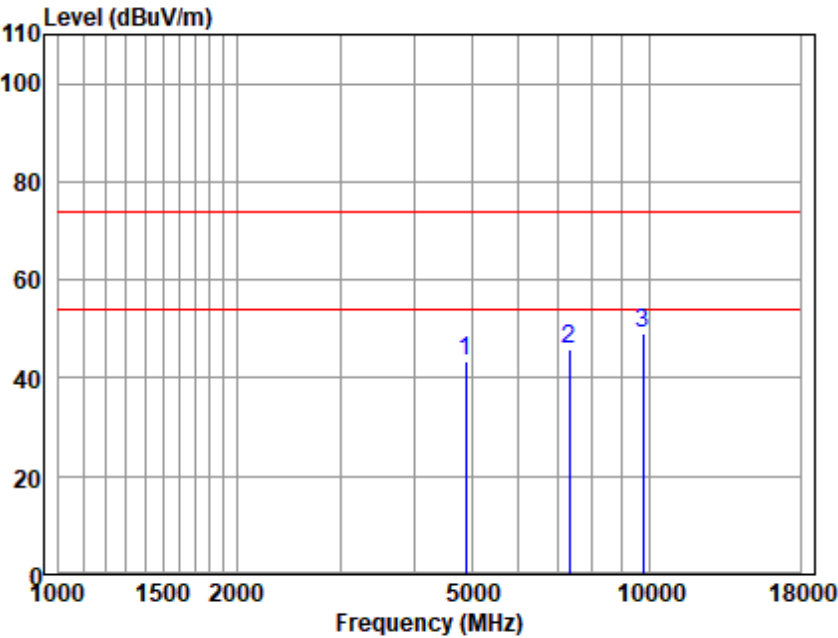


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4880.043	41.48	33.66	5.28	36.81	43.61	74.00	-30.39	Peak
7326.267	37.45	36.33	7.44	35.42	45.80	74.00	-28.20	Peak
9753.371	36.39	37.54	8.80	33.50	49.23	74.00	-24.77	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

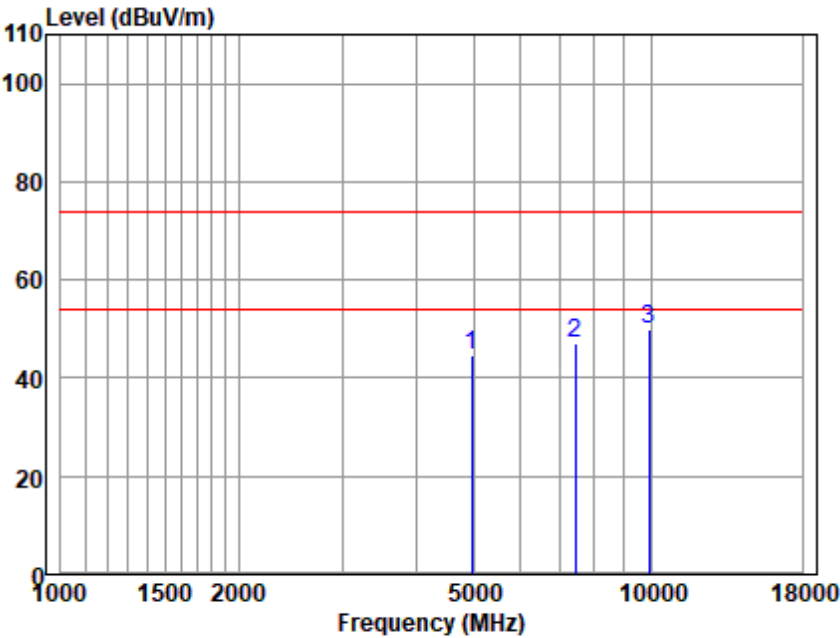


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.307	42.54	33.65	5.34	36.83	44.70	74.00	-29.30	Peak
7432.914	38.44	36.31	7.53	35.34	46.94	74.00	-27.06	Peak
9923.991	36.64	37.62	8.88	33.41	49.73	74.00	-24.27	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

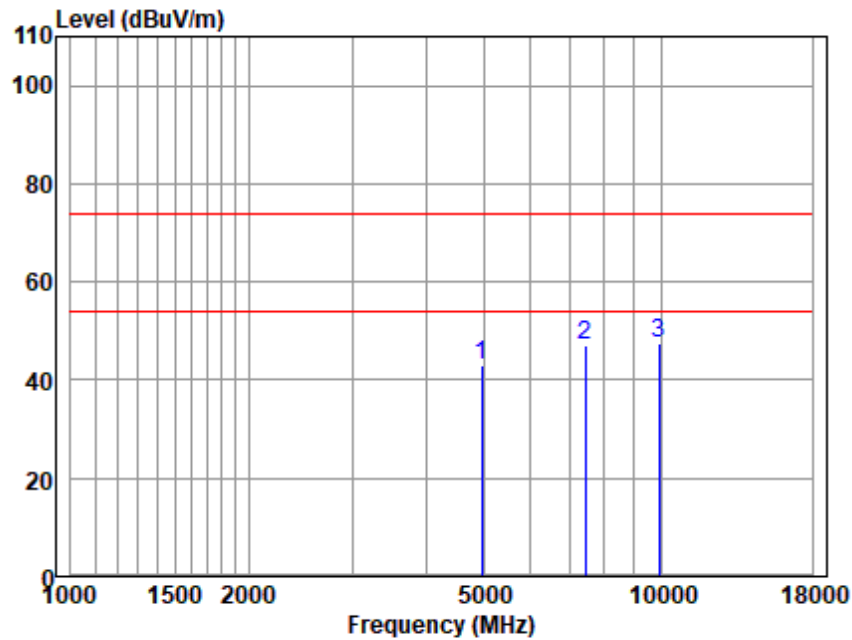


Antenna Polarity :VERTICAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4960.307	41.04	33.65	5.34	36.83	43.20	74.00	-30.80	Peak
7432.914	38.44	36.31	7.53	35.34	46.94	74.00	-27.06	Peak
9923.991	34.38	37.62	8.88	33.41	47.47	74.00	-26.53	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

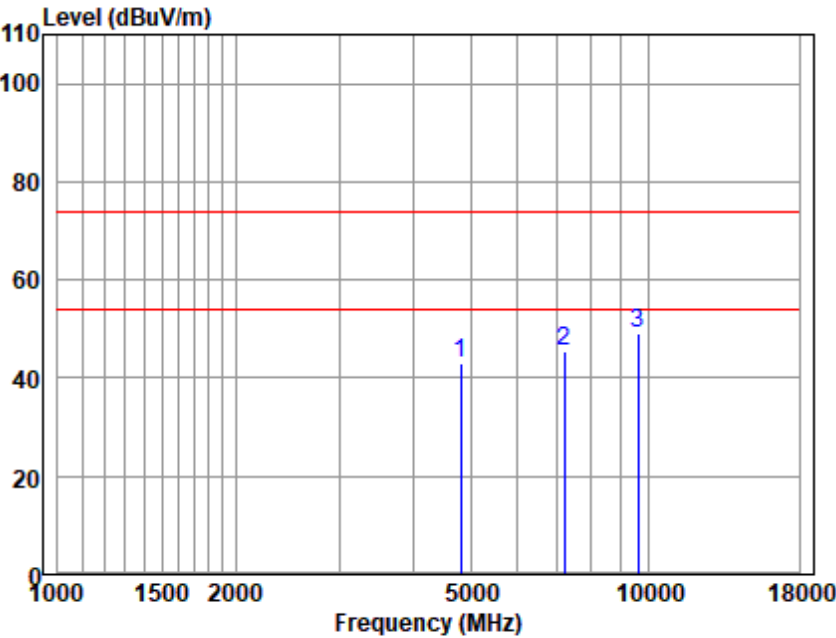


Antenna Polarity :HORIZONTAL
EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	41.10	33.57	5.23	36.79	43.11	74.00	-30.89	Peak
7200.309	37.26	36.24	7.33	35.53	45.30	74.00	-28.70	Peak
9613.430	36.30	37.75	8.74	33.58	49.21	74.00	-24.79	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

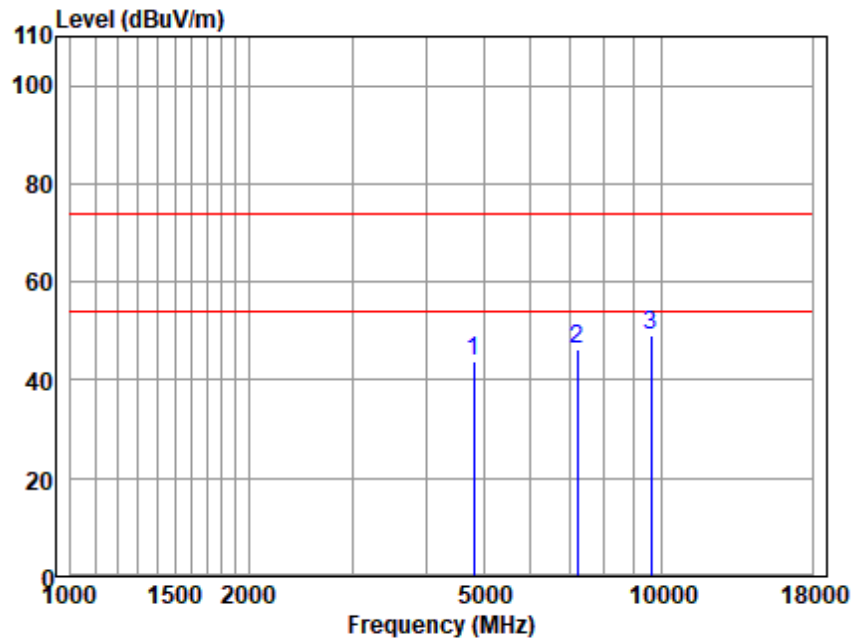


Antenna Polarity :VERTICAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	41.65	33.57	5.23	36.79	43.66	74.00	-30.34	Peak
7200.309	38.41	36.24	7.33	35.53	46.45	74.00	-27.55	Peak
9613.430	36.38	37.75	8.74	33.58	49.29	74.00	-24.71	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

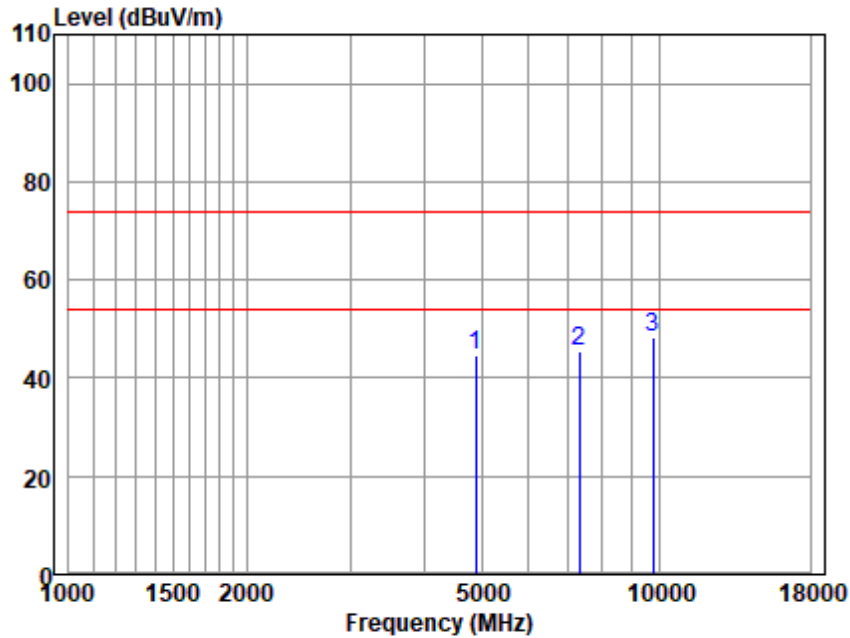


Antenna Polarity :HORIZONTAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4880.043	42.47	33.66	5.28	36.81	44.60	74.00	-29.40	Peak
7326.267	36.93	36.33	7.44	35.42	45.28	74.00	-28.72	Peak
9753.371	35.63	37.54	8.80	33.50	48.47	74.00	-25.53	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

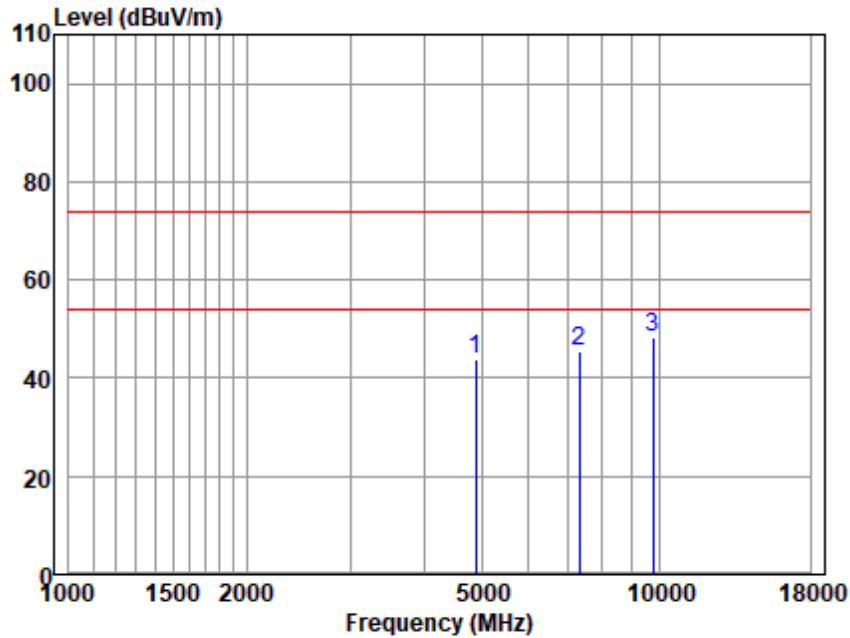


Antenna Polarity :VERTICAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4880.043	41.58	33.66	5.28	36.81	43.71	74.00	-30.29	Peak
7326.267	37.15	36.33	7.44	35.42	45.50	74.00	-28.50	Peak
9753.371	35.39	37.54	8.80	33.50	48.23	74.00	-25.77	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

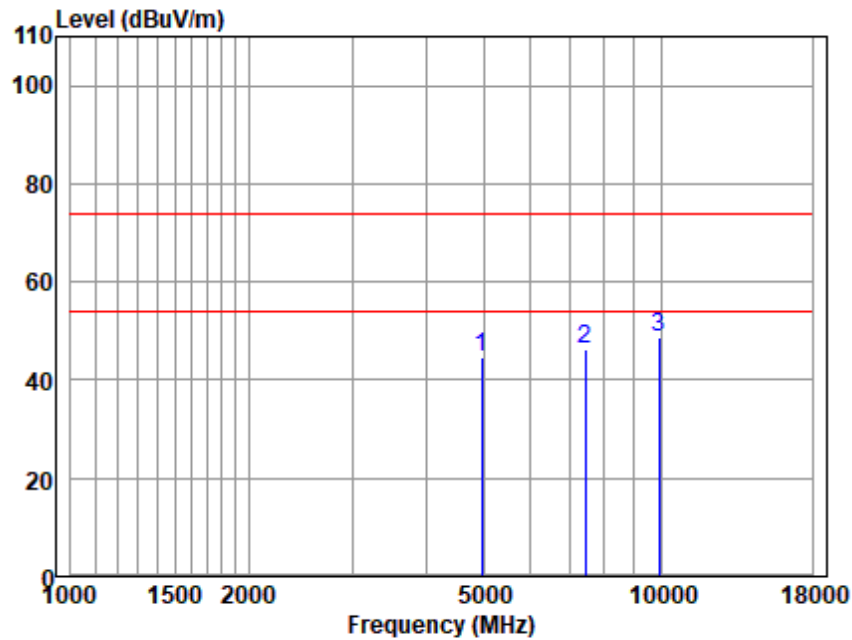


Antenna Polarity :HORIZONTAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4960.307	42.61	33.65	5.34	36.83	44.77	74.00	-29.23	Peak
7432.914	37.66	36.31	7.53	35.34	46.16	74.00	-27.84	Peak
9923.991	35.81	37.62	8.88	33.41	48.90	74.00	-25.10	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

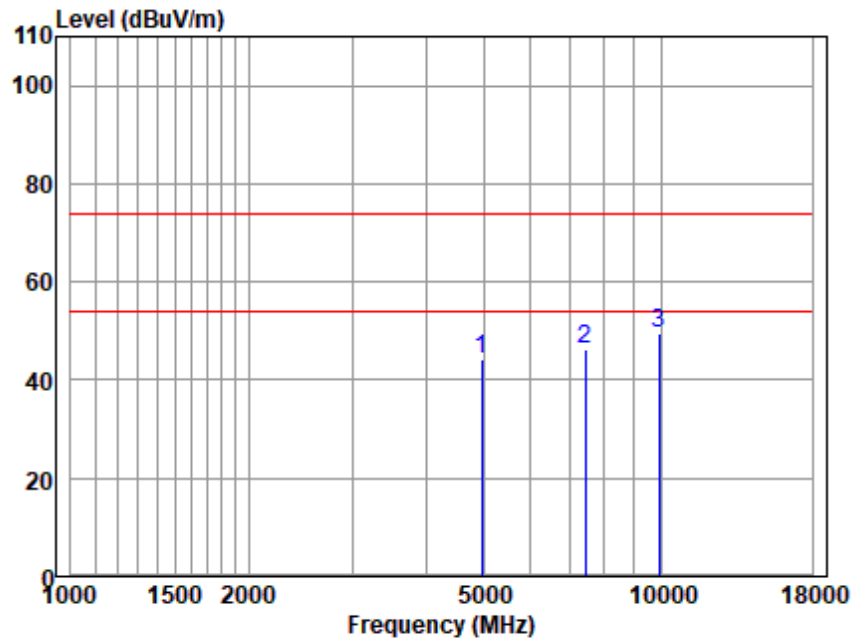

Antenna Polarity :VERTICAL

EUT/Project :1751HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.307	42.06	33.65	5.34	36.83	44.22	74.00	-29.78	Peak
7432.914	37.90	36.31	7.53	35.34	46.40	74.00	-27.60	Peak
9923.991	36.60	37.62	8.88	33.41	49.69	74.00	-24.31	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.9 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	01	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.9.3 Test Setup Diagram

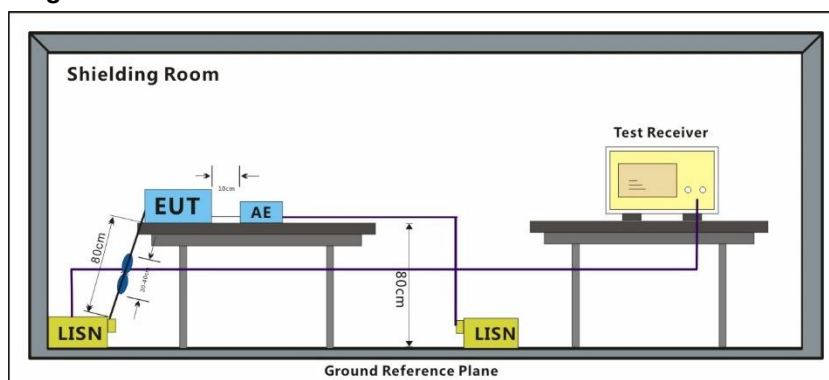


7.9.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 00; Line: Live line

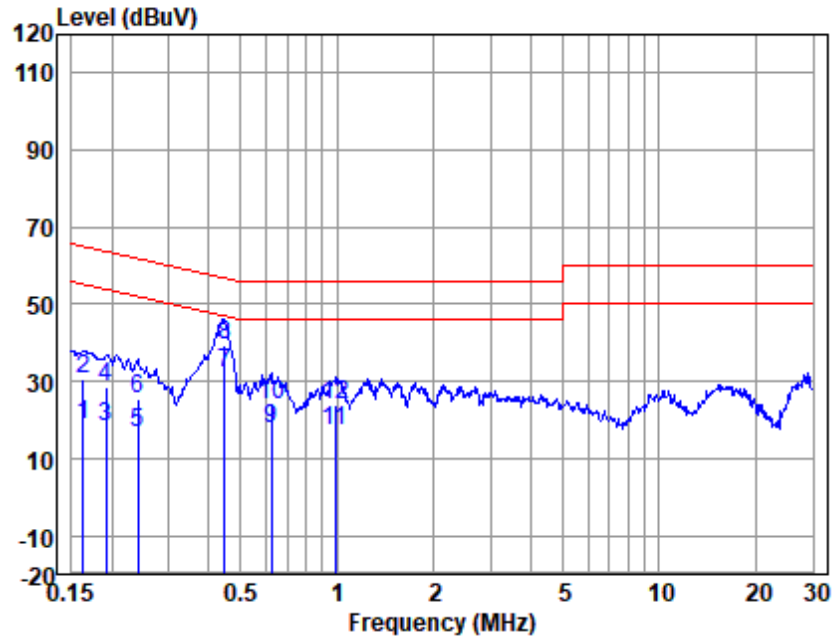


LISN : LINE
EUT/Project No : 1751HS
Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	8.33	0.50	9.90	18.73	55.30	-36.57	Average
2	0.16	20.46	0.50	9.90	30.86	65.30	-34.44	QP
3	0.19	8.06	0.50	9.90	18.46	53.93	-35.47	Average
4	0.19	18.29	0.50	9.90	28.69	63.93	-35.24	QP
5	0.24	6.11	0.46	9.90	16.47	52.08	-35.61	Average
6	0.24	15.31	0.46	9.90	25.67	62.08	-36.41	QP
7	0.45	22.16	0.32	9.90	32.38	46.89	-14.51	Average
8	0.45	29.25	0.32	9.90	39.47	56.89	-17.42	QP
9	0.62	7.76	0.30	9.90	17.96	46.00	-28.04	Average
10	0.62	13.93	0.30	9.90	24.13	56.00	-31.87	QP
11	0.99	6.82	0.30	9.90	17.02	46.00	-28.98	Average
12	0.99	13.48	0.30	9.90	23.68	56.00	-32.32	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 00; Line: Neutral Line

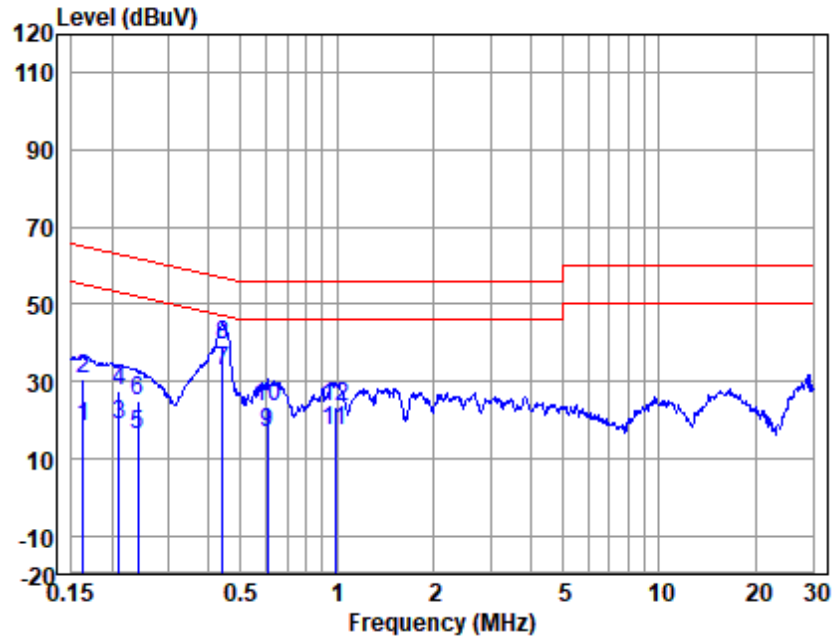

LISN : NEUTRAL
EUT/Project No : 1751HS
Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	8.15	0.43	9.90	18.48	55.30	-36.82	Average
2	0.16	20.11	0.43	9.90	30.44	65.30	-34.86	QP
3	0.21	8.41	0.40	9.90	18.71	53.18	-34.47	Average
4	0.21	16.98	0.40	9.90	27.28	63.18	-35.90	QP
5	0.24	5.93	0.40	9.90	16.23	52.08	-35.85	Average
6	0.24	14.82	0.40	9.90	25.12	62.08	-36.96	QP
7	0.44	22.45	0.40	9.90	32.75	47.02	-14.27	Average
8	0.44	29.10	0.40	9.90	39.40	57.02	-17.62	QP
9	0.61	6.45	0.34	9.90	16.69	46.00	-29.31	Average
10	0.61	13.09	0.34	9.90	23.33	56.00	-32.67	QP
11	0.99	6.92	0.30	9.90	17.12	46.00	-28.88	Average
12	0.99	13.26	0.30	9.90	23.46	56.00	-32.54	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101

Page: 57 of 84

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2507001751HS

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for SHCR2507001751HS

10 Appendix

10.1 Appendix A: DTS Bandwidth

10.1.1 Test Result


Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.660	2401.624	2402.284	0.5	PASS
		2440	0.656	2439.636	2440.292	0.5	PASS
		2480	0.664	2479.636	2480.300	0.5	PASS
BLE_2M	Ant1	2402	1.232	2401.320	2402.552	0.5	PASS
		2440	1.164	2439.388	2440.552	0.5	PASS
		2480	1.148	2479.400	2480.548	0.5	PASS

10.1.2 Test Graphs


BLE_1M_Ant1_2402



BLE_1M_Ant1_2440

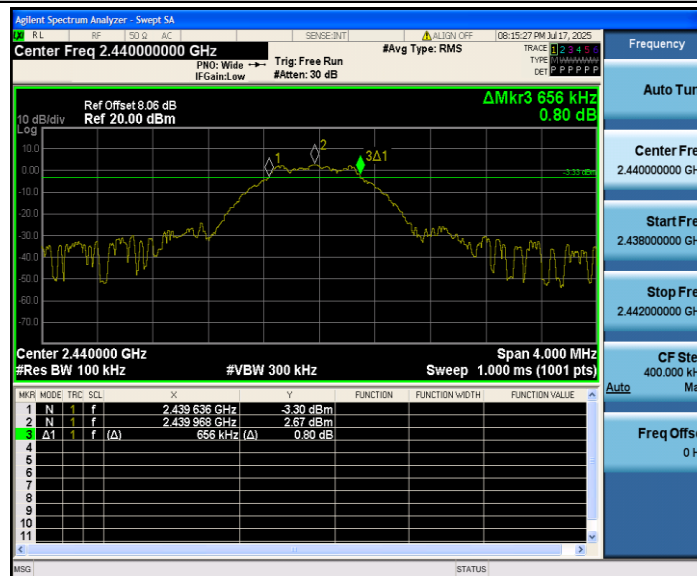

BLE_1M_Ant1_2480

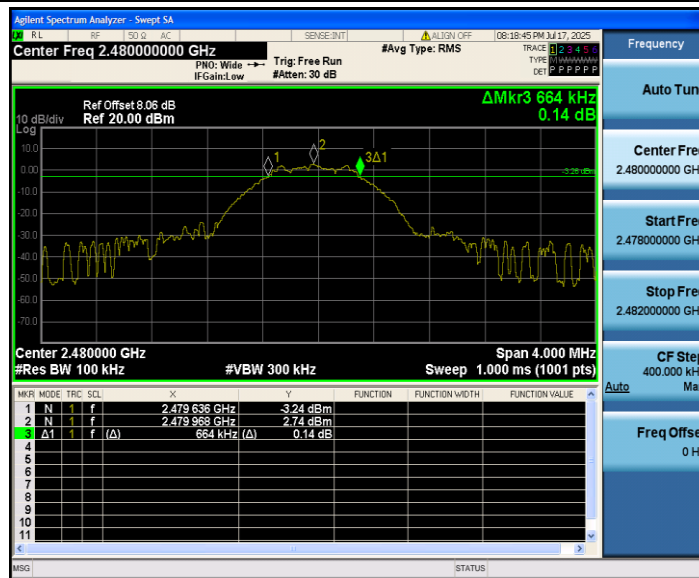


BLE_2M_Ant1_2402



BLE_2M_Ant1_2440



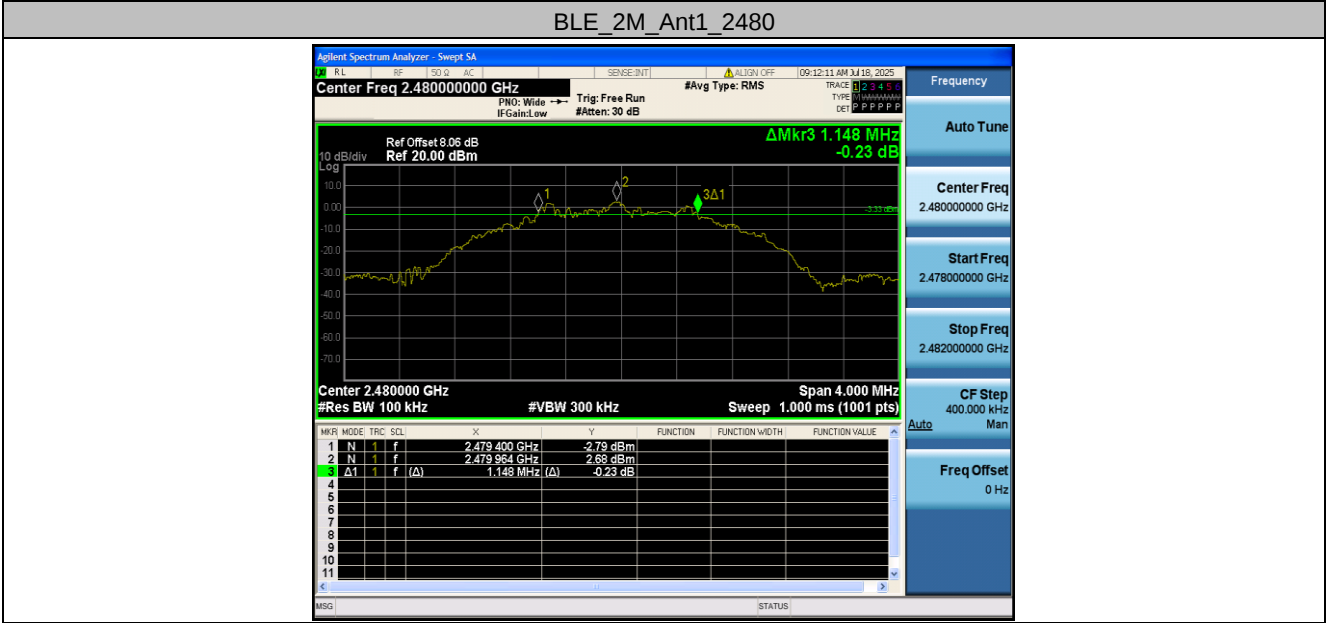



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101


Page: 61 of 84

10.2 Appendix B: Occupied Channel Bandwidth

10.2.1 Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0292	2401.4574	2402.4866	---	---
		2440	1.0343	2439.4504	2440.4847	---	---
		2480	1.0268	2479.4575	2480.4843	---	---
BLE_2M	Ant1	2402	2.0651	2400.9587	2403.0238	---	---
		2440	2.0478	2438.9553	2441.0031	---	---
		2480	2.0628	2478.9586	2481.0214	---	---

10.2.2 Test Graphs

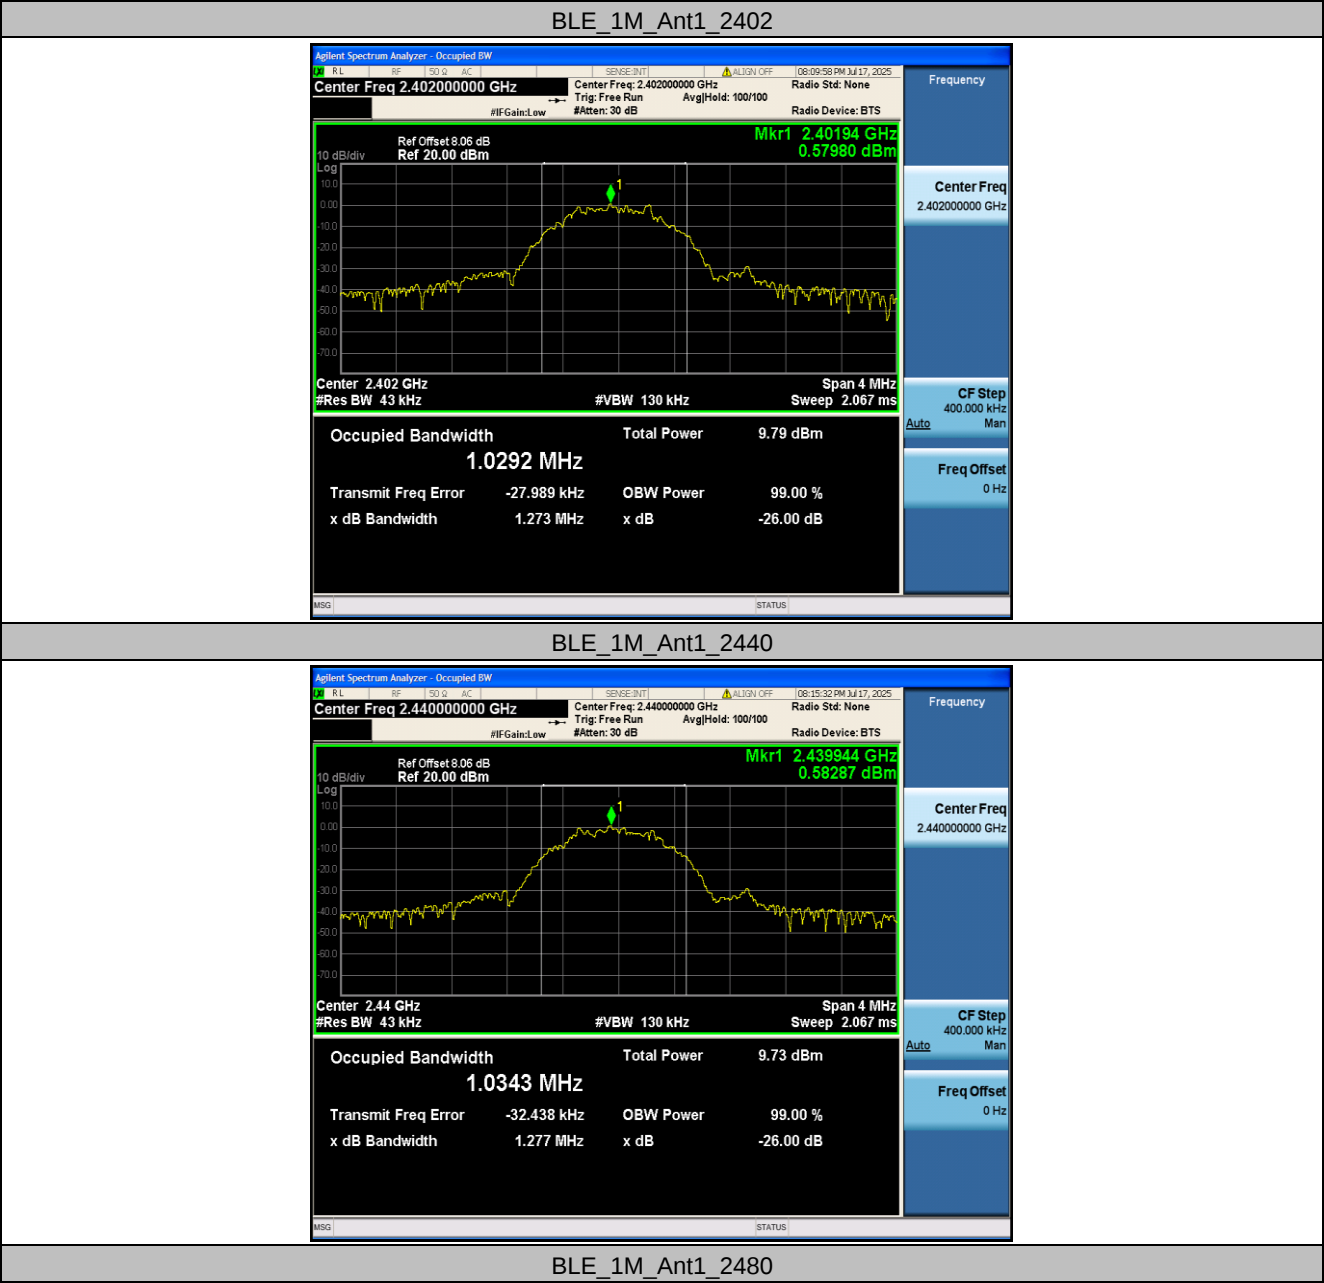







SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101


Page: 65 of 84


10.3 Appendix C: Maximum conducted output power

10.3.1 Test Result


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	3.93	≤30	PASS
		2440	4.00	≤30	PASS
		2480	3.91	≤30	PASS
BLE_2M	Ant1	2402	4.08	≤30	PASS
		2440	3.98	≤30	PASS
		2480	4.15	≤30	PASS

10.3.2 Test Graphs

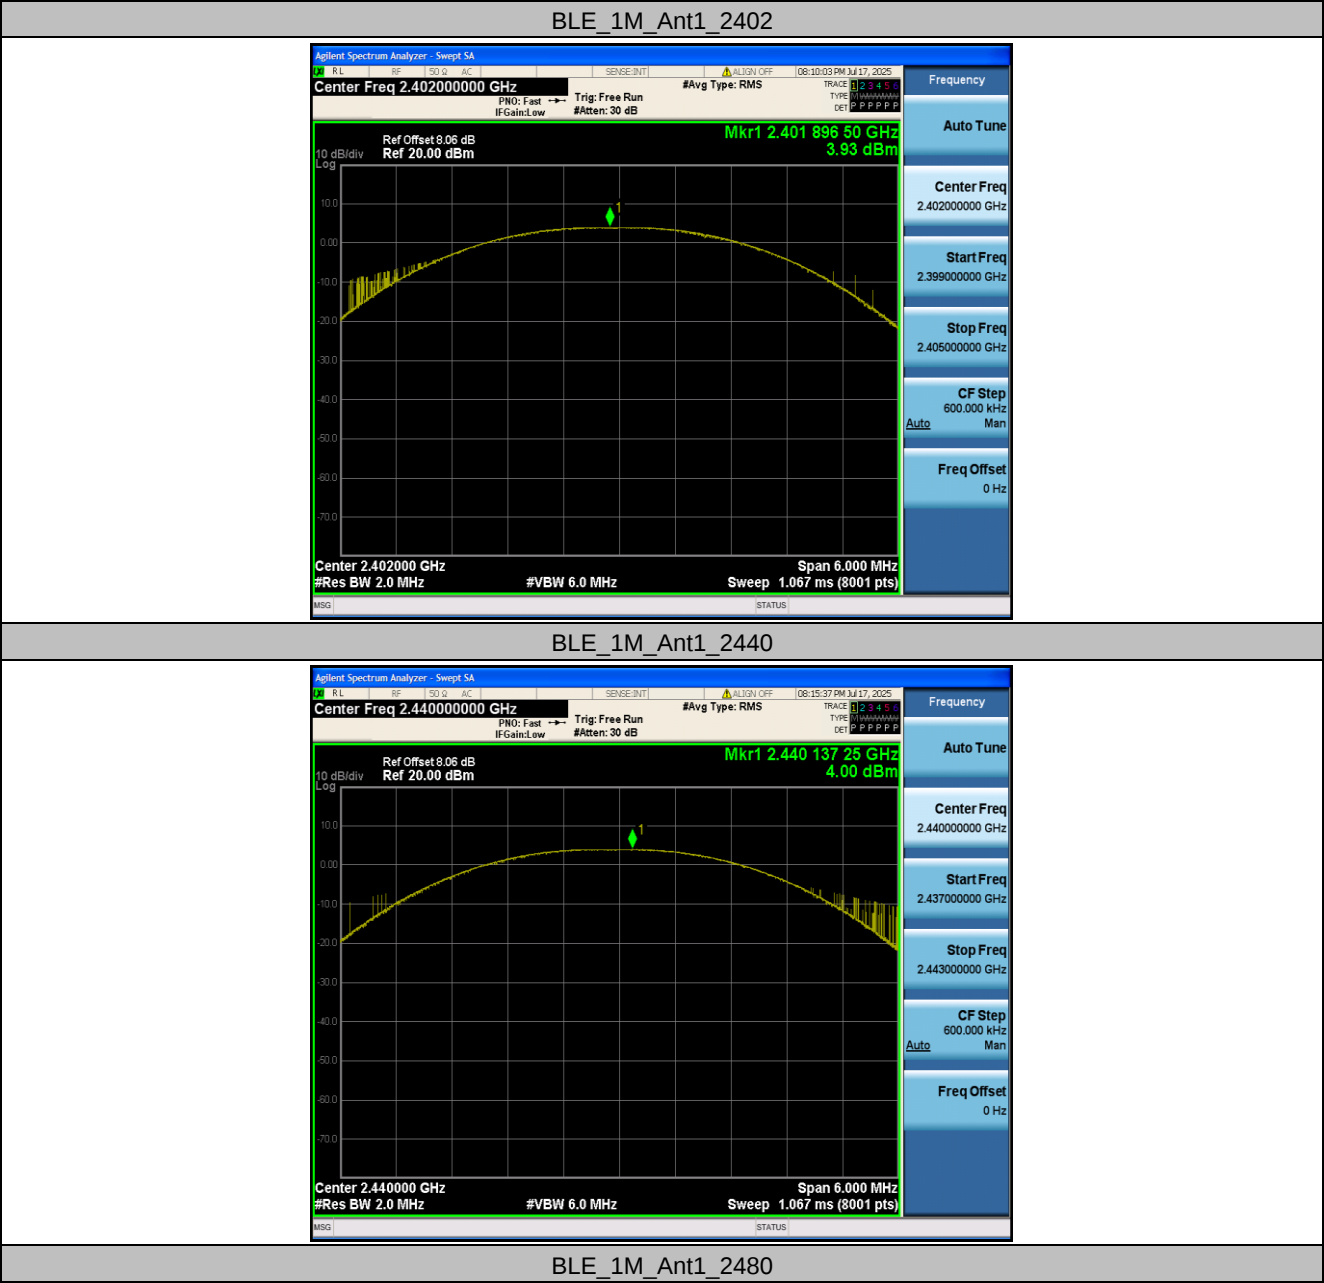


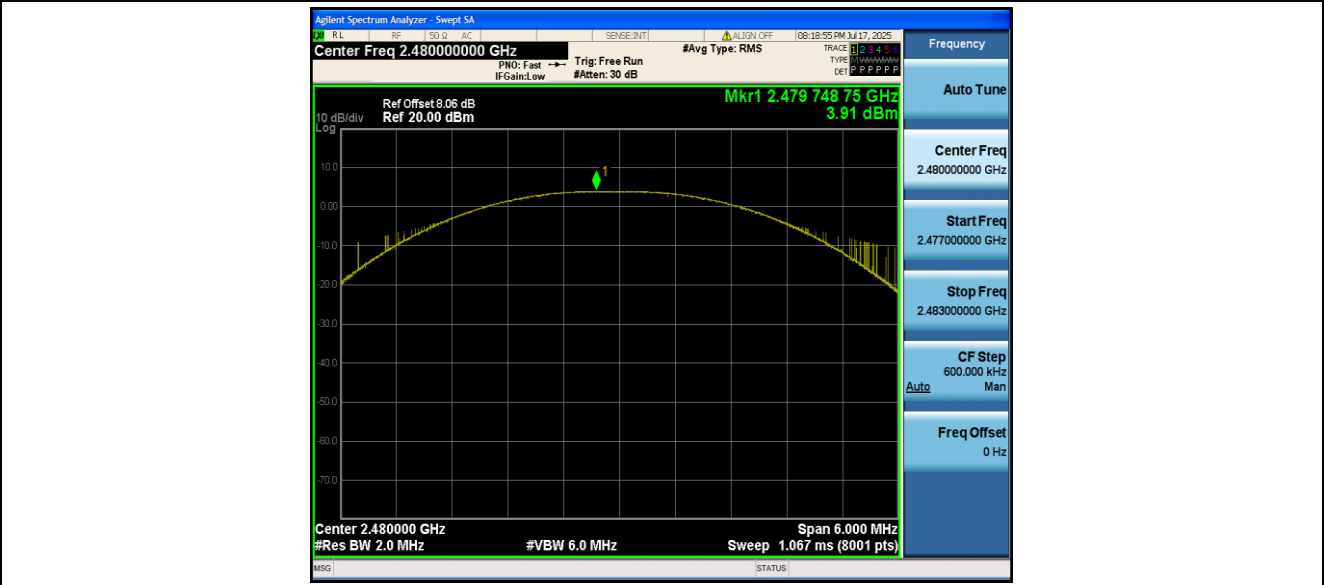

BLE_2M_Ant1_2402

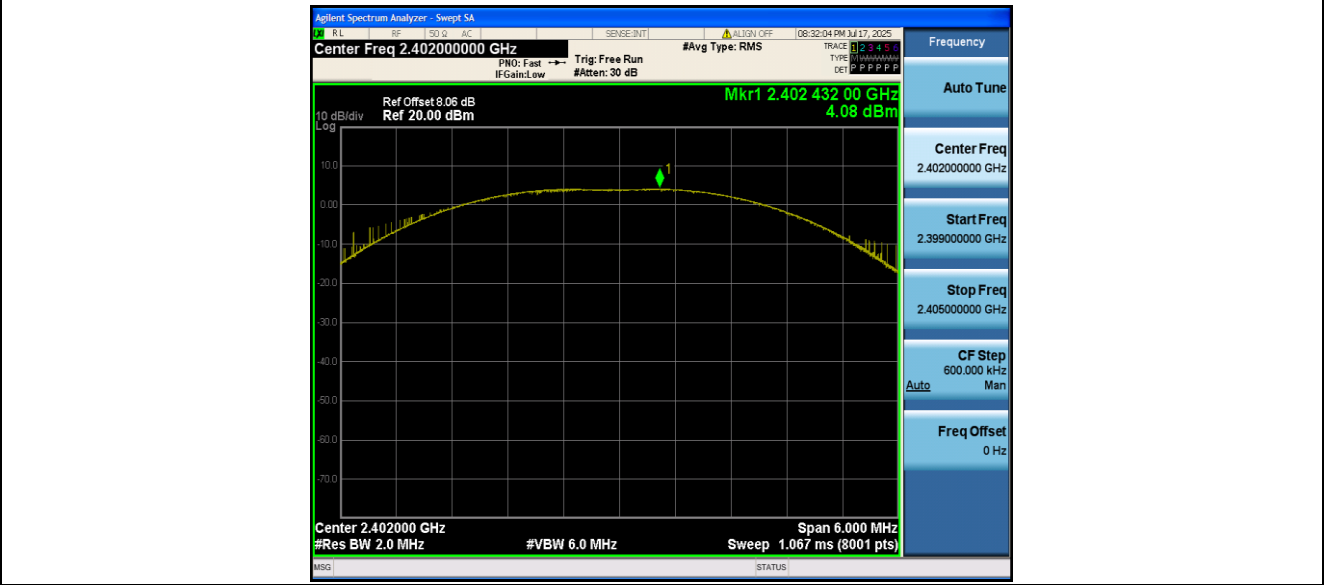

BLE_2M_Ant1_2440

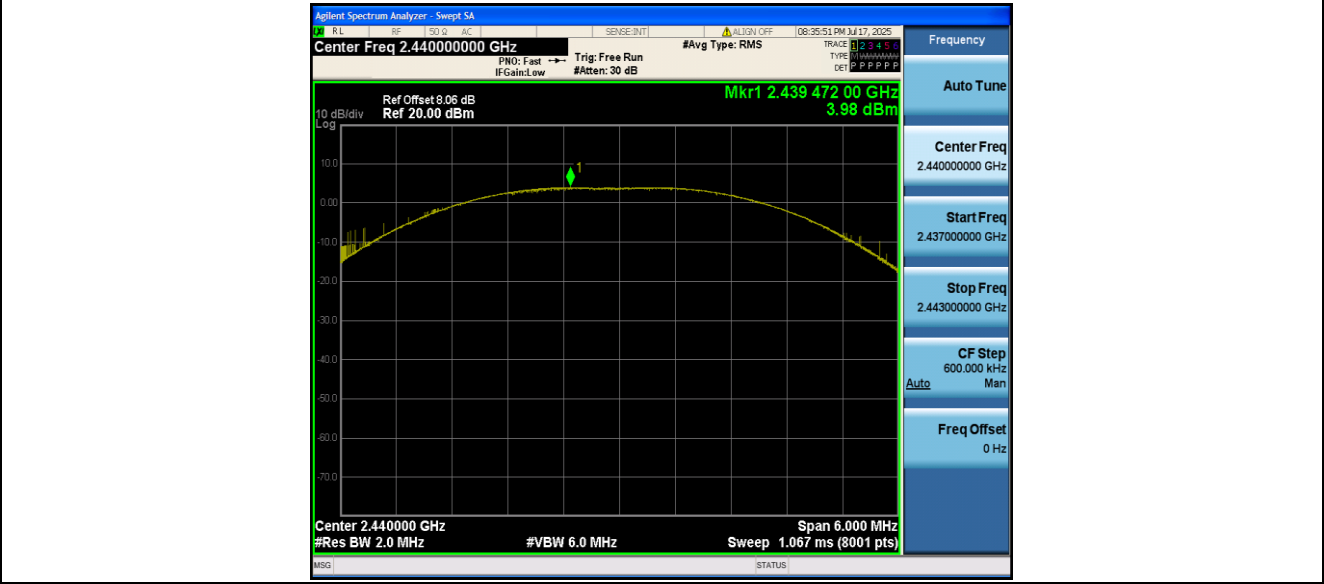





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101


Page: 69 of 84


10.4 Appendix D: Maximum power spectral density

10.4.1 Test Result


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-12.99	≤8.00	PASS
		2440	-12.96	≤8.00	PASS
		2480	-13.05	≤8.00	PASS
BLE_2M	Ant1	2402	-15.45	≤8.00	PASS
		2440	-15.52	≤8.00	PASS
		2480	-15.38	≤8.00	PASS

10.4.2 Test Graphs

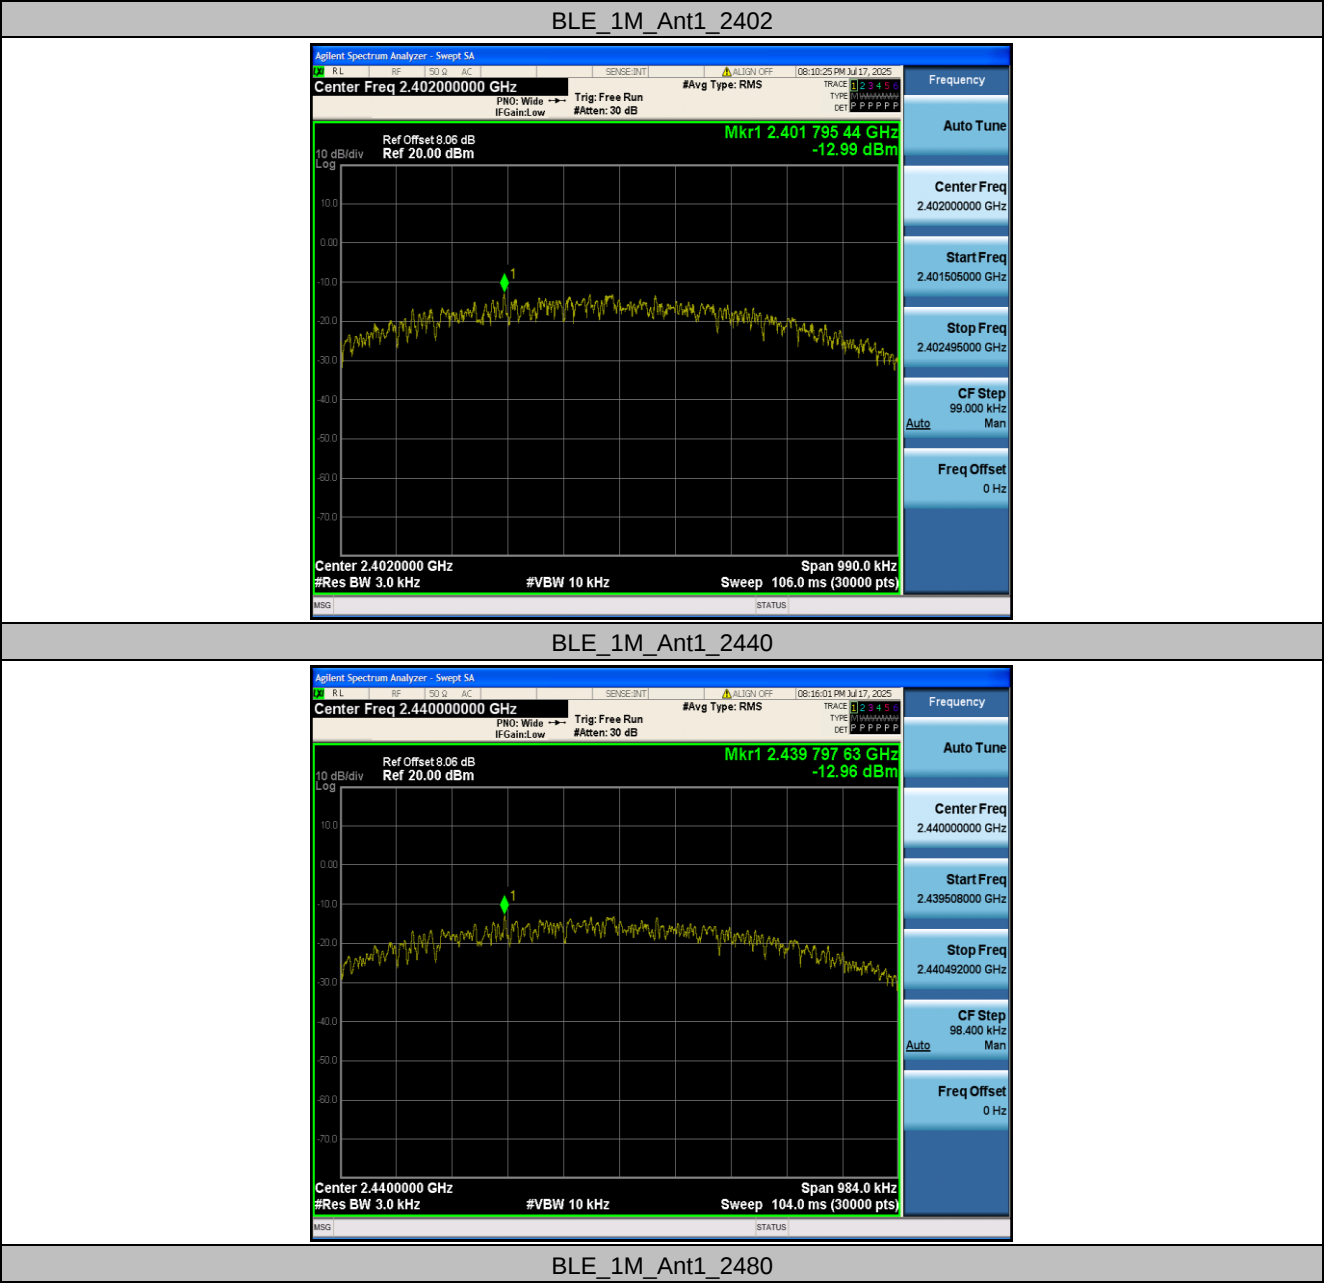


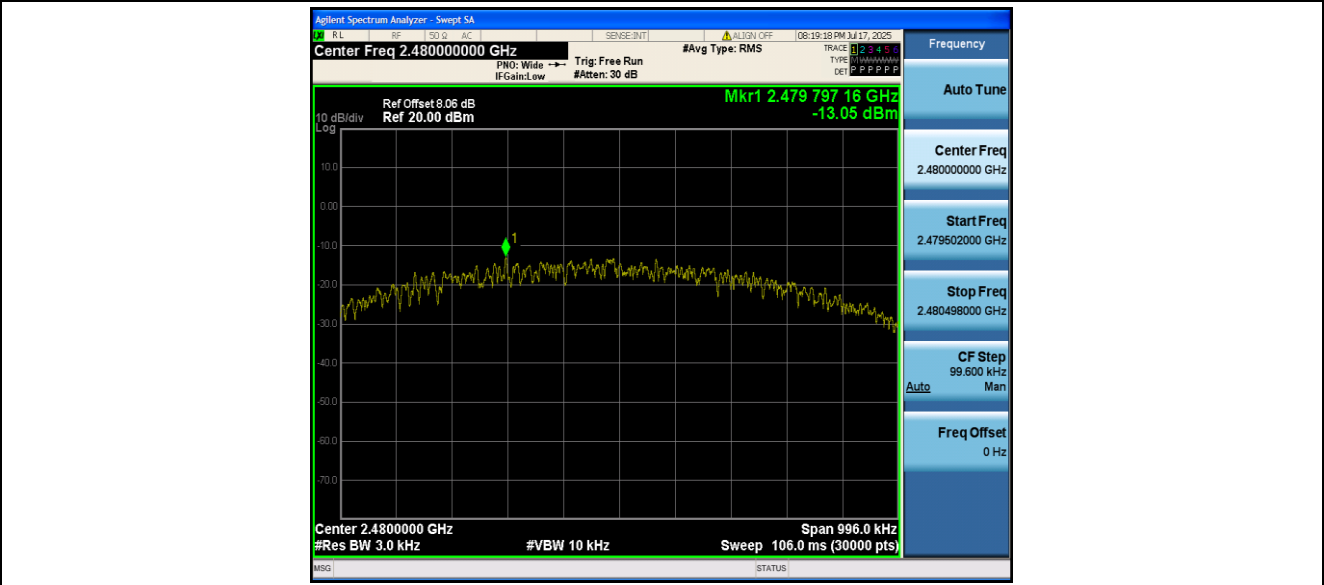


BLE_2M_Ant1_2402

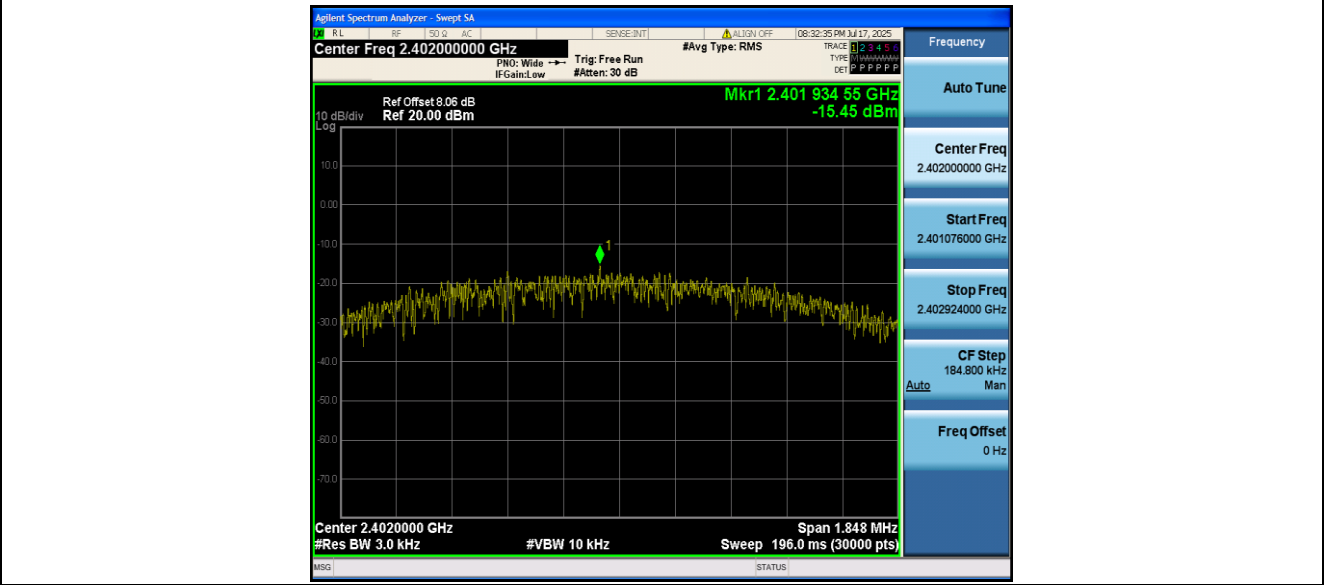

BLE_2M_Ant1_2440

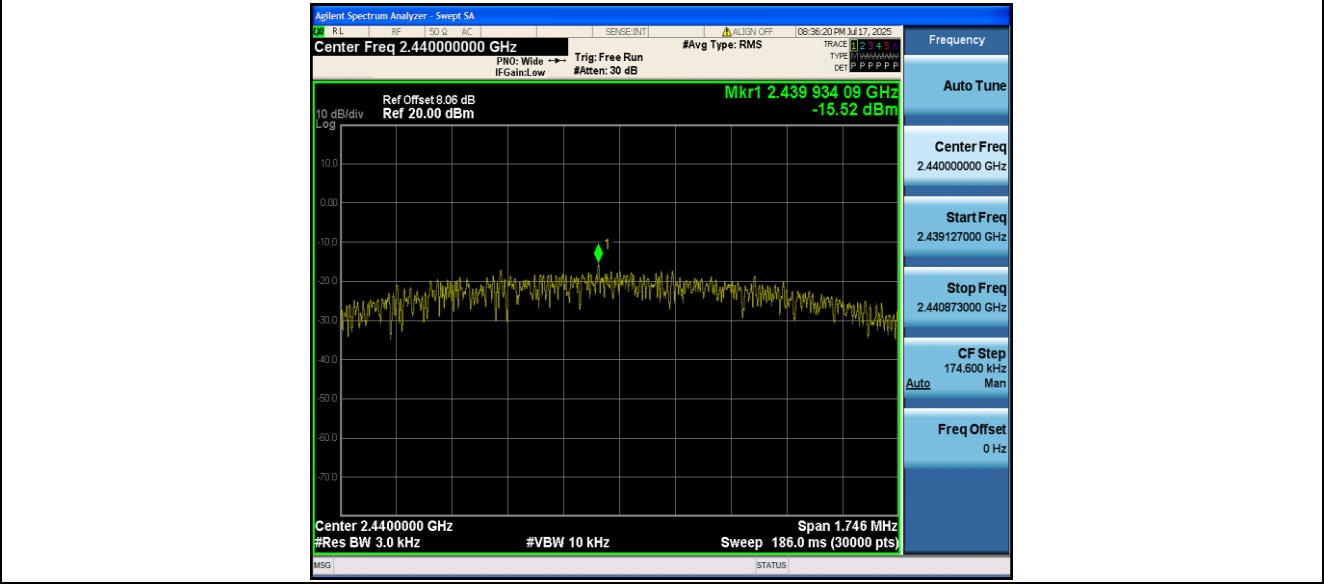

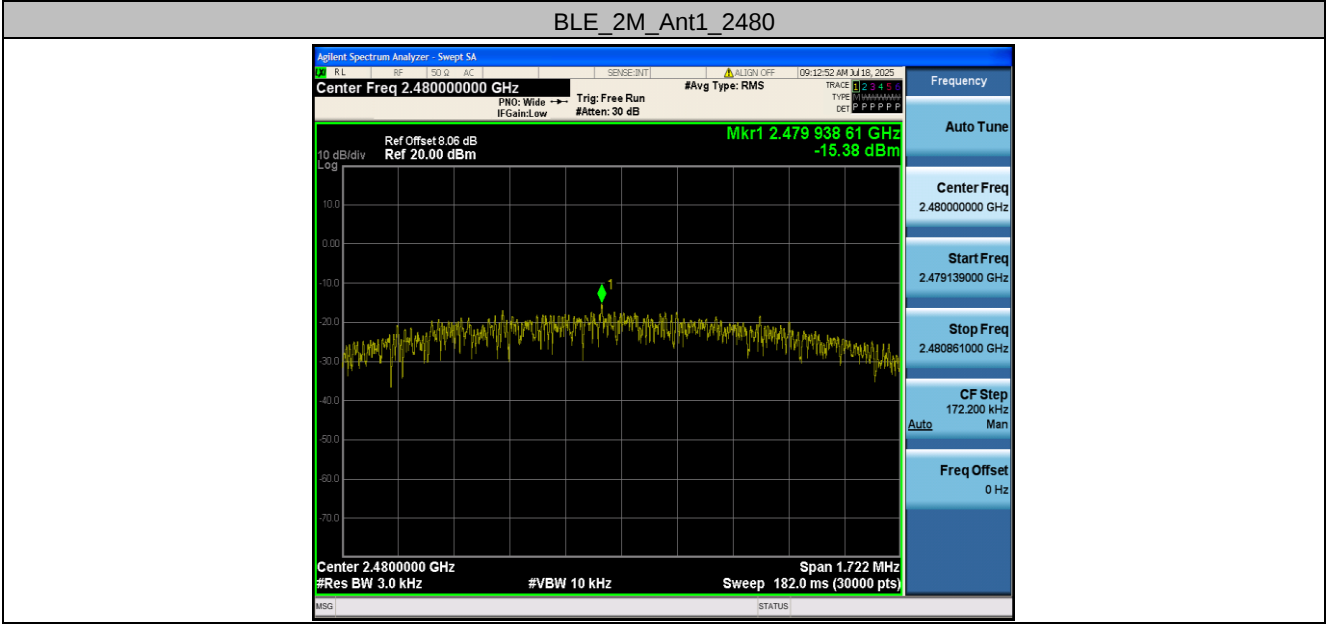



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR250700175101

Page: 73 of 84


10.5 Appendix E: Band edge measurements

10.5.1 Test Result


Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	2.85	-35.33	≤-17.15	PASS
		High	2480	2.40	-40.1	≤-17.6	PASS
BLE_2M	Ant1	Low	2402	2.78	-30.55	≤-17.22	PASS
		High	2480	2.71	-38.16	≤-17.29	PASS

10.5.2 Test Graphs


BLE_1M_Ant1_Low_2402

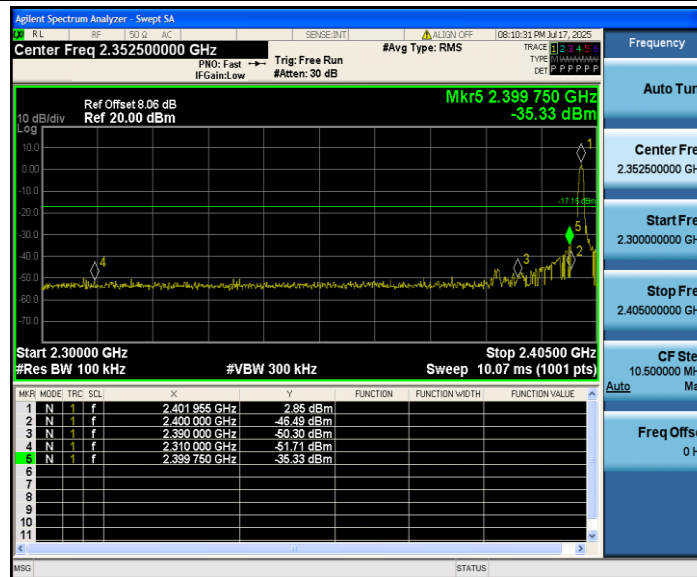

BLE_1M_Ant1_High_2480

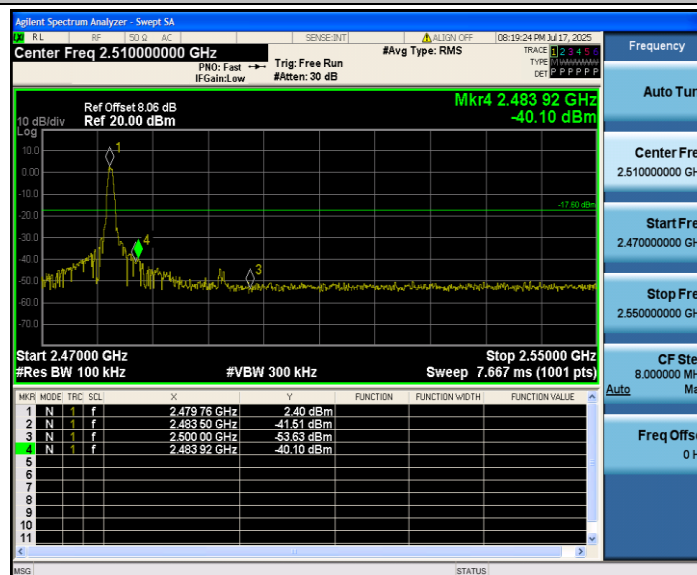

BLE_2M_Ant1_Low_2402

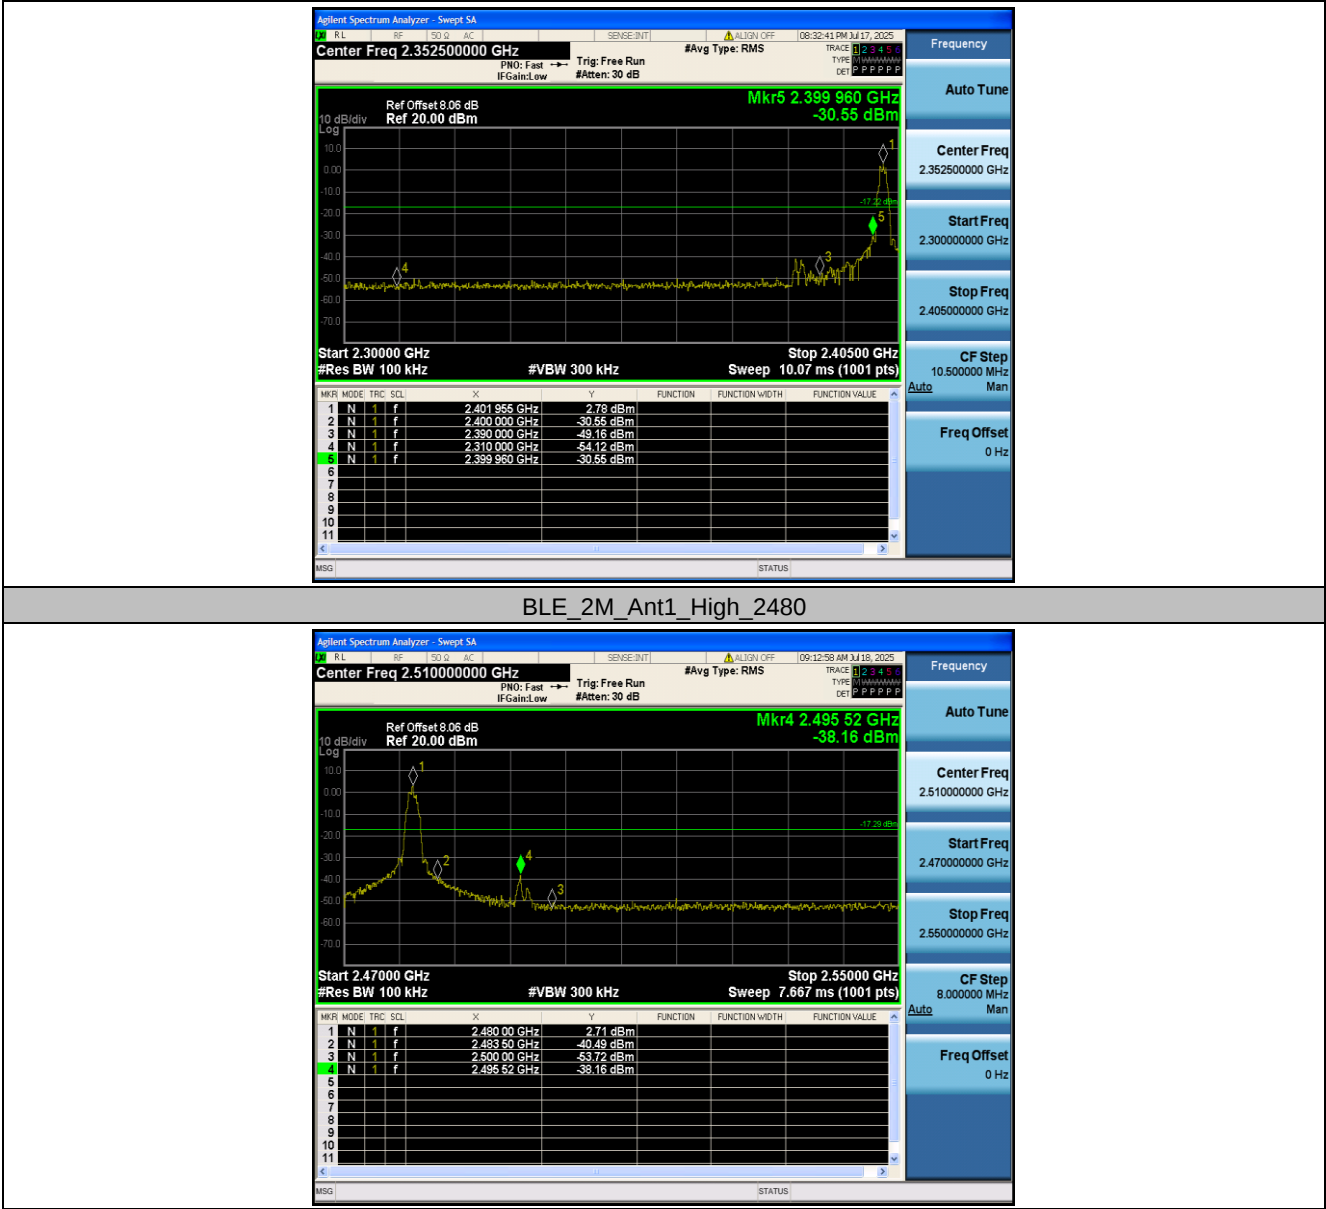

BLE_2M_Ant1_High_2480

Agilent Spectrum Analyzer - Swept SA

Center Freq 2.510000000 GHz

Ref Offset 8.06 dB
Ref 20.00 dBm

Mkr4 2.495 52 GHz
-38.16 dBm

Start 2.470000 GHz
#Res BW 100 kHz

Stop 2.550000 GHz
#VBW 300 kHz
Sweep 7.667 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.480000 GHz	2.71 dBm			
2	N	1	f	2.483500 GHz	-40.49 dBm			
3	N	1	f	2.500000 GHz	-53.72 dBm			
4	N	1	f	2.495520 GHz	-38.16 dBm			


10.6 Appendix F: Conducted Spurious Emission

10.6.1 Test Result

Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	2.29	2.29	---	PASS
			30~1000	2.29	-57.12	≤ -17.71	PASS
			1000~26500	2.29	-42.97	≤ -17.71	PASS
		2440	Reference	0.80	0.80	---	PASS
			30~1000	0.80	-55.04	≤ -19.2	PASS
			1000~26500	0.80	-42.3	≤ -19.2	PASS
		2480	Reference	2.29	2.29	---	PASS
			30~1000	2.29	-52.76	≤ -17.71	PASS
			1000~26500	2.29	-43.12	≤ -17.71	PASS
BLE_2M	Ant1	2402	Reference	1.97	1.97	---	PASS
			30~1000	1.97	-53.88	≤ -18.03	PASS
			1000~26500	1.97	-42.83	≤ -18.03	PASS
		2440	Reference	1.11	1.11	---	PASS
			30~1000	1.11	-55.58	≤ -18.89	PASS
			1000~26500	1.11	-42.91	≤ -18.89	PASS
		2480	Reference	2.31	2.31	---	PASS
			30~1000	2.31	-55.54	≤ -17.69	PASS
			1000~26500	2.31	-43.41	≤ -17.69	PASS

10.6.2 Test Graphs




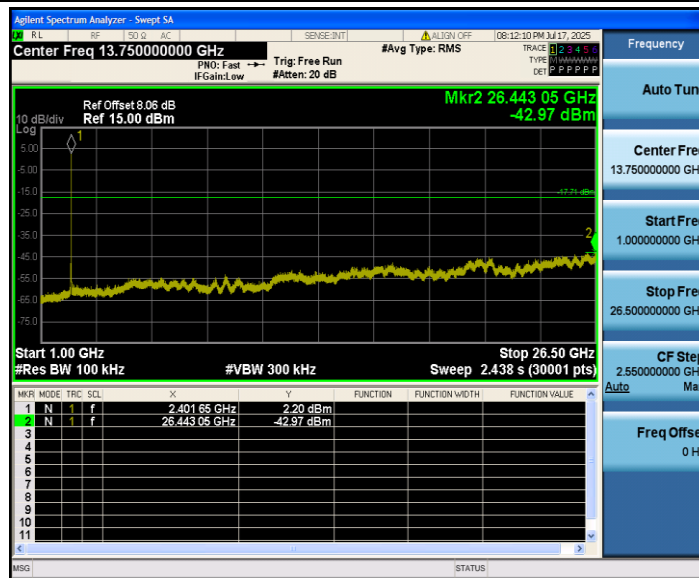


BLE_1M_Ant1_2440_0~Reference



BLE_1M_Ant1_2440_30~1000

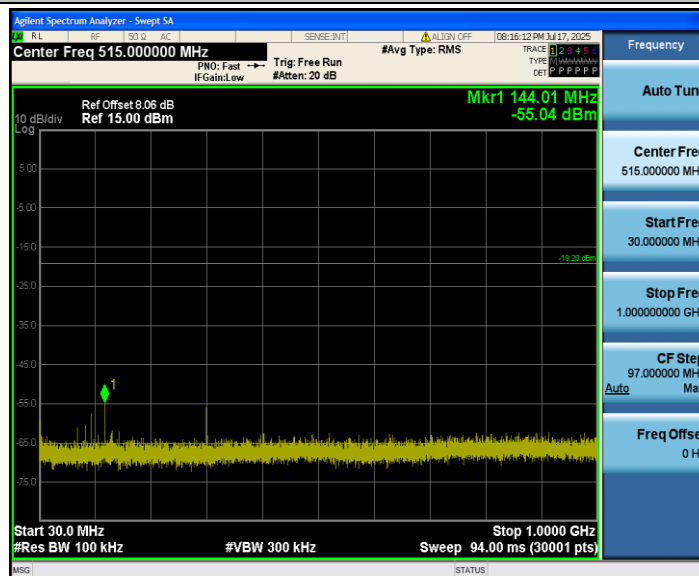


BLE_1M_Ant1_2440_1000~26500

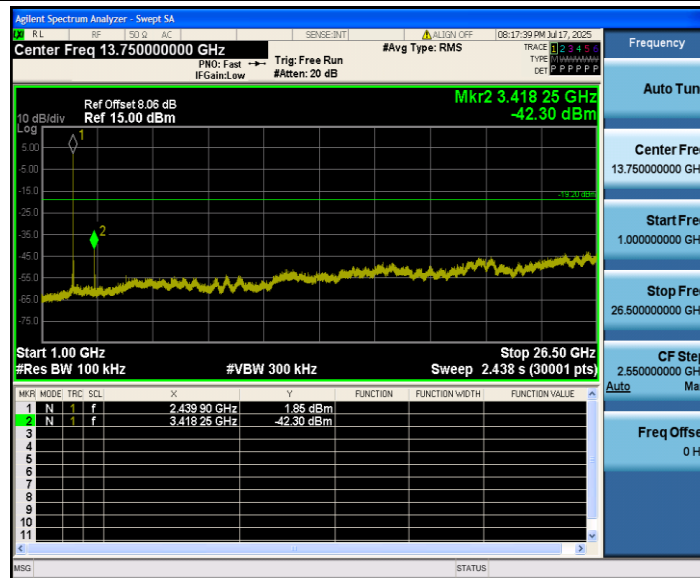


BLE_1M_Ant1_2480_0~Reference




BLE_1M_Ant1_2480_30~1000

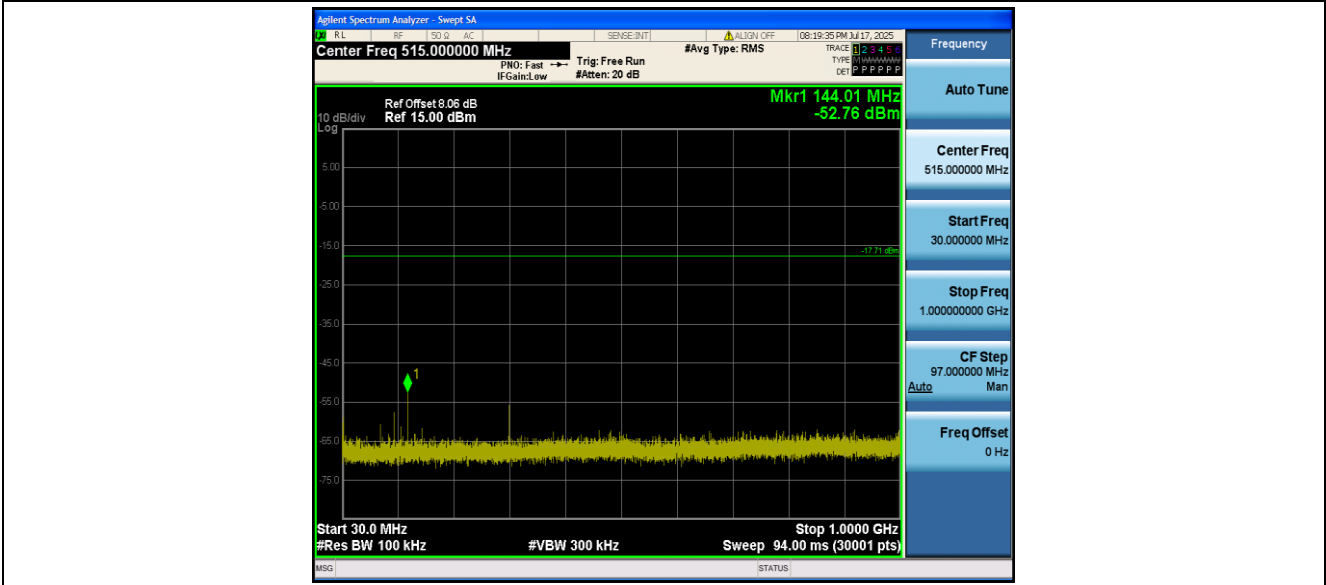


BLE_1M_Ant1_2480_1000~26500

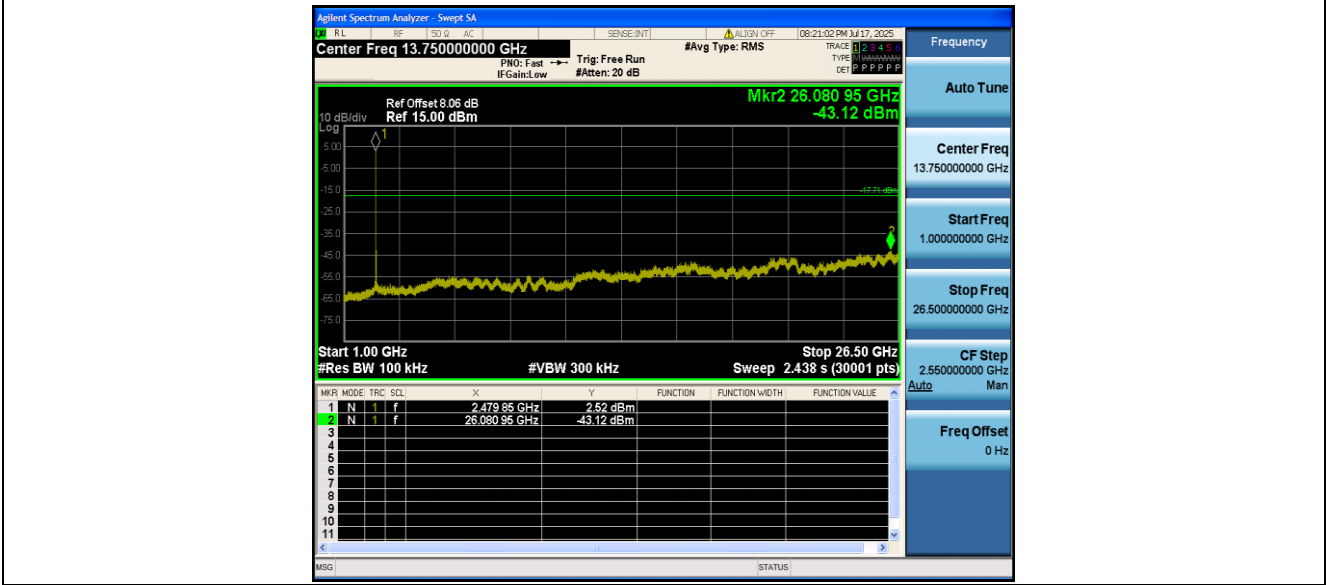


BLE_2M_Ant1_2402_0~Reference

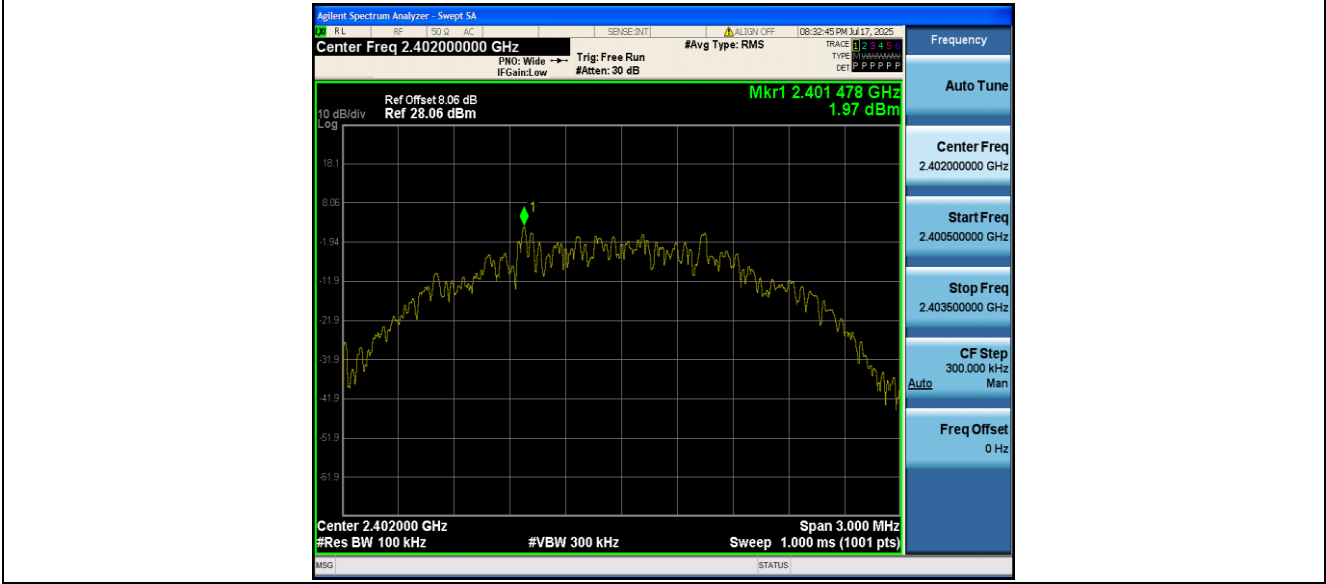


BLE_2M_Ant1_2402_30~1000

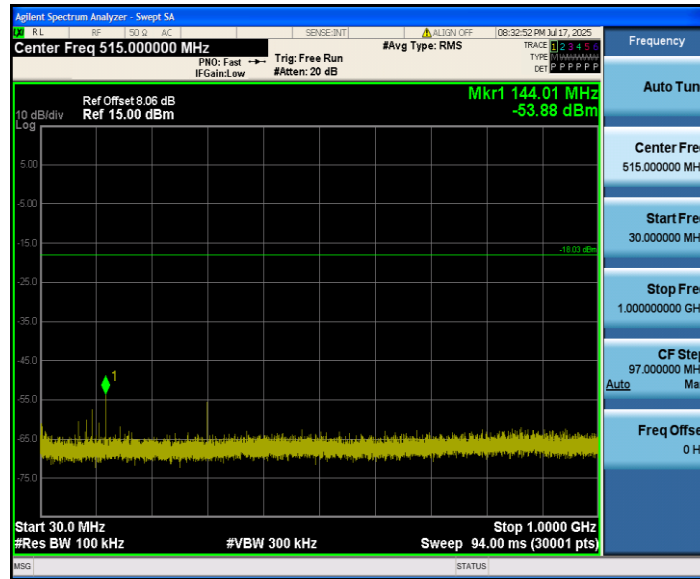


BLE_2M_Ant1_2402_1000~26500

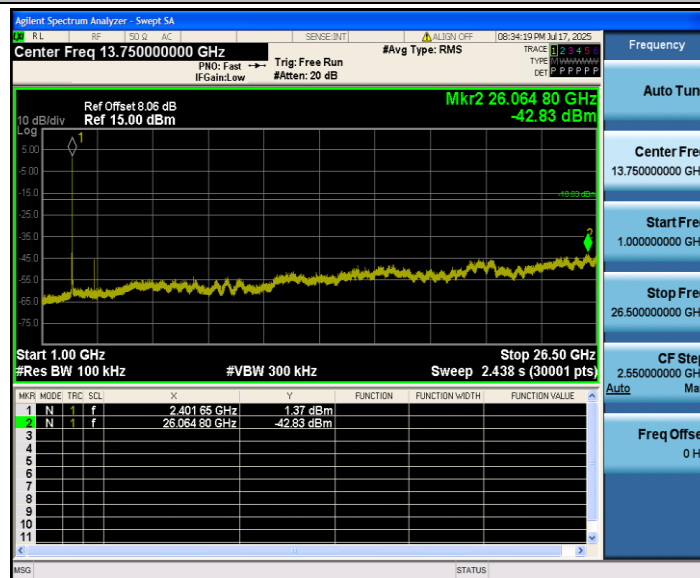


BLE_2M_Ant1_2440_0~Reference

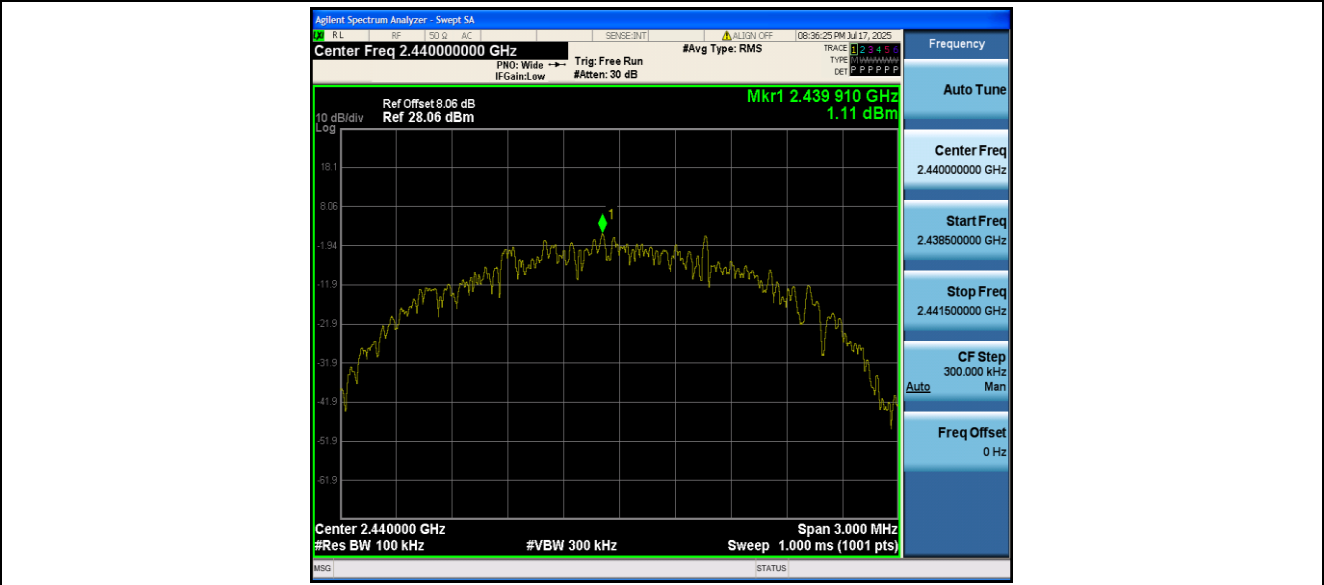

BLE_2M_Ant1_2440_30~1000

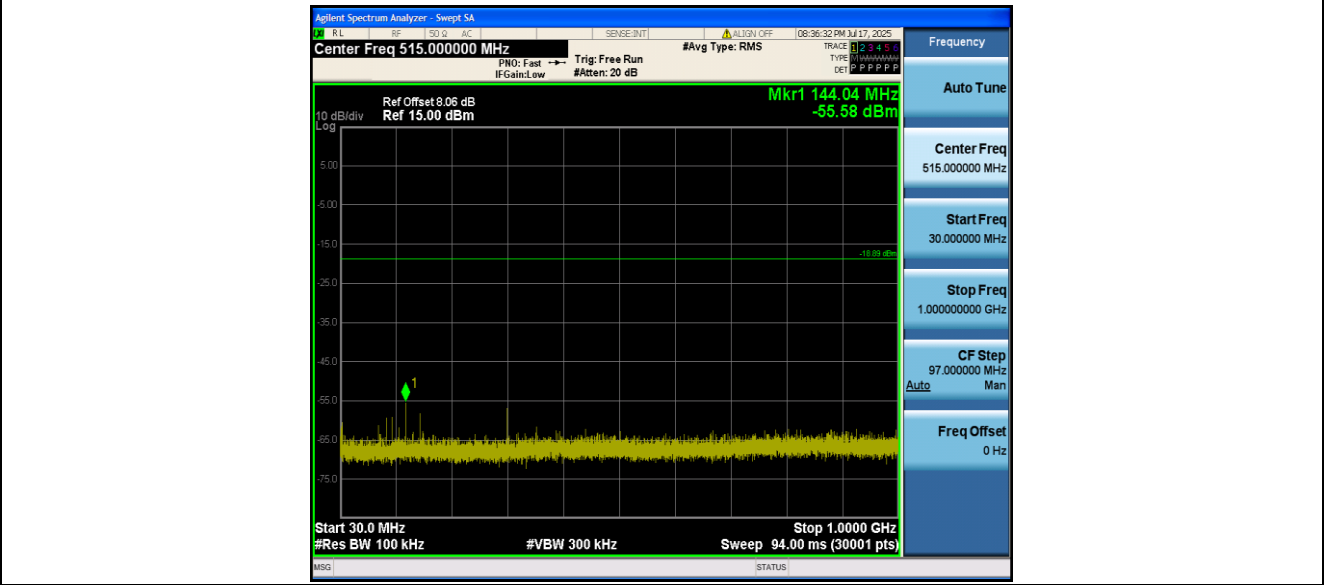


BLE_2M_Ant1_2440_1000~26500

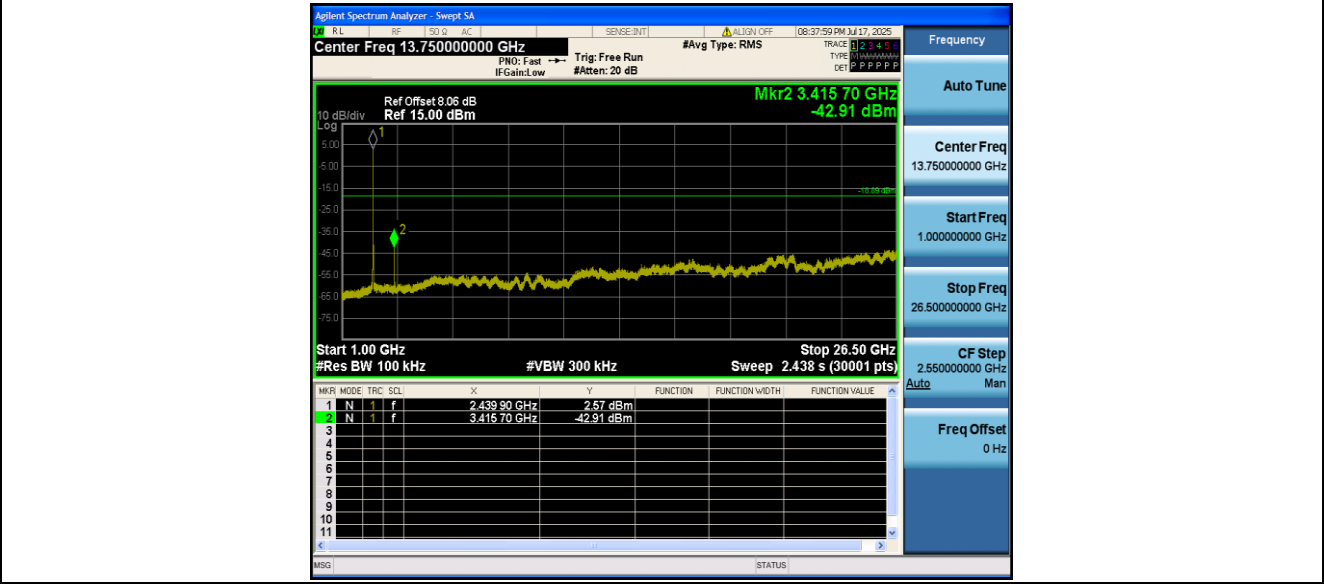


BLE_2M_Ant1_2480_0~Reference



BLE_2M_Ant1_2480_30~1000

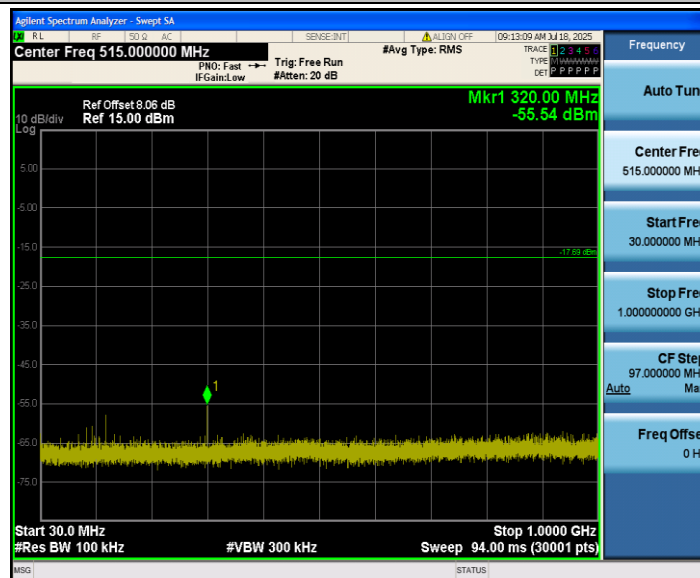

BLE_2M_Ant1_2480_1000~26500

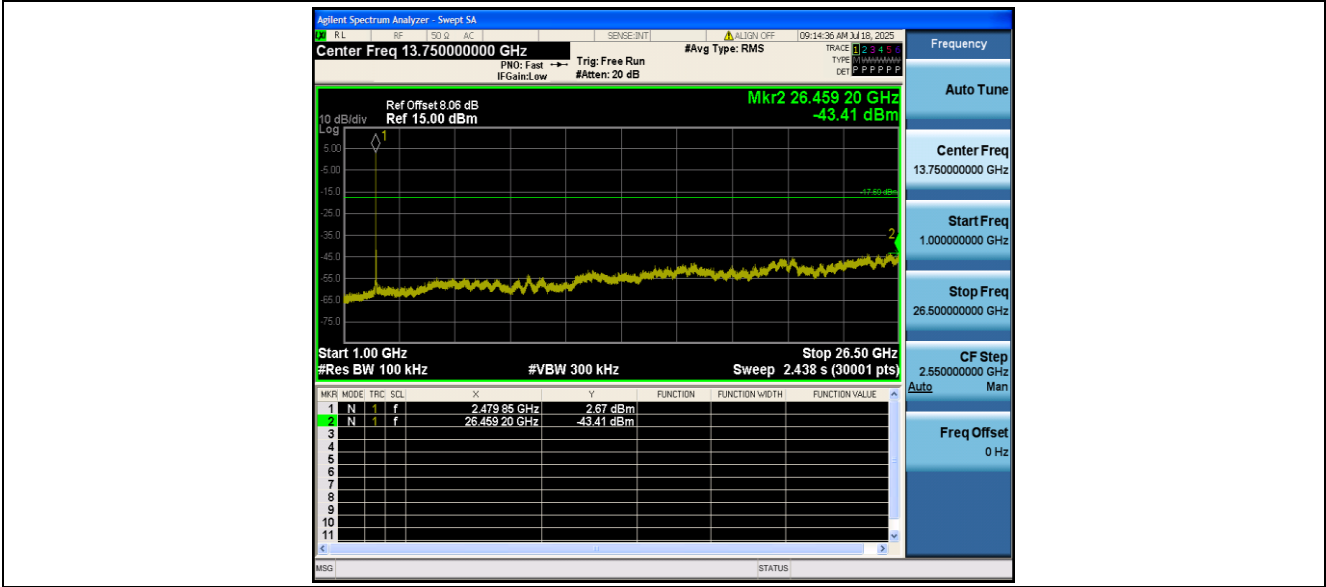

- End of the Report -