



承认书

SPECIFICATION FOR APPROVAL

客户名称 Customer Name: 深圳市钜弘技术有限公司

产品型号 Product Model: JD190H-B06

客户料号 Customer P/N : Y0201020100046

鑫恒阳料号 XINHENG YANG P/N: CP. 04. A00920001

产品规格 SPECIFICATIONS: 频段: WIFI 2.4G+5.8G

制作日期 Production date: 2023.10.27

封样版本 Sample Version: V1

鑫恒阳 (XINHENG YANG)		
编制 (FICTION)	结构 (SE)	研发 (R&D)
客户 (Customer)		
采购 (PUR)	品质 (QC)	研发 (R&D)



目录 Index

一、	封面 (Cover)	-----1
二、	目录 (Index)	-----2
三、	变更履历 (Changehistory)	-----3
四、	基本参数 (The basic parameters)	-----4
五、	测试设备 (TestEquipment& Conditions)	-----5
六、	性能测试报告 (Test Report)	-----6
七、	工程图纸 (Product Drawing)	-----10
八、	ROHS	-----11
九、	产品包装说明 (Product packaging instructions)	-----11



三、变更履历 (Changehistory)

Number	Effective date	Change record
V1	2023.10.27	Initial release



四、基本参数 (The basic parameters)

A. Electrical Characteristics	
Frequency	2400MHZ~2500MHZ 5150MHZ~5850MHZ
VSWR	<2.50
Avg Efficiency	2.4G > 55% 5.8G > 50%
Impedance	50 ± 15 Ohm
Polarization	Linear
Peak Gain	2.4G:2.25 dBi 5.8G:5.50 dBi
B. Material & Mechanical Characteristics	
Material of Radiator	PCB black
Cable Type	Φ 1.13MM*340MM
Connector Type	Generation
Dimension	48.4MM*9.6MM*0.6MM±0.2MM
C. Environmental	
Operation Temperature	- 20 °C ~ + 60 °C
Storage Temperature	- 30 °C ~ + 70 °C


五、测试设备 Introduction:

Microwave darkroom and no reflection chamber, absorbing short wave darkroom dark room. Microwave darkroom by electromagnetic shielding room, filtering and isolation, grounding device, the ventilation duct, indoor distribution system, monitoring system, ceiling wave material part. It is based on the wave absorbing material as the lining of the shield room, it can absorb the most of the electromagnetic energy into the six wall is a better simulation of the free space conditions.

The main working principle of microwave anechoic chamber is according to the electromagnetic wave in the medium from the low magnetic guide magnetic direction of propagation rules, absorbing materials to guide the electromagnetic wave using high permeability, through resonance, a substantial absorption of electromagnetic wave radiation energy, by coupling the electromagnetic energy into heat energy.

main performance :


Frequency range: 400MHz ~ 6GHz ceiling reflected wave loss materials: 400MHz ~ 6GHz is equal to or more than 15dB (microwave absorbing material by composite wave absorbing materials, namely tapered containing carbon sponge suction wave material paste in ferrite).

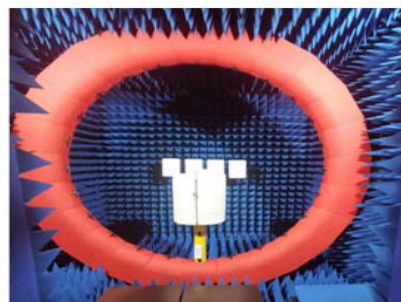

六. 性能测试报告 (Test Report)


Those specifications were specially defined for JD190H-B06 model.

1. Antenna position:

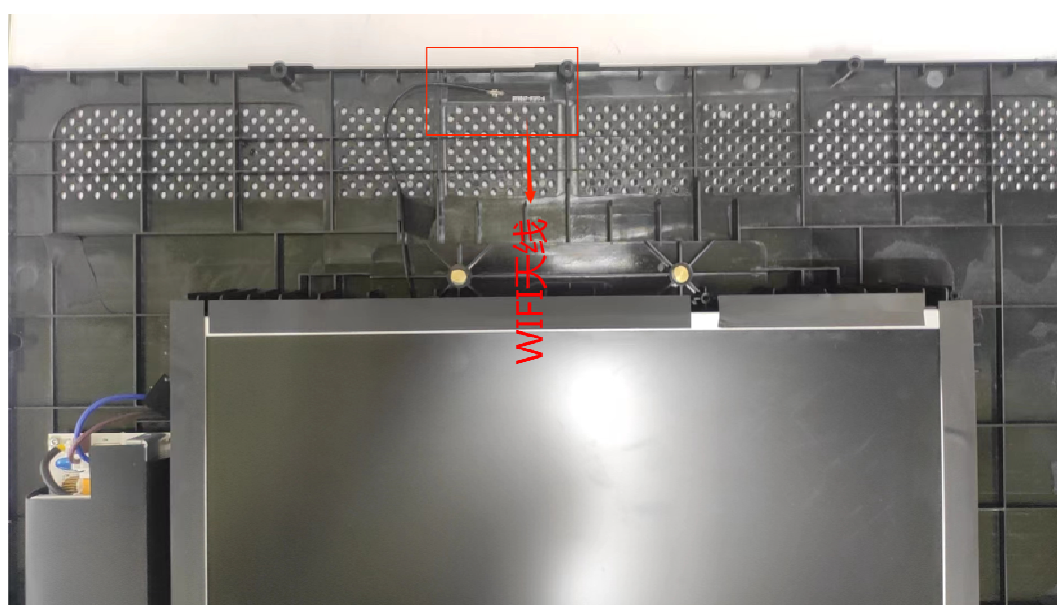

2. Antenna passive field pattern and passive efficiency gain table:


WIFI-2.4G:

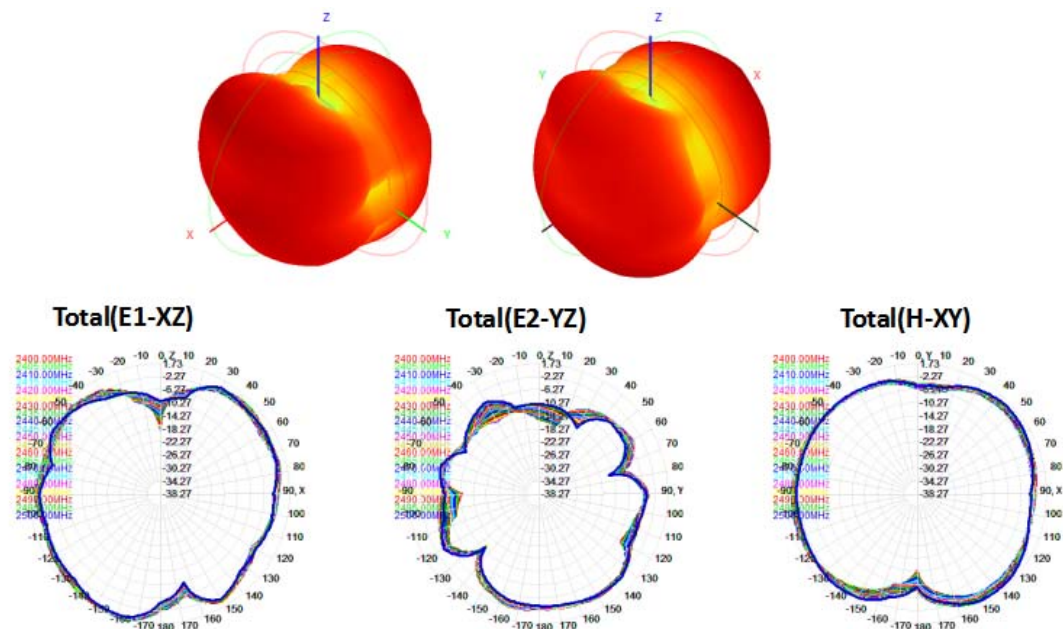

Frequency	ID	Frequency (MHz)	Gain (dBi)	Efficiency (%)
1		2400.0	1.26	55.25
2		2410.0	1.11	56.55
3		2420.0	1.10	58.77
4		2430.0	0.96	58.78
5		2440.0	1.21	59.62
6		2450.0	1.26	57.94
7		2460.0	1.22	57.72

8	2470.0	1.14	58.15
9	2480.0	1.55	60.44
10	2490.0	1.90	63.15
11	2500.0	2.25	66.79

WIFI-5.8G:

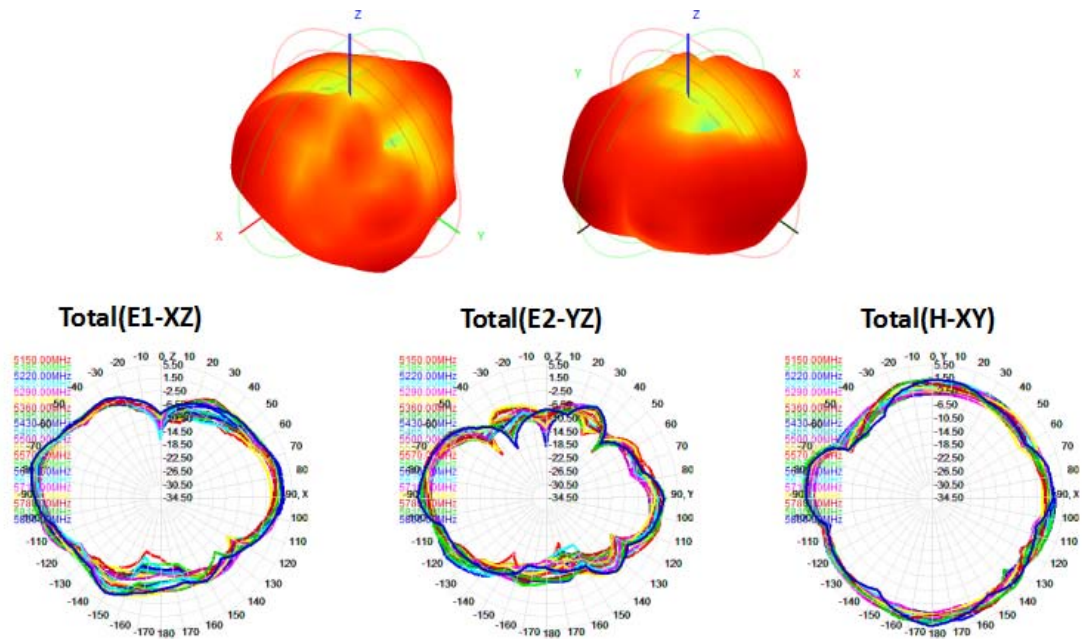

Frequency	ID	Frequency(MHz)	Gain(dBi)	Efficiency(%)
1		5150	3.04	60.19
2		5220	3.28	66.30
3		5290	3.66	57.22
4		5360	3.51	57.30
5		5430	3.42	61.28
6		5465	3.72	60.26
7		5500	2.78	51.69
8		5535	3.04	56.12
9		5570	3.53	62.73
10		5605	3.03	69.48
11		5640	3.71	62.72



深圳市鑫恒阳科技有限公司


Shenzhen XINHENGYANG Technology Co., Ltd

12	5675	2.98	60.99
13	5710	3.69	60.25
14	5745	3.83	65.98
15	5780	3.26	68.95
16	5815	3.13	65.67
17	5850	3.50	64.16

3. OTA:

Test Condition		鑫恒阳天线	
band	Channel	TRP (dBm)	TIS (dBm)
802.11A 54Mbps	149	7.87	-66.51
	157	6.33	-66.19
	165	5.53	-66.75
802.11B 11Mbps	1	14.88	-79.58
	6	15.73	-71.02
	11	16.15	-81.11
802.11G 54Mbps	1	14.75	-65.79
	6	14.61	-62.73
	11	14.55	-66.43
802.11N MCS7	1	14.21	-58.69
	6	13.87	-60.43
	11	14.46	-59.35
802.11AC 40M MCS Index0	36	12.43	-84.74
	149	10.86	-84.51
	161	6.88	-76.75
802.11AX 40M MCS Index0	36	15.58	-76.73
	149	14.12	-86.47
	161	19.48	-70.37

七、 工程图纸 (Product Drawing)

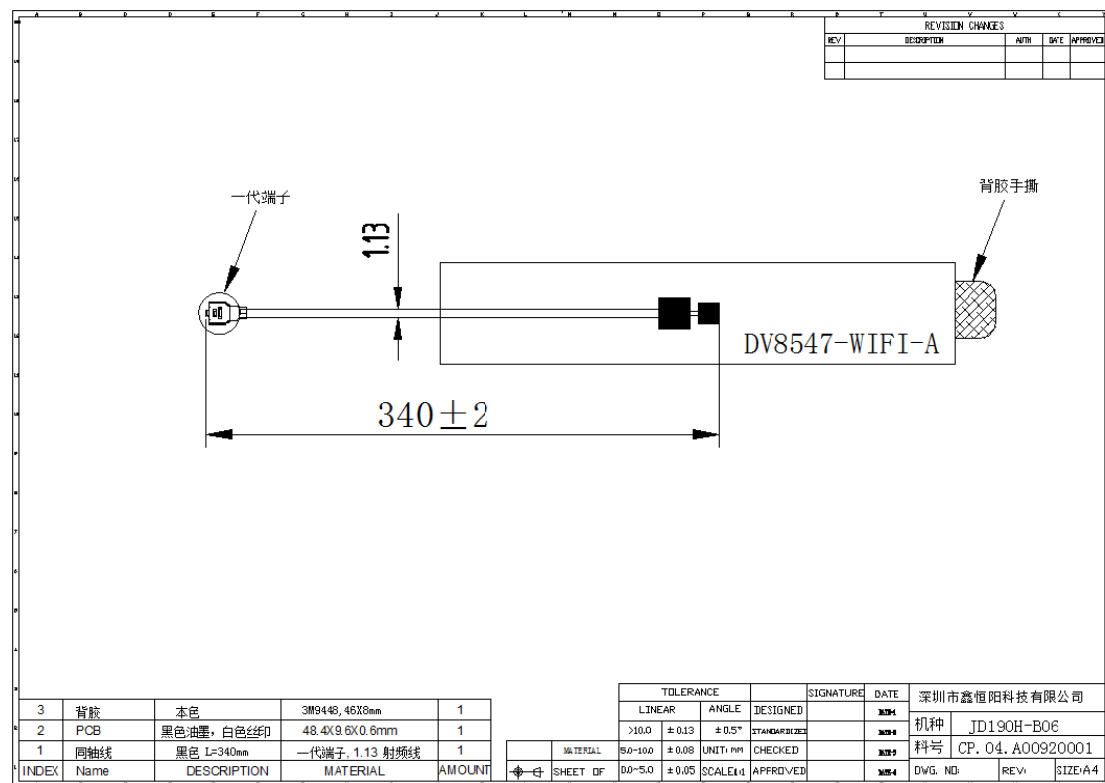

八、 ROHS

Antenna DV8547-WIFI-A meets ROHS requirements.

九、 Product packaging instructions

A. packing should meet the moistureproof, vibration, pressure and mildew proof, etc.

B. the smallest packing unit logo must have the manufacturer trademarks, product model, name, code and quantity.



深圳市鑫恒阳科技有限公司

Shenzhen XINHENG YANG Technology Co., Ltd

C. in the attached packing list, certificate of approval, and the factory inspection report.

*****END*****