

Directory


1、Performance parameter	3
2、VSWR	4
3、Passive test data.....	4
4、Radiation pattern	5
5、A n t	6

Product specification

1、Performance parameter

Name	<u>2.4G Antenna</u>
Model Type	2.4G black FPC ant
ELECTRICAL SPECTFICATIONS	
Frenquency Range	2400-2500MHz
Impedance	50 Ω
VSWR	< 2.0
Max Gain	3.00 dBi
Polarization	Vertical/Horizontal
Radiation	Omnidirectional
Power	50 W
MECHANICAL SPECTFICATIONS	
Connector	Welding type
Working Temperature	-40°C - + 85°C
Limit Temperature	-40°C - + 125°C

2、VSWR

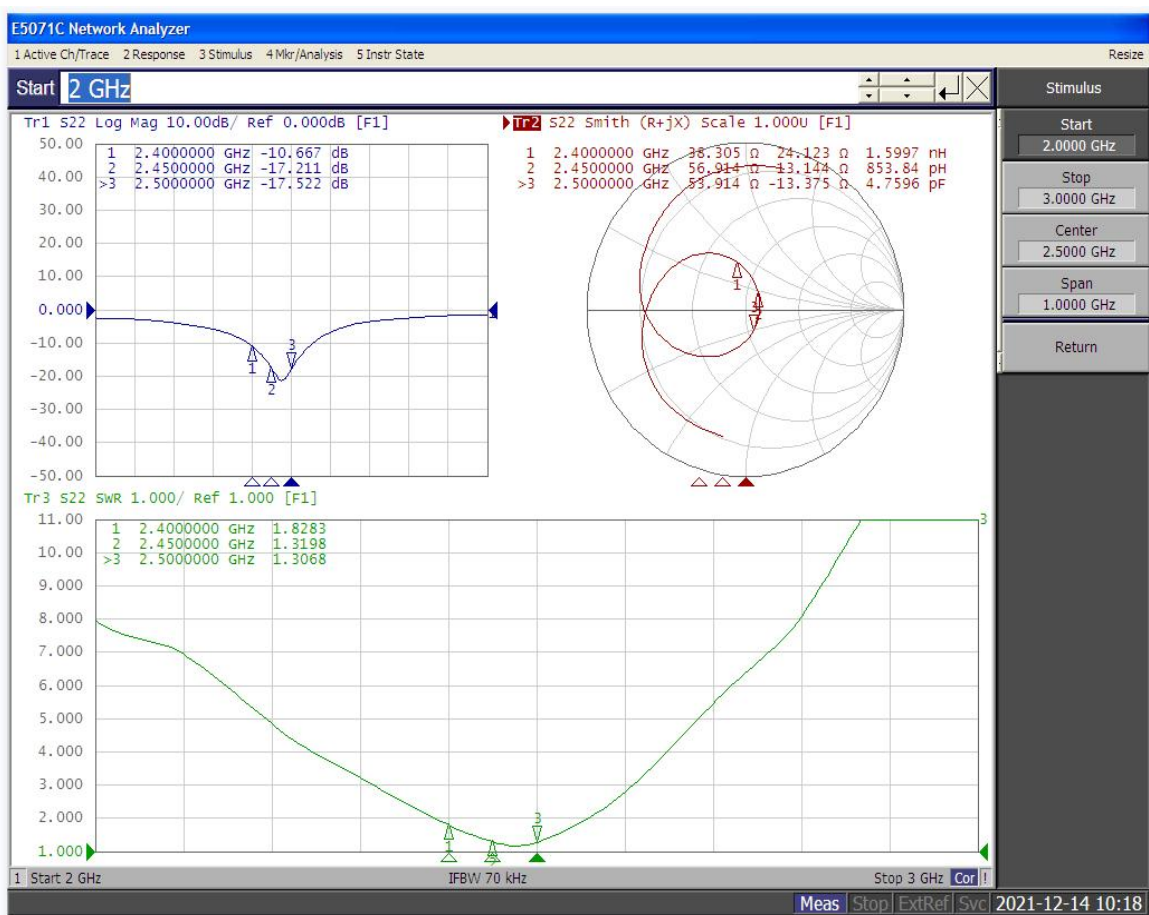


3、Passive test data:


Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	1.95	2.10	1.96	2.11	2.04	2.28	2.34	3.00	3.00	2.56	2.36
Efficiency (%)	54.51	56.69	55.34	57.62	56.20	58.56	58.07	58.32	56.88	59.15	56.37

4、Radiation pattern


2400MHz

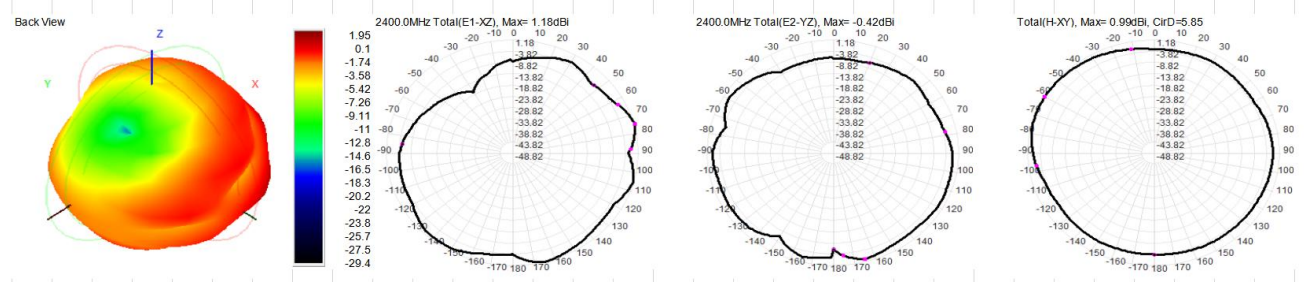

2450MHz

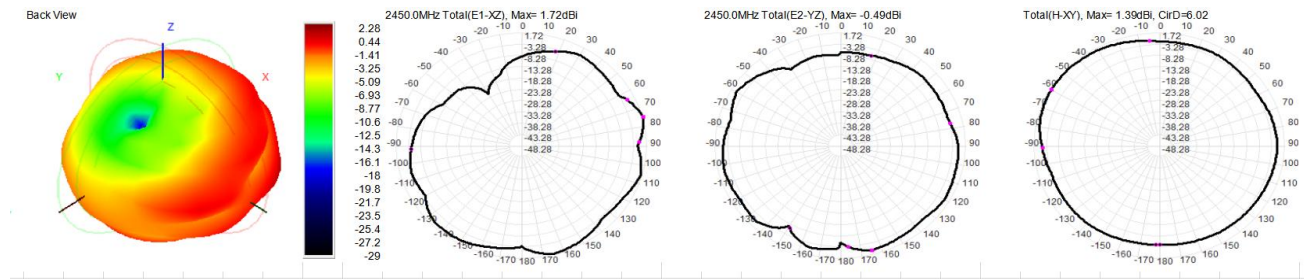

2500MHz

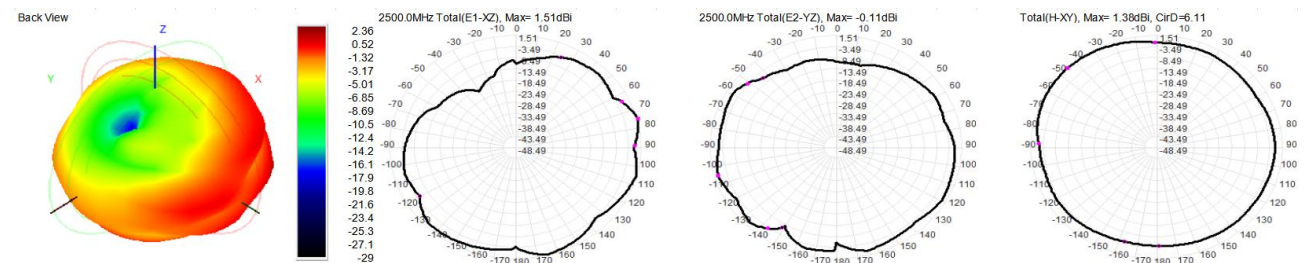

5、Antenna

