

FCC Test Report

**Test Report
On Behalf of
SHENZHEN ROODER TECHNOLOGY CO., LTD
For
electric scooter
Model No.: RZ2, RZ1, RZ3, RZ4**

FCC ID: 2BREP-RZ2

Prepared For: SHENZHEN ROODER TECHNOLOGY CO., LTD
1503 Yingfei Haocheng Technology Park Guansheng 5th Road Luhu Community
Guanhu, Shenzhen Guangdong, 518110, China

Prepared By: Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: July 15, 2025 ~ July 24, 2025

Date of Report: July 24, 2025

Report Number: HK2507153861-E

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Test Result Certification

Applicant's Name SHENZHEN ROODER TECHNOLOGY CO., LTD
Address 1503 Yingfei Haocheng Technology Park Guansheng 5th Road
Luhu Community Guanhu, Shenzhen Guangdong, 518110, China
Manufacturer's Name SHENZHEN ROODER TECHNOLOGY CO., LTD
Address 1503 Yingfei Haocheng Technology Park Guansheng 5th Road
Luhu Community Guanhu, Shenzhen Guangdong, 518110, China
Product Description
Trade Mark RONZLLA
Product Name electric scooter
Model and/or Type Reference RZ2, RZ1, RZ3, RZ4
Standards FCC Rules and Regulations Part 15 Subpart C Section 15.225
ANSI C63.10: 2020

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test
Date (s) of Performance of Tests **July 15, 2025 ~ July 24, 2025**
Date of Issue **July 24, 2025**
Test Result **Pass**

Testing Engineer

len liao

Len Liao

Technical Manager

Sliver Wan

Sliver Wan

Authorized Signatory

Jason Zhou

Jason Zhou



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Table of Contents

1. Test Result Summary	5
1.1 Information of the Test Laboratory	5
1.2 Measurement Uncertainty	5
2. EUT Description	6
3. General Information.....	7
3.1 Test Environment and Mode	7
3.2 Description of Test Setup.....	8
3.3 Description of Support Units	9
4. Test Results and Measurement Data	10
4.1 Antenna Requirement.....	10
4.2 AC Conducted Emission	11
4.3 Radiated Emission Measurement.....	14
4.4 Occupied Bandwidth.....	21
4.5 Frequency Stability	23
5. Photographs of Test Setup	25
6. Photos of the EUT.....	27

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

** Modified History **

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	July 24, 2025	Jason Zhou



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING



1. Test Result Summary

Requirement	CFR 47 Section	Result
AC Conduction Emission, 0.15MHz to 30MHz	§15.207	PASS
Radiation Emission	§15.225, §15.205, §15.209, §15.35	PASS
Occupied Bandwidth	§ 15.215	PASS
Antenna Requirement	§ 15.203	PASS
Frequency Stability	§ 15.225	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.1 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.2 Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.71dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



2. EUT Description


Equipment:	electric scooter
Model Name:	RZ2
Series Model(s):	RZ2, RZ1, RZ3, RZ4
Model Difference:	All model's the function, software and electric circuit are the same, only with product model named different. Test sample model: RZ2.
FCC ID:	2BREP-RZ2
Antenna Type:	PCB antenna
Antenna Gain:	-5dBi
Operation frequency:	13.56MHz
Modulation Type:	ASK
Power Source:	DC67.2V from Adapter with AC100-240V, 50/60Hz or DC60V from Battery
Power Rating:	DC67.2V from Adapter with AC100-240V, 50/60Hz or DC60V from Battery
Note:	<p>1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</p> <p>2. Antenna gain Refer to the antenna specifications.</p> <p>3. The cable loss data is obtained from the supplier.</p> <p>4. The test results in the report only apply to the tested sample.</p>




HUAK TESTING

3.2 Description of Test Setup

Operation of EUT during AC Conducted testing:



Operation of EUT during 30M-1GHz Radiation testing:



Operation of EUT during 9K-30MHz Radiation testing:



The sample was placed (0.1m below 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	electric scooter	RONZLLA	RZ2	N/A	EUT
2	Adapter	N/A	XSL120-6720175	Input: AC100-240V, 50/60Hz, 2.5A MAX Output: DC67.2V, 1.75A, 117.6W	Accessory

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. Test Results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	PCB antenna
The antenna used in this product is a PCB Antenna, is a permanently attached antenna on the PCB. It conforms to the standard requirements. The directional gains of antenna used for transmitting is -5dBi.	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAK TESTING

HUAK TESTING

4.3 Radiated Emission Measurement

4.3.1 Test Specification

Test Requirement:	FCC Part15 C Section 15.225(a) and 15.209				
Test Method:	ANSI C63.10: 2020				
Frequency Range:	9 kHz to 1 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber in below 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4.3.3 Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)	Field strength (microvolts/meter)
0.009-0.490	300	$20\log 2400/F$ (kHz)	$2400/F$ (kHz)
0.490-1.705	30	$20\log 24000/F$ (kHz)	$24000/F$ (kHz)
1.705-30	30	$20\log 30$	30
30-88	3	40.0	100**
88-216	3	43.5	150**
216-960	3	46.0	200**
Above 960	3	54.0	500

NOTE:

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., S 15.231 and 15.241.



HUAK TESTING

HUAK TESTING

4.3.4 Test Instruments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	1 Year
2.	L.I.S.N.	R&S	ENV216	HKE-002	Feb. 19, 2025	1 Year
3.	L.I.S.N.	R&S	ENV216	HKE-059	Feb. 19, 2025	1 Year
4.	EMI Test Receiver	R&S	ESR	HKE-005	Feb. 19, 2025	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	1 Year
6.	Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	1 Year
7.	Preamplifier	EMCI	EMC051845S	HKE-006	Feb. 19, 2025	1 Year
8.	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	1 Year
9.	Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	1 Year
10.	6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	1 Year
11.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	1 Year
12.	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	2 Year
13.	Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	2 Year
14.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	2 Year
15.	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
16.	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
17.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 19, 2025	1 Year



4.3.5 Test Data

PASS

Note: this EUT was tested for all models and the worst case model (DC54.6V) data was reported.

Field Strength of Fundamental

Frequency (MHz)	Reading (dBuV/m)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar (H/V)	Detector
13.21	45.11	15.82	60.93	80.51	19.58	H	QP
13.21	44.98	15.82	60.80	80.51	19.71	V	QP
13.85	47.96	15.82	63.78	80.51	16.73	H	QP
13.85	48.17	15.82	63.99	80.51	16.52	V	QP
13.56	79.35	12.33	91.68	124	32.32	H	Peak
13.56	78.65	12.33	90.98	124	33.02	V	Peak
13.45	53.86	15.82	69.68	90.47	20.79	H	QP
13.45	52.61	15.82	68.43	90.47	22.04	V	QP
13.62	46.92	15.82	62.74	90.47	27.73	H	QP
13.62	45.99	15.82	61.81	90.47	28.66	V	QP

Remark: Margin = Limit - Result

Result = Reading + Correction Factor

Correction Factor = Antenna Factor + Cable Factor

Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING




HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING


Report No.: HK2507153861-E

Page 19 of 27

About 30MHz-1GHz

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Antenna polarity: H

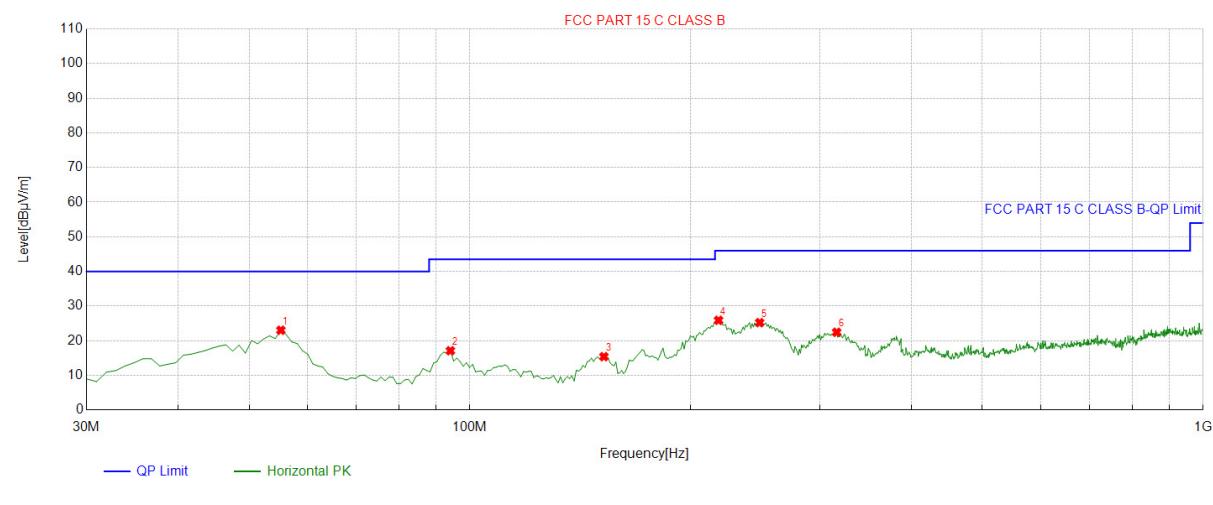

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.2452	-14.00	37.03	23.03	40.00	16.97	100	123	Horizontal
2	94.0841	-15.78	32.89	17.11	43.50	26.39	100	323	Horizontal
3	152.3423	-17.95	33.35	15.40	43.50	28.10	100	1	Horizontal
4	218.3684	-14.63	40.53	25.90	46.00	20.10	100	127	Horizontal
5	248.4685	-13.36	38.59	25.23	46.00	20.77	100	130	Horizontal
6	316.4364	-11.36	33.81	22.45	46.00	23.55	100	88	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**


HUAK TESTING



HUAK TESTI



HUAK TE

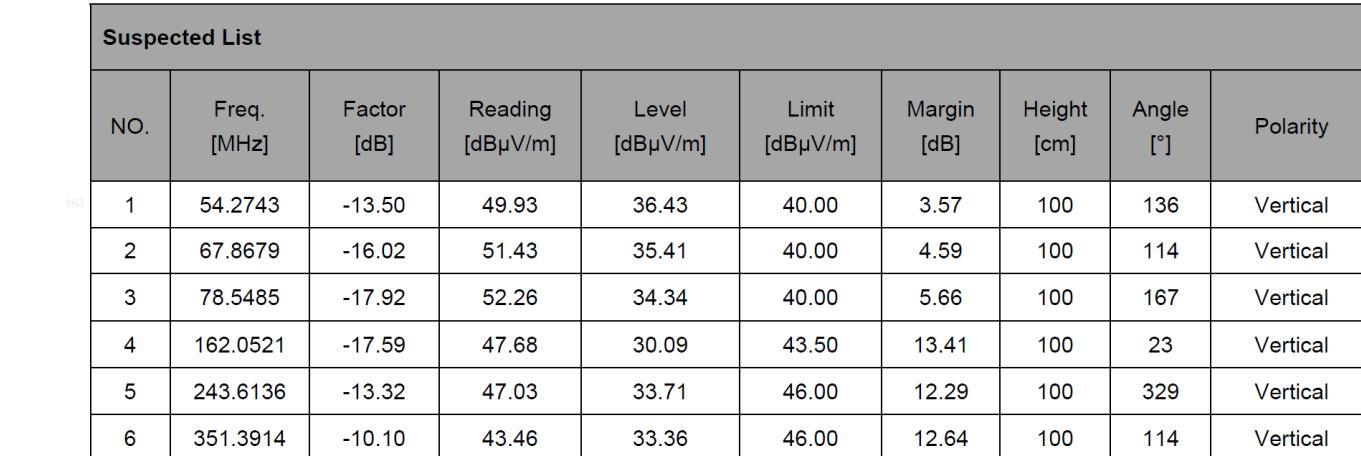

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

4.4 Occupied Bandwidth

4.4.1 Test Specification

Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2020
Limit:	N/A
	<ol style="list-style-type: none">1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.2. Set to the maximum power setting and enable the EUT transmit continuously.3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; $RBW \geq 1\%$ of the 20 dB bandwidth; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.4. Measure and record the results in the test report.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting Mode
Test Results:	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING
HUAK TESTING

4.4.2 Test Data

Test Channel (MHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
13.56	2.703	N/A	PASS

Test plots as follows:




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.5 Frequency Stability

4.5.1 Test Specification

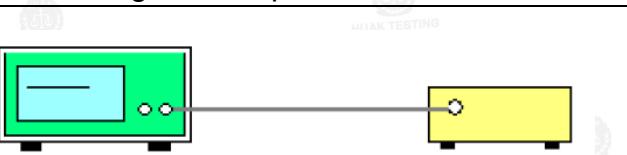Test Requirement:	FCC Part15 C Section 15.225
Test Method:	ANSI C63.10: 2020
Limit:	+/-0.01%
	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a spectrum analyzer. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to - 20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Setup:	 <p>The diagram illustrates the test setup. A green rectangular box labeled "Spectrum Analyzer" is connected to a yellow rectangular box labeled "EUT" (Equipment Under Test) via a horizontal line representing a cable. The "Spectrum Analyzer" has a small screen and two buttons on its front panel. The "EUT" has a small circular port on its front panel.</p>
Test Mode:	Transmitting Mode
Test Results:	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel : +86-0755-2302 9901 E-mail: info@huak.com Web : www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China. Tel.: +86-0755-2322 5501 E-mail: info@nuak.com Web: www.nuak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Futian Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

4.5.2 Test Data

PASS

Page 24 of 27

Report No.: HK2507153861-E

Note: this EUT was tested for all models and the worst case model (DC67.2V) data was reported.

Voltage (Vdc)	Temperature (°C)	Frequency (MHz)	Deviation (%)	Limit (%)
67.2	-20	13.560037	0.00027%	+/-0.01%
67.2	-10	13.560374	0.00276%	
67.2	0	13.560394	0.00291%	
67.2	10	13.560045	0.00033%	
67.2	20	13.560059	0.00044%	
67.2	30	13.559810	-0.00140%	
67.2	40	13.559985	-0.00011%	
67.2	50	13.559836	-0.00121%	
57.12	-20	13.560154	0.00114%	
57.12	-10	13.560060	0.00044%	
57.12	0	13.559992	-0.00006%	
57.12	10	13.560104	0.00077%	
57.12	20	13.559887	-0.00083%	
57.12	30	13.559889	-0.00082%	
57.12	40	13.559862	-0.00102%	
57.12	50	13.560241	0.00178%	
77.28	-20	13.560067	0.00049%	
77.28	-10	13.559889	-0.00082%	
77.28	0	13.560303	0.00223%	
77.28	10	13.559870	-0.00096%	
77.28	20	13.559978	-0.00016%	
77.28	30	13.559836	-0.00121%	
77.28	40	13.559712	-0.00212%	
77.28	50	13.559905	-0.00070%	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




HUAK TESTING

AC Conducted Emission



RF Conducted Emission

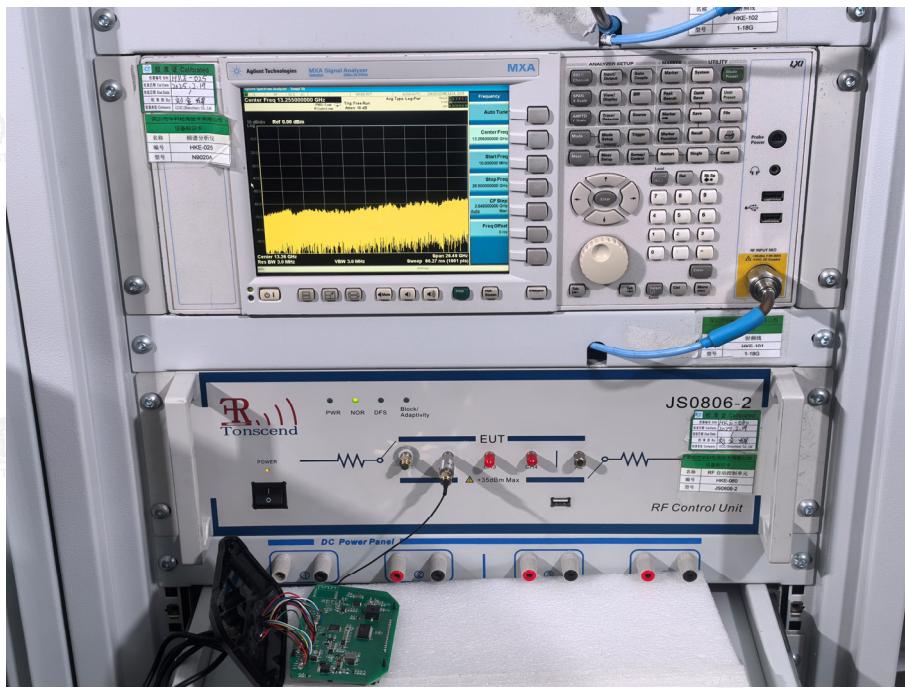

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----

