

FCC Test Report

**Test Report
On Behalf of**

shenzhen rilla technology company limited

For

electric scooter

Model No.: liideway1, liideway2, liideway3, liideway4

FCC ID: 2BREQ-LIIDeway1

Prepared For: **shenzhen rilla technology company limited**

**Room A305, Building 4, Huayu'an, Guanghua Community, Jihua Subdistrict
Longgang District, Shenzhen City, Guangdong Province, 518112, China**

Prepared By: **Shenzhen HUAK Testing Technology Co., Ltd.**

**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China**

Date of Test: **July 08, 2025 ~ July 17, 2025**

Date of Report: **July 17, 2025**

Report Number: **HK2507083695-E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Test Result Certification

Applicant's Name: shenzhen rilla technology company limited
Address: Room A305, Building 4, Huayu'an, Guanghua Community, Jihua Subdistrict Longgang District, Shenzhen City, Guangdong Province, 518112, China

Manufacturer's Name: shenzhen rilla technology company limited
Address: Room A305, Building 4, Huayu'an, Guanghua Community, Jihua Subdistrict Longgang District, Shenzhen City, Guangdong Province, 518112, China

Product Description

Trade Mark: liideway
Product Name: electric scooter
Model and/or Type Reference : liideway1, liideway2, liideway3, liideway4
Standards: FCC Rules and Regulations Part 15 Subpart C Section 15.225
ANSI C63.10: 2020

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of Performance of Tests: **July 08, 2025 ~ July 17, 2025**

Date of Issue: **July 17, 2025**

Test Result: **Pass**

Testing Engineer


Len Liao

Len Liao

Technical Manager


Sliver Wan

Sliver Wan

Authorized Signatory


Jason Zhou

Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Table of Contents

1. Test Result Summary	5
1.1 Information of the Test Laboratory	5
1.2 Measurement Uncertainty	5
2. EUT Description	6
3. General Information.....	7
3.1 Test Environment and Mode	7
3.2 Description of Test Setup.....	8
3.3 Description of Support Units	9
4. Test Results and Measurement Data	10
4.1 Antenna Requirement.....	10
4.2 AC Conducted Emission	11
4.3 Radiated Emission Measurement.....	14
4.4 Occupied Bandwidth.....	21
4.5 Frequency Stability	23
5. Photographs of Test Setup	25
6. Photos of the EUT.....	27

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

Page 4 of 27

Report No.: HK2507083695-E

** Modified History **

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	July 17, 2025	Jason Zhou



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING



2. EUT Description

Equipment:	electric scooter
Model Name:	liideway1
Series Model(s):	liideway2, liideway3, liideway4
Model Difference:	All model's the function, software and electric circuit are the same, only with product model named different. Test sample model: liideway1.
FCC ID:	2BREQ-LIIDeway1
Antenna Type:	PCB antenna
Antenna Gain:	-5dBi
Operation frequency:	13.56MHz
Modulation Type:	ASK
Power Source:	DC54.6V from Adapter with AC100-240V, 50/60Hz or DC48.1V from Battery
Power Rating:	DC54.6V from Adapter with AC100-240V, 50/60Hz or DC48.1V from Battery
<p>Note:</p> <ol style="list-style-type: none">1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.2. Antenna gain Refer to the antenna specifications.3. The cable loss data is obtained from the supplier.4. The test results in the report only apply to the tested sample.	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

3. General Information

3.1 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed (0.1m below 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	64.54	87.66	67.96

Final Test Mode:

According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup": Y axis (see the test setup photo)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING


HUAK TESTING

HUAK TESTING


HUAK TESTING

3.2 Description of Test Setup

Operation of EUT during AC Conducted and below 1GHz Radiation testing:



Operation of EUT during below 30MHz Radiation testing:



The sample was placed (0.1m below 1GHz) above the ground plane of 3mchamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	electric scooter	liideway	liideway1	N/A	EUT
2	Adapter	N/A	XSL120-5460200	Input: AC100-240V, 50/60Hz 2.5A MAX Output: DC54.6V, 2.0A 109.2W	Accessory

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


4. Test Results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	PCB antenna
The antenna used in this product is a PCB Antenna, is a permanently attached antenna on the PCB. It conforms to the standard requirements. The directional gains of antenna used for transmitting is -5dBi.	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Test Specification: Neutral

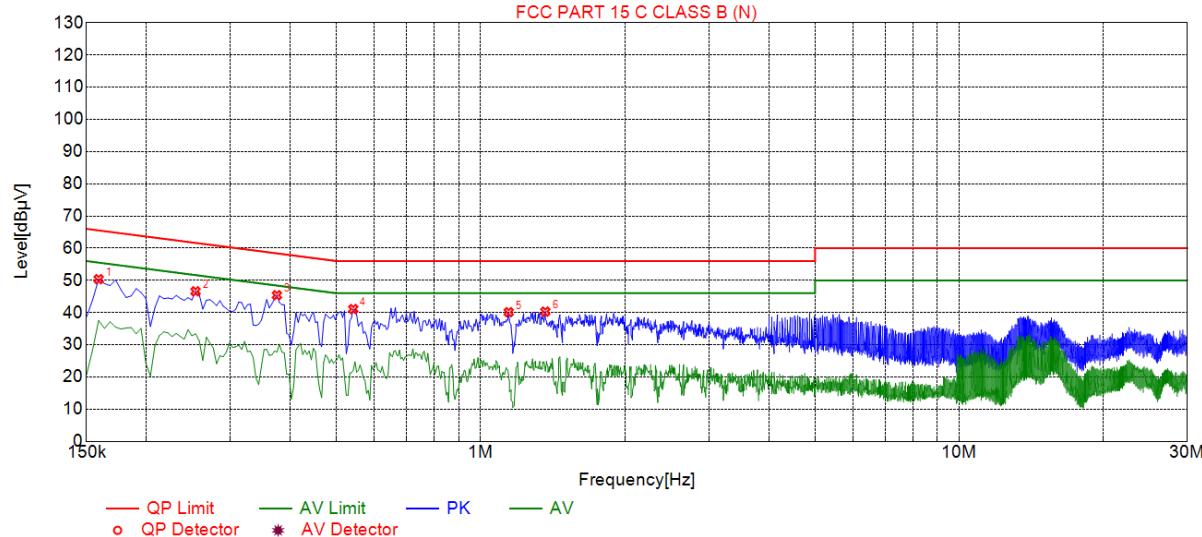

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1590	50.38	19.61	65.52	15.14	35.77	PK	N
2	0.2535	46.60	19.66	61.64	15.04	31.94	PK	N
3	0.3750	45.40	19.71	58.39	12.99	30.69	PK	N
4	0.5415	41.09	19.75	56.00	14.91	26.34	PK	N
5	1.1445	40.12	19.80	56.00	15.88	25.32	PK	N
6	1.3650	40.31	19.84	56.00	15.69	25.47	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor

4.3 Radiated Emission Measurement

4.3.1 Test Specification

Test Requirement:	FCC Part15 C Section 15.225(a) and 15.209				
Test Method:	ANSI C63.10: 2020				
Frequency Range:	9 kHz to 1 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber in below 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				



HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING


HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

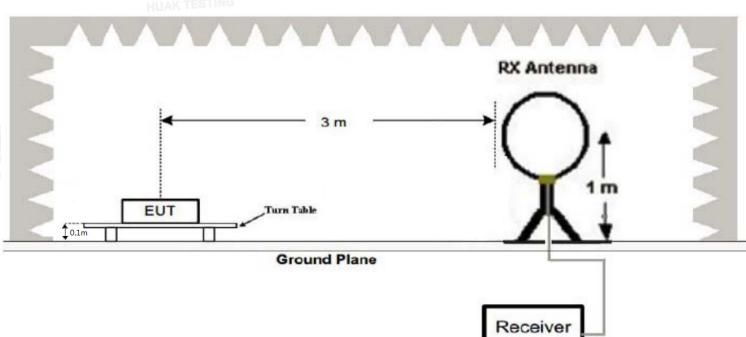For radiated emissions	
Test Setup:	
Test Mode:	Transmitting Mode
Test Results:	PASS

4.3.2 Limit

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4.3.3 Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)	Field strength (microvolts/meter)
0.009-0.490	300	$20\log 2400/F$ (kHz)	$2400/F$ (kHz)
0.490-1.705	30	$20\log 24000/F$ (kHz)	$24000/F$ (kHz)
1.705-30	30	$20\log 30$	30
30-88	3	40.0	100**
88-216	3	43.5	150**
216-960	3	46.0	200**
Above 960	3	54.0	500

NOTE:

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., S 15.231 and 15.241.

**HUAK TESTING**

HUAK TESTING

4.3.4 Test Instruments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	HKE-002	Feb. 19, 2025	1 Year
2.	L.I.S.N.	R&S	ENV216	HKE-059	Feb. 19, 2025	1 Year
3.	EMI Test Receiver	R&S	ESR	HKE-005	Feb. 19, 2025	1 Year
4.	Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	1 Year
6.	Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	1 Year
7.	Preamplifier	EMCI	EMC051845S	HKE-006	Feb. 19, 2025	1 Year
8.	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	1 Year
9.	Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	1 Year
10.	6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	1 Year
11.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	1 Year
12.	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	2 Year
13.	Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	2 Year
14.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	2 Year
15.	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
16.	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
17.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 19, 2025	1 Year




HUAK TESTING

HUAK TESTING

About 30MHz-1GHz

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Antenna polarity: H

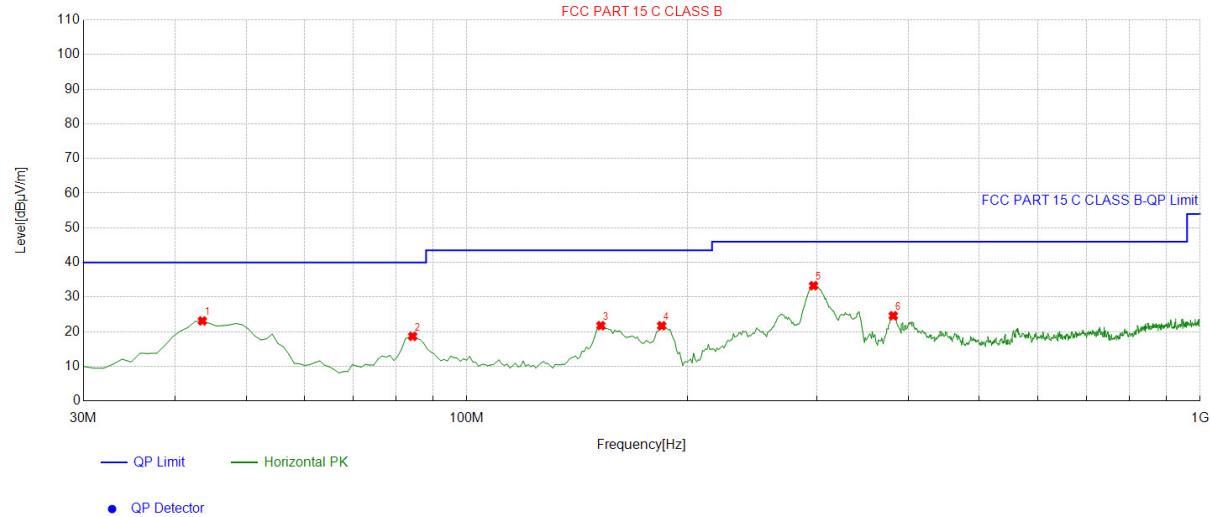

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.5936	-13.30	36.42	23.12	40.00	16.88	100	95	Horizontal
2	84.3744	-17.88	36.56	18.68	40.00	21.32	100	3	Horizontal
3	152.3423	-17.95	39.72	21.77	43.50	21.73	100	1	Horizontal
4	184.3844	-15.77	37.49	21.72	43.50	21.78	100	110	Horizontal
5	297.0170	-11.84	45.12	33.28	46.00	12.72	100	17	Horizontal
6	381.4915	-9.22	33.84	24.62	46.00	21.38	100	326	Horizontal


Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Antenna polarity: V

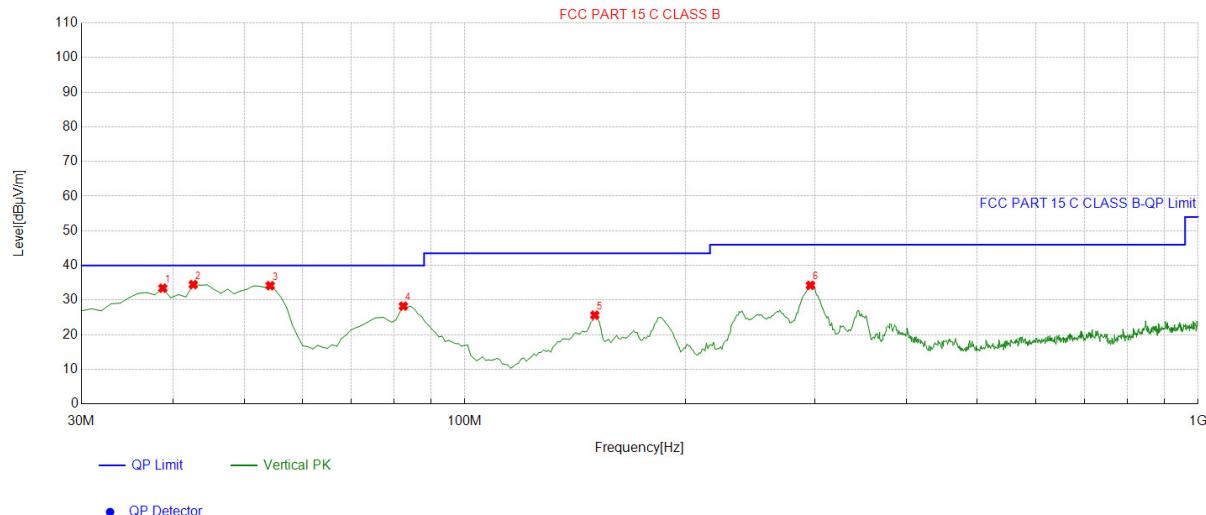

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.7387	-14.30	47.74	33.44	40.00	6.56	100	212	Vertical
2	42.6226	-13.31	47.78	34.47	40.00	5.53	100	190	Vertical
3	54.2743	-13.50	47.66	34.16	40.00	5.84	100	194	Vertical
4	82.4324	-18.19	46.44	28.25	40.00	11.75	100	23	Vertical
5	150.4004	-18.13	43.79	25.66	43.50	17.84	100	320	Vertical
6	296.0460	-11.88	46.15	34.27	46.00	11.73	100	359	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

4.4 Occupied Bandwidth

4.4.1 Test Specification

Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2020
Limit:	N/A
	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; $RBW \geq 1\%$ of the 20 dB bandwidth; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting Mode
Test Results:	PASS



HUAK TESTING
HUAK TESTING

HUAK TESTING


HUAK TESTING

HUAK TESTING

4.4.2 Test data

Test Channel (MHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
13.56	2.635	N/A	PASS

Test plots as follows:

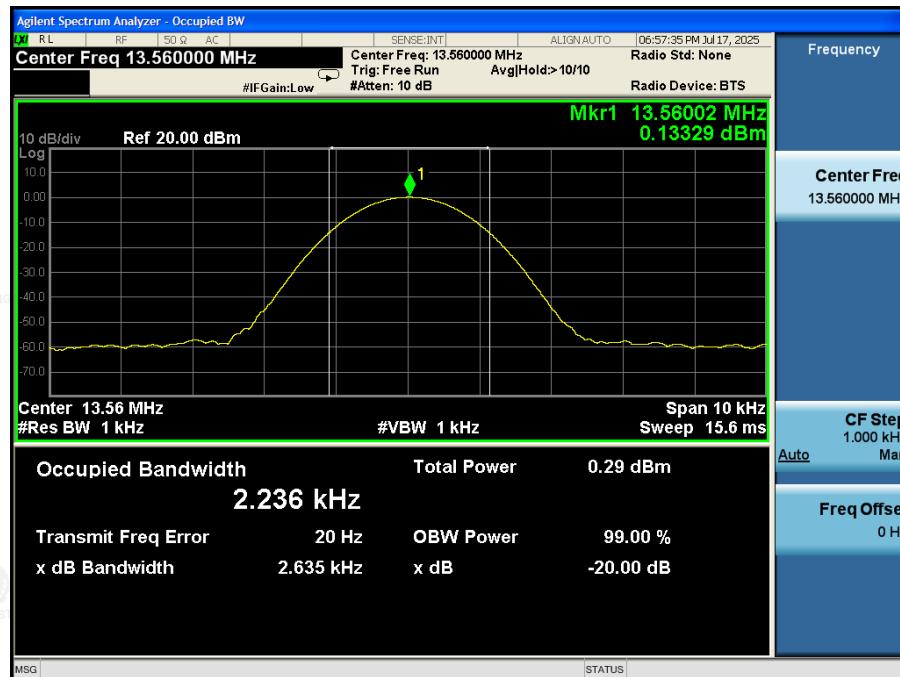

HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.5 Frequency Stability

4.5.1 Test Specification

Test Requirement:	FCC Part15 C Section 15.225
Test Method:	ANSI C63.10: 2020
Limit:	+/-0.01%
	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a spectrum analyzer. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to - 20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Setup:	 <p>Spectrum Analyzer</p> <p>EUT</p>
Test Mode:	Transmitting Mode
Test Results:	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4.5.2 Test Data

PASS

Note: this EUT was tested for all models and the worst case model (DC54.6V) data was reported.

Voltage (Vdc)	Temperature (°C)	Frequency (MHz)	Deviation (%)	Limit (%)
54.6	-20	13.560221	0.00163%	+/-0.01%
54.6	-10	13.560153	0.00113%	
54.6	0	13.560211	0.00156%	
54.6	10	13.560196	0.00145%	
54.6	20	13.560112	0.00083%	
54.6	30	13.560087	0.00064%	
54.6	40	13.559984	-0.00012%	
54.6	50	13.560123	0.00091%	
46.41	-20	13.560224	0.00165%	
46.41	-10	13.560128	0.00094%	
46.41	0	13.559889	-0.00082%	
46.41	10	13.560112	0.00083%	
46.41	20	13.560009	0.00007%	
46.41	30	13.560325	0.00240%	
46.41	40	13.559869	-0.00097%	
46.41	50	13.560312	0.00230%	
62.79	-20	13.560325	0.00240%	
62.79	-10	13.560283	0.00209%	
62.79	0	13.560112	0.00083%	
62.79	10	13.560129	0.00095%	
62.79	20	13.560425	0.00313%	
62.79	30	13.560259	0.00191%	
62.79	40	13.559964	-0.00027%	
62.79	50	13.560312	0.00230%	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING


HUAK TESTING

HUAK TESTING

HUAK TESTING



RF Conducted Emission

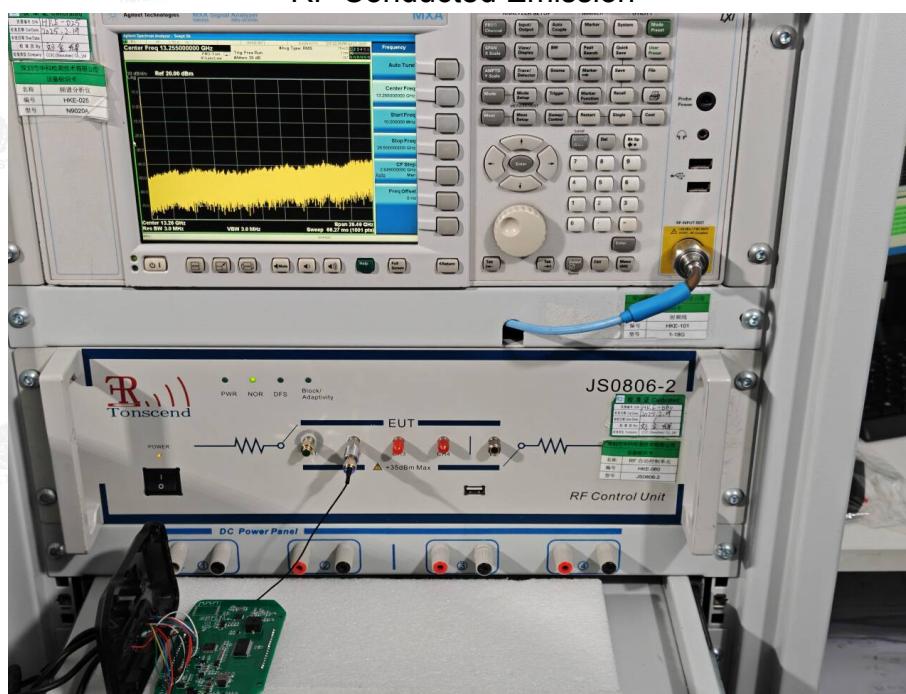

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----