



Senasic Electronic Technology Co. ,Ltd.
Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo
Road, Jiangbei New Area, Nanjing

VSWR

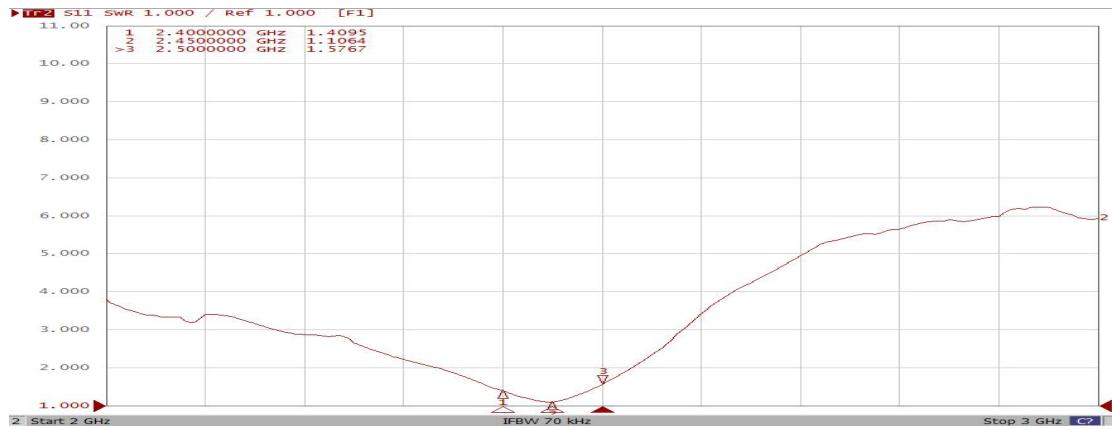


Return Loss

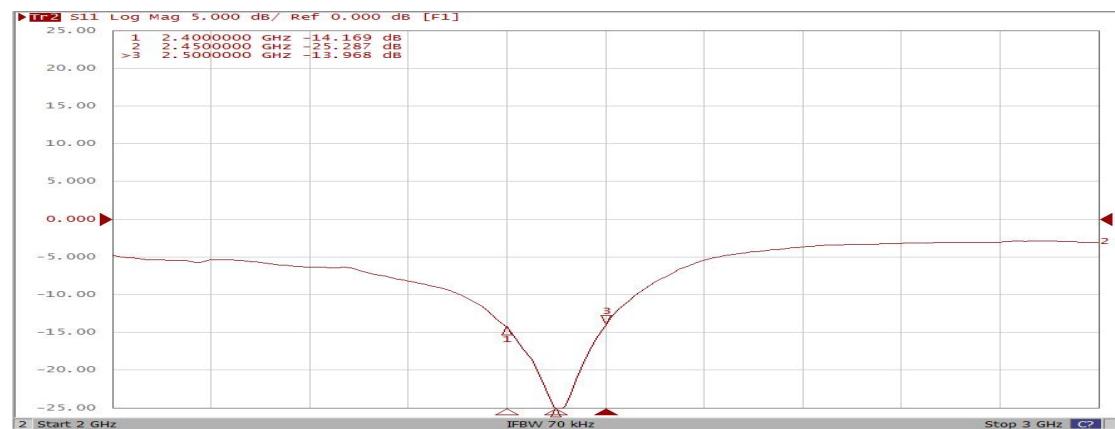


Radiation

2.4GHz

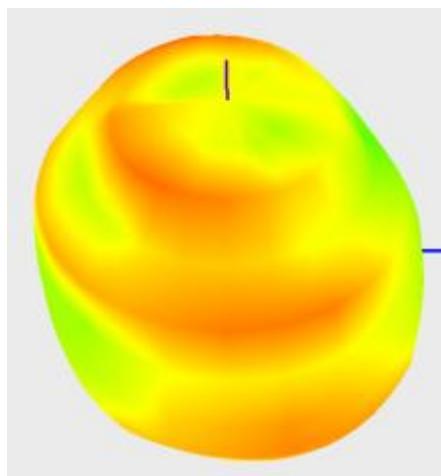


2.5GHz

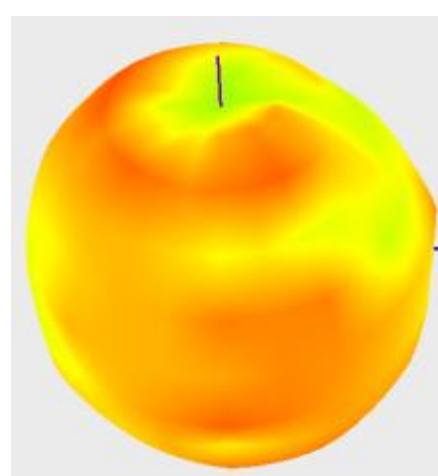






Senasic Electronic Technology Co. ,Ltd.
Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo
Road, Jiangbei New Area, Nanjing

Radiation Patterns

2.4GHz

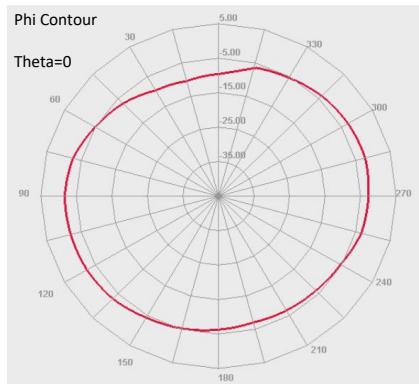

2.5GHz

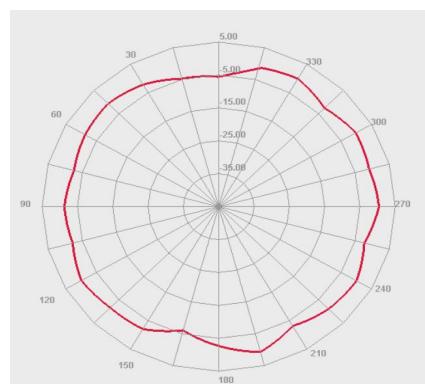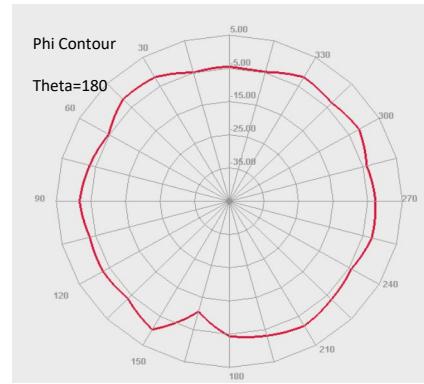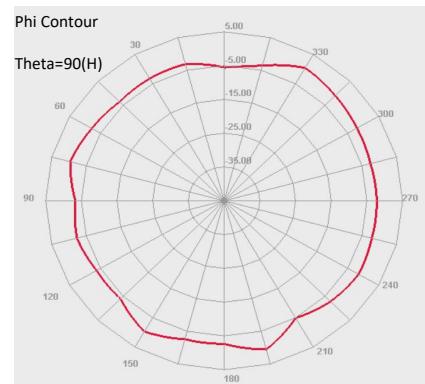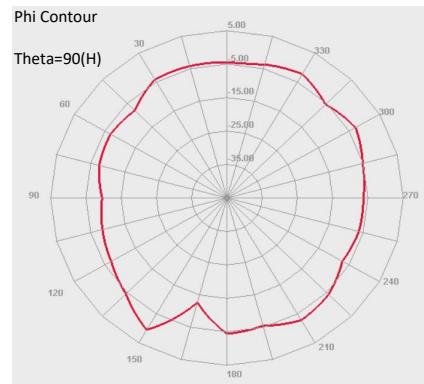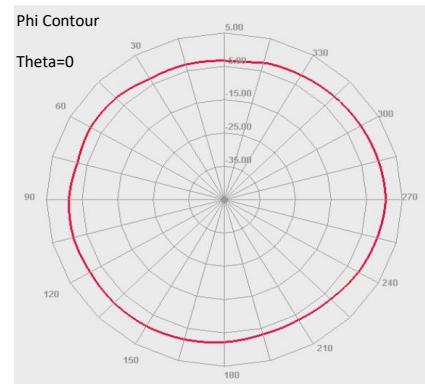

Senasic Electronic Technology Co. ,Ltd.
Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo
Road, Jiangbei New Area, Nanjing

Electrical Specifications

Frequency	2.402GHz-2.48GHz	
VSWR(max)	2.402GHz-2.48GHz	1.57
Return Loss(max)		-13.9
Peak Gain(dB i)		3
Average Gain(dB i)		2.6
Efficiency(%)		45%
Polarization		linear
Radiation		Omnidirectional
Wavelength		1/4-wave
Electrical Type		Monopole
Impedance		50Ω

Senasic Electronic Technology Co. ,Ltd.
Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo
Road, Jiangbei New Area, Nanjing

