



Certificate #7130.01

FCC Radio Test Report

FCC ID: 2BREZ-YMHEARTXY-12

This report concerns: Original Grant

Project No. : 2507C140
Equipment : Wearable ECG Recorder
Brand Name : XINYANCARE
Model Name : YMHeart XY-12, YMHeart XY-03, YMHeart XY-0301, YMHeart XY-0302, YMHeart XY-0303, YMHeart XY-1201, YMHeart XY-1202, YMHeart XY-1203
Applicant : Shenzhen Xinyan Medical Technology Co.,Ltd.
Address : Bldg 1, 501-1/2, Mth&Pky Park, No.9 Jinxiu East, Laokeng, Longtian St, Pingshan Shenzhen, China
Manufacturer : Shenzhen Xinyan Medical Technology Co.,Ltd.
Address : Bldg 1, 501-1/2, Mth&Pky Park, No.9 Jinxiu East, Laokeng, Longtian St, Pingshan Shenzhen, China
Factory : Shenzhen Xinyan Medical Technology Co.,Ltd.
Address : Bldg 1, 501-1/2, Mth&Pky Park, No.9 Jinxiu East, Laokeng, Longtian St, Pingshan Shenzhen, China
Date of Receipt : Jul. 16, 2025
Date of Test : Jul. 16, 2025~ Jul. 29, 2025
Issued Date : Sep. 09, 2025
Test Sample : Engineering Sample No.: DG20250716119-1 for Conducted
DG20250716119-3 for others
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by


:



Chella Zheng

Approved by

:



Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 PARAMETERS OF TEST SOFTWARE	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 SUPPORT UNITS	13
3.6 CUSTOMER INFORMATION DESCRIPTION	13
4 . RADIATED EMISSIONS	14
4.1 LIMIT	14
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	16
4.4 TEST SETUP	16
4.5 EUT OPERATING CONDITIONS	18
4.6 TEST RESULT - 9 KHZ TO 30 MHZ	18
4.7 TEST RESULT - 30 MHZ TO 1000 MHZ	18
4.8 TEST RESULT - ABOVE 1000 MHZ	18
5 . BANDWIDTH	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	19
5.3 DEVIATION FROM STANDARD	19
5.4 TEST SETUP	19
5.5 EUT OPERATION CONDITIONS	19
5.6 TEST RESULTS	19
6 . MAXIMUM OUTPUT POWER	20
6.1 LIMIT	20

Table of Contents	Page
6.2 TEST PROCEDURE	20
6.3 DEVIATION FROM STANDARD	20
6.4 TEST SETUP	20
6.5 EUT OPERATION CONDITIONS	20
6.6 TEST RESULTS	20
7 . CONDUCTED SPURIOUS EMISSION	21
7.1 LIMIT	21
7.2 TEST PROCEDURE	21
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
8 . POWER SPECTRAL DENSITY	23
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
9 . MEASUREMENT INSTRUMENTS LIST	24
APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ	32
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	37
APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ	40
APPENDIX D - BANDWIDTH	53
APPENDIX E - MAXIMUM OUTPUT POWER	56
APPENDIX F - CONDUCTED SPURIOUS EMISSION	58
APPENDIX G - POWER SPECTRAL DENSITY	61

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2507C140	R00	Original Report.	Aug. 22, 2025	Invalid
BTL-FCCP-1-2507C140	R01	This report change Page 10 Chapter 3.3.3 Antenna Manufacturer information. It is a revision of the report BTL-FCCP-1-2507C140 R00. This is a newly released report, replacing the BTL-FCCP-1-2507C140 R00 report.	Sep. 03, 2025	Invalid
BTL-FCCP-1-2507C140	R02	This report change Page 1 FCC ID information. It is a revision of the report BTL-FCCP-1-2507C140 R01. This is a newly released report, replacing the BTL-FCCP-1-2507C140 R01 report.	Sep. 09, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	-----	N/A	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX A APPENDIX B APPENDIX C	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX D	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX E	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX F	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX G	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of

1#For Radiated test - Band edge & Harmonic(1 GHz to 18 GHz): Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

2#For other test items: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB19 (3m)	CISPR	1GHz ~ 6GHz	4.56
		6GHz ~ 18GHz	4.12

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36

B. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
Radiated Emissions -9 kHz to 30 MHz	22°C	48%	DC 3.3V	Hayden Chen	Jul. 26, 2025
Radiated Emissions -30 MHz to 1000 MHz	23°C	54%	DC 3.3V	Calvin Wen	Jul. 28, 2025
Radiated Emissions -Above 1000 MHz	23-29°C	54-55%	DC 3.3V	Allen Tong Calvin Wen	Jul. 28, 2025
Bandwidth	25°C	45%	DC 3.3V	Arvin Tong	Jul. 29, 2025
Maximum Output Power	25°C	45%	DC 3.3V	Arvin Tong	Jul. 29, 2025
Conducted Spurious Emission	25°C	45%	DC 3.3V	Arvin Tong	Jul. 29, 2025
Power Spectral Density	25°C	45%	DC 3.3V	Arvin Tong	Jul. 29, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wearable ECG Recorder
Brand Name	XINYANCARE
Test Model	YMHeart XY-12
Model Name	YMHeart XY-12, YMHeart XY-03, YMHeart XY-0301, YMHeart XY-0302, YMHeart XY-0303, YMHeart XY-1201, YMHeart XY-1202, YMHeart XY-1203
Model Difference(s)	Function: YMHeart XY-12 is compatible with all models of wearable ECG sensors. Appearance: Different shell colors. Everything else is the same.
Hardware Version	V01
Software Version	V01
Power Source	Battery supplied.
Power Rating	DC 3.3V
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps
Max. Output Power	2Mbps: -1.23 dBm (0.0008 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	Shenzhen shengbanger Technology Co., Ltd	S03216ISMA04	Chip	N/A	4.08

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_2Mbps Channel 00

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 3	TX Mode_2Mbps Channel 00

Radiated emissions test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Note:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emission above 1GHz test, both Vertical and Horizontal are evaluated, only the worst polarization is recorded.


3.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	GRDirect Test Mode Tool		
Frequency (MHz)	2402	2440	2480
1Mbps	6	6	6
2Mbps	6	6	6

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

For Radiated 9kHz~30MHz&Radiated 1GHz~26.5GHz

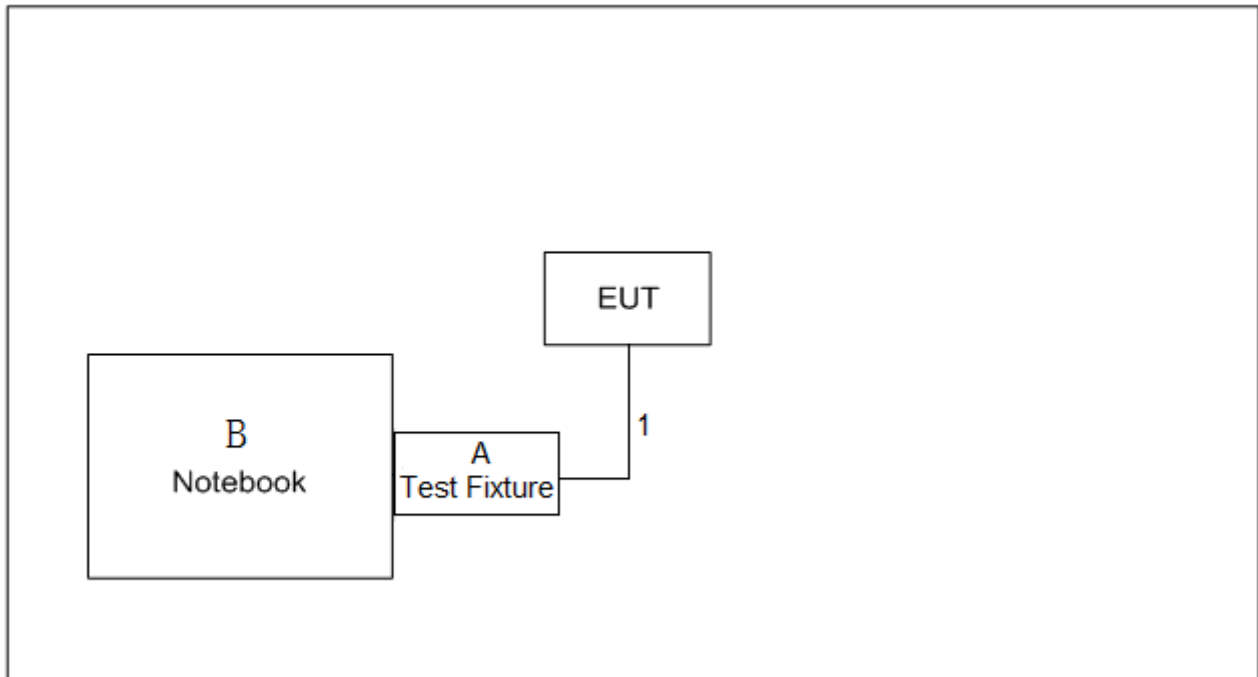

For Radiated 30MHz~1GHz



3.5 SUPPORT UNITS

For Radiated 9kHz~30MHz&Radiated 1GHz~26.5GHz

Item	Equipment	Brand	Model No.	Series No.
A	Test Fixture	N/A	N/A	N/A
B	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Data Cable	NO	NO	0.2m

For Radiated 30MHz~1GHz

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
-	-	-	-	-

3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) , then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

Note:

(1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP


9 kHz to 30 MHz

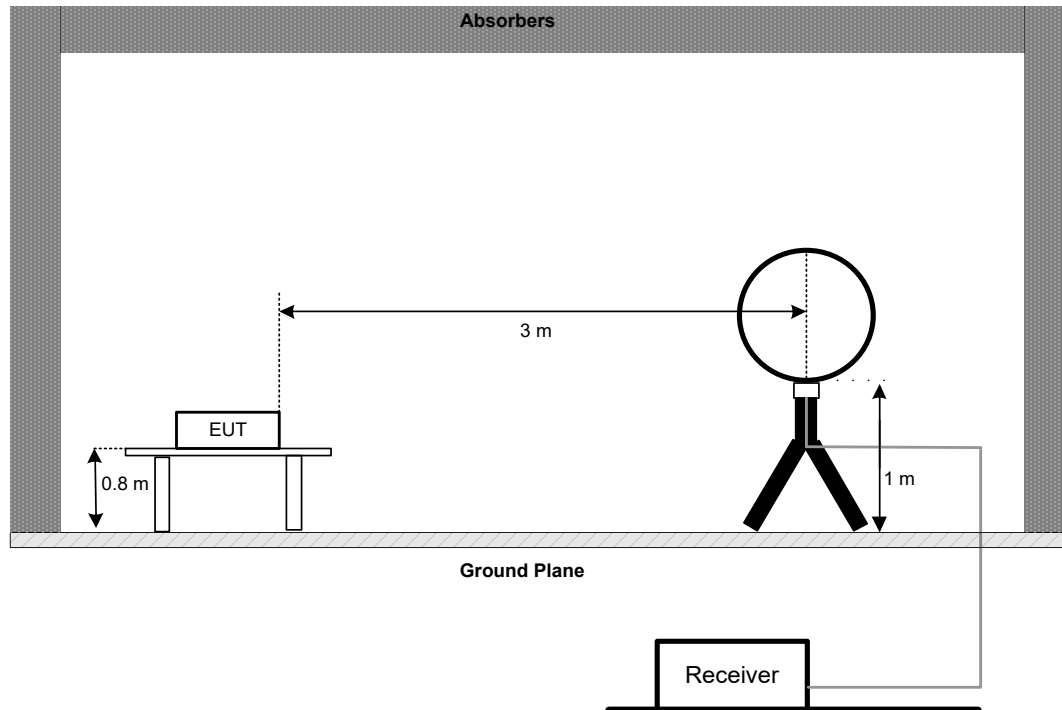


30 MHz to 1 GHz

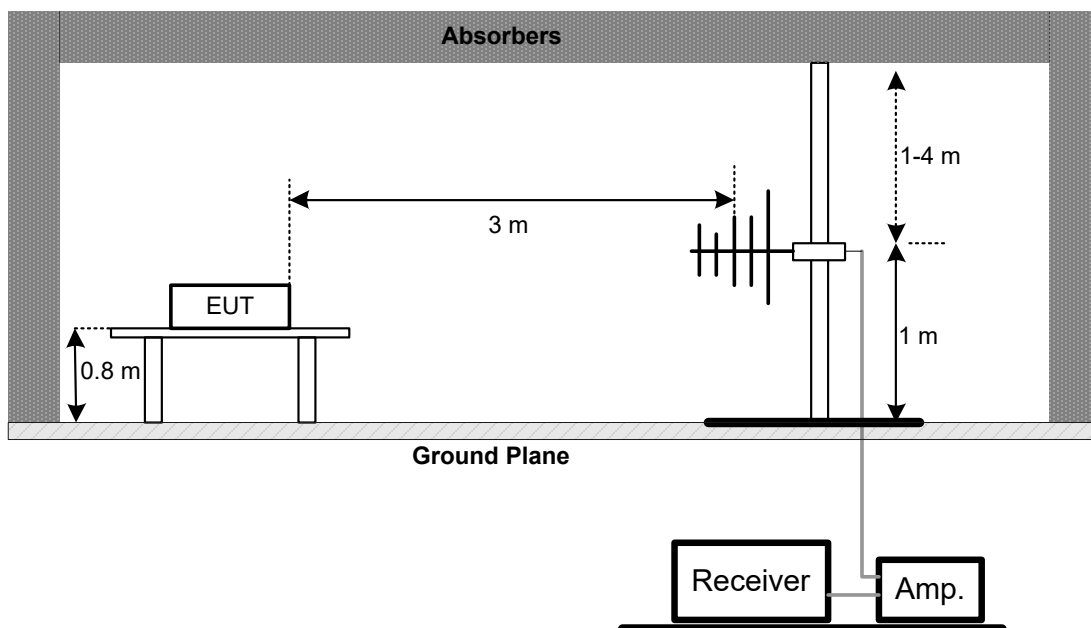

**Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)**

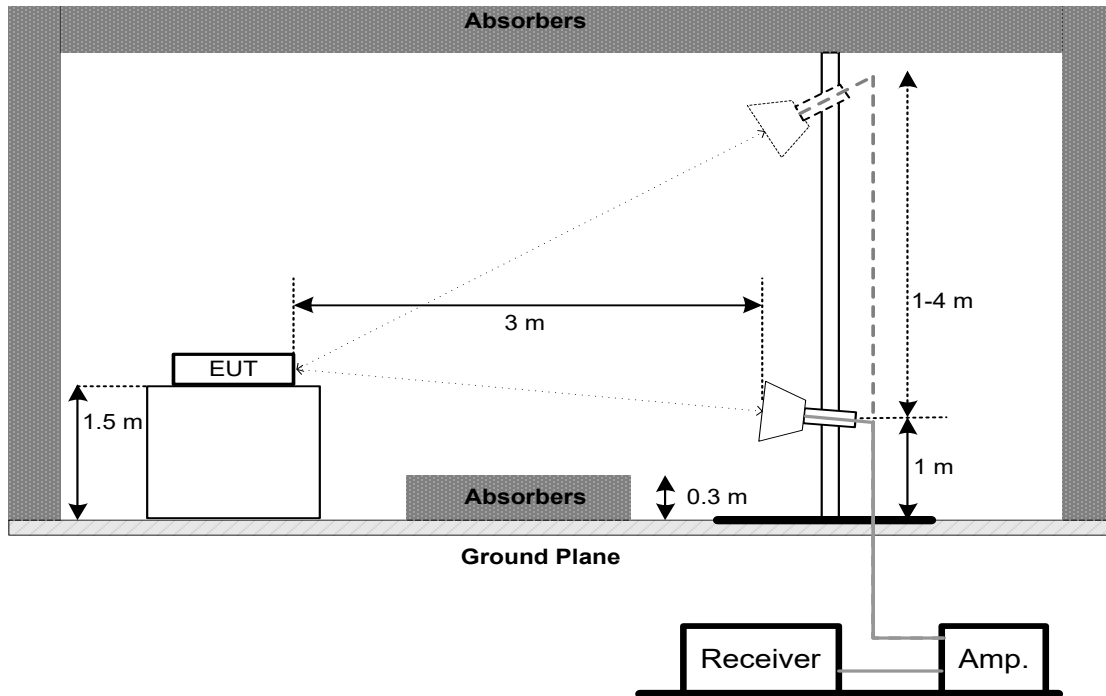

Harmonic(18 GHz to 26.5 GHz)

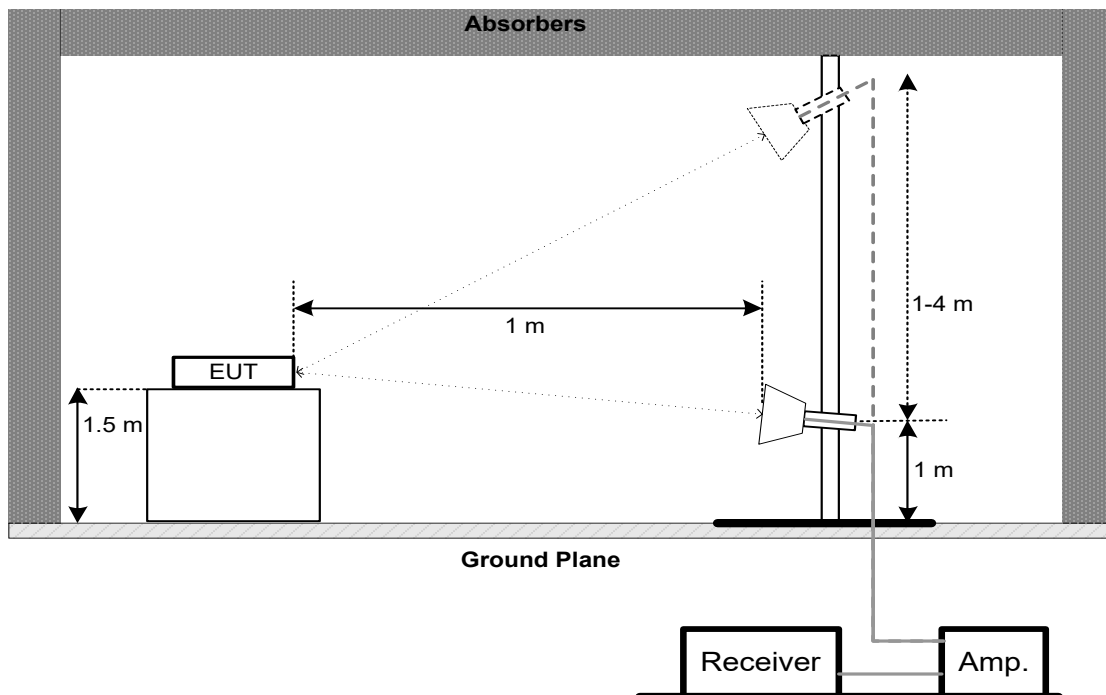

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX A.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX B.

4.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. CONDUCTED SPURIOUS EMISSION

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For Reference Level:

Spectrum Parameters	Setting
Span	≥ 1.5 times the bandwidth.
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Band edge:


Spectrum Parameters	Setting
Start Frequency	2300 MHz
Stop Frequency	2690 MHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Harmonic:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

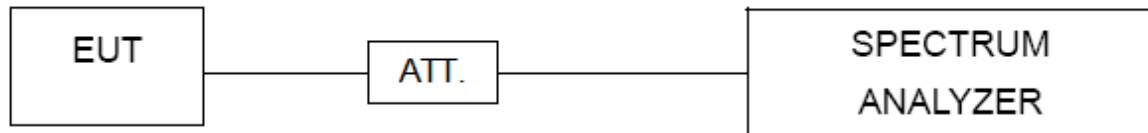7.4 TEST SETUP**7.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	1.5 times the DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6 m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM -3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec.14,2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec.14,2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 1 GHz - 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Positioning Controller	MF	MF-7802	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 0000	N/A	Jun. 12, 2026
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-3 000	N/A	Jun. 12, 2026
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 000	N/A	Jun. 12, 2026
7	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	May 18, 2026
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 28, 2026
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	COM-MW	ZHPF6-M3000-180 00-174	N/A	Oct. 29, 2025



Radiated Emissions - Above 18 GHz



Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 23, 2026
3	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 23, 2026
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
5	Positioning Controller	MF	MF-7802	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	May 17, 2026
8	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

**Bandwidth &
Maximum Output Power &
Power Spectral Density &
Conducted Spurious Emission**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multimeter	FLUKE	15B+(TR13)	45123773WS	May 17, 2026
2	Spectrum Analyzer	R&S	FSP38	100852	May 27, 2026
3	CTA	BTL	CTA	N/A	N/A
4	DC power supply	UNI-T	UDP6721	AWP7224050031	Dec. 06, 2025
5	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

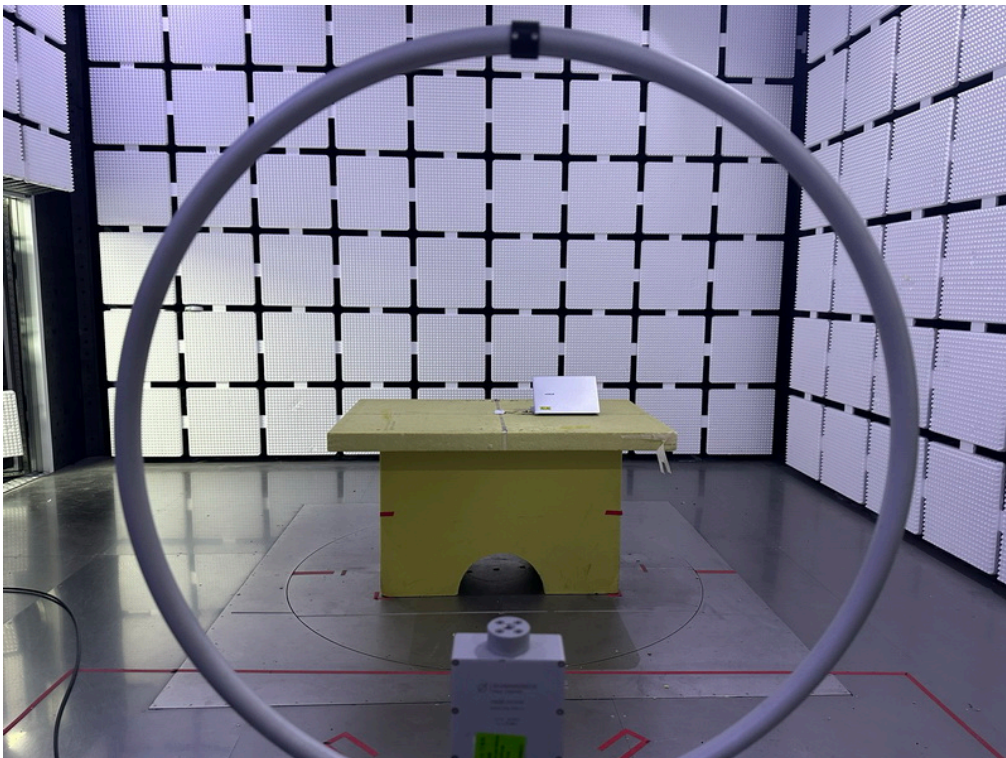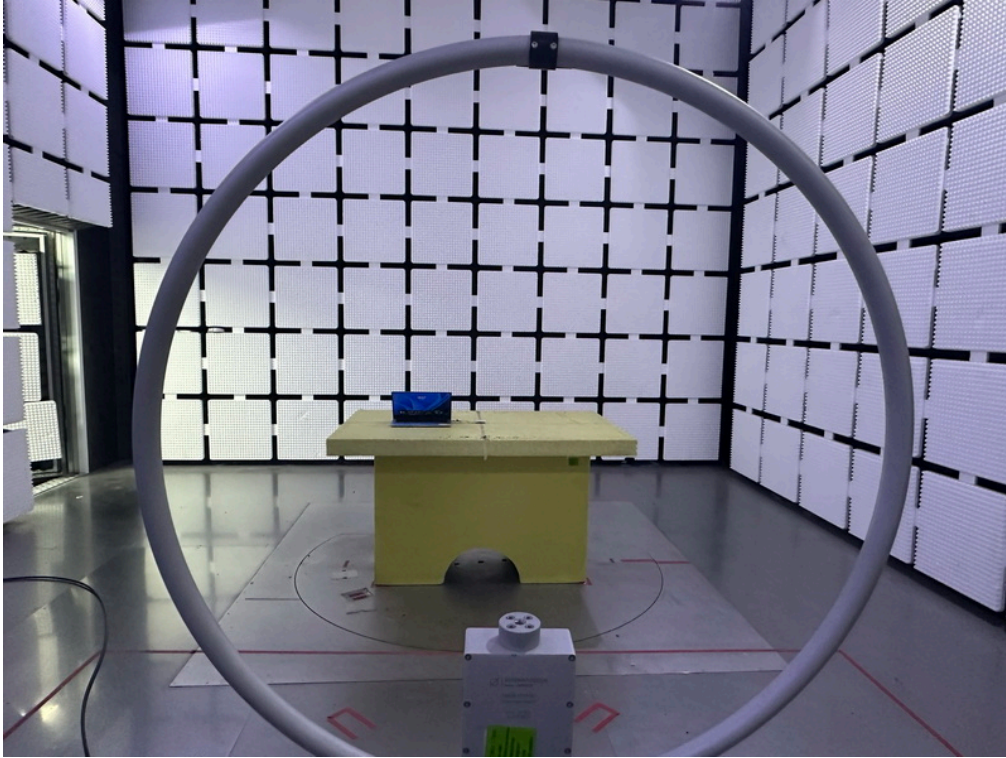9.1. EUT TEST PHOTO**Radiated Emissions Test Photos****9 kHz to 30 MHz**

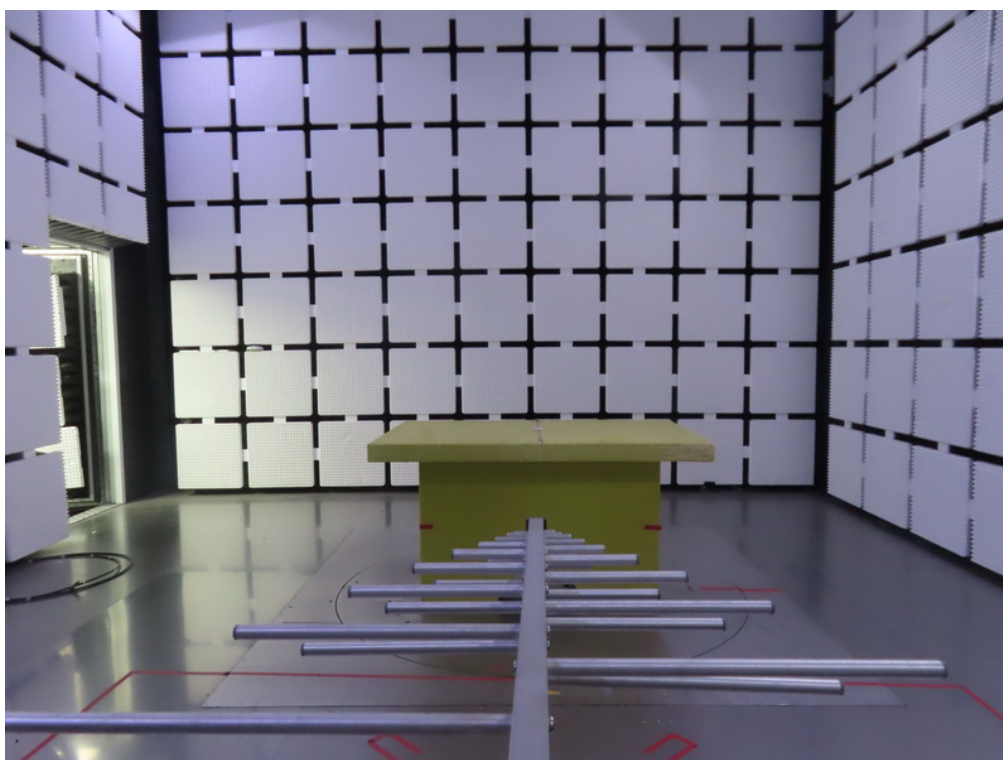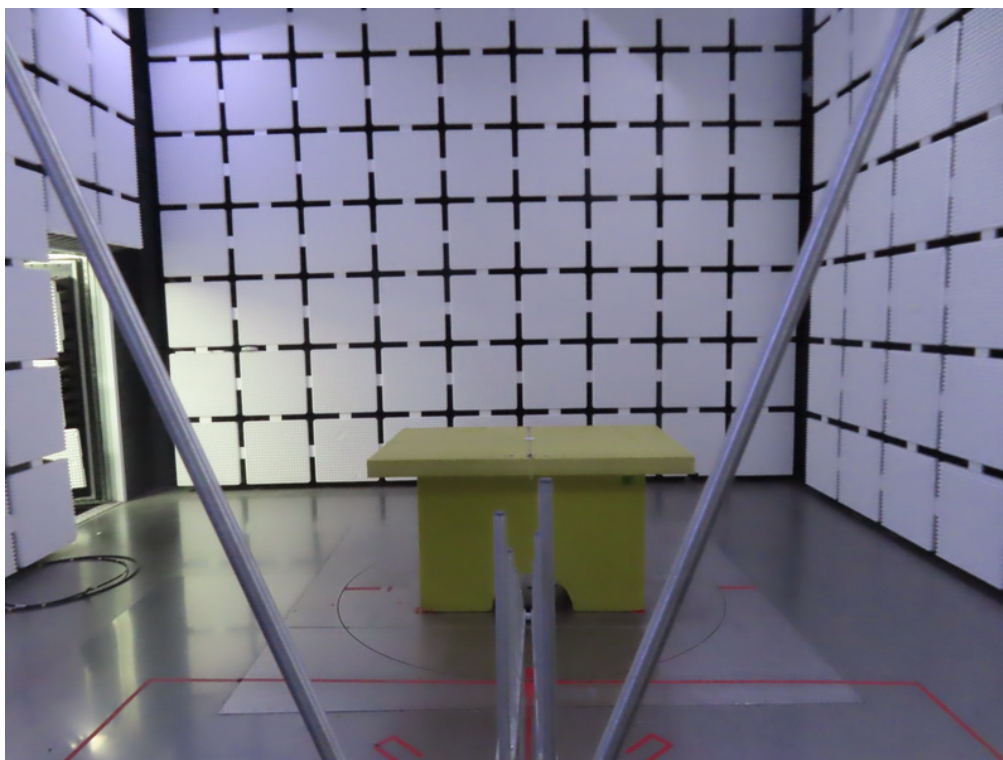Radiated Emissions Test Photos**30 MHz to 1000 MHz**



Radiated Emissions Test Photos

Band edge & Harmonic(1 GHz to 18 GHz)

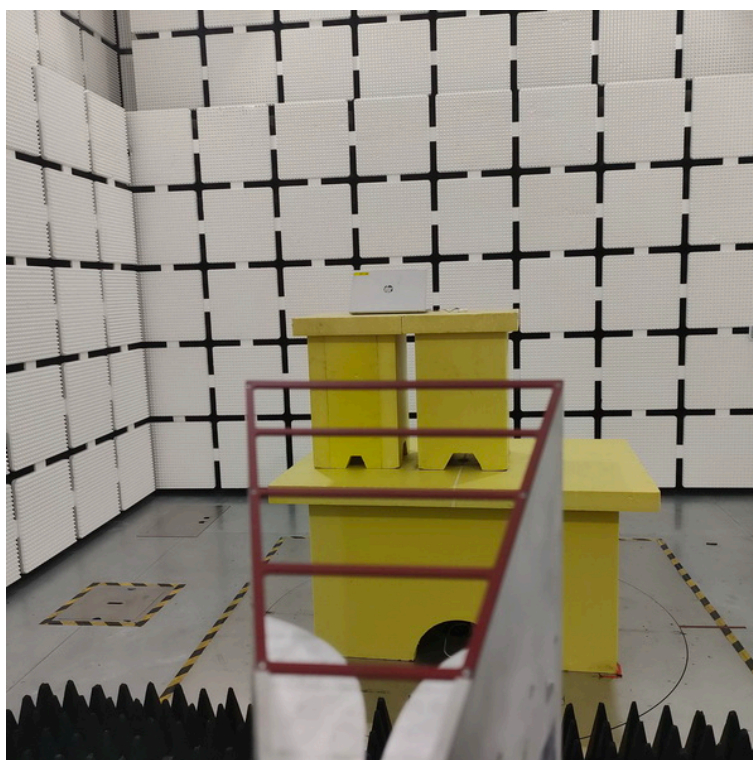
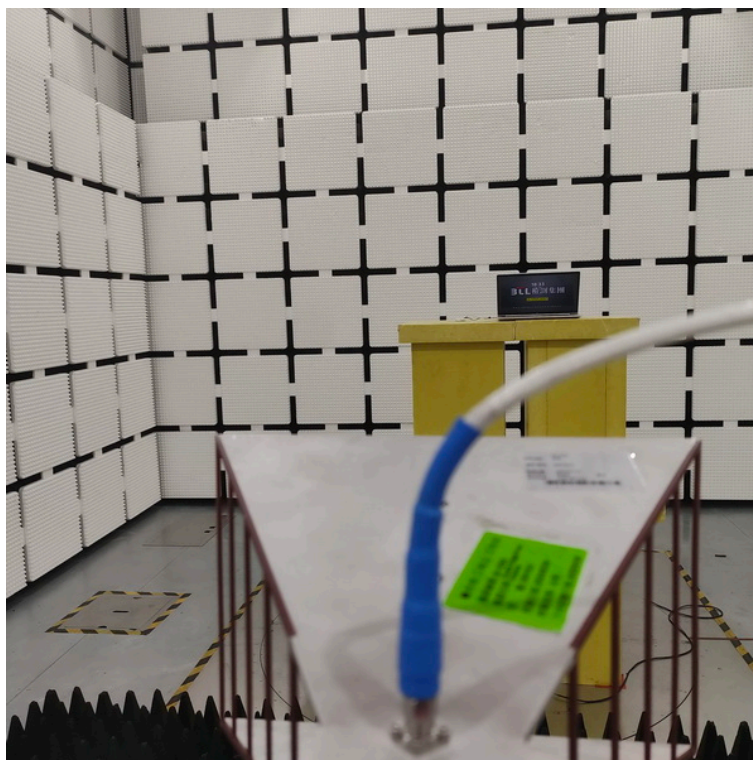


Radiated Emissions Test Photos

Harmonic(18 GHz to 26.5 GHz)

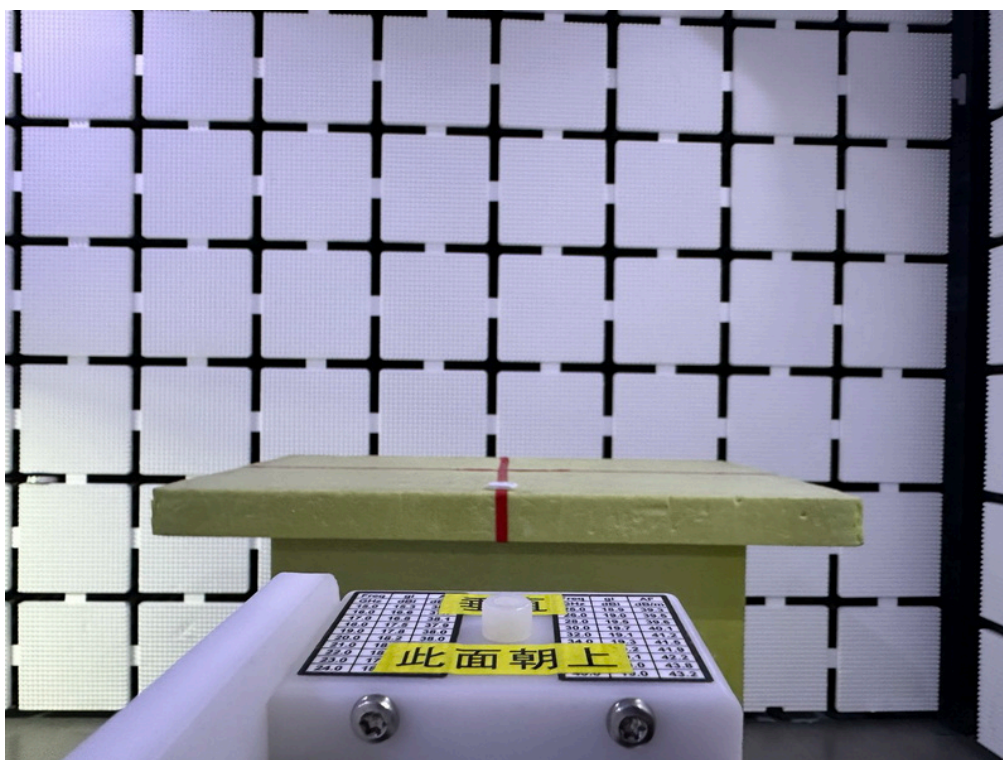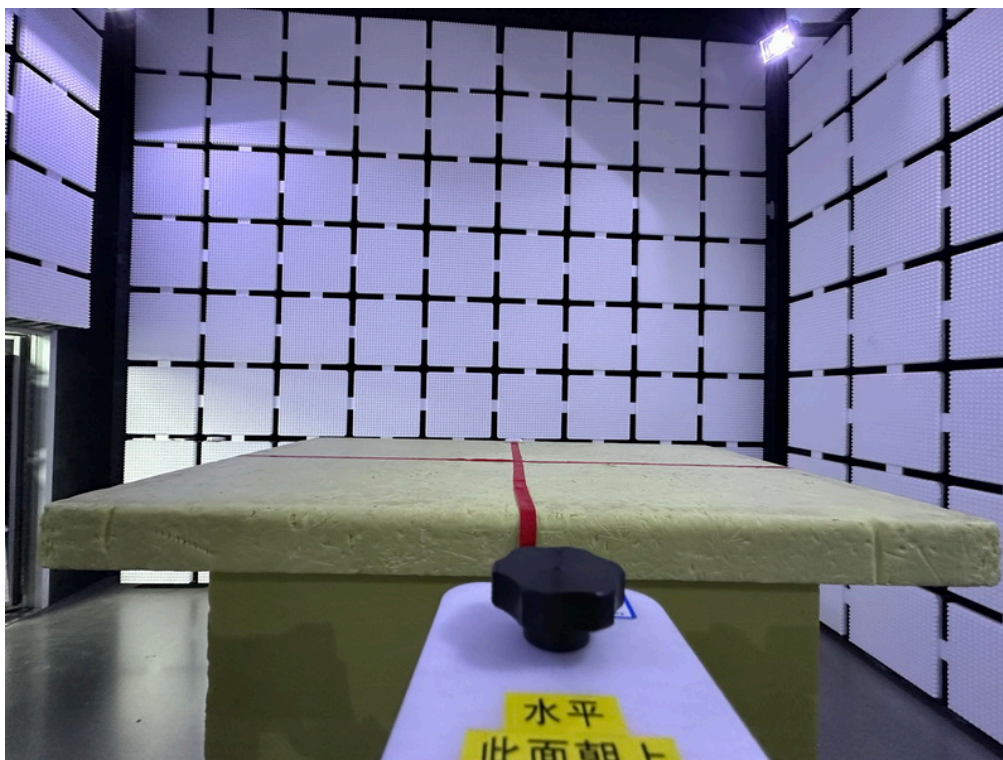


Conducted Test Photos

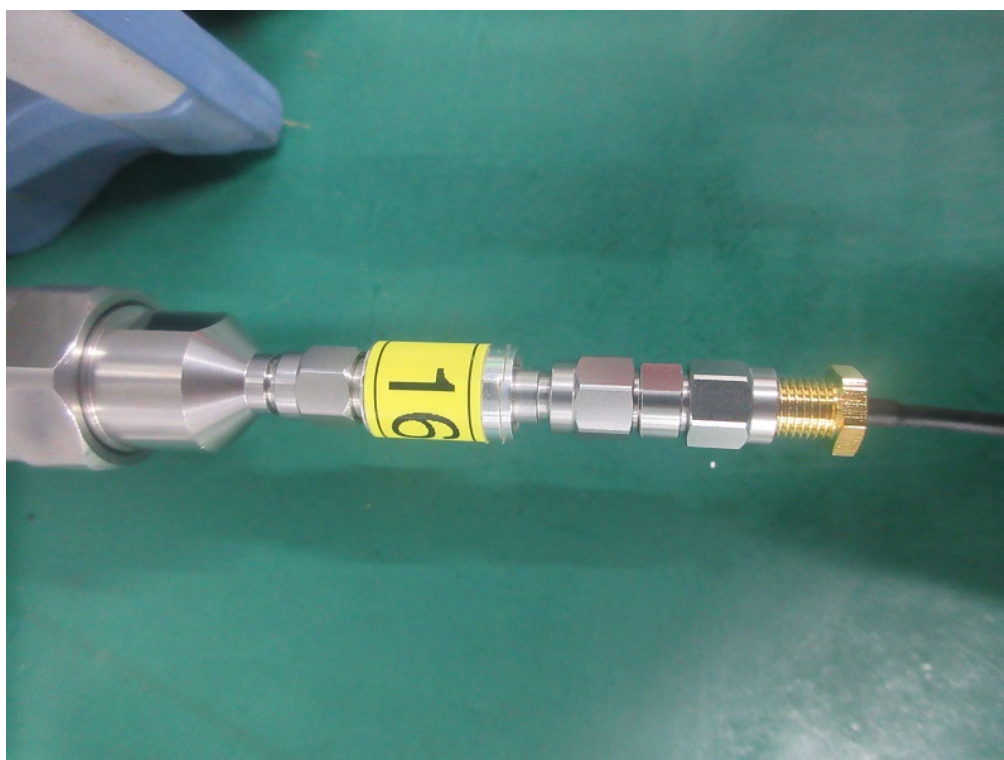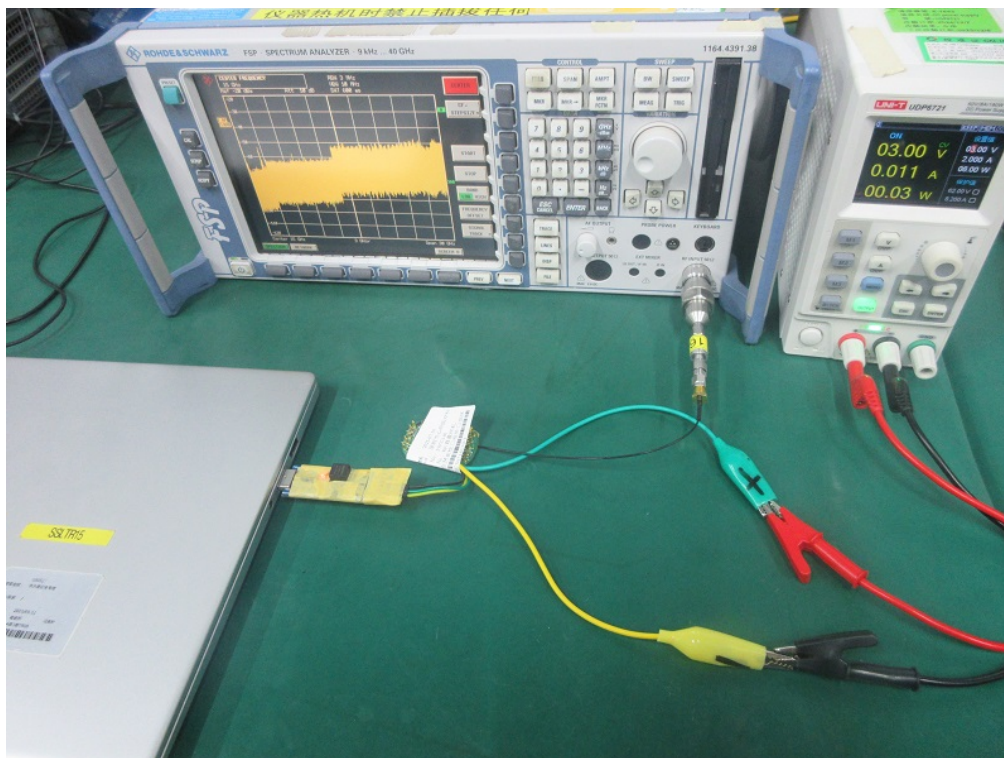



APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Ant 0°
-----------	---------------------------	--------------	--------

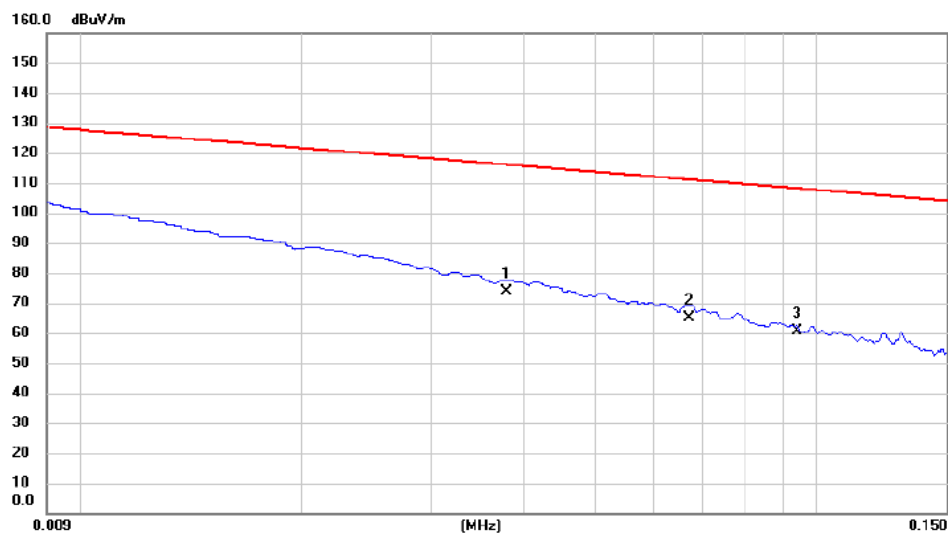


No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	0.038	53.56	20.14	73.70	116.01	-42.31	AVG	
2	0.067	44.99	20.14	65.13	111.08	-45.95	AVG	
3	0.094	40.66	20.14	60.80	108.14	-47.34	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Ant 0°
-----------	---------------------------	--------------	--------

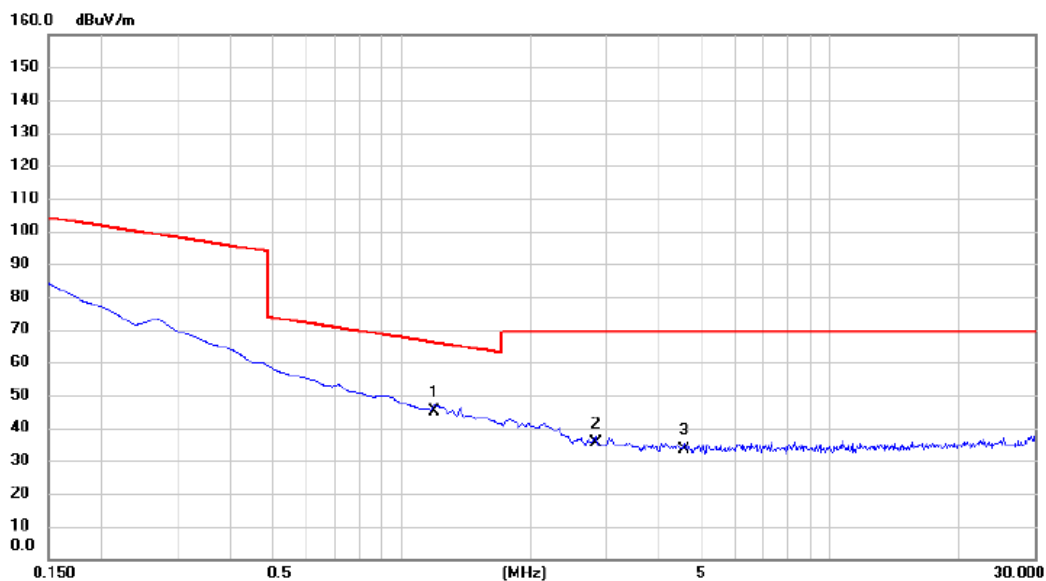


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.195	25.09	20.00	45.09	66.06	-20.97	QP	
2		2.837	15.33	20.06	35.39	69.54	-34.15	QP	
3		4.568	13.23	20.17	33.40	69.54	-36.14	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Ant 90°
-----------	---------------------------	--------------	---------

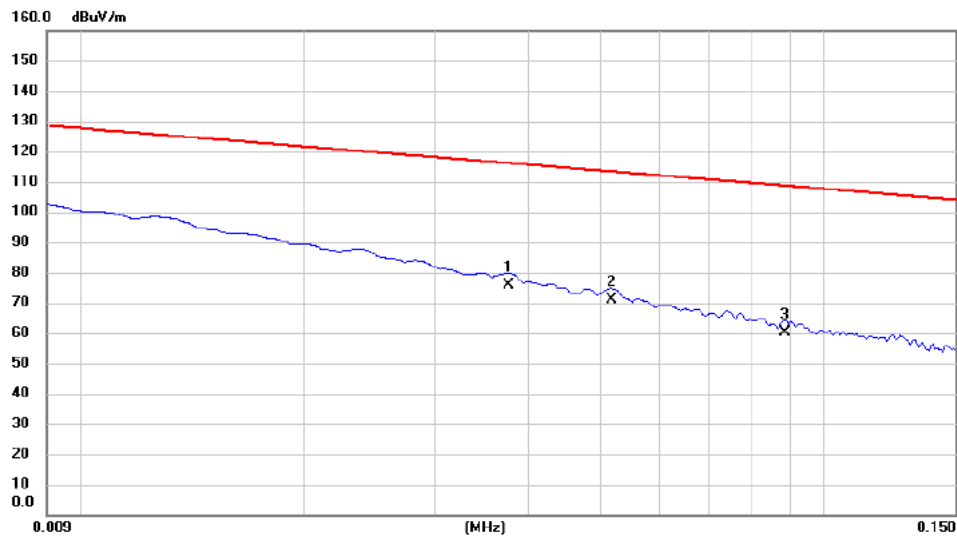


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.038	55.66	20.14	75.80	116.10	-40.30	AVG	
2		0.052	50.70	20.14	70.84	113.34	-42.50	AVG	
3		0.088	40.18	20.14	60.32	108.68	-48.36	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Ant 90°
-----------	---------------------------	--------------	---------

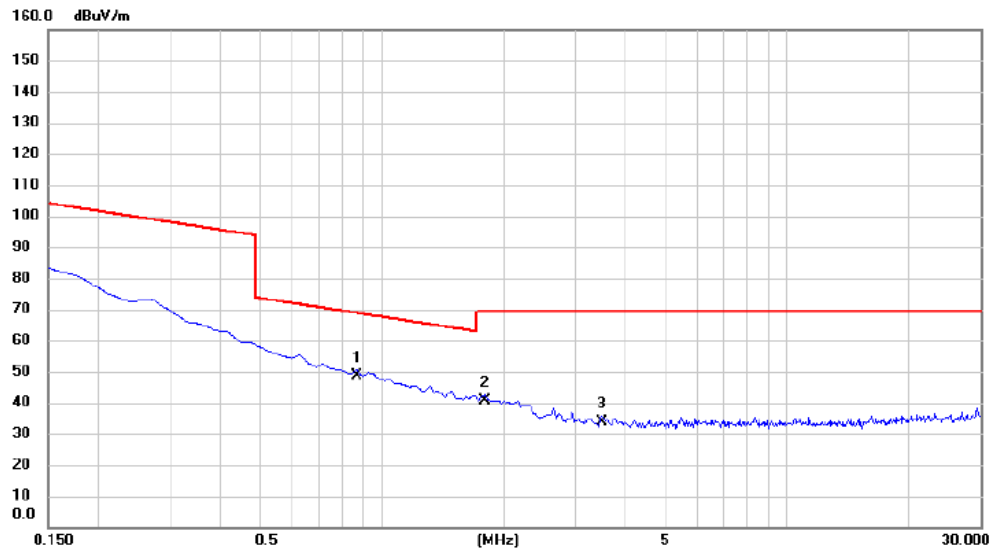

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.866	28.44	19.98	48.42	68.85	-20.43	QP	
2		1.792	20.77	20.01	40.78	69.54	-28.76	QP	
3		3.493	13.55	20.09	33.64	69.54	-35.90	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

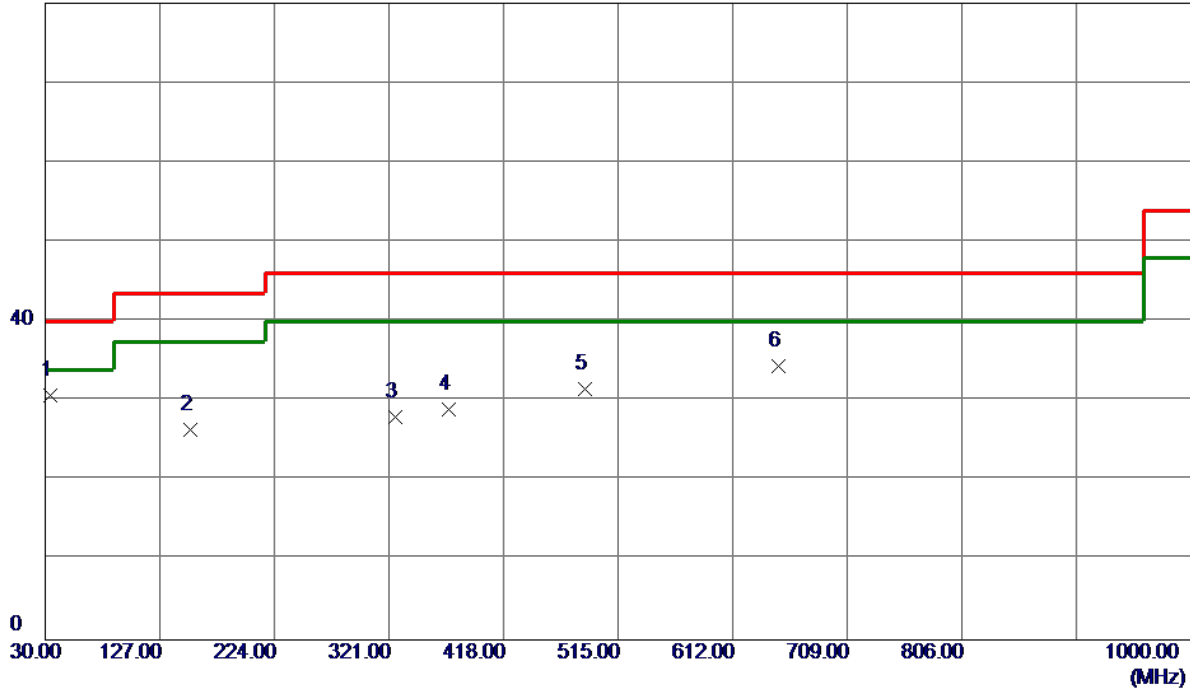

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.8800	42.97	-12.29	30.68	40.00	-9.32	Peak	
2	153.1900	37.06	-10.60	26.46	43.52	-17.06	Peak	
3	326.8200	36.91	-8.86	28.05	46.02	-17.97	Peak	
4	371.4400	36.96	-8.01	28.95	46.02	-17.07	Peak	
5	486.8700	37.00	-5.45	31.55	46.02	-14.47	Peak	
6	650.8000	36.64	-2.18	34.46	46.02	-11.56	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

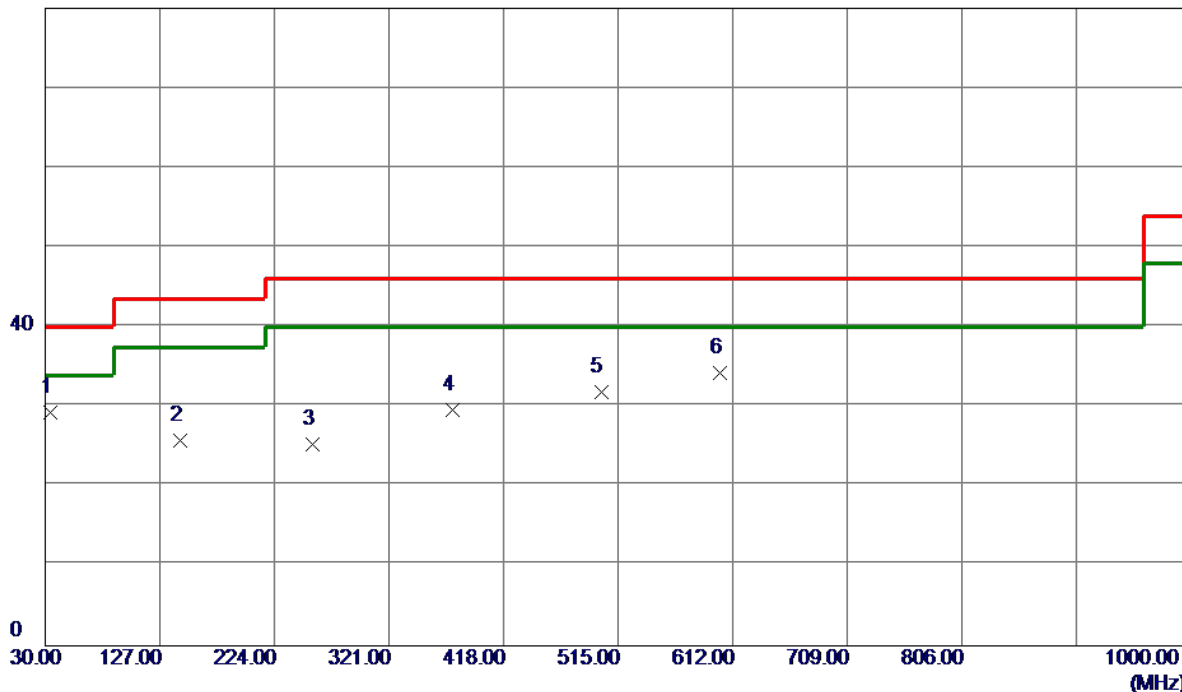

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.8800	41.58	-12.29	29.29	40.00	-10.71	Peak	
2	144.4600	36.68	-10.95	25.73	43.52	-17.79	Peak	
3	256.0100	36.62	-11.31	25.31	46.02	-20.71	Peak	
4	375.3200	37.50	-7.90	29.60	46.02	-16.42	Peak	
5	500.4500	37.15	-5.25	31.90	46.02	-14.12	Peak	
6	601.3300	37.40	-3.21	34.19	46.02	-11.83	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

120 dBuV/m

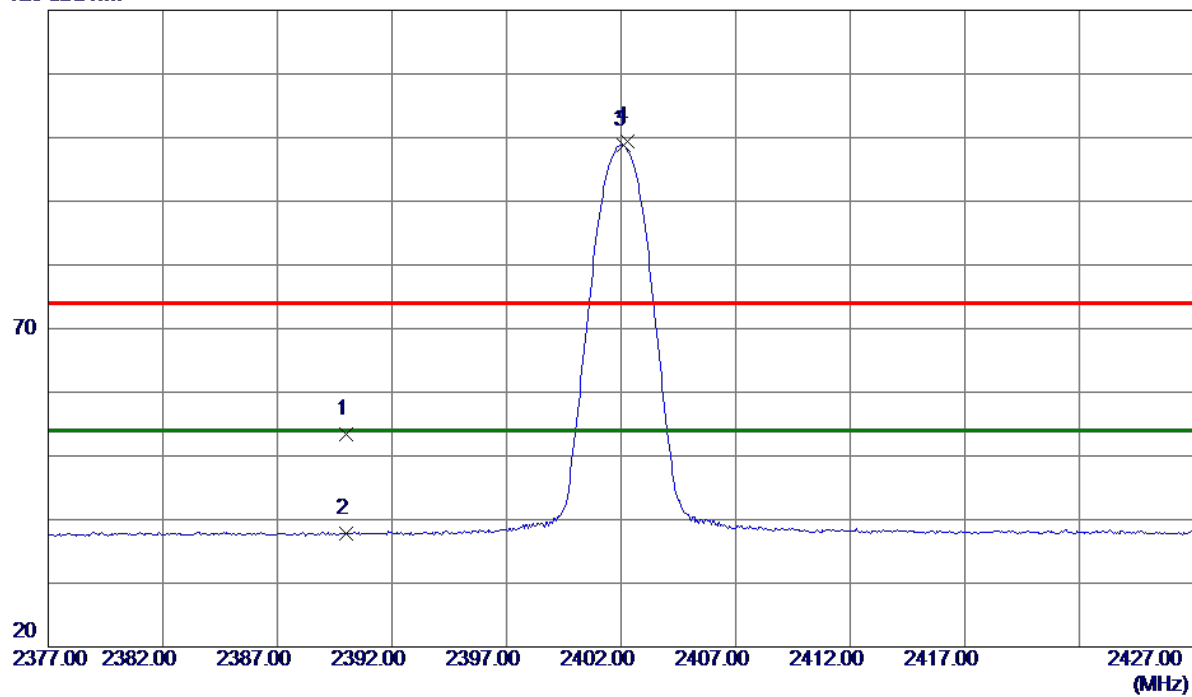

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	44.13	9.26	53.39	74.00	-20.61	Peak	
2	2390.0000	28.60	9.26	37.86	54.00	-16.14	AVG	
3 *	2402.1000	89.51	9.28	98.79	54.00	44.79	AVG	No Limit
4	2402.2500	90.16	9.29	99.45	74.00	25.45	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

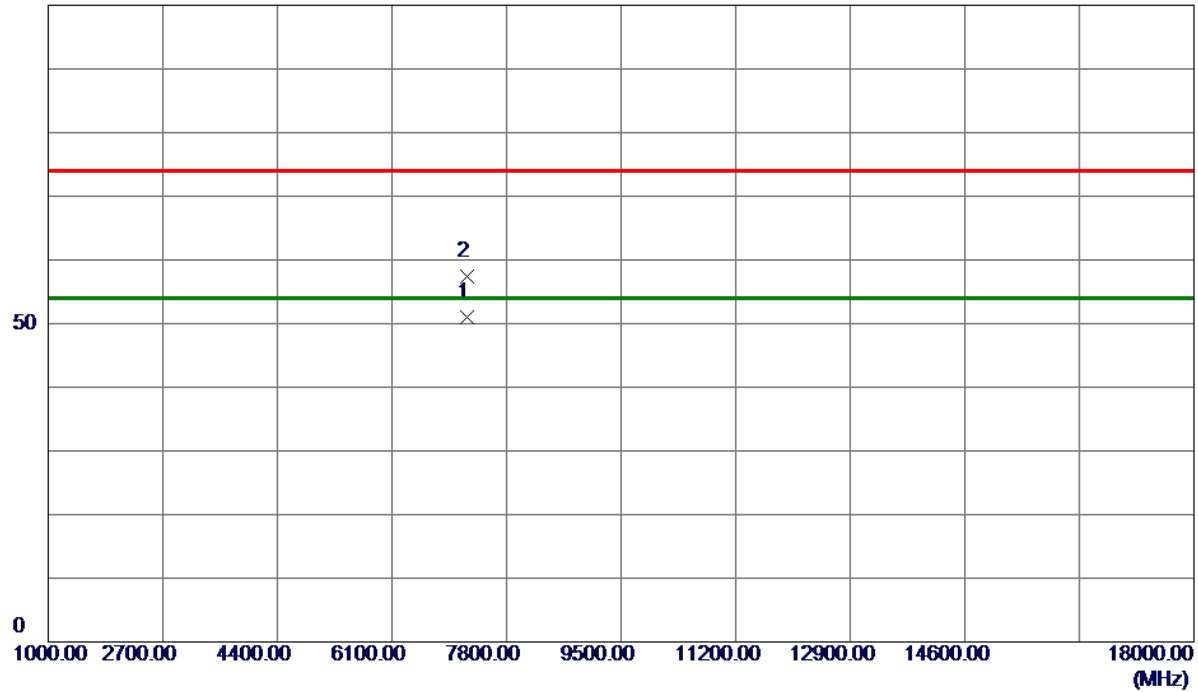

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7206.1000	43.00	7.99	50.99	54.00	-3.01	AVG	
2	7206.7000	49.33	7.99	57.32	74.00	-16.68	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

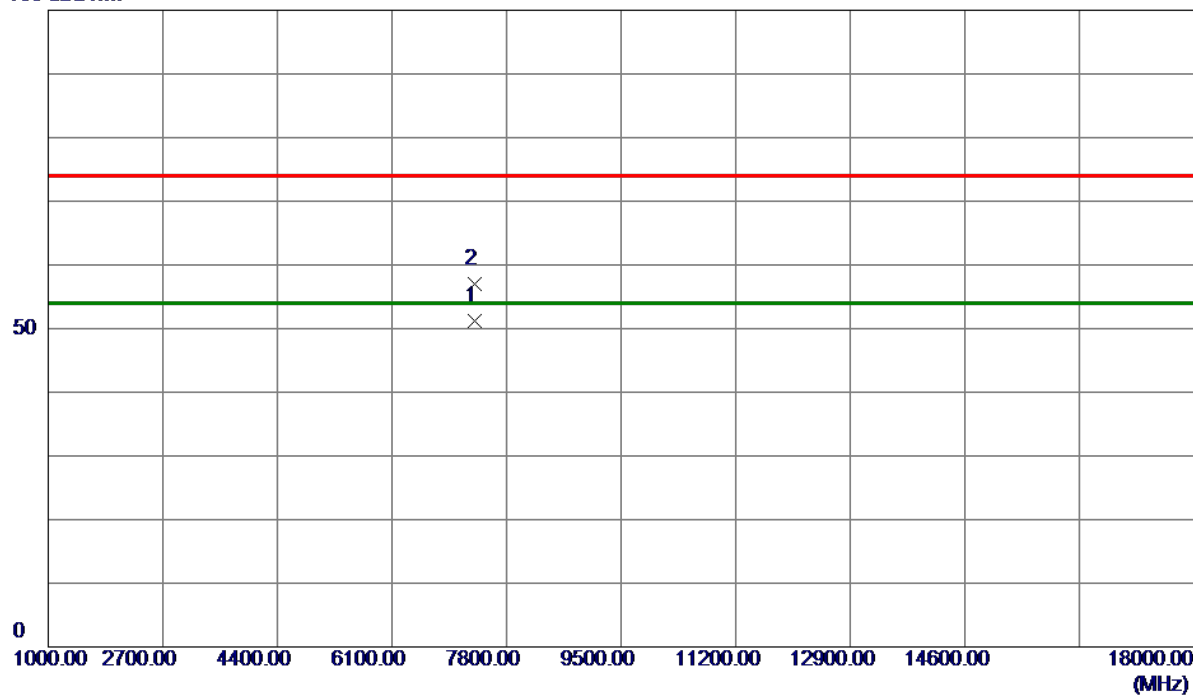

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7319.9500	42.90	8.27	51.17	54.00	-2.83	AVG	
2	7319.3000	48.67	8.27	56.94	74.00	-17.06	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

120 dBuV/m

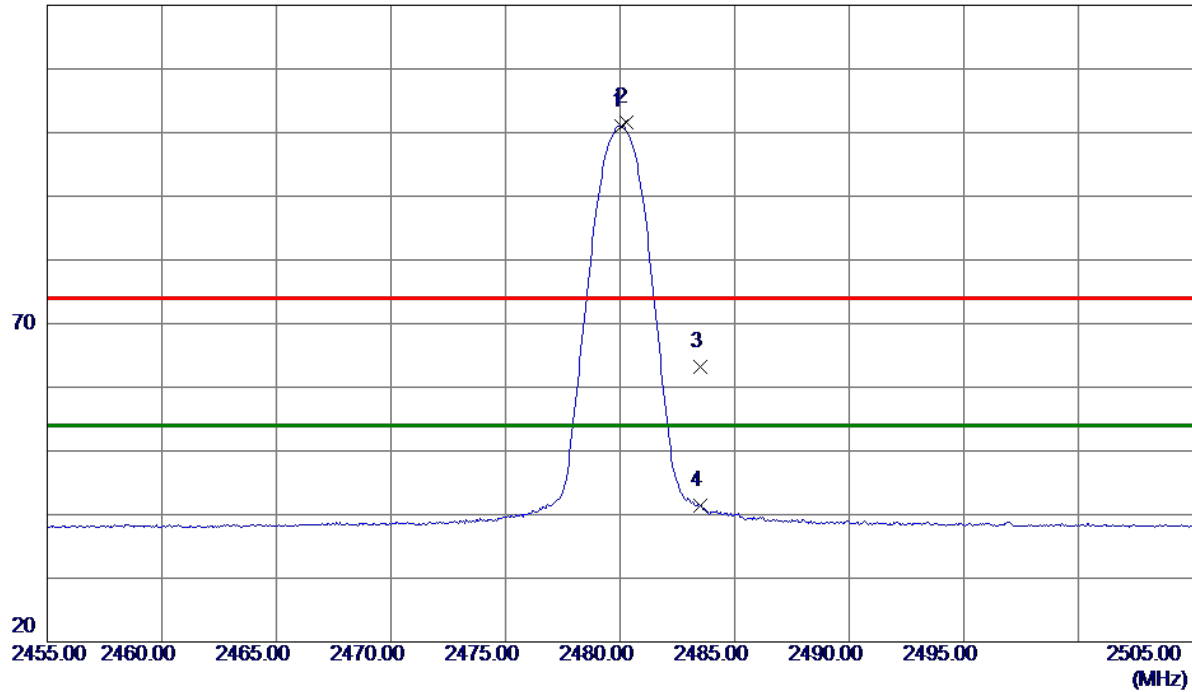

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0500	91.61	9.47	101.08	54.00	47.08	AVG	No Limit
2	2480.2500	92.20	9.47	101.67	74.00	27.67	Peak	No Limit
3	2483.5000	53.65	9.48	63.13	74.00	-10.87	Peak	
4	2483.5000	31.91	9.48	41.39	54.00	-12.61	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

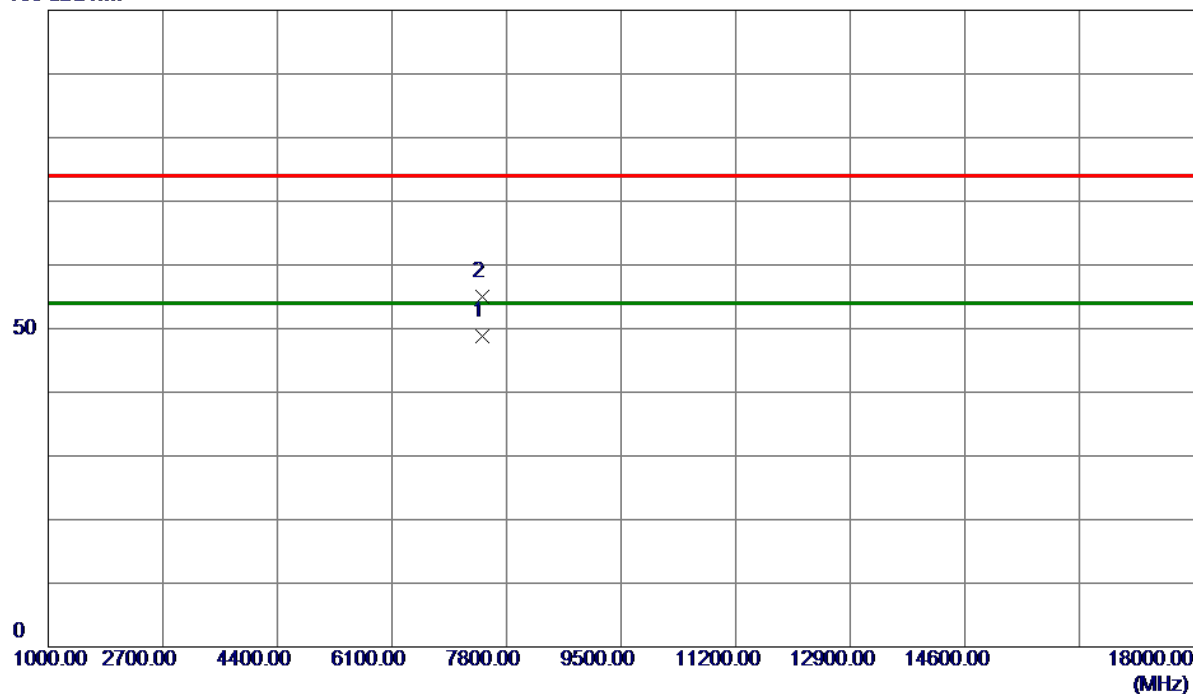

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7440.0000	40.24	8.56	48.80	54.00	-5.20	AVG	
2	7439.3500	46.51	8.56	55.07	74.00	-18.93	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

120 dBuV/m

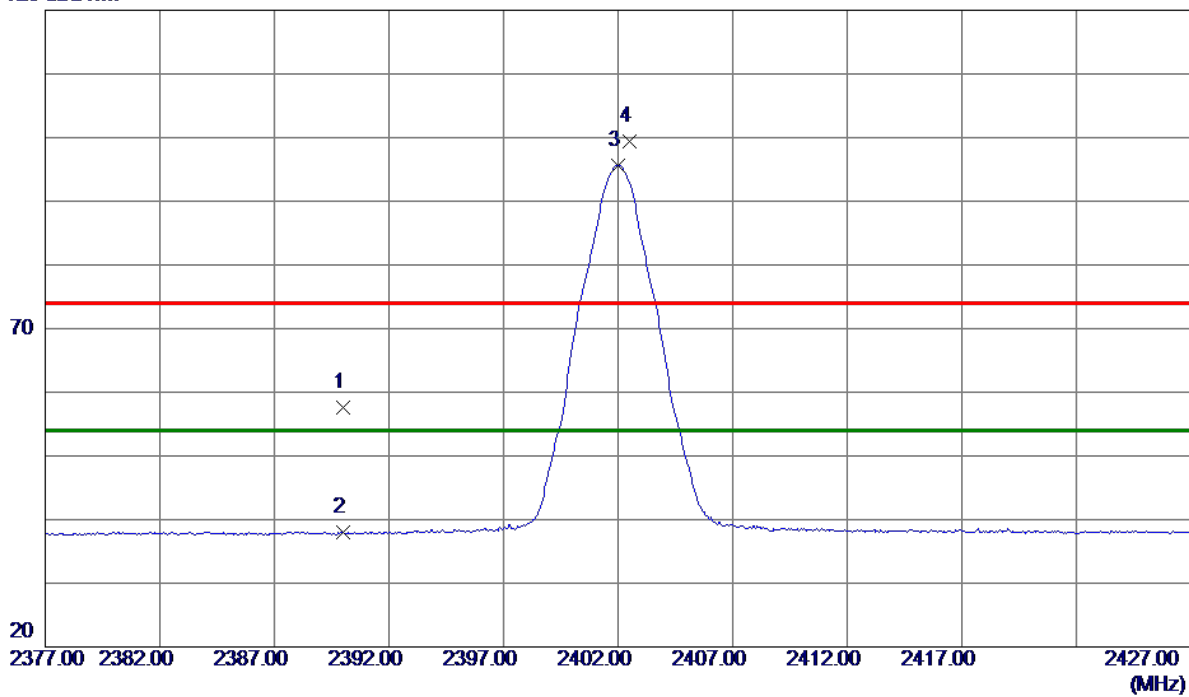

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	48.31	9.26	57.57	74.00	-16.43	Peak	
2	2390.0000	28.78	9.26	38.04	54.00	-15.96	AVG	
3 *	2402.0000	86.34	9.28	95.62	54.00	41.62	AVG	No Limit
4	2402.5000	90.10	9.29	99.39	74.00	25.39	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

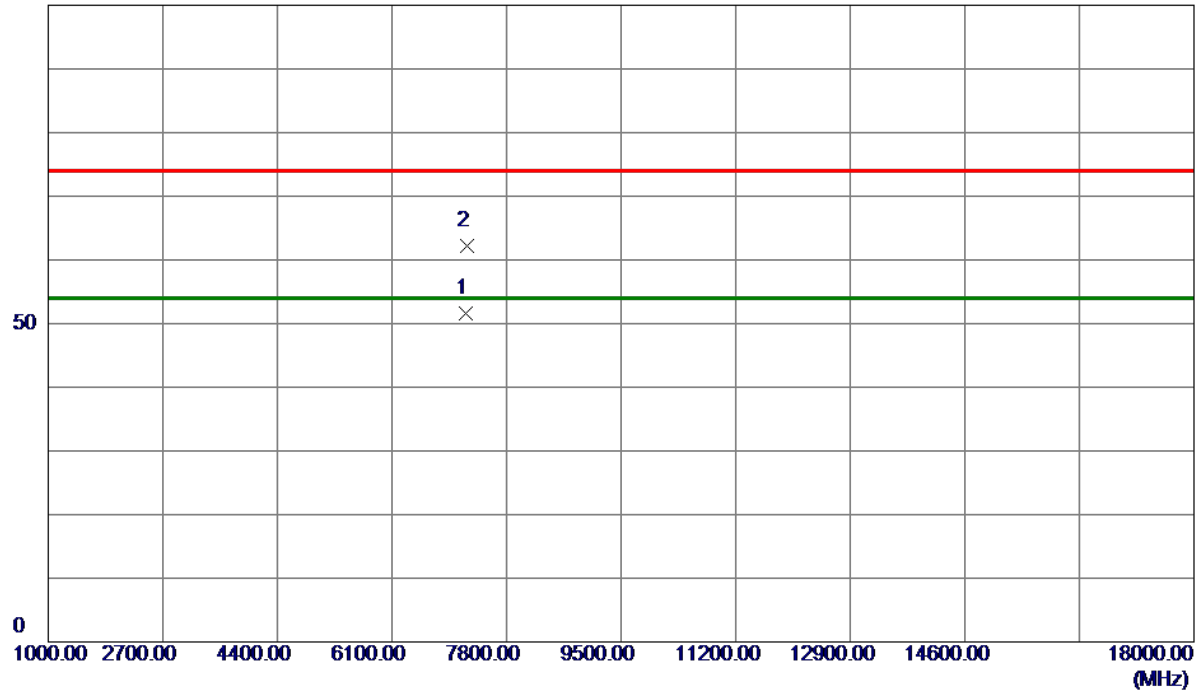

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7204.9000	43.54	7.98	51.52	54.00	-2.48	AVG	
2	7205.8000	54.22	7.99	62.21	74.00	-11.79	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

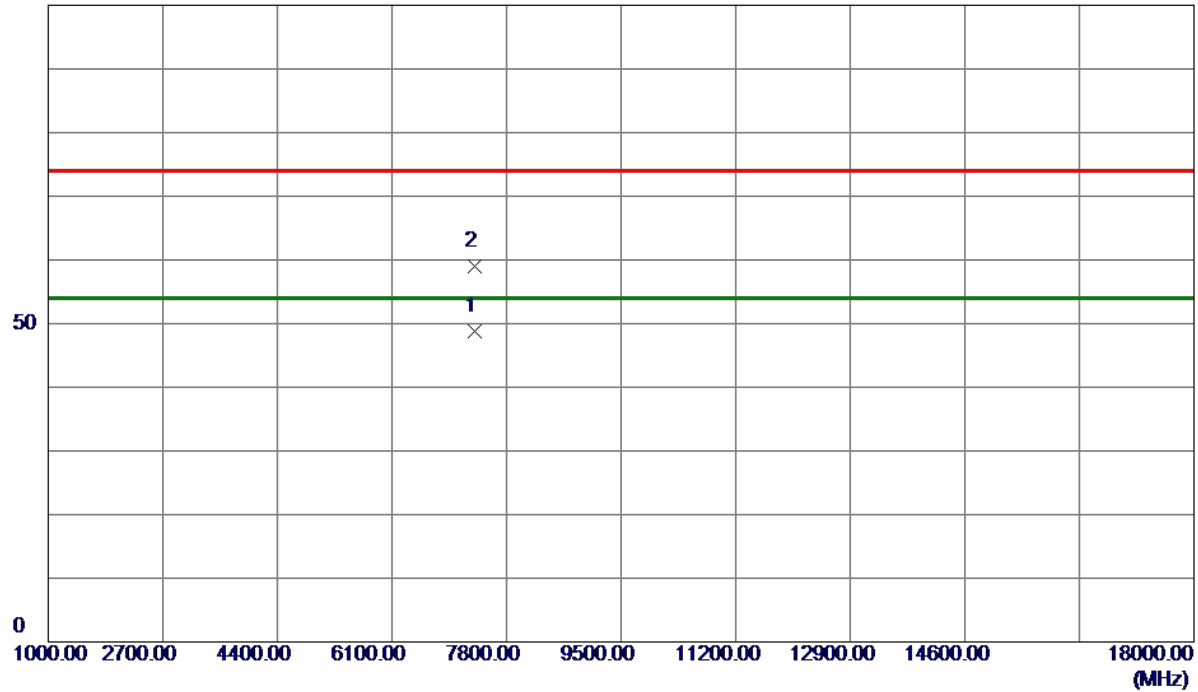

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7318.8500	40.54	8.26	48.80	54.00	-5.20	AVG	
2	7318.4000	50.77	8.26	59.03	74.00	-14.97	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

120 dBuV/m

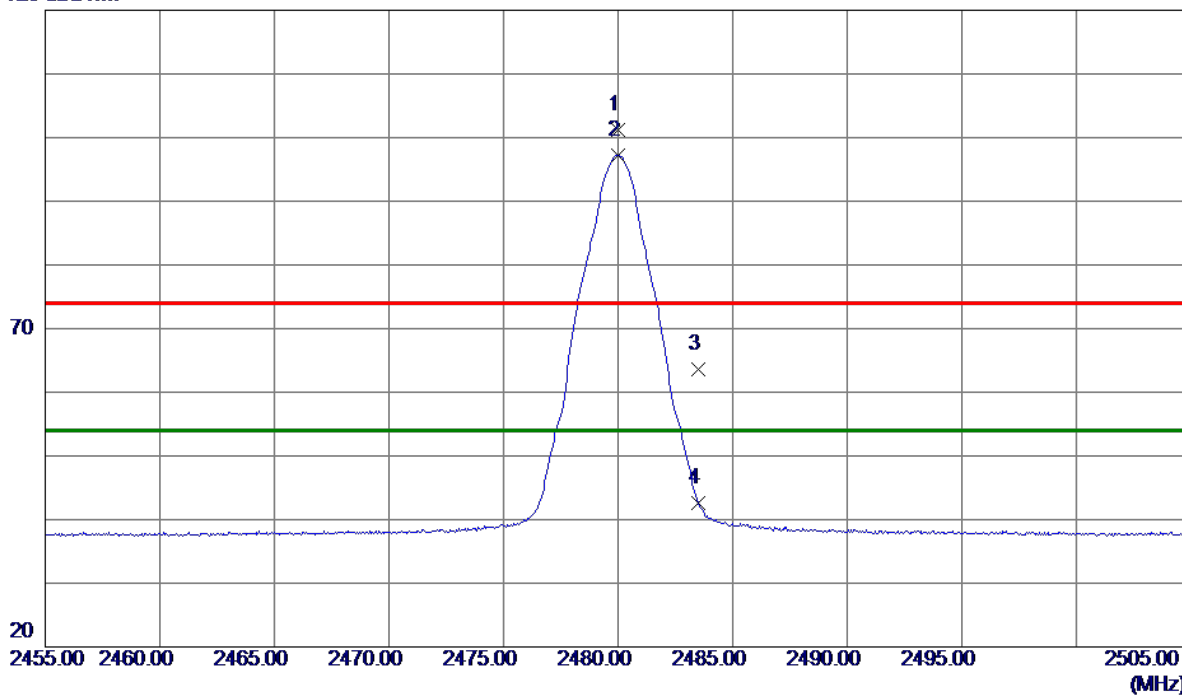

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2480.0000	91.81	9.47	101.28	74.00	27.28	Peak	No Limit
2 *	2480.0000	87.74	9.47	97.21	54.00	43.21	AVG	No Limit
3	2483.5000	54.04	9.48	63.52	74.00	-10.48	Peak	
4	2483.5000	33.15	9.48	42.63	54.00	-11.37	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

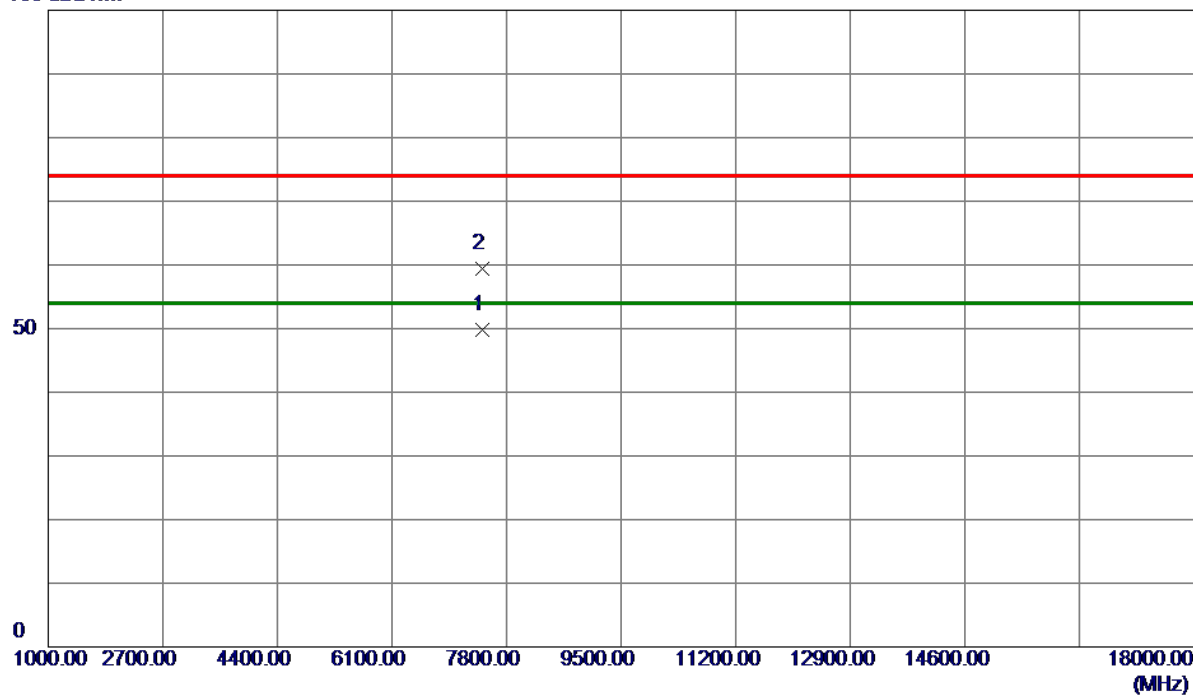


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7438.9500	41.17	8.56	49.73	54.00	-4.27	AVG	
2	7441.4500	50.82	8.57	59.39	74.00	-14.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

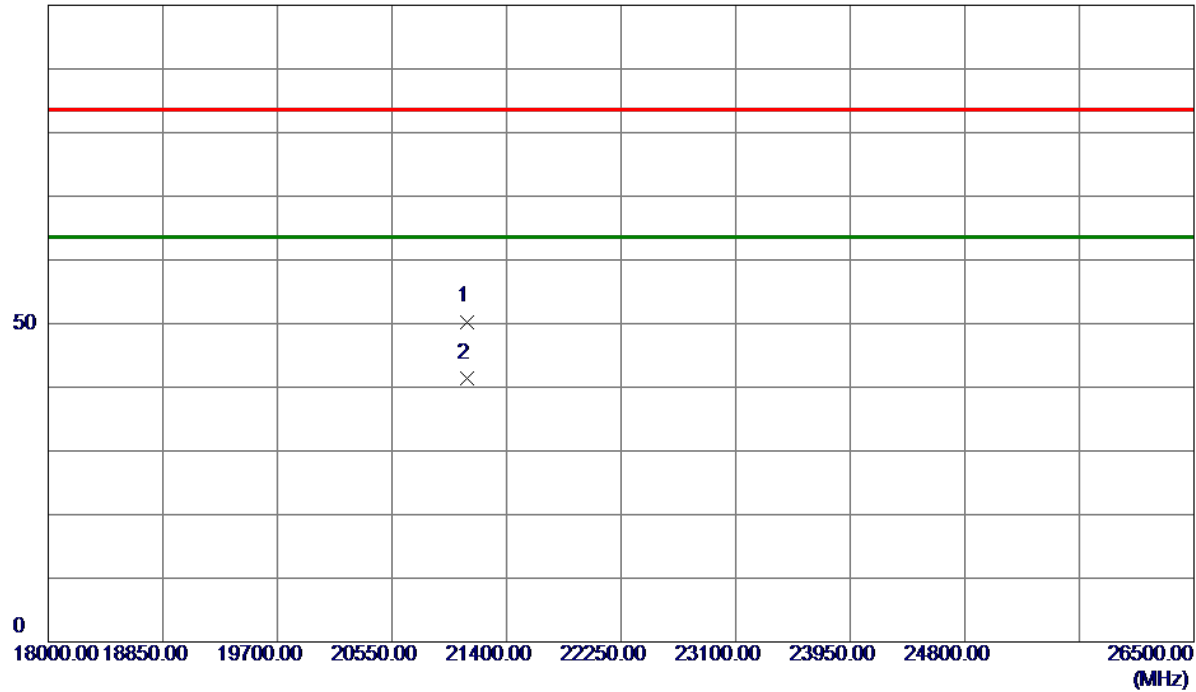

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	21111.0000	54.16	-3.86	50.30	83.50	-33.20	Peak	
2 *	21111.0000	45.23	-3.86	41.37	63.50	-22.13	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_ 2Mbps Channel 00	Polarization	Horizontal
-----------	---------------------------	--------------	------------

100 dBuV/m

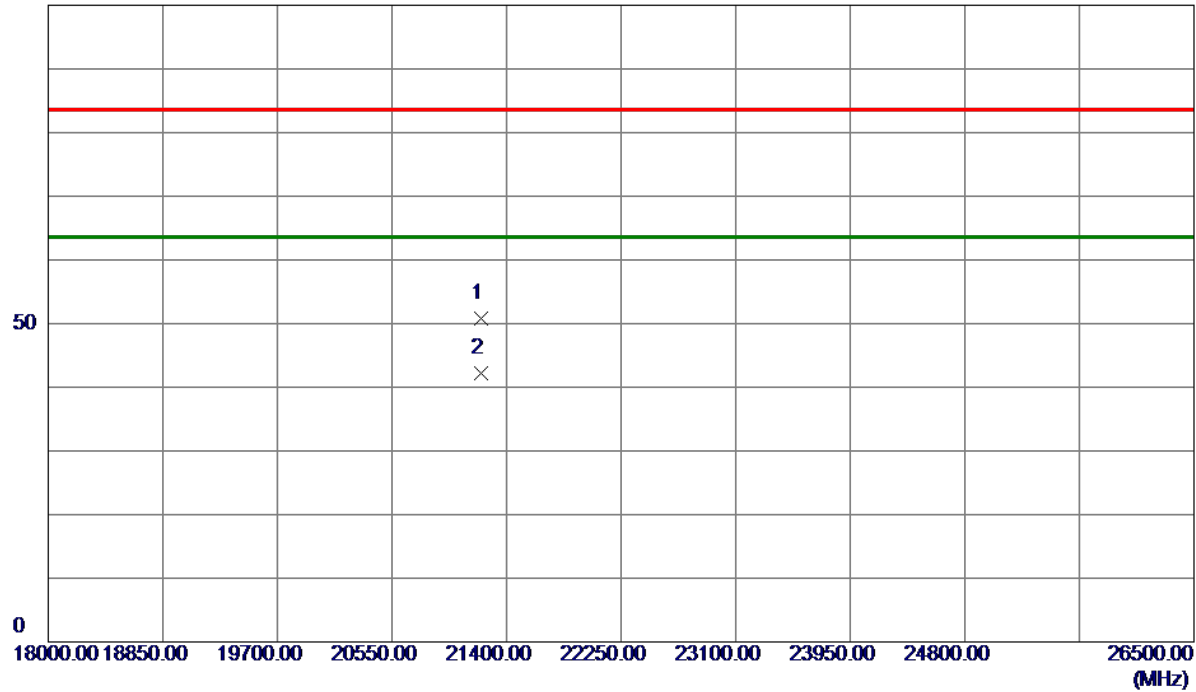

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	21213.0000	54.68	-3.90	50.78	83.50	-32.72	Peak	
2 *	21213.0000	46.17	-3.90	42.27	63.50	-21.23	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH

Test Mode	TX Mode_1Mbps
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.688	1.016	0.5	Pass
19	2440	0.704	1.024	0.5	Pass
39	2480	0.688	1.016	0.5	Pass

CH00

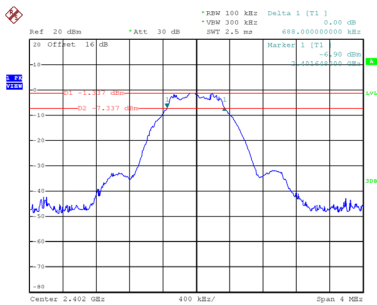


Date: 29.JUL.2025 12:30:28

CH19
6 dB Bandwidth

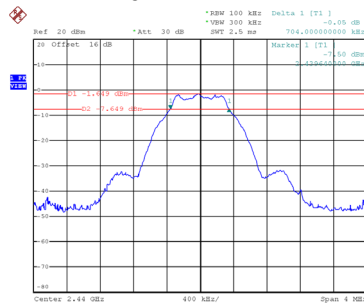


Date: 29.JUL.2025 12:32:18

CH39

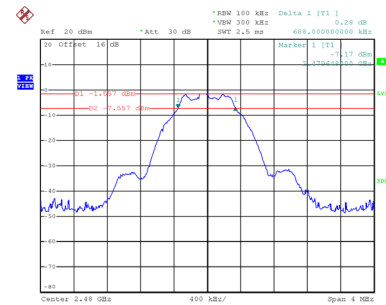


Date: 29.JUL.2025 12:34:18


99 % Occupied Bandwidth

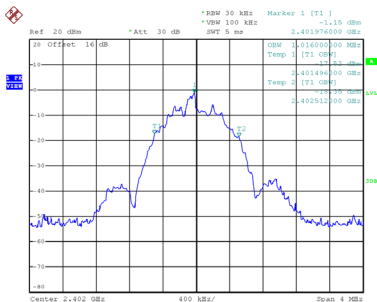

Date: 29.JUL.2025 12:30:39

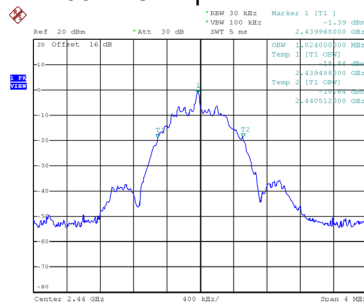

Date: 29.JUL.2025 12:32:29

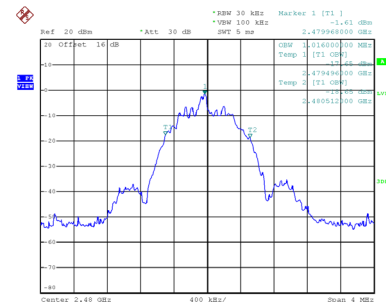


Date: 29.JUL.2025 12:34:28

Test Mode	TX Mode_2Mbps
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	1.208	2.000	0.5	Pass
19	2440	1.192	1.992	0.5	Pass
39	2480	1.208	1.984	0.5	Pass

CH00

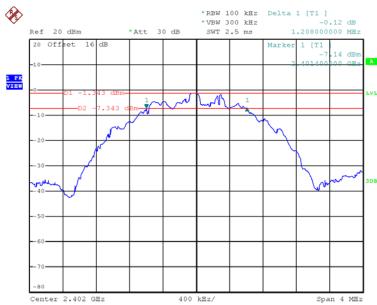


Date: 29.JUL.2025 12:36:08

CH19
6 dB Bandwidth

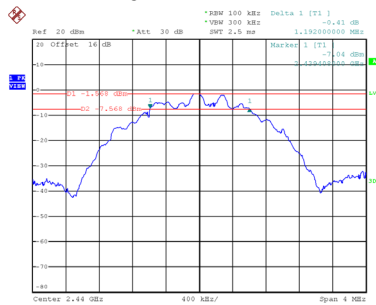

Date: 29.JUL.2025 12:39:29

CH39

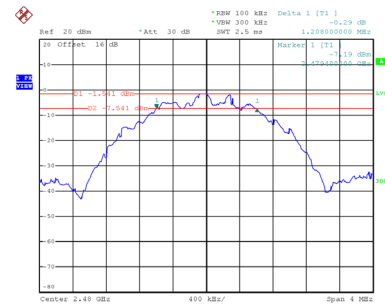


Date: 29.JUL.2025 12:41:25


99 % Occupied Bandwidth



Date: 29.JUL.2025 12:36:19

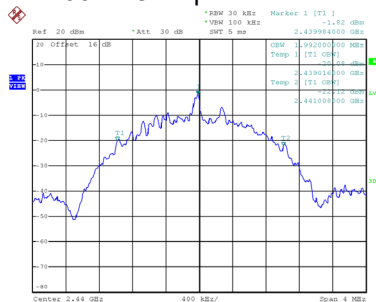

Date: 29.JUL.2025 12:39:40

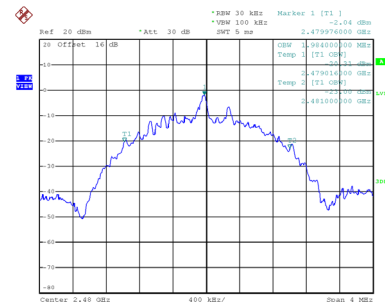


Date: 29.JUL.2025 12:41:36

APPENDIX E - MAXIMUM OUTPUT POWER


Test Mode	TX Mode_1Mbps
-----------	---------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	-1.23	0.0008	30.00	1.0000	Pass
2440	-1.41	0.0007	30.00	1.0000	Pass
2480	-1.41	0.0007	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

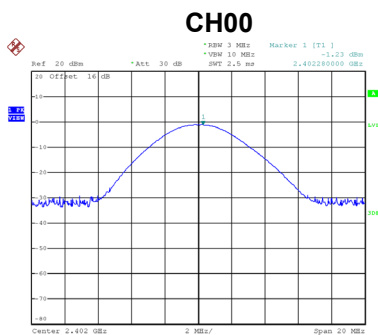

Date: 29.JUL.2025 12:30:17

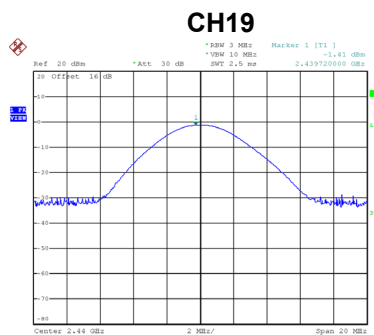

Date: 29.JUL.2025 12:32:08

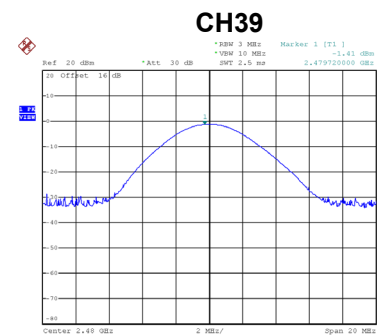


Date: 29.JUL.2025 12:34:07


Test Mode	TX Mode_2Mbps
-----------	---------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	-1.23	0.0008	30.00	1.0000	Pass
2440	-1.41	0.0007	30.00	1.0000	Pass
2480	-1.38	0.0007	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

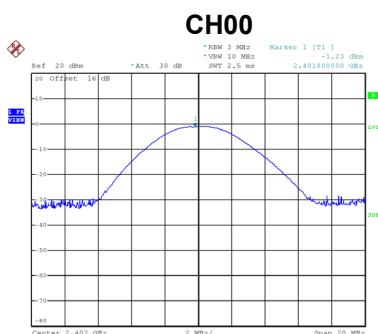

Date: 29.JUL.2025 12:35:58

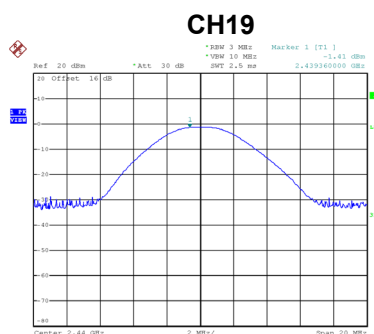

Date: 29.JUL.2025 12:39:19

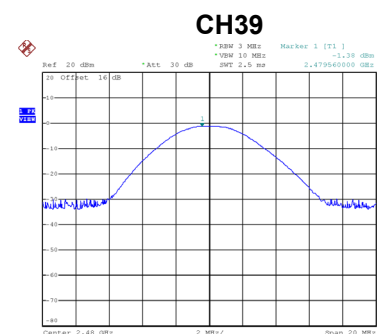


Date: 29.JUL.2025 12:41:14

APPENDIX F - CONDUCTED SPURIOUS EMISSION


Test Mode TX Mode_1Mbps

Reference Level-CH00

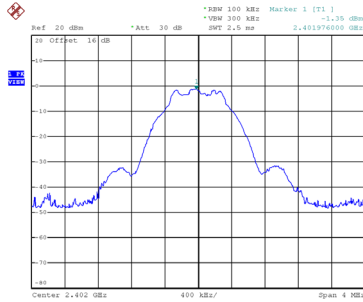


Date: 29.JUL.2025 12:30:59

Reference Level-CH19

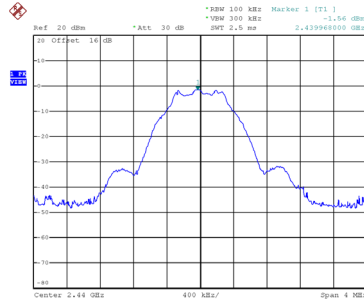


Date: 29.JUL.2025 12:32:50

Reference Level-CH39

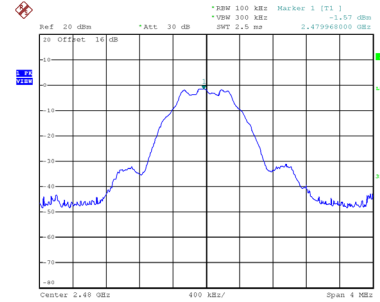


Date: 29.JUL.2025 12:34:48

Bandedge-CH00

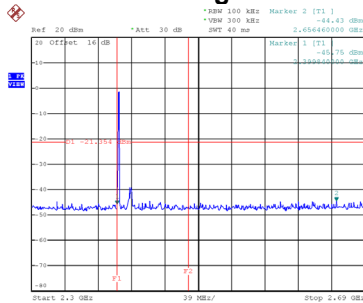


Date: 29.JUL.2025 12:31:10

Bandedge-CH39

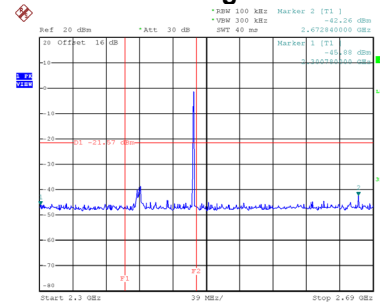


Date: 29.JUL.2025 12:34:59

Harmonic-CH00

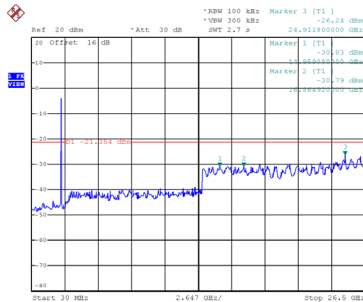


Date: 29.JUL.2025 12:31:21

Harmonic-CH19

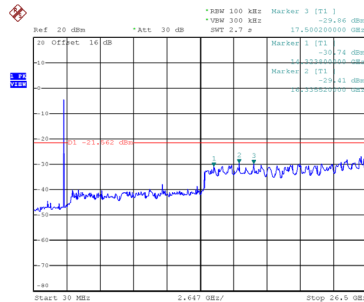

Date: 29.JUL.2025 12:33:12


Harmonic-CH39

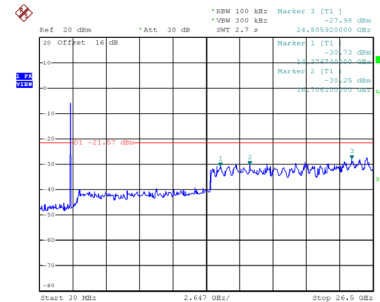

Date: 29.JUL.2025 12:35:10


Test Mode TX Mode_2Mbps

Reference Level-CH00

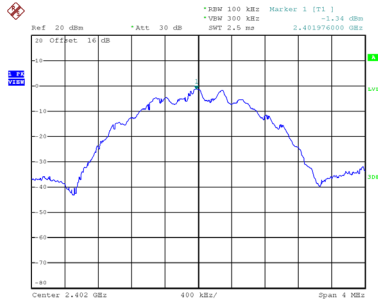


Date: 29.JUL.2025 12:36:39

Reference Level-CH19

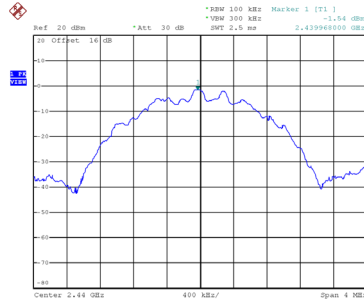


Date: 29.JUL.2025 12:40:00

Reference Level-CH39

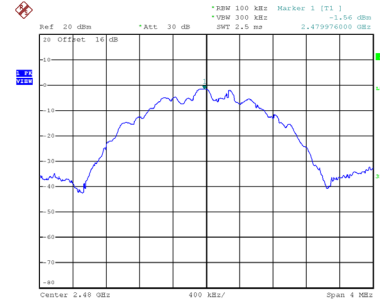


Date: 29.JUL.2025 12:41:56

Bandedge-CH00

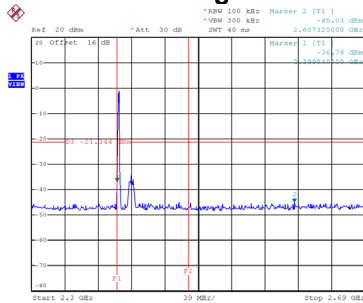


Date: 29.JUL.2025 12:36:50

Bandedge-CH39

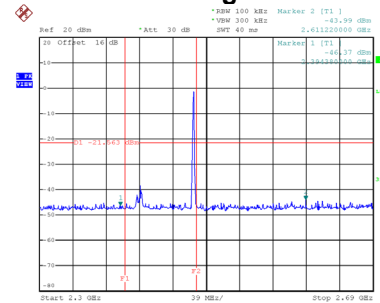


Date: 29.JUL.2025 12:42:07

Harmonic-CH00

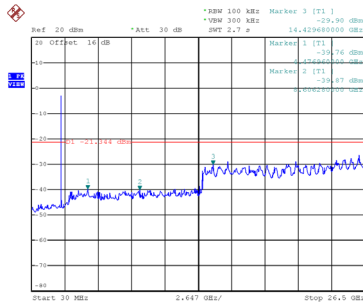


Date: 29.JUL.2025 12:38:51

Harmonic-CH19

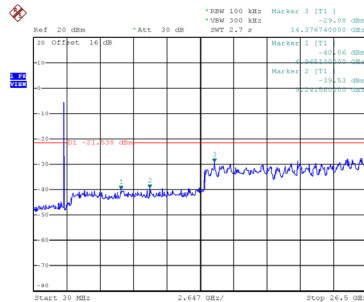

Date: 29.JUL.2025 12:40:49

Harmonic-CH39

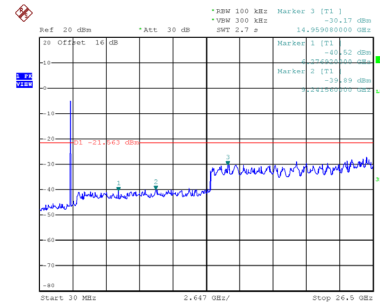


Date: 29.JUL.2025 12:42:18


APPENDIX G - POWER SPECTRAL DENSITY

Test Mode	TX Mode_1Mbps
-----------	---------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	-13.83	8.00	Pass
19	2440	-13.55	8.00	Pass
39	2480	-15.52	8.00	Pass

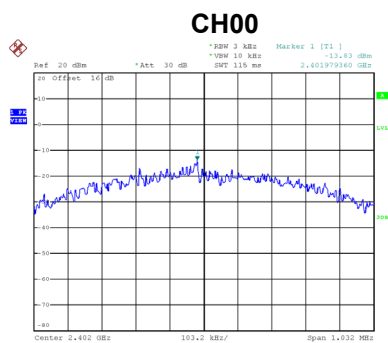

Date: 29.JUL.2025 12:30:49

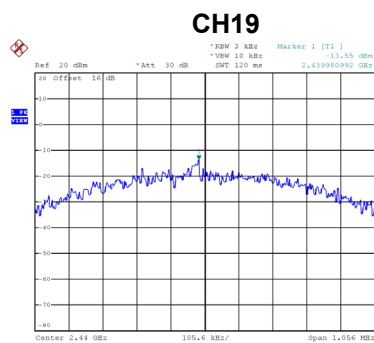


Date: 29.JUL.2025 12:32:40

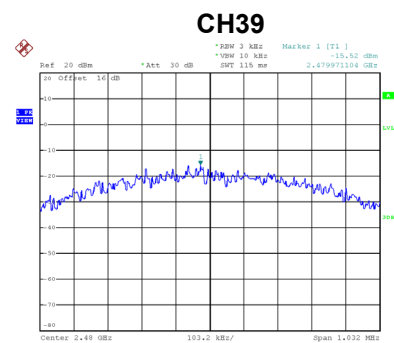


Date: 29.JUL.2025 12:34:38

Test Mode	TX Mode_2Mbps
-----------	---------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	-16.75	8.00	Pass
19	2440	-17.42	8.00	Pass
39	2480	-17.37	8.00	Pass

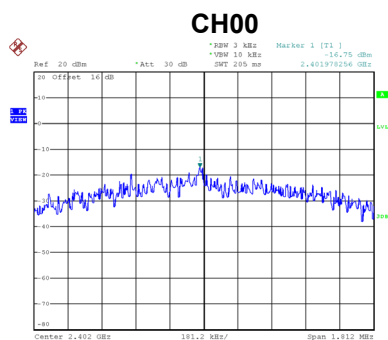

Date: 29.JUL.2025 12:36:29

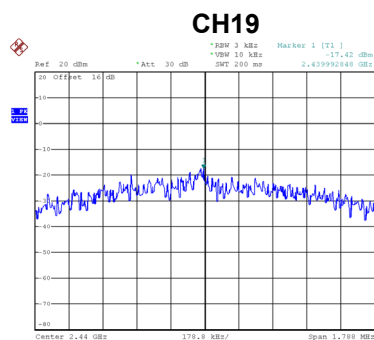

Date: 29.JUL.2025 12:39:50

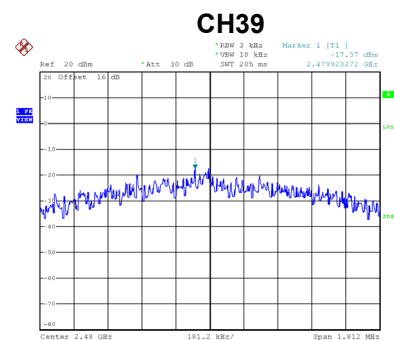

Date: 29.JUL.2025 12:41:46

End of Test Report