



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 1 of 102

TEST REPORT

Application No.: SHCR2410002024HS
FCC ID: 2BRFD-AS360
Applicant: ASMOKE USA INC
Address of Applicant: 244 Madison Avenue, SUITE 1666, New York, NY 10016
Manufacturer: ASMOKE USA INC
Address of Manufacturer: 244 Madison Avenue, SUITE 1666, New York, NY 10016
Factory:
1. Jiangsu Henglu Electronic Technology Co., Ltd
2. Guangdong Hyxion Smart Kitchen Co.Ltd
Address of Factory:
1. 86 Center Road, North Park, Jiang Economic Development Zone, Jiang, 214522, Jiangsu, China
2. NO.1 and No.2 Haixin Road Hongmei Town, Dongguan, China
Equipment Under Test (EUT):
EUT Name: ASMOKE Essential
Model No.: AS360
Trade Mark: ASMOKE
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2024-10-14
Date of Test: 2024-10-29 to 2024-11-07
Date of Issue: 2024-11-13

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 2 of 102

Revision Record			
Version	Description	Date	Remark
00	Original	2024-11-13	/

Authorized for issue by:				
Tested By		Wade Zhang		
		Wade Zhang/Project Engineer		
Approved By		Parlam Zhan		
		Parlam Zhan / Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth		ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time		ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Power level setting using in test:.....	6
4.3 Description of Support Units	6
4.4 Measurement Uncertainty	6
4.5 Test Location.....	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	9
6.1 Antenna Requirement	9
6.1.1 Test Requirement:	9
6.1.2 Conclusion	9
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	10
6.2.1 Test Requirement:	10
6.2.2 Conclusion	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Peak Output Power.....	11
7.1.1 E.U.T. Operation	11
7.1.2 Test Mode Description	11
7.1.3 Test Setup Diagram.....	11
7.1.4 Measurement Procedure and Data.....	11
7.2 20dB Bandwidth	12
7.2.1 E.U.T. Operation	12
7.2.2 Test Mode Description	12
7.2.3 Test Setup Diagram.....	12
7.2.4 Measurement Procedure and Data.....	12
7.3 Carrier Frequencies Separation	13
7.3.1 E.U.T. Operation	13
7.3.2 Test Mode Description	13
7.3.3 Test Setup Diagram.....	13
7.3.4 Measurement Procedure and Data.....	13
7.4 Hopping Channel Number.....	14
7.4.1 E.U.T. Operation	14
7.4.2 Test Mode Description	14
7.4.3 Test Setup Diagram.....	14
7.4.4 Measurement Procedure and Data.....	14
7.5 Dwell Time.....	15
7.5.1 E.U.T. Operation	15
7.5.2 Test Mode Description	15
7.5.3 Test Setup Diagram.....	15
7.5.4 Measurement Procedure and Data.....	15

7.6	Conducted Band Edges Measurement	16
7.6.1	E.U.T. Operation	16
7.6.2	Test Mode Description	16
7.6.3	Test Setup Diagram	16
7.6.4	Measurement Procedure and Data	16
7.7	Conducted Spurious Emissions	17
7.7.1	E.U.T. Operation	17
7.7.2	Test Mode Description	17
7.7.3	Test Setup Diagram	17
7.7.4	Measurement Procedure and Data	17
7.8	Radiated Emissions which fall in the restricted bands	18
7.8.1	E.U.T. Operation	18
7.8.2	Test Mode Description	18
7.8.3	Test Setup Diagram	18
7.8.4	Measurement Procedure and Data	19
7.9	Radiated Spurious Emissions Below 1GHz	32
7.9.1	E.U.T. Operation	32
7.9.2	Test Mode Description	32
7.9.3	Test Setup Diagram	32
7.9.4	Measurement Procedure and Data	33
7.10	Radiated Spurious Emissions Above 1GHz	36
7.10.1	E.U.T. Operation	36
7.10.2	Test Mode Description	36
7.10.3	Test Setup Diagram	36
7.10.4	Measurement Procedure and Data	37
8	Test Setup Photo	56
9	EUT Constructional Details (EUT Photos)	56
10	Appendix.....	56
10.1	Appendix A: 20dB Emission Bandwidth	56
10.1.1	Test Result	56
10.1.2	Test Graphs	57
10.2	Appendix B: Occupied Channel Bandwidth	61
10.2.1	Test Result	61
10.2.2	Test Graphs	62
10.3	Appendix C: Maximum conducted output power	66
10.3.1	Test Result	66
10.3.2	Test Graphs	67
10.4	Appendix D: Carrier frequency separation	71
10.4.1	Test Result	71
10.4.2	Test Graphs	72
10.5	Appendix E: Time of occupancy	74
10.5.1	Test Result	74
10.5.2	Test Graphs	75
10.6	Appendix F: Number of hopping channels	82
10.6.1	Test Result	82
10.6.2	Test Graphs	83
10.7	Appendix G: Band edge measurements	85
10.7.1	Test Result	85
10.7.2	Test Graphs	86
10.8	Appendix H: Conducted Spurious Emission	91
10.8.1	Test Result	91
10.8.2	Test Graphs	92

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 14.4V 6.6Ah Li-ion Battery
Test Voltage:	DC 14.4V
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Number of Channels:	79
Channel Spacing:	1MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Antenna Type:	FPC Antenna
Antenna Gain:	1.9dBi (Provided by manufacturer)
Antenna Number:	1

4.2 Power level setting using in test:

Channel	Power setting		
	DH5	2DH5	3DH5
Low	0	0	0
Middle	0	0	0
High	0	0	0

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	LENOVO	L460	-

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-6GHz)
		5.4dB (6GHz-18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 7 of 102

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.
Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Conducted Test					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2023-12-19	2024-12-18
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2024-07-31	2025-07-30
Signal Generator	R&S	SMR20	SHEM006-1	2024-07-31	2025-07-30
Signal Generator	Agilent	N5182A	SHEM182-1	2024-07-31	2025-07-30
Communication Tester	R&S	CMW270	SHEM183-1	2024-05-23	2025-05-22
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Power Sensor	Keysight	U2021XA * 4	SHEM293-1	2024-07-31	2025-07-30
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2024-11-05	2026-11-04
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2023-12-19	2024-12-18
DC Power Supply	HP	6010A	SHEM222-1	2023-12-19	2024-12-18
Conducted test Cable	/	RF01~RF04	/	2023-12-19	2024-12-18
Switcher	Tonscend	JS0806	SHEM293-1	2024-07-31	2025-07-30
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2024-07-31	2025-07-30
Test software	TST	TST PASS	Version: 2.0	/	/
RF Radiated Test					
EMI test Receiver	R&S	ESU40	SHEM051-1	2023-12-19	2024-12-18
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2023-12-19	2024-12-18
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2023-09-03	2025-09-02
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2023-04-17	2025-04-16
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2024-08-05	2026-08-04
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023-09-03	2025-09-02
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2023-09-03	2025-09-02
Pre-Amplifier	HP	8447D	SHEM236-1	2023-12-19	2024-12-18
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2023-12-19	2024-12-18
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023-05-06	2026-05-05
RE test Cable	/	PT18-NMMN-10M	SHEM217-2	2023-12-19	2024-12-18
Test software	ESE	E3	Version: 6.111221a	/	/

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is 1.9 dBi.

Antenna location: Refer to internal photo.

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

7 Radio Spectrum Matter Test Results

7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 73.9 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

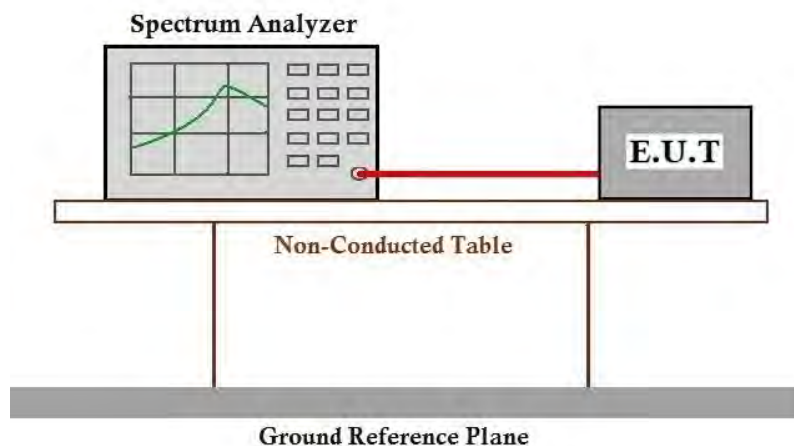

7.1.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.7


7.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 23.3 °C Humidity: 73.9 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

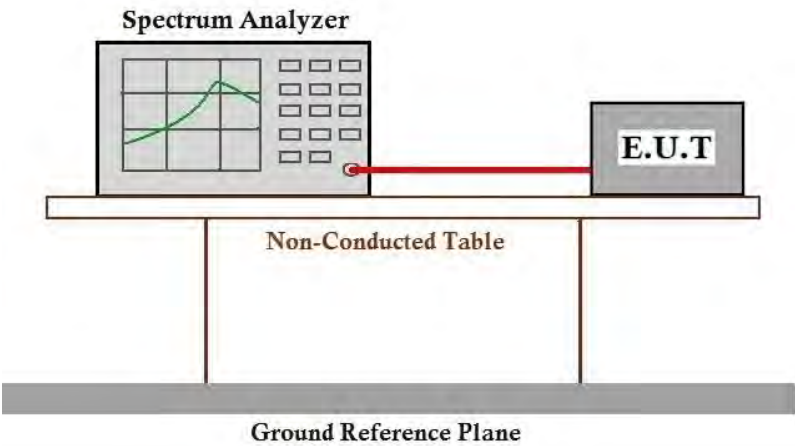

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 73.9 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

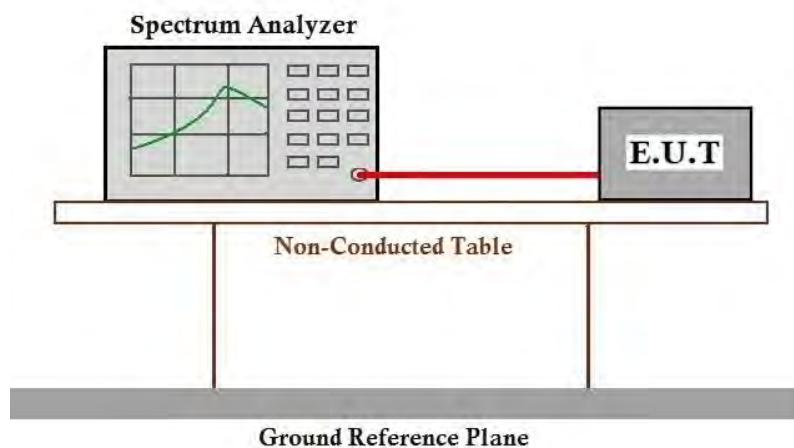

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 73.9 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

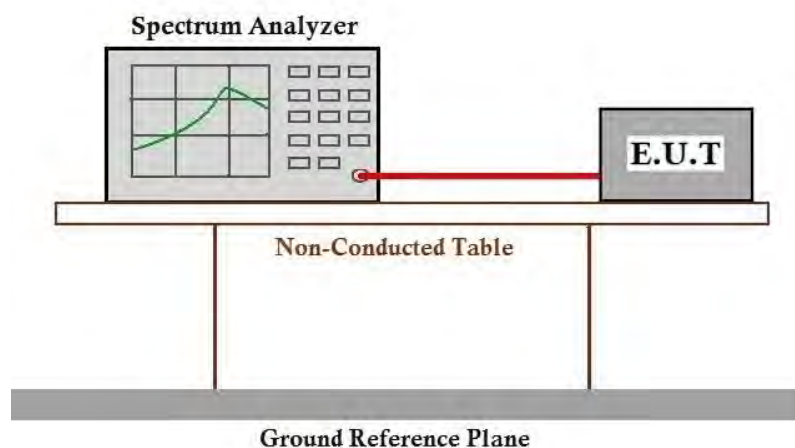

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 73.9 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

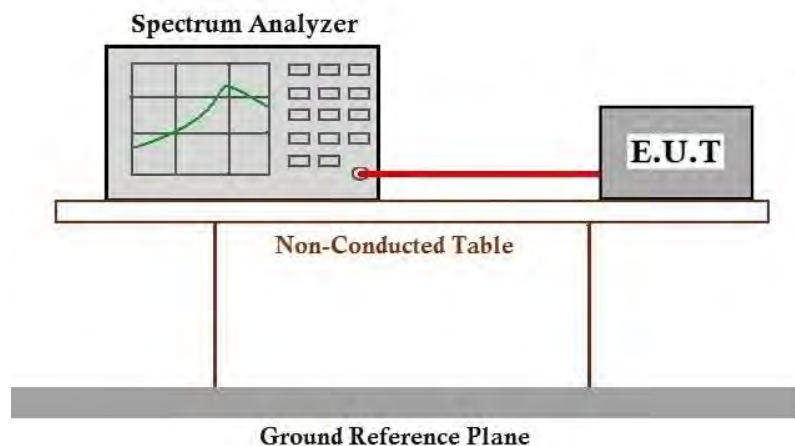

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit:
 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


7.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 23.3 °C Humidity: 73.9 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	01	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

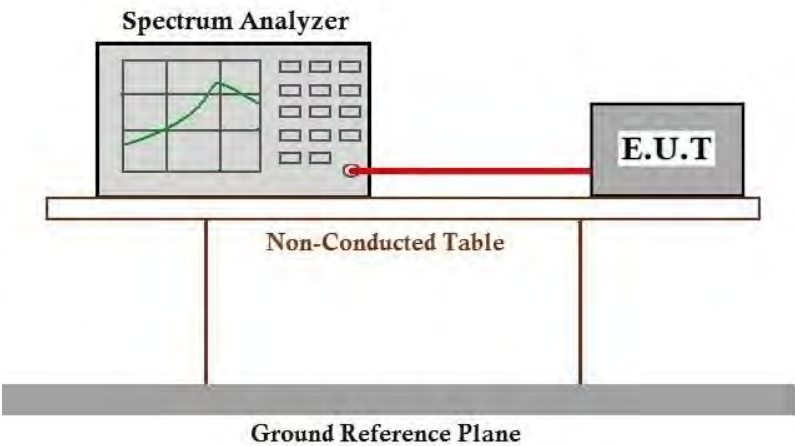

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 73.9 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

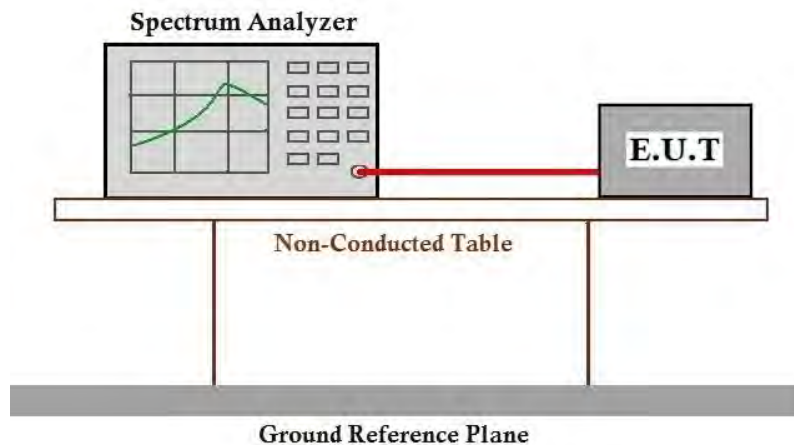

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 23.3 °C Humidity: 73.9 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

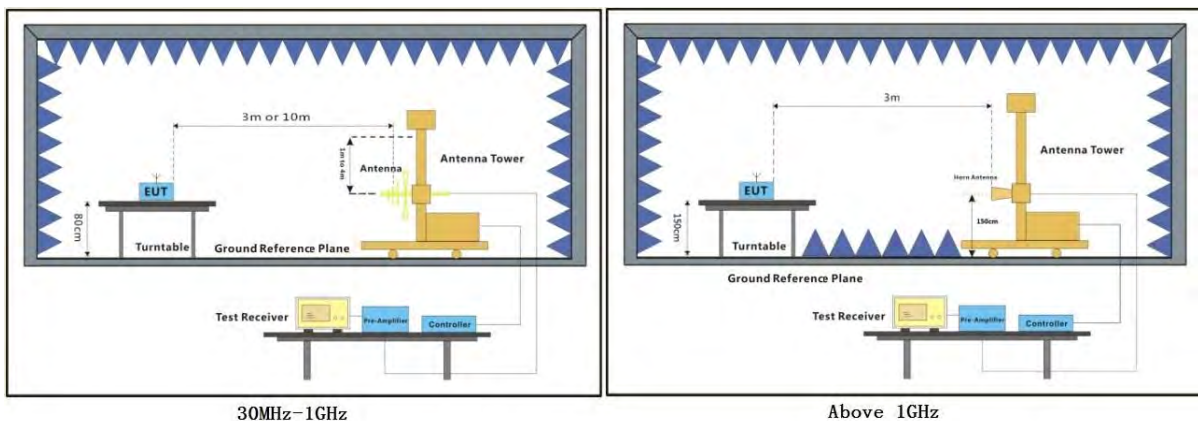


7.8.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

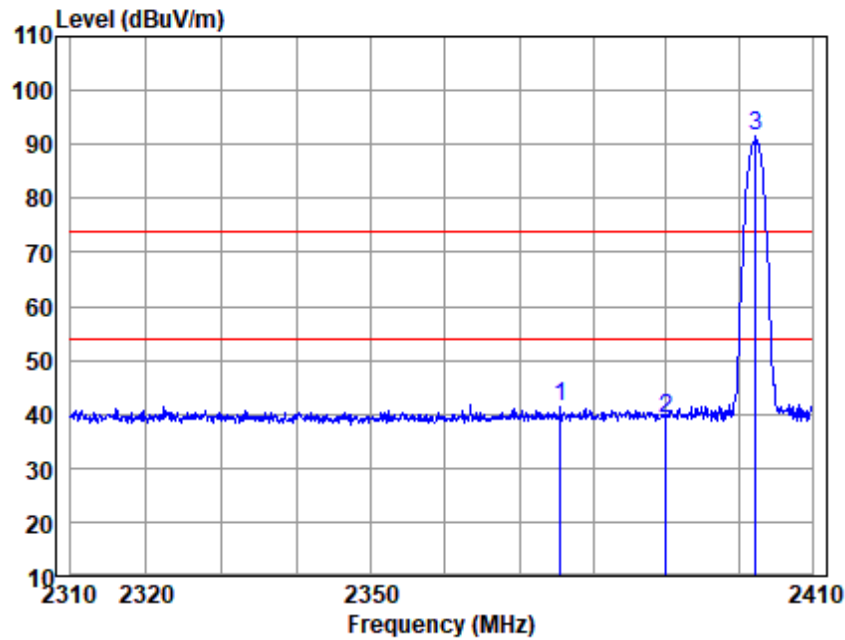


Antenna Polarity :HORIZONTAL

EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2375.624	44.46	28.71	3.32	35.17	41.32	74.00	-32.68	Peak
2390.000	42.23	28.80	3.33	35.18	39.18	74.00	-34.82	Peak
2402.250	94.49	28.85	3.34	35.19	91.49	74.00	17.49	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

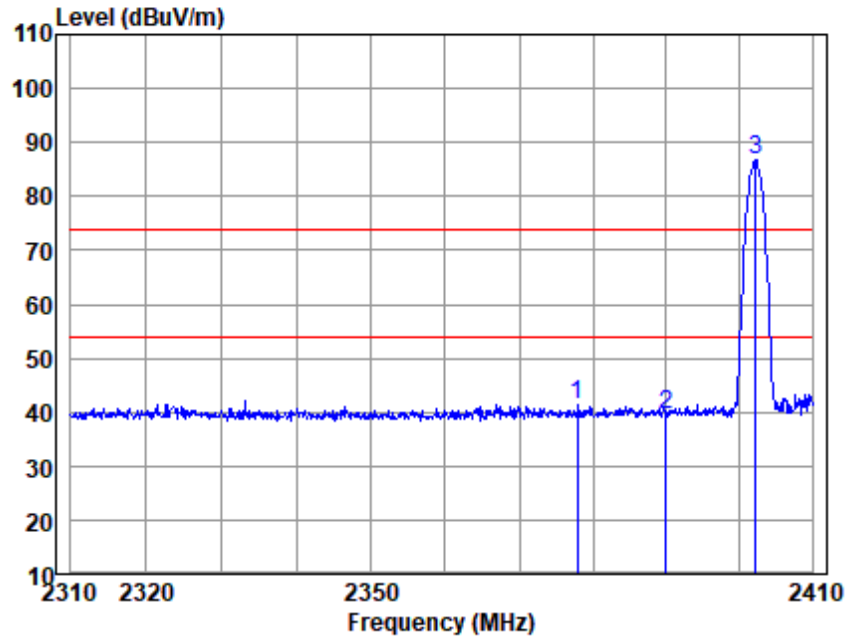


Antenna Polarity :VERTICAL

EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2377.941	44.40	28.76	3.32	35.17	41.31	74.00	-32.69	Peak
2390.000	42.75	28.80	3.33	35.18	39.70	74.00	-34.30	Peak
2402.250	89.71	28.85	3.34	35.19	86.71	74.00	12.71	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

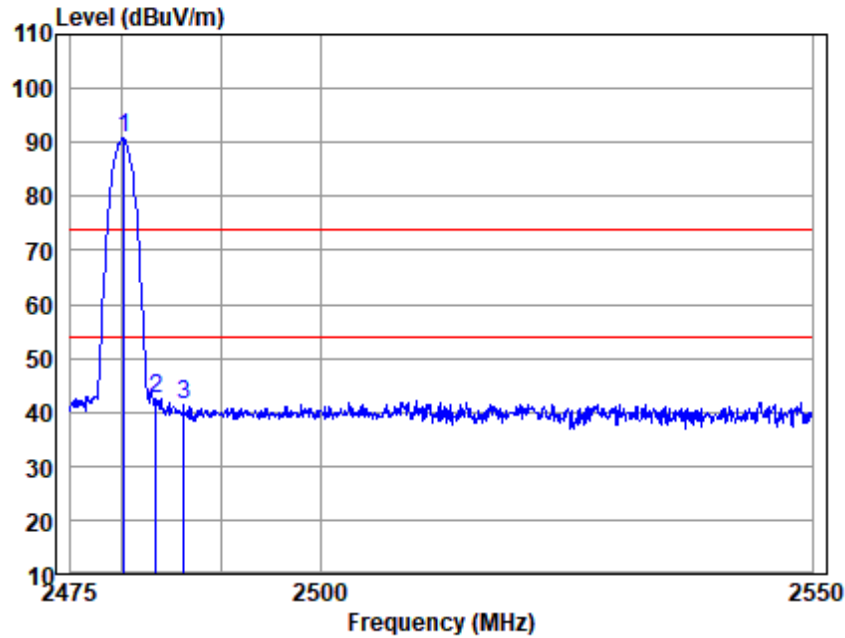


Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.325	93.76	29.08	3.40	35.25	90.99	74.00	16.99	Peak
2483.500	45.11	29.09	3.41	35.26	42.35	74.00	-31.65	Peak
2486.256	43.97	29.09	3.41	35.26	41.21	74.00	-32.79	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

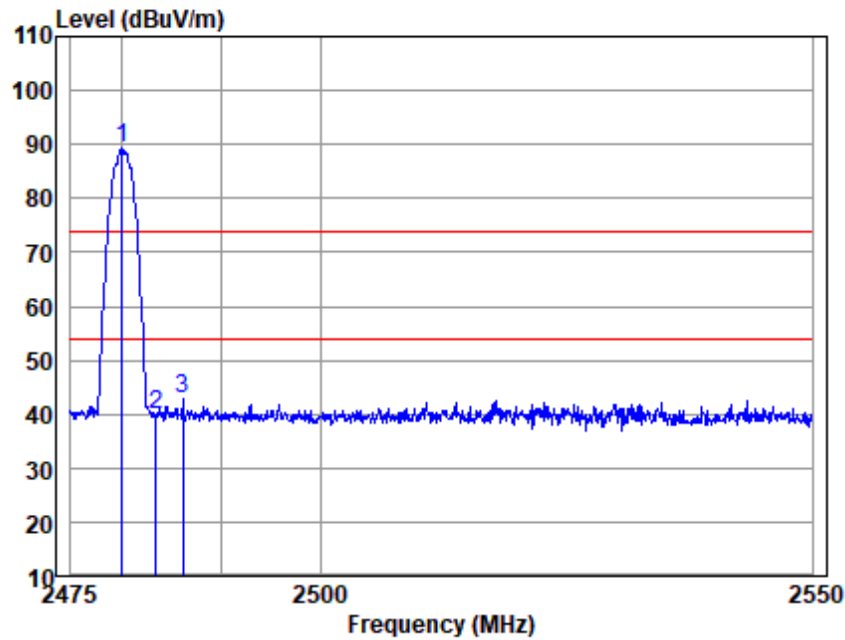


Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.104	92.14	29.08	3.40	35.25	89.37	74.00	15.37	Peak
2483.500	42.63	29.09	3.41	35.26	39.87	74.00	-34.13	Peak
2486.182	45.65	29.09	3.41	35.26	42.89	74.00	-31.11	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: Low

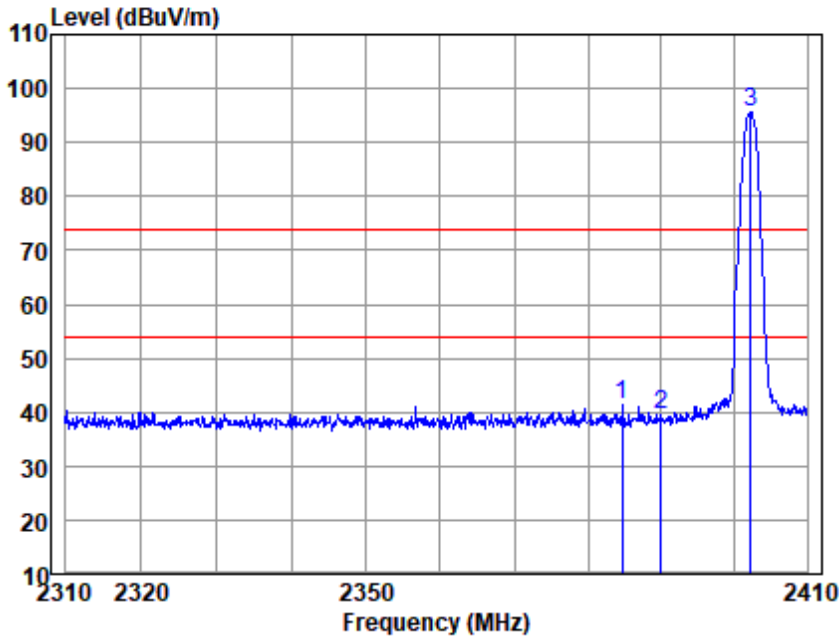

Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2384.702	44.41	28.80	3.33	35.18	41.36	74.00	-32.64	Peak
2390.000	42.74	28.80	3.33	35.18	39.69	74.00	-34.31	Peak
2402.250	98.44	28.85	3.34	35.19	95.44	74.00	21.44	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 25 of 102

Test Mode: 00; Polarity: Vertical; Modulation:π/4 DQPSK; Channel:Low

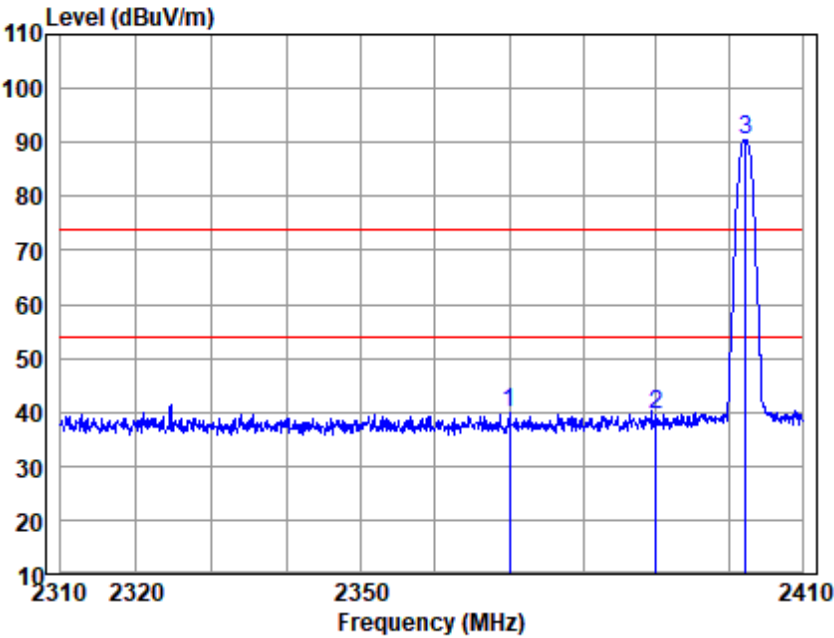


Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2370.093	42.84	28.71	3.32	35.17	39.70	74.00	-34.30	Peak
2390.000	42.60	28.80	3.33	35.18	39.55	74.00	-34.45	Peak
2402.250	93.45	28.85	3.34	35.19	90.45	74.00	16.45	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation: $\pi/4$ DQPSK; Channel: High

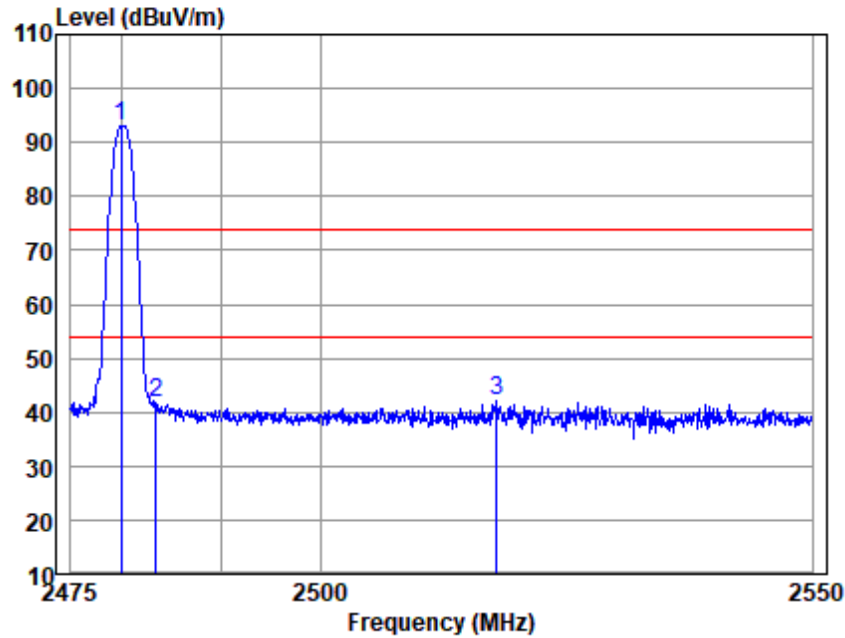


Antenna Polarity : HORIZONTAL

EUT/Project : 2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.029	95.81	29.08	3.40	35.25	93.04	74.00	19.04	Peak
2483.500	44.32	29.09	3.41	35.26	41.56	74.00	-32.44	Peak
2517.851	44.84	29.13	3.43	35.29	42.11	74.00	-31.89	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamplifier Factor

Test Mode: 00; Polarity: Vertical; Modulation: $\pi/4$ DQPSK; Channel: High

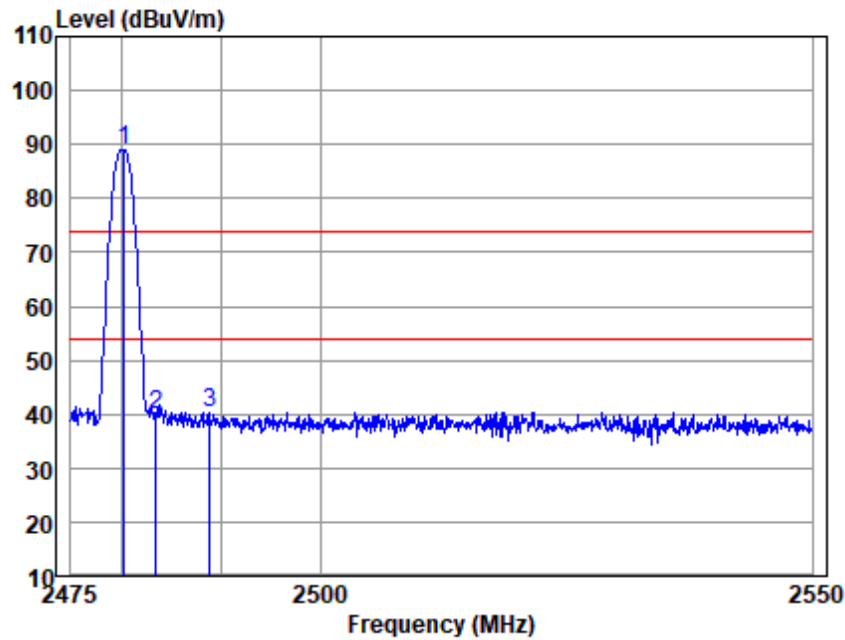


Antenna Polarity : VERTICAL

EUT/Project : 2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.325	91.80	29.08	3.40	35.25	89.03	74.00	15.03	Peak
2483.500	42.53	29.09	3.41	35.26	39.77	74.00	-34.23	Peak
2488.930	43.10	29.09	3.41	35.26	40.34	74.00	-33.66	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

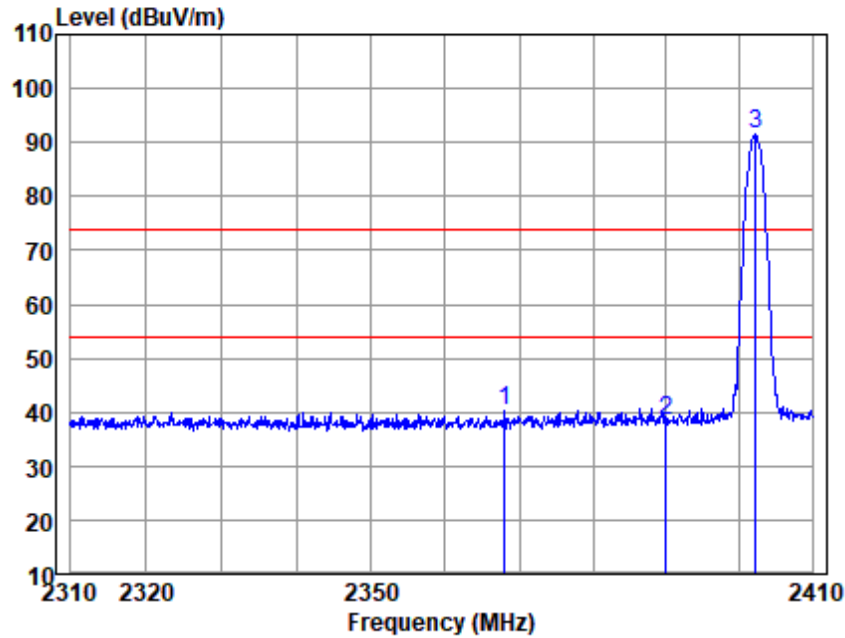


Antenna Polarity :HORIZONTAL

EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2367.985	43.44	28.68	3.31	35.16	40.27	74.00	-33.73	Peak
2390.000	41.33	28.80	3.33	35.18	38.28	74.00	-35.72	Peak
2402.250	94.48	28.85	3.34	35.19	91.48	74.00	17.48	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

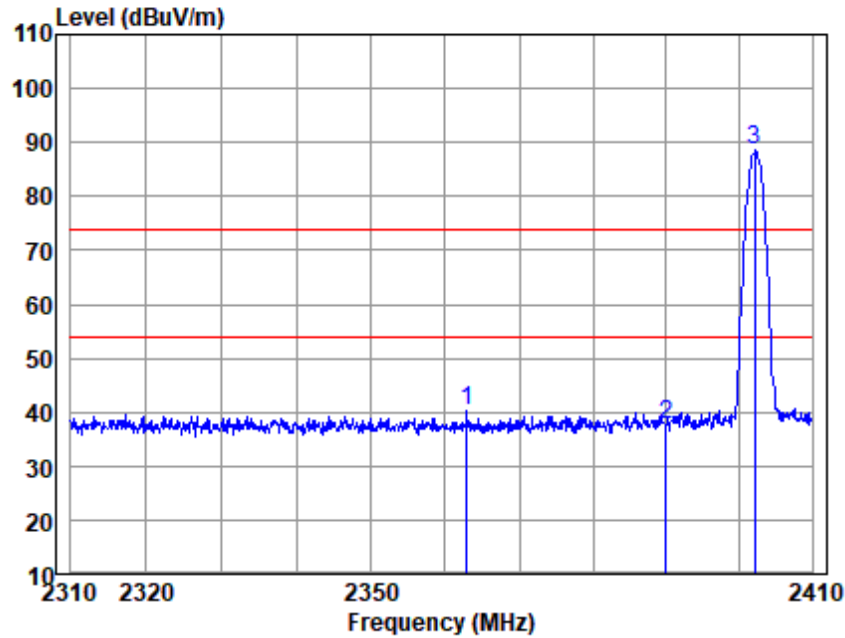


Antenna Polarity :VERTICAL

EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2362.873	43.63	28.66	3.30	35.16	40.43	74.00	-33.57	Peak
2390.000	40.62	28.80	3.33	35.18	37.57	74.00	-36.43	Peak
2402.148	91.47	28.85	3.34	35.19	88.47	74.00	14.47	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:High

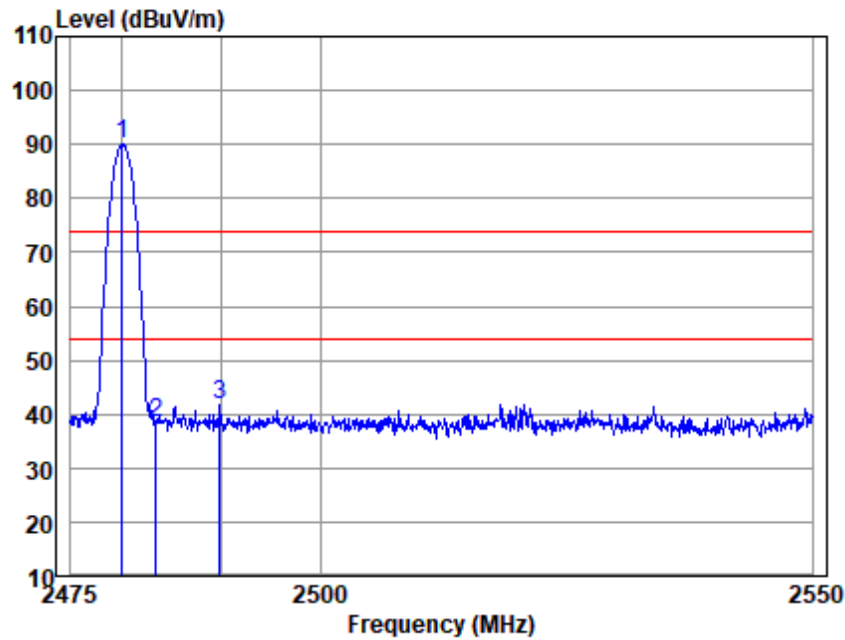


Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2480.177	92.87	29.08	3.40	35.25	90.10	74.00	16.10	Peak
2483.500	41.24	29.09	3.41	35.26	38.48	74.00	-35.52	Peak
2489.896	44.39	29.10	3.41	35.26	41.64	74.00	-32.36	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation: 8DPSK; Channel: High

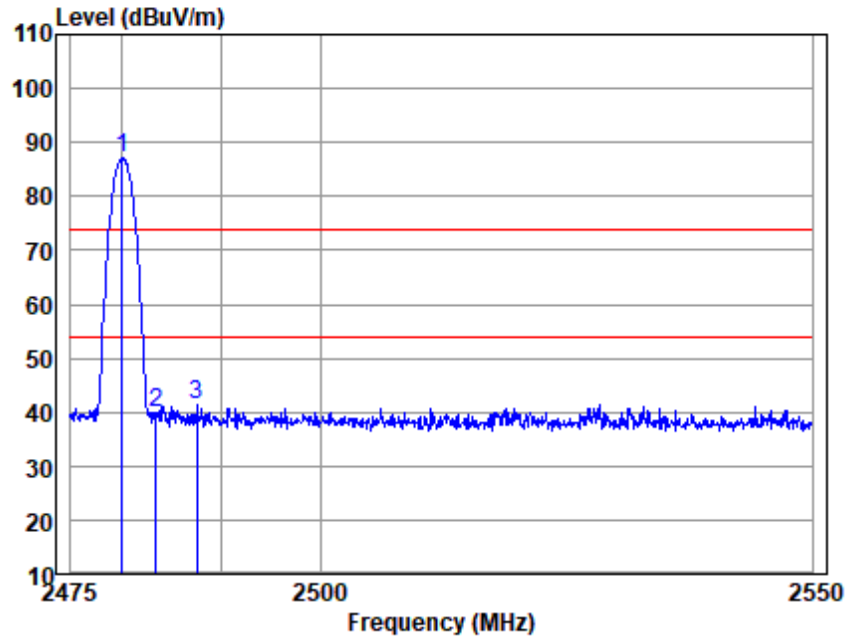

Antenna Polarity : VERTICAL
EUT/Project : 2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
2480.104	89.81	29.08	3.40	35.25	87.04	74.00	13.04	Peak
2483.500	42.47	29.09	3.41	35.26	39.71	74.00	-34.29	Peak
2487.593	44.01	29.09	3.41	35.26	41.25	74.00	-32.75	Peak

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamplifier Factor

7.9 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

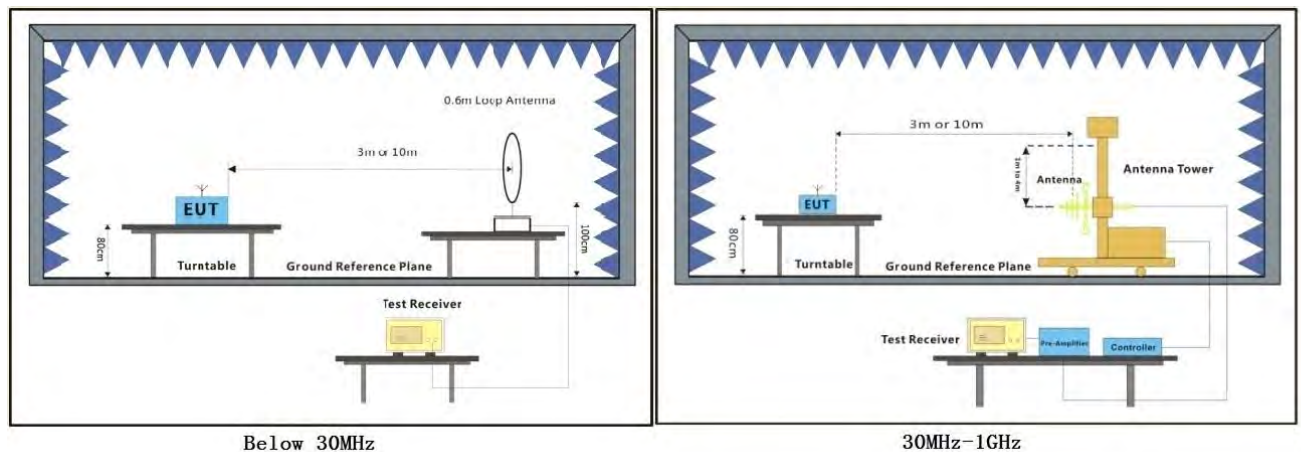


7.9.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 00; Polarity: Horizontal

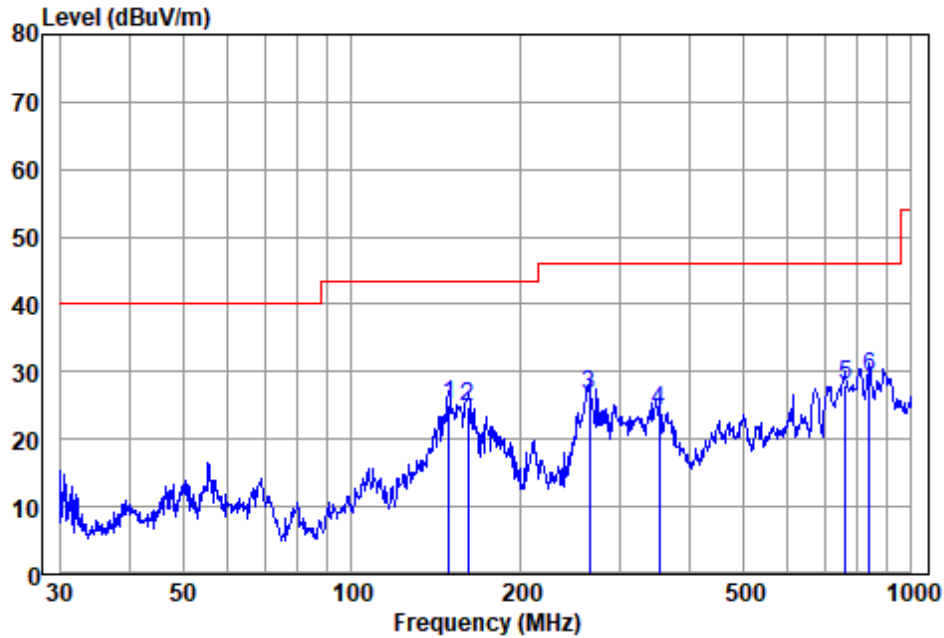


Antenna Polarity :HORIZONTAL
EUT/Project :2024HS
Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	148.963	42.10	13.60	2.52	33.00	25.22	43.50	-18.28	QP
2	161.474	41.68	13.55	2.63	33.00	24.86	43.50	-18.64	QP
3	265.676	43.92	12.16	3.40	32.83	26.65	46.00	-19.35	QP
4	354.183	38.33	14.64	3.96	32.71	24.22	46.00	-21.78	QP
5	760.704	31.78	22.60	5.99	32.30	28.07	46.00	-17.93	QP
6	842.130	31.98	22.92	6.36	32.05	29.21	46.00	-16.79	QP

Note1:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical

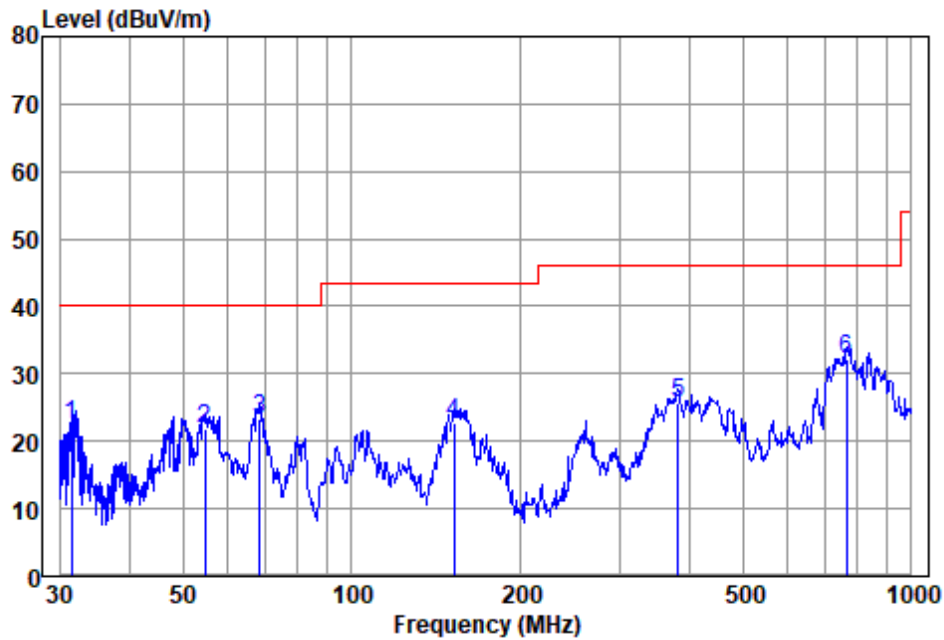

Antenna Polarity :VERTICAL

EUT/Project :2024HS

Test mode :00

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.620	42.40	12.20	1.13	33.20	22.53	40.00	-17.47	QP
2	54.643	39.73	13.78	1.48	33.20	21.79	40.00	-18.21	QP
3	68.391	43.17	11.68	1.66	33.20	23.31	40.00	-16.69	QP
4	152.130	39.44	13.80	2.55	33.00	22.79	43.50	-20.71	QP
5	382.588	38.87	15.41	4.10	32.77	25.61	46.00	-20.39	QP
6	766.057	35.66	22.67	6.03	32.30	32.06	46.00	-13.94	QP

Note1:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

7.10 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 23.3 °C


Humidity: 73.9 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

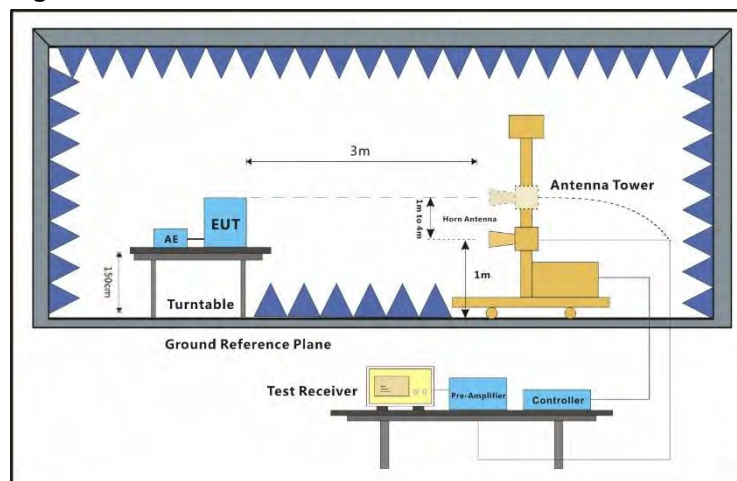


7.10.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:Low

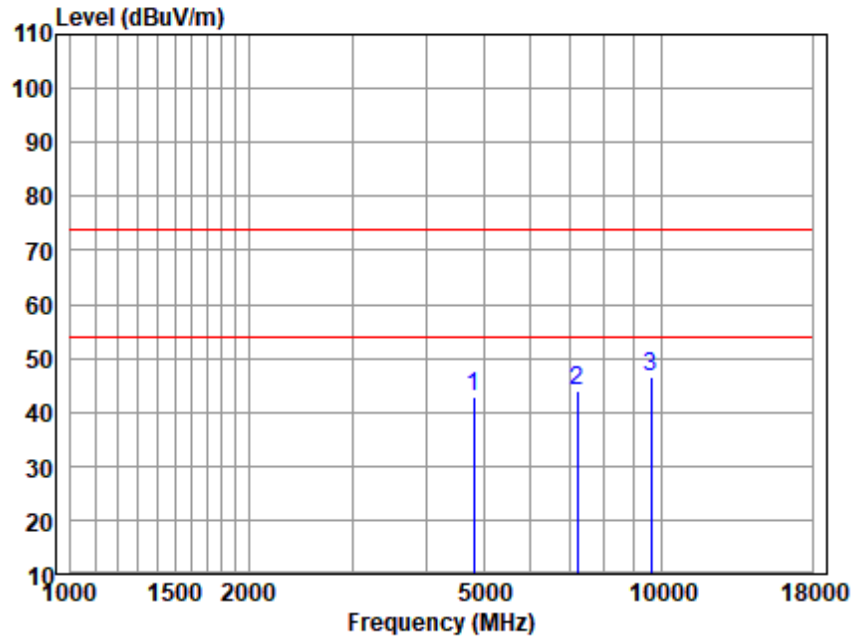

Antenna Polarity :HORIZONTAL

EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4804.110	40.84	33.57	5.23	36.79	42.85	74.00	-31.15	Peak
7200.309	35.97	36.24	7.33	35.53	44.01	74.00	-29.99	Peak
9613.430	33.78	37.75	8.74	33.58	46.69	74.00	-27.31	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 39 of 102

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:Low

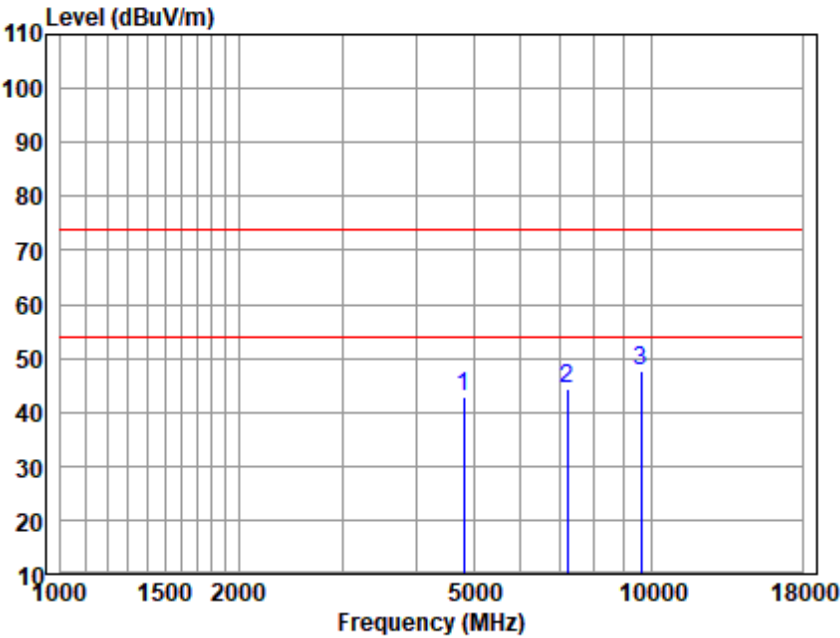

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	40.99	33.57	5.23	36.79	43.00	74.00	-31.00	Peak
7200.309	36.46	36.24	7.33	35.53	44.50	74.00	-29.50	Peak
9613.430	34.70	37.75	8.74	33.58	47.61	74.00	-26.39	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 40 of 102

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:middle

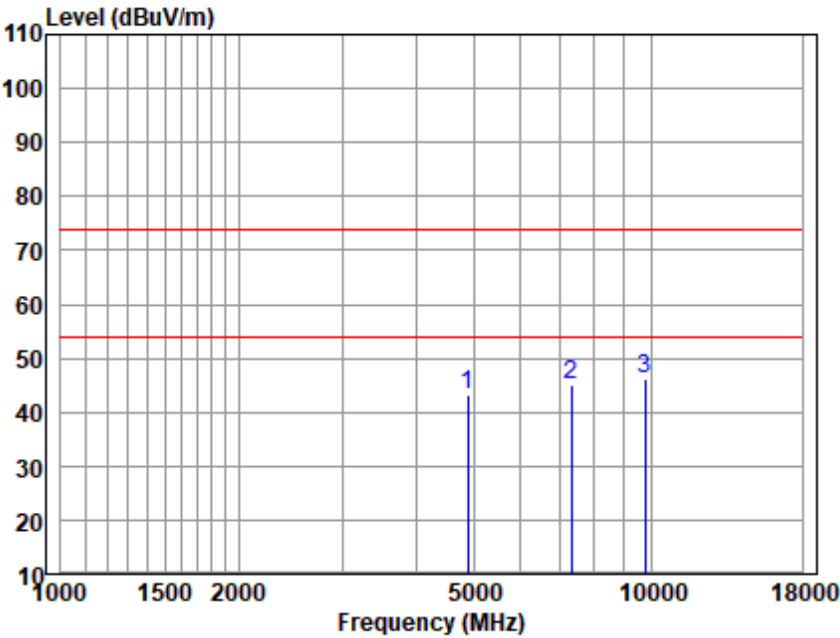

Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.151	41.14	33.66	5.29	36.81	43.28	74.00	-30.72	Peak
7326.267	36.63	36.33	7.44	35.42	44.98	74.00	-29.02	Peak
9753.371	33.35	37.54	8.80	33.50	46.19	74.00	-27.81	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 41 of 102

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:middle

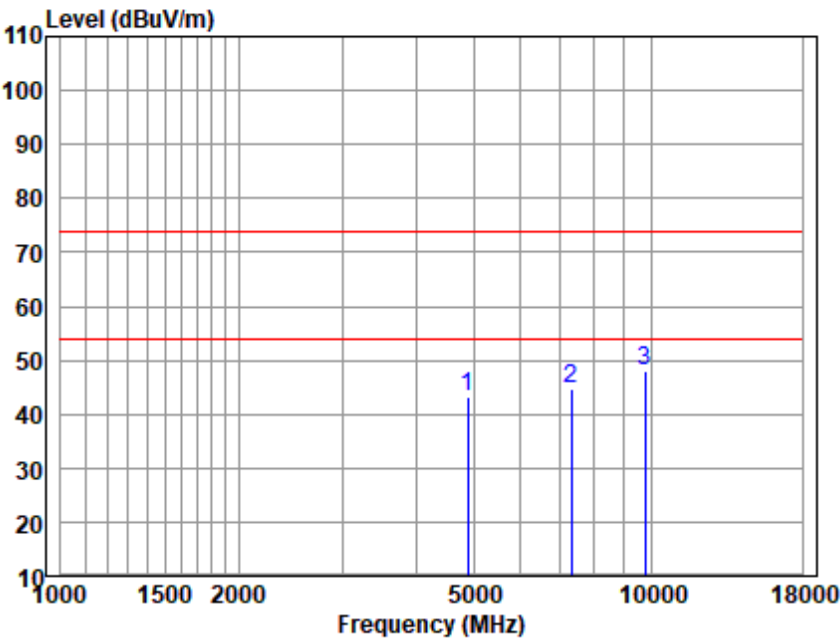

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.151	41.24	33.66	5.29	36.81	43.38	74.00	-30.62	Peak
7326.267	36.47	36.33	7.44	35.42	44.82	74.00	-29.18	Peak
9753.371	35.02	37.54	8.80	33.50	47.86	74.00	-26.14	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 42 of 102

Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

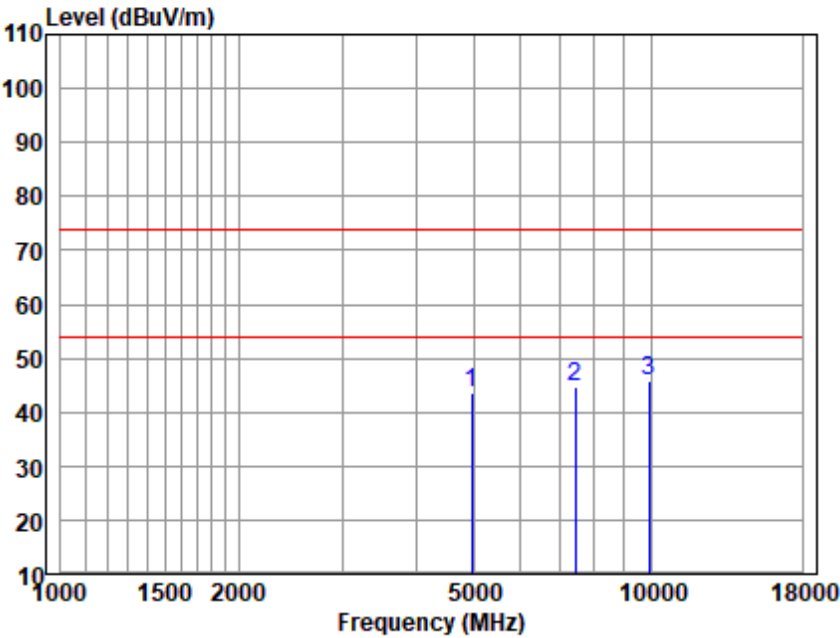


Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.307	41.33	33.65	5.34	36.83	43.49	74.00	-30.51	Peak
7432.914	36.09	36.31	7.53	35.34	44.59	74.00	-29.41	Peak
9923.991	32.53	37.62	8.88	33.41	45.62	74.00	-28.38	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

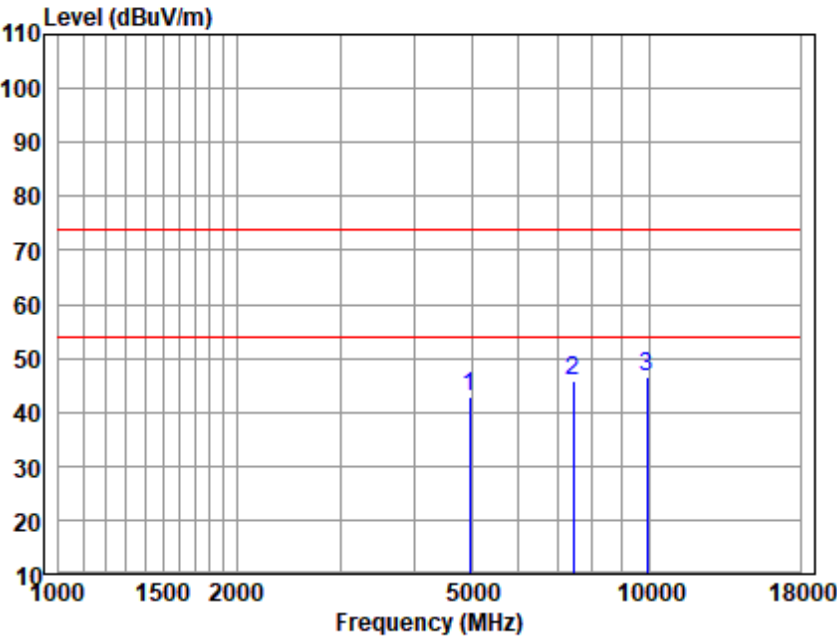

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.307	40.84	33.65	5.34	36.83	43.00	74.00	-31.00	Peak
7432.914	37.23	36.31	7.53	35.34	45.73	74.00	-28.27	Peak
9923.991	33.41	37.62	8.88	33.41	46.50	74.00	-27.50	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 44 of 102

Test Mode: 00; Polarity: Horizontal; Modulation:π/4 DQPSK; Channel:Low

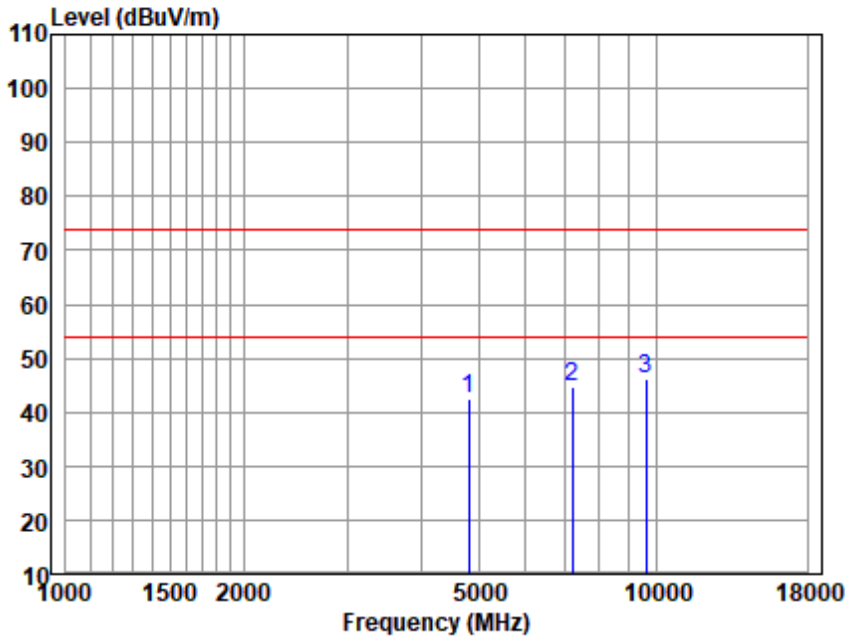

Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	40.46	33.57	5.23	36.79	42.47	74.00	-31.53	Peak
7200.309	36.66	36.24	7.33	35.53	44.70	74.00	-29.30	Peak
9613.430	33.08	37.75	8.74	33.58	45.99	74.00	-28.01	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 45 of 102

Test Mode: 00; Polarity: Vertical; Modulation:π/4 DQPSK; Channel:Low

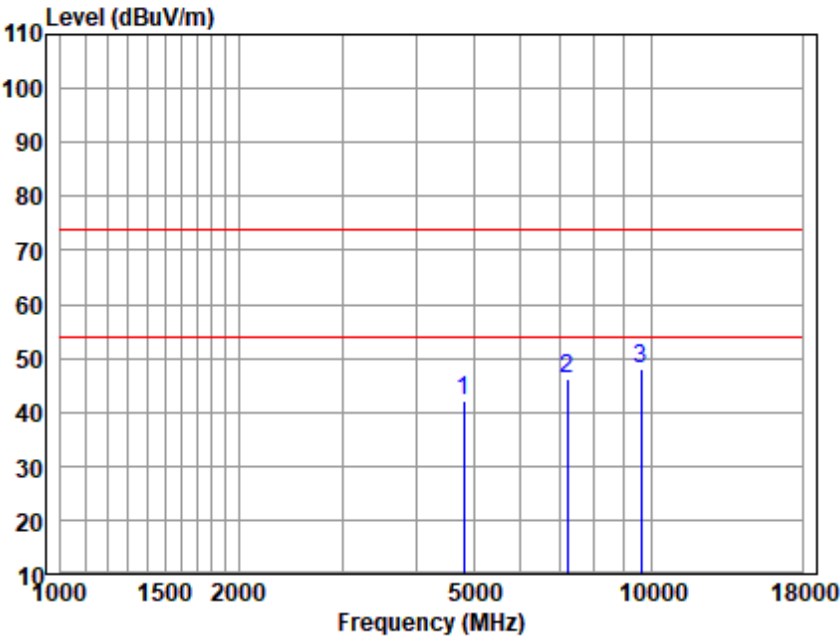

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	40.03	33.57	5.23	36.79	42.04	74.00	-31.96	Peak
7200.309	38.18	36.24	7.33	35.53	46.22	74.00	-27.78	Peak
9613.430	34.96	37.75	8.74	33.58	47.87	74.00	-26.13	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 46 of 102

Test Mode: 00; Polarity: Horizontal; Modulation:π/4 DQPSK; Channel:middle

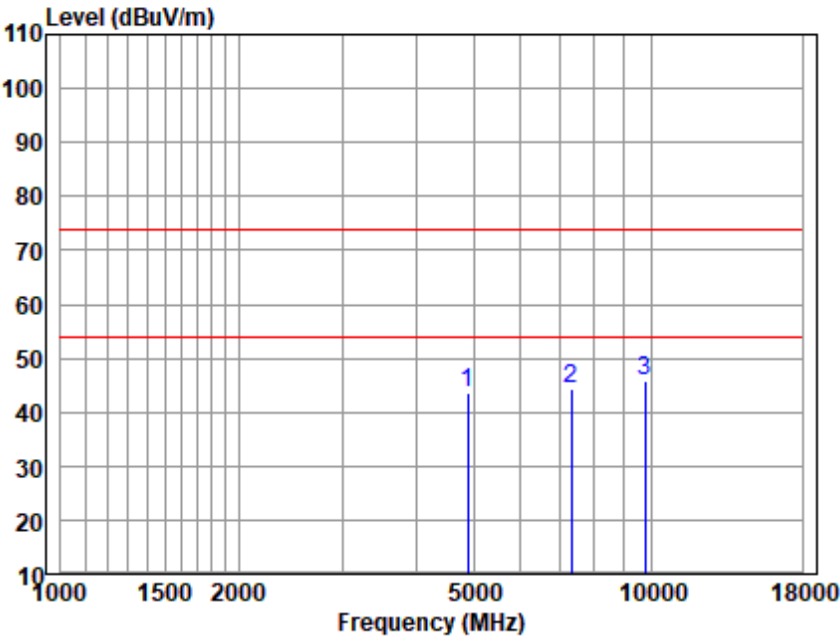

Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.151	41.48	33.66	5.29	36.81	43.62	74.00	-30.38	Peak
7326.267	36.12	36.33	7.44	35.42	44.47	74.00	-29.53	Peak
9753.371	33.06	37.54	8.80	33.50	45.90	74.00	-28.10	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 47 of 102

Test Mode: 00; Polarity: Vertical; Modulation:π/4 DQPSK; Channel:middle

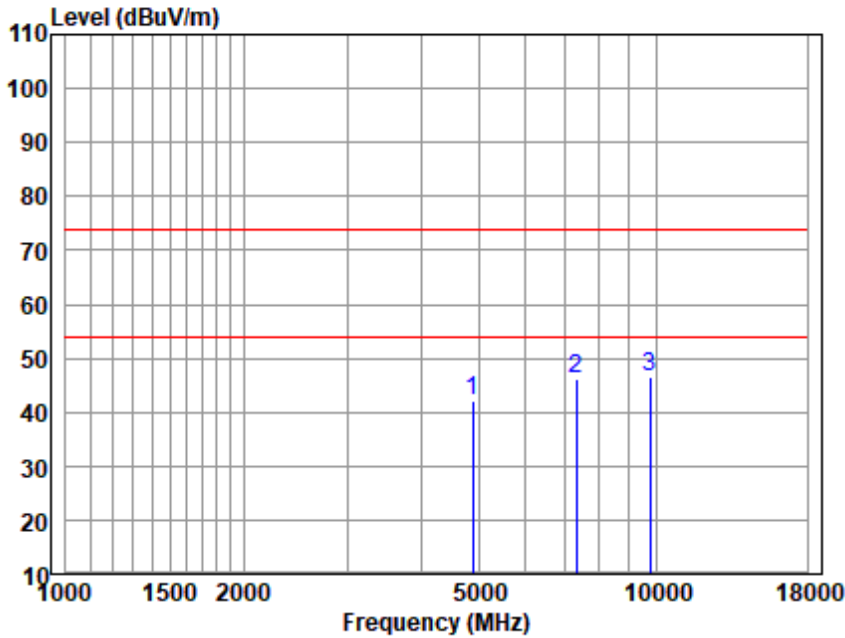

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.151	40.08	33.66	5.29	36.81	42.22	74.00	-31.78	Peak
7326.267	37.64	36.33	7.44	35.42	45.99	74.00	-28.01	Peak
9753.371	33.60	37.54	8.80	33.50	46.44	74.00	-27.56	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 48 of 102

Test Mode: 00; Polarity: Horizontal; Modulation:π/4 DQPSK; Channel:High

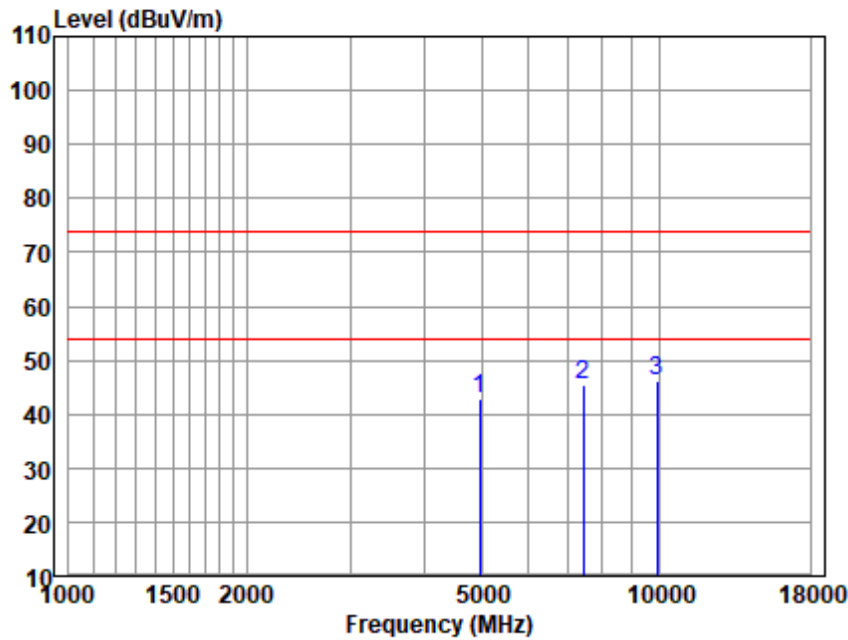

Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.307	40.86	33.65	5.34	36.83	43.02	74.00	-30.98	Peak
7432.914	37.03	36.31	7.53	35.34	45.53	74.00	-28.47	Peak
9923.991	32.96	37.62	8.88	33.41	46.05	74.00	-27.95	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 49 of 102

Test Mode: 00; Polarity: Vertical; Modulation:π/4 DQPSK; Channel:High

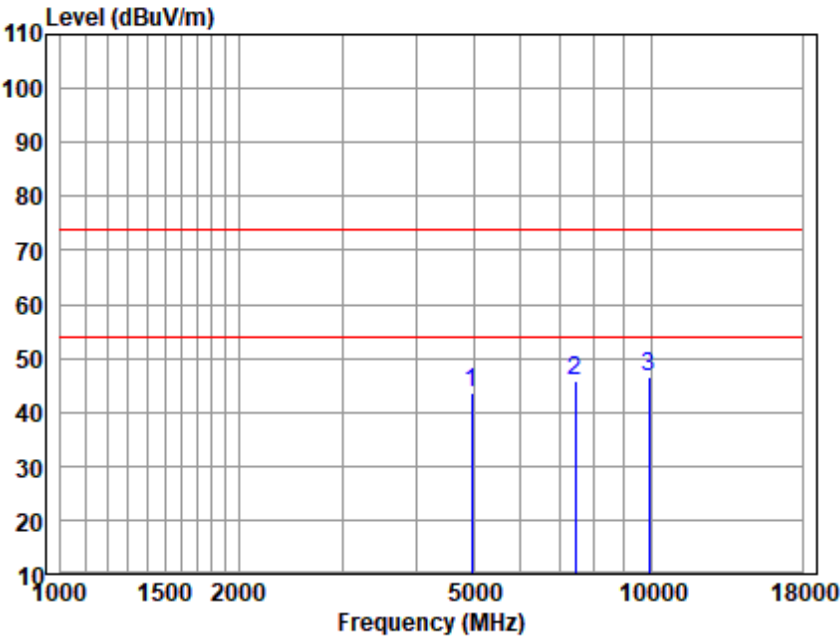

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.307	41.41	33.65	5.34	36.83	43.57	74.00	-30.43	Peak
7432.914	37.30	36.31	7.53	35.34	45.80	74.00	-28.20	Peak
9923.991	33.62	37.62	8.88	33.41	46.71	74.00	-27.29	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 50 of 102

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:Low

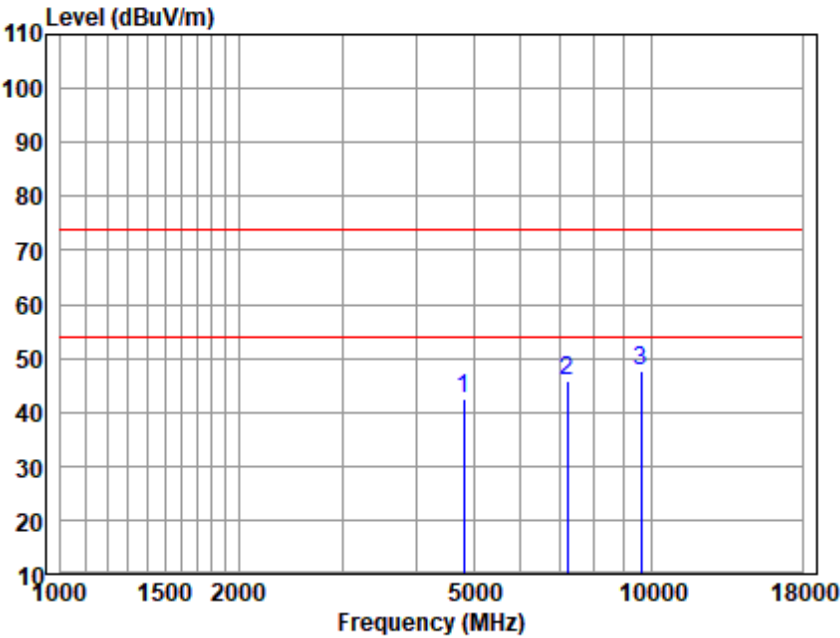

Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	40.29	33.57	5.23	36.79	42.30	74.00	-31.70	Peak
7200.309	37.65	36.24	7.33	35.53	45.69	74.00	-28.31	Peak
9613.430	34.88	37.75	8.74	33.58	47.79	74.00	-26.21	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 51 of 102

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:Low

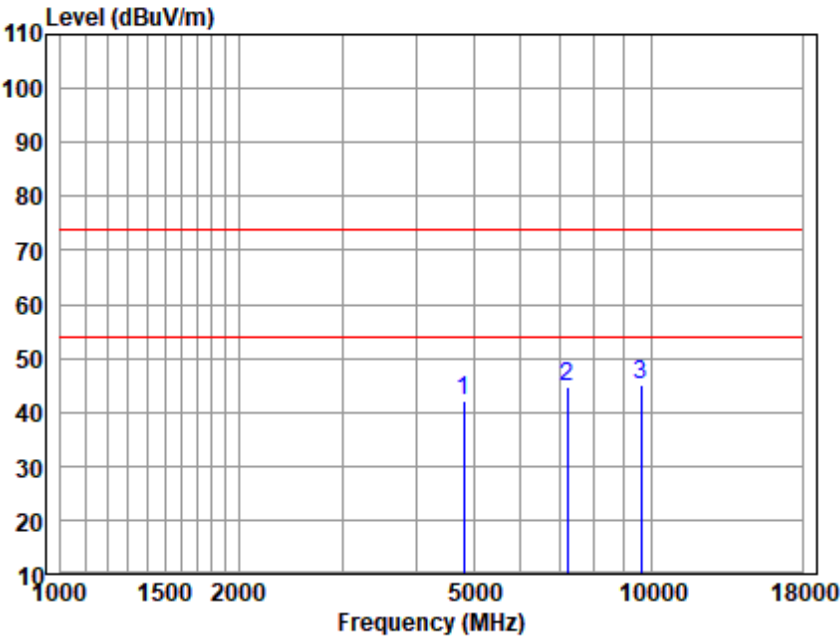


Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4804.110	40.22	33.57	5.23	36.79	42.23	74.00	-31.77	Peak
7200.309	36.82	36.24	7.33	35.53	44.86	74.00	-29.14	Peak
9613.430	32.28	37.75	8.74	33.58	45.19	74.00	-28.81	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:middle

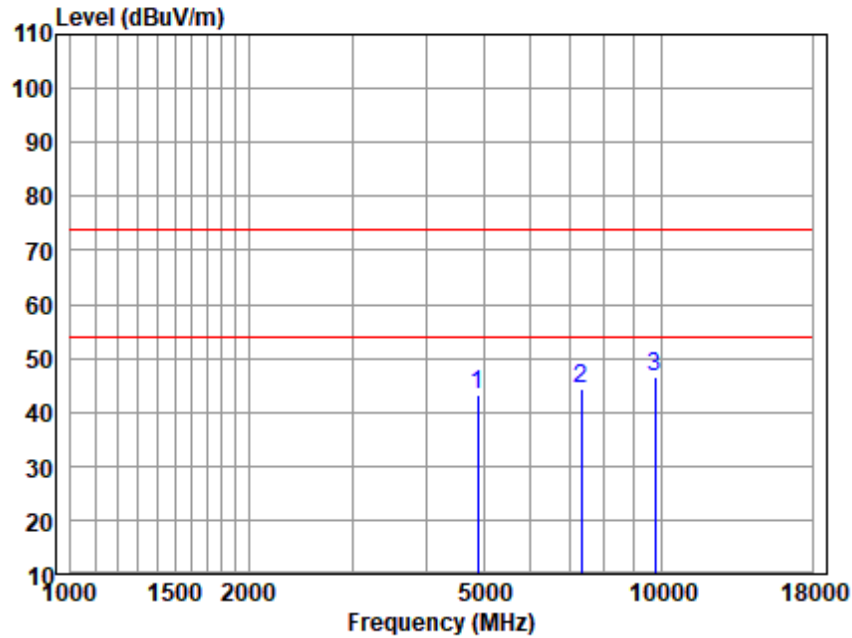

Antenna Polarity :HORIZONTAL

EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4882.151	40.96	33.66	5.29	36.81	43.10	74.00	-30.90	Peak
7326.267	35.99	36.33	7.44	35.42	44.34	74.00	-29.66	Peak
9753.371	33.65	37.54	8.80	33.50	46.49	74.00	-27.51	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 53 of 102

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:middle

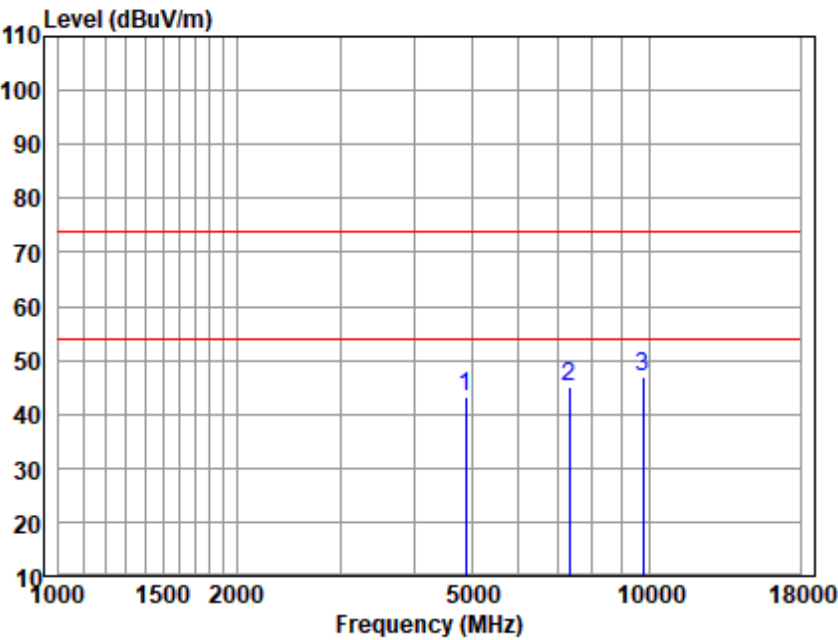

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4882.151	41.08	33.66	5.29	36.81	43.22	74.00	-30.78	Peak
7326.267	36.79	36.33	7.44	35.42	45.14	74.00	-28.86	Peak
9753.371	34.12	37.54	8.80	33.50	46.96	74.00	-27.04	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 54 of 102

Test Mode: 00; Polarity: Horizontal; Modulation:8DPSK; Channel:High

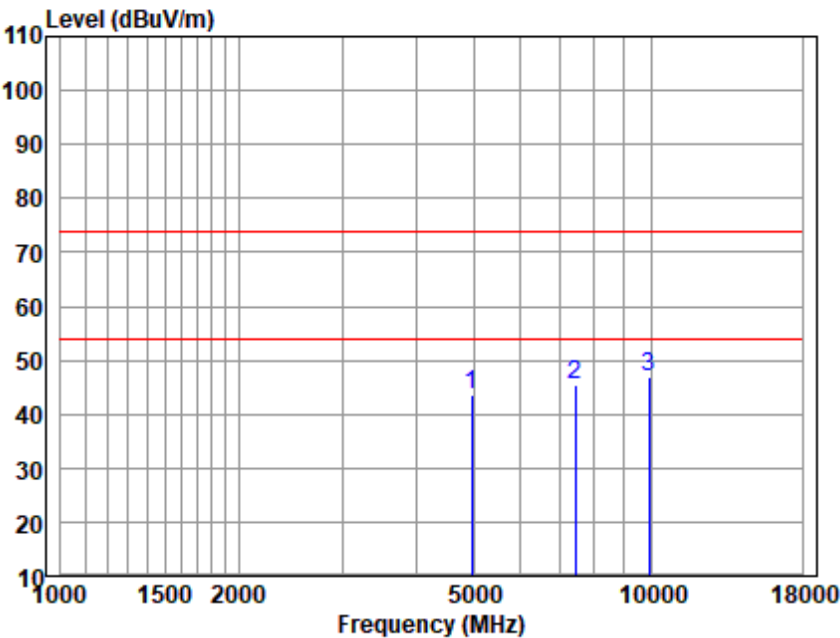

Antenna Polarity :HORIZONTAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
4960.307	41.50	33.65	5.34	36.83	43.66	74.00	-30.34	Peak
7432.914	37.04	36.31	7.53	35.34	45.54	74.00	-28.46	Peak
9923.991	33.63	37.62	8.88	33.41	46.72	74.00	-27.28	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 55 of 102

Test Mode: 00; Polarity: Vertical; Modulation:8DPSK; Channel:High

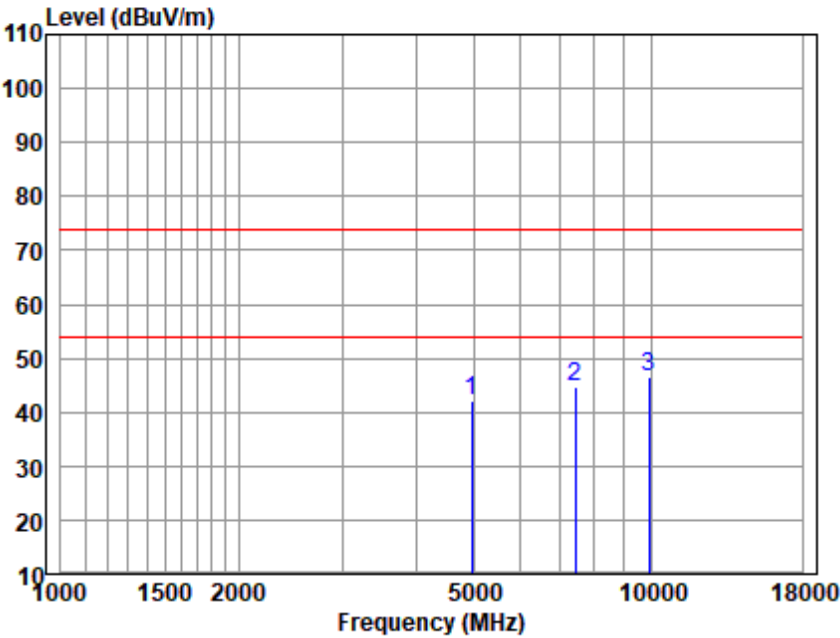

Antenna Polarity :VERTICAL
EUT/Project :2024HS

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4960.307	39.86	33.65	5.34	36.83	42.02	74.00	-31.98	Peak
7432.914	36.37	36.31	7.53	35.34	44.87	74.00	-29.13	Peak
9923.991	33.35	37.62	8.88	33.41	46.44	74.00	-27.56	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 56 of 102

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SHCR2410002024HS

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SHCR2410002024HS

10 Appendix

10.1 Appendix A: 20dB Emission Bandwidth

10.1.1 Test Result

Test Mode	Antenna	Channel	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.011	2401.655	2402.666	---	---
		2441	0.996	2440.640	2441.636	---	---
		2480	1.038	2479.625	2480.663	---	---
2DH5	Ant1	2402	1.362	2401.451	2402.813	---	---
		2441	1.389	2440.433	2441.822	---	---
		2480	1.368	2479.448	2480.816	---	---
3DH5	Ant1	2402	1.320	2401.472	2402.792	---	---
		2441	1.347	2440.454	2441.801	---	---
		2480	1.371	2479.442	2480.813	---	---

10.1.2 Test Graphs

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 61 of 102

10.2 Appendix B: Occupied Channel Bandwidth

10.2.1 Test Result

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.90560	2401.6808	2402.5864	---	---
		2441	0.94735	2440.6655	2441.6129	---	---
		2480	0.94507	2479.6563	2480.6013	---	---
2DH5	Ant1	2402	1.2273	2401.5180	2402.7453	---	---
		2441	1.2255	2440.5175	2441.7430	---	---
		2480	1.2210	2479.5207	2480.7417	---	---
3DH5	Ant1	2402	1.2216	2401.5110	2402.7326	---	---
		2441	1.2209	2440.5122	2441.7331	---	---
		2480	1.2185	2479.5118	2480.7303	---	---

10.2.2 Test Graphs

DH5_Ant1_2402




DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402

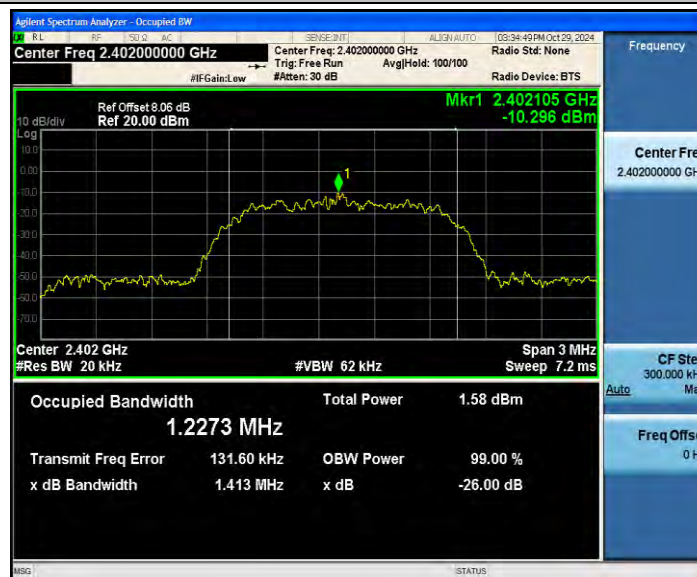

2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402


Page: 66 of 102

10.3 Appendix C: Maximum conducted output power

10.3.1 Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-3.19	≤20.97	PASS
		2441	-3.60	≤20.97	PASS
		2480	-4.88	≤20.97	PASS
2DH5	Ant1	2402	-2.98	≤20.97	PASS
		2441	-3.31	≤20.97	PASS
		2480	-4.67	≤20.97	PASS
3DH5	Ant1	2402	-2.57	≤20.97	PASS
		2441	-2.95	≤20.97	PASS
		2480	-4.33	≤20.97	PASS

10.3.2 Test Graphs

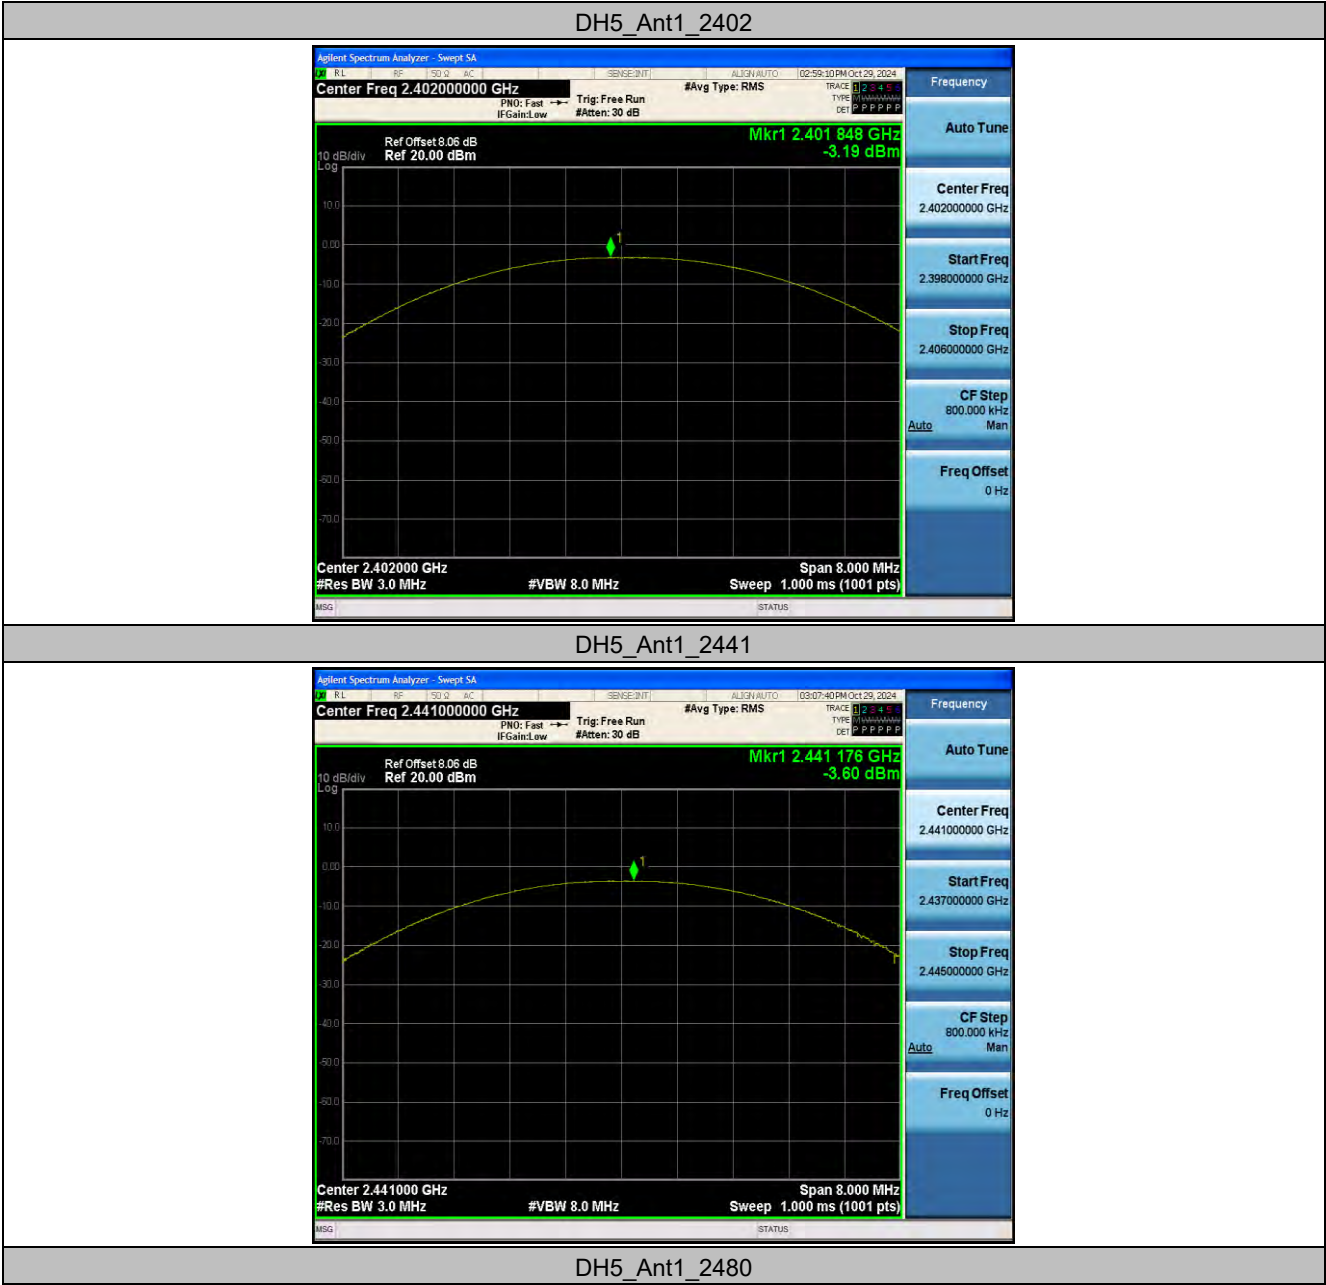




2DH5_Ant1_2402



2DH5_Ant1_2441

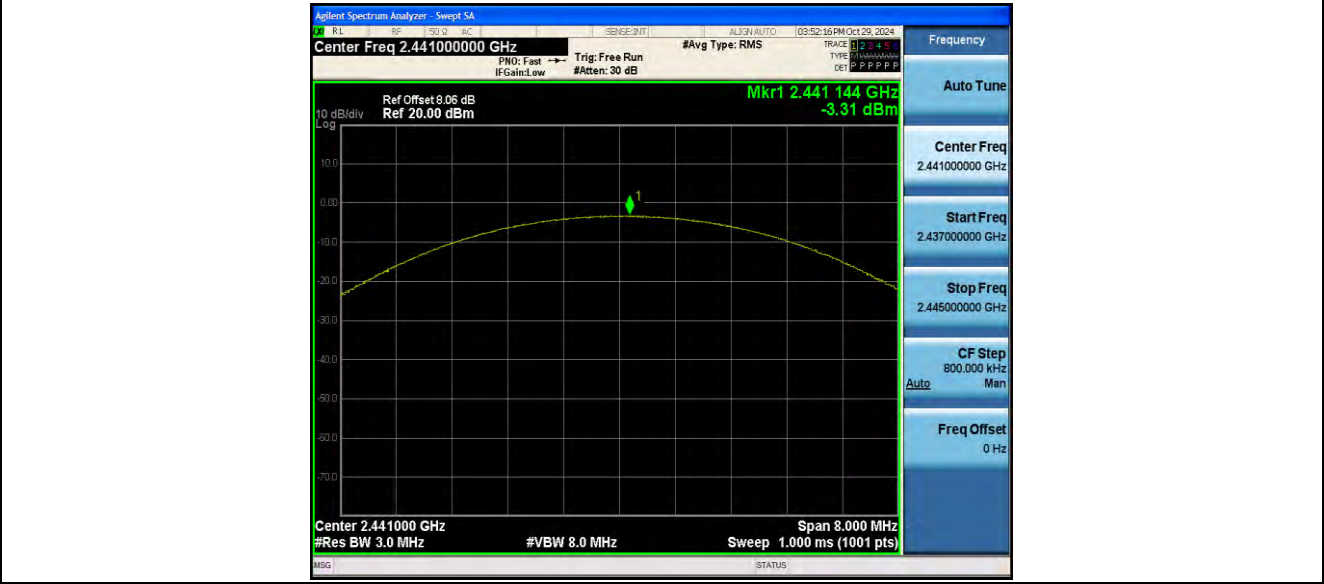


2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441

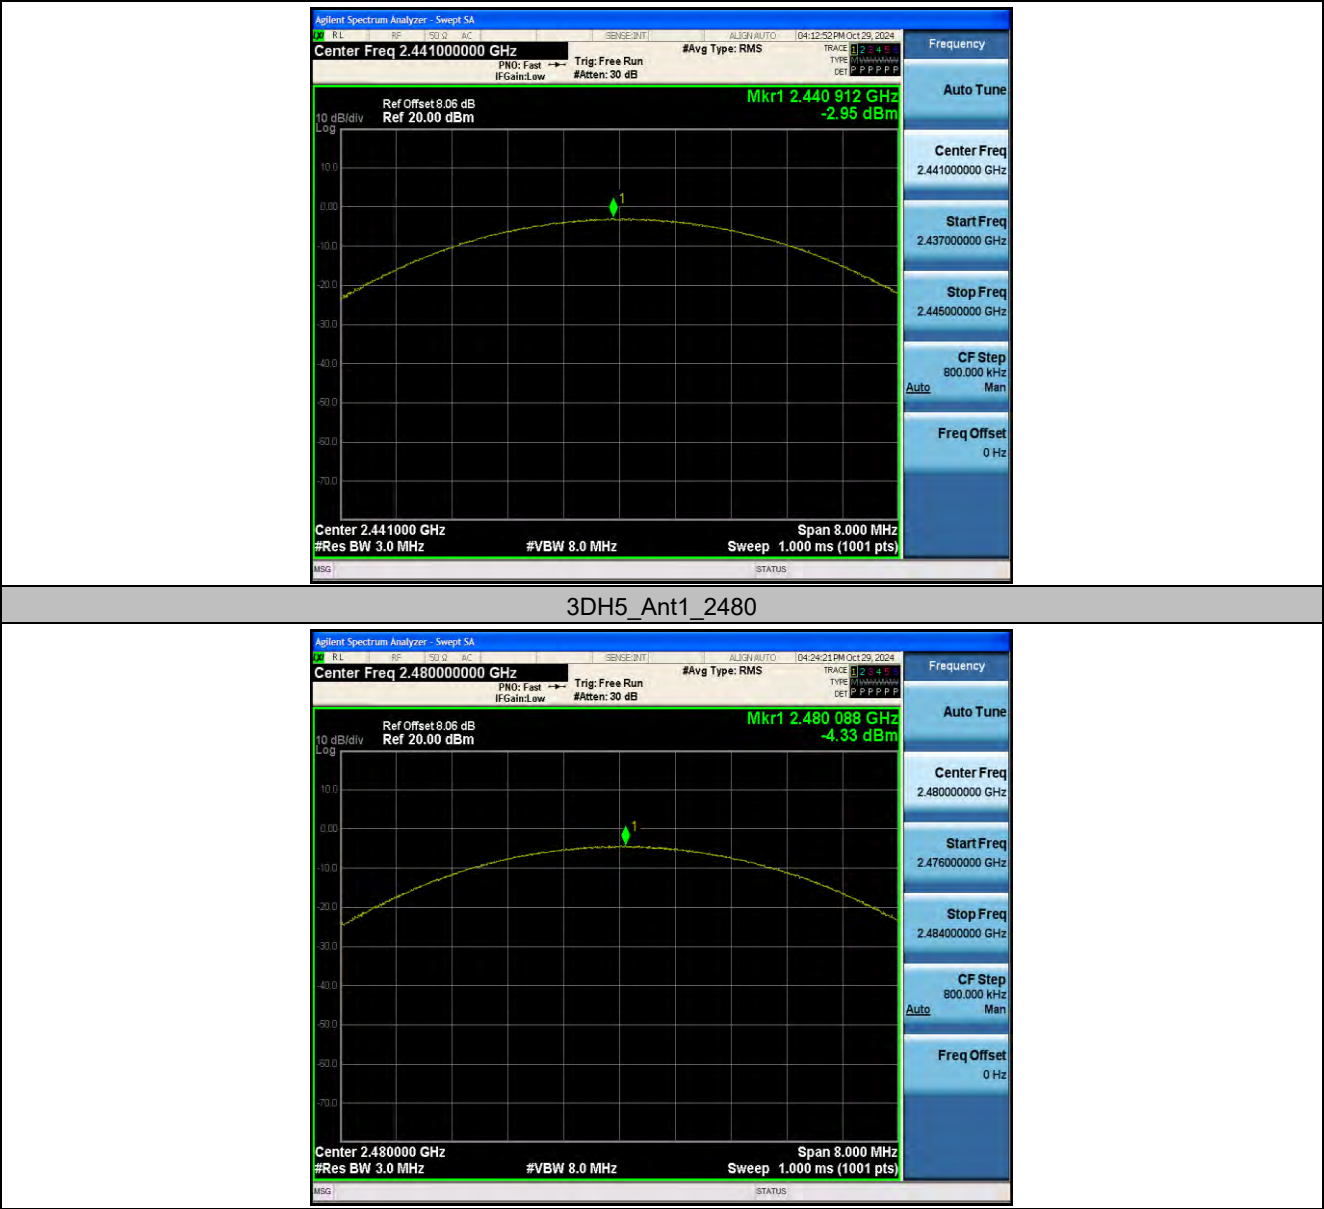



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 71 of 102

10.4 Appendix D: Carrier frequency separation

10.4.1 Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.988	≥0.692	PASS
2DH5	Ant1	Hop	0.994	≥0.926	PASS
3DH5	Ant1	Hop	1.036	≥0.914	PASS

10.4.2 Test Graphs





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 73 of 102





SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402


Page: 74 of 102


10.5 Appendix E: Time of occupancy


10.5.1 Test Result

Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.381	320	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.638	180	0.295	≤0.4	PASS
DH5	Ant1	Hop	2.885	110	0.317	≤0.4	PASS
2DH1	Ant1	Hop	0.386	320	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.638	180	0.295	≤0.4	PASS
2DH5	Ant1	Hop	2.887	100	0.289	≤0.4	PASS
3DH1	Ant1	Hop	0.386	320	0.124	≤0.4	PASS
3DH3	Ant1	Hop	1.637	110	0.18	≤0.4	PASS
3DH5	Ant1	Hop	2.888	80	0.231	≤0.4	PASS



10.5.2 Test Graphs

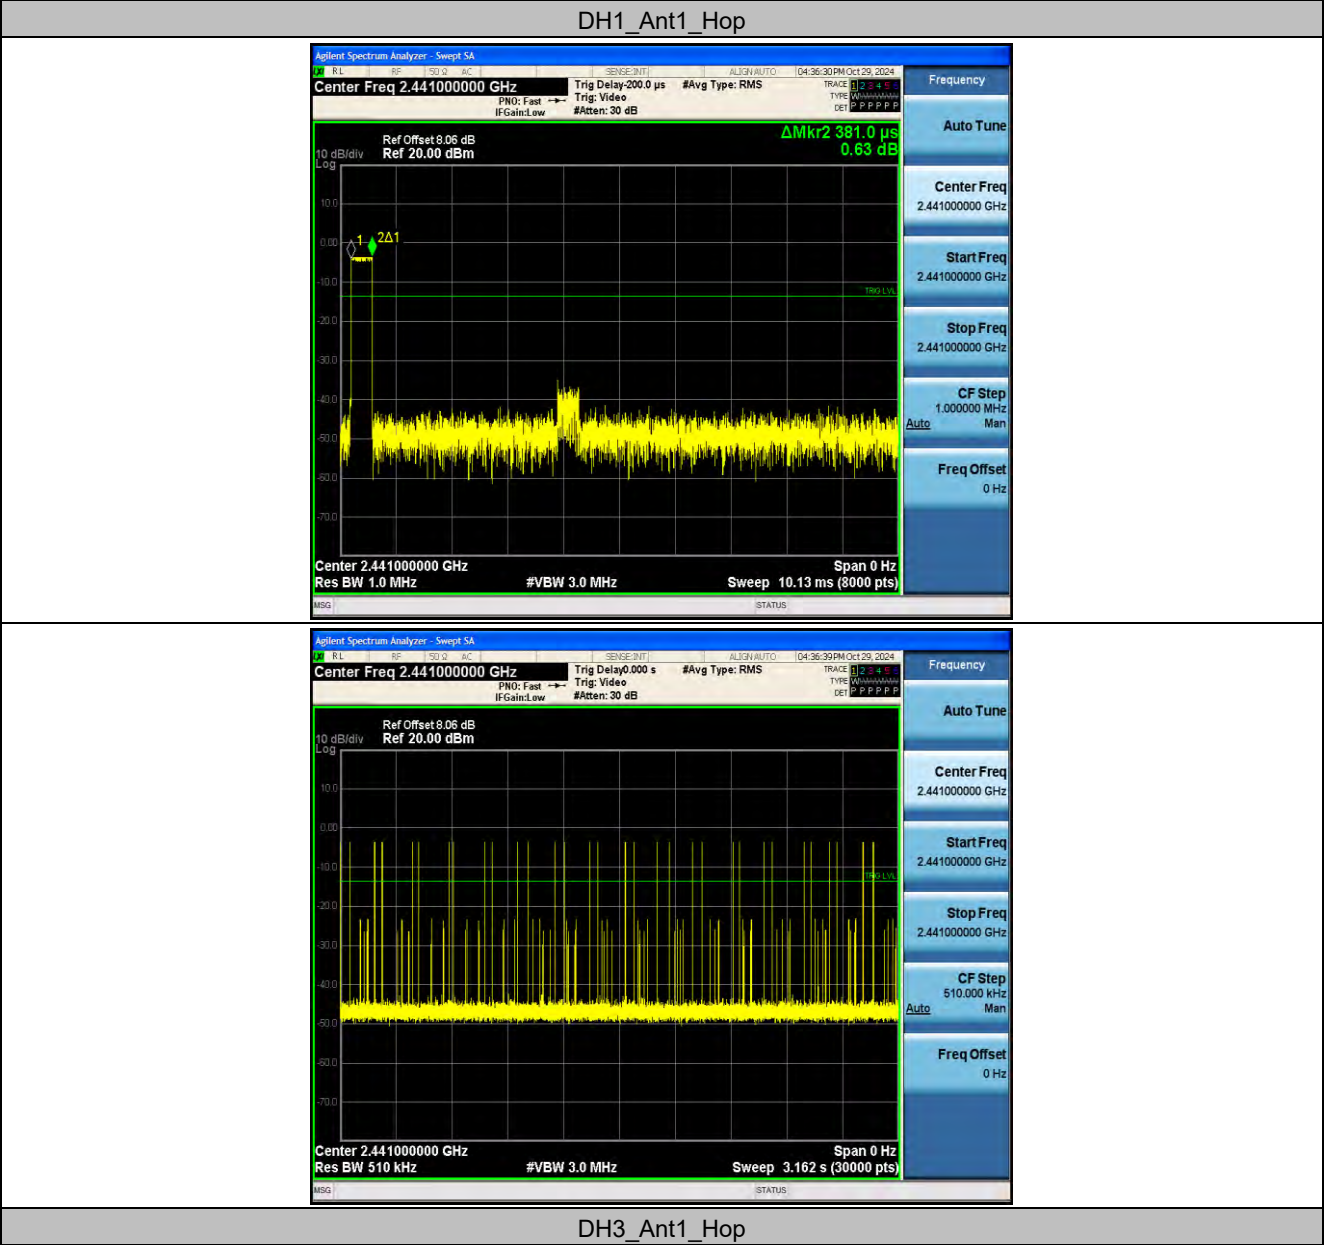

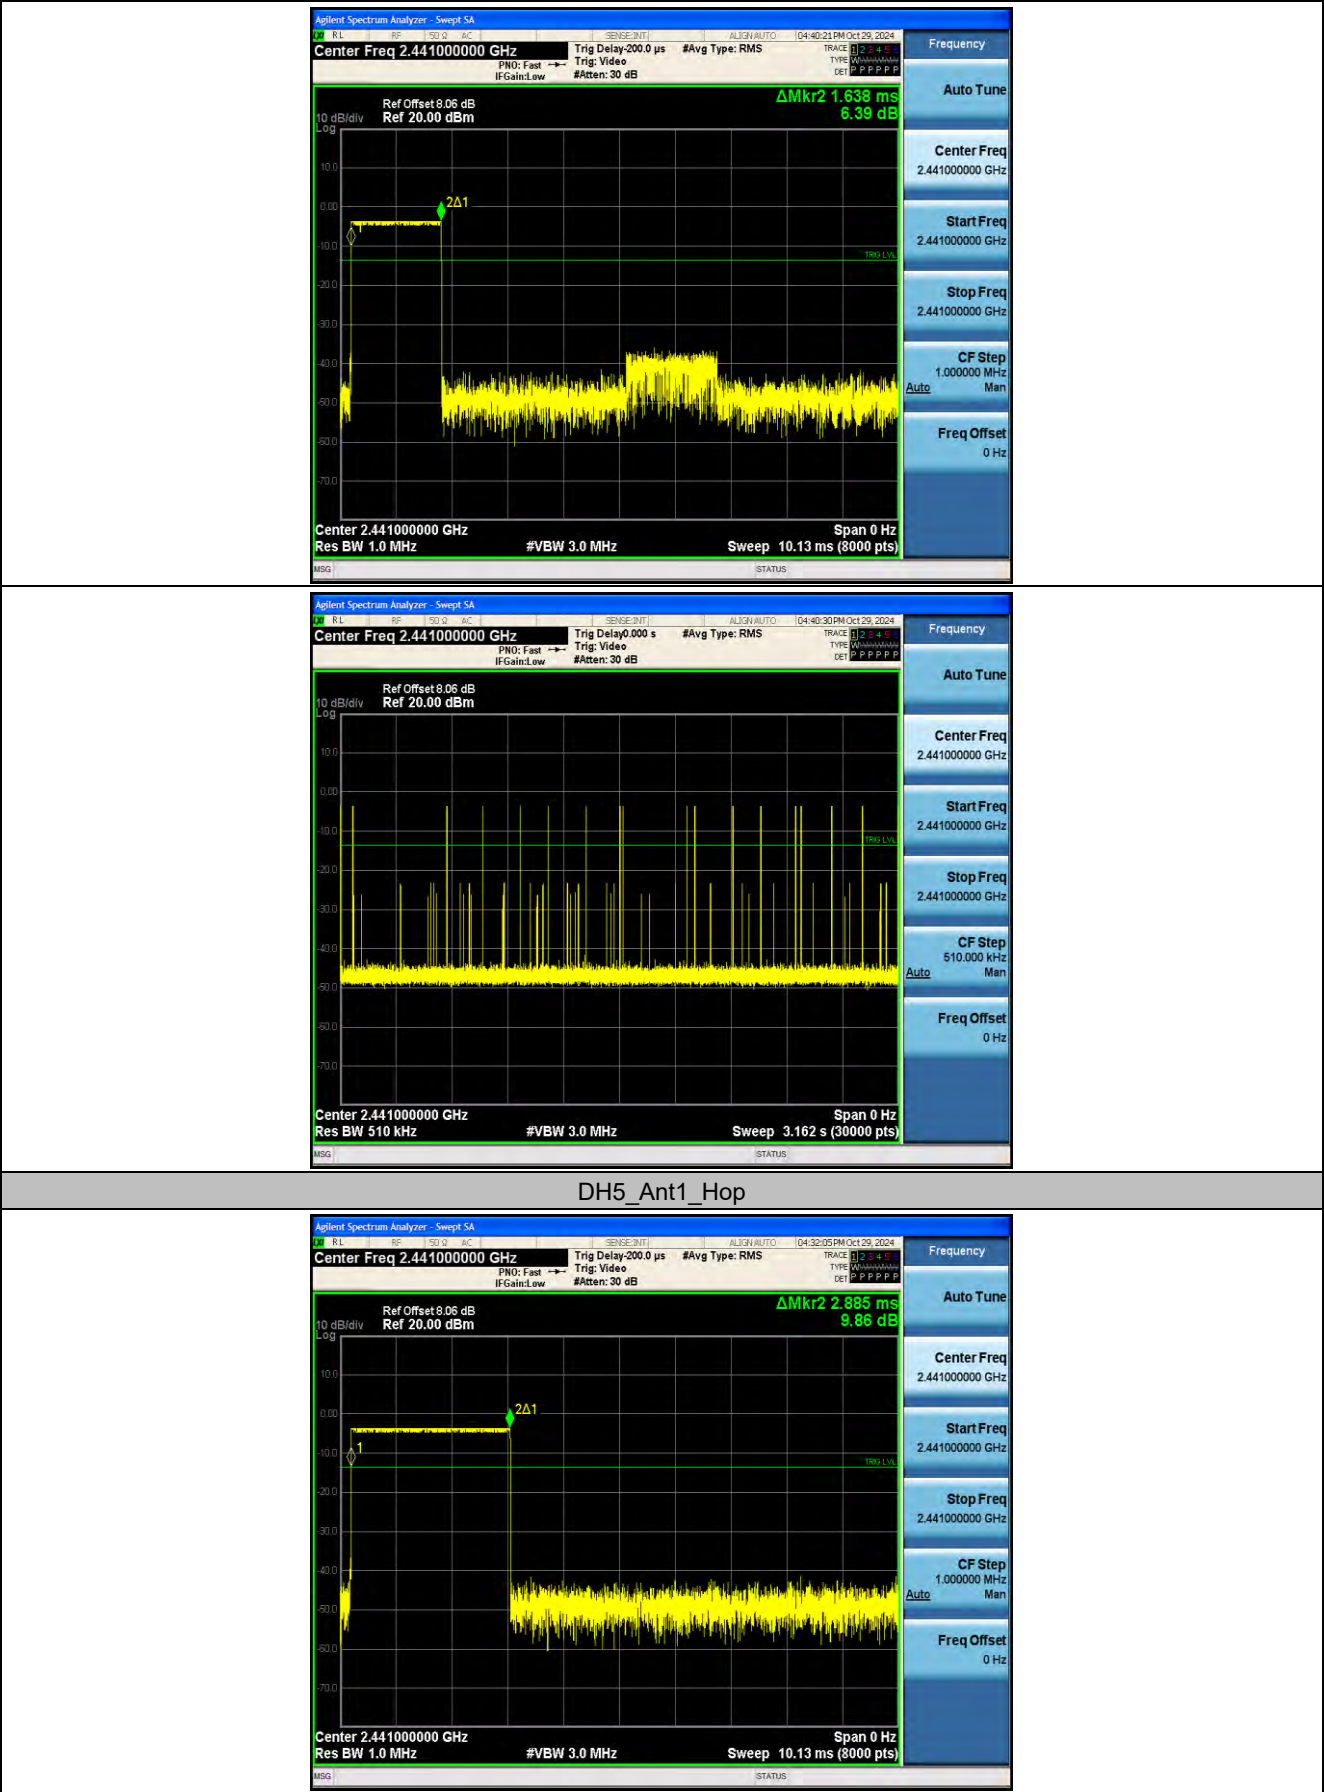


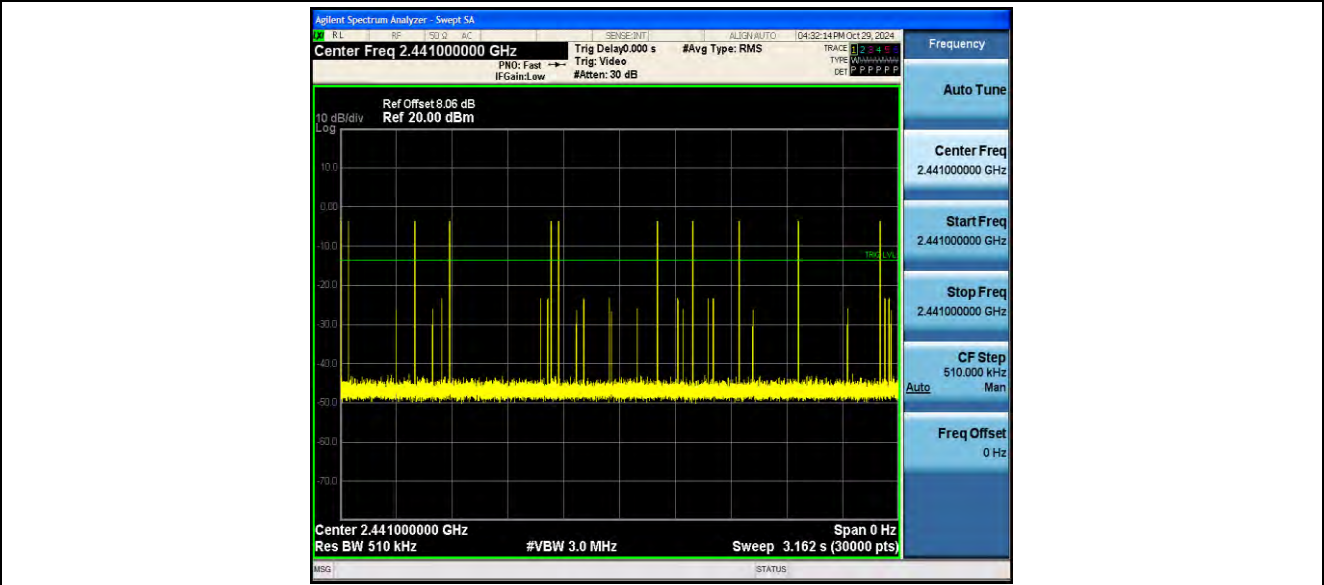



2DH1_Ant1_Hop

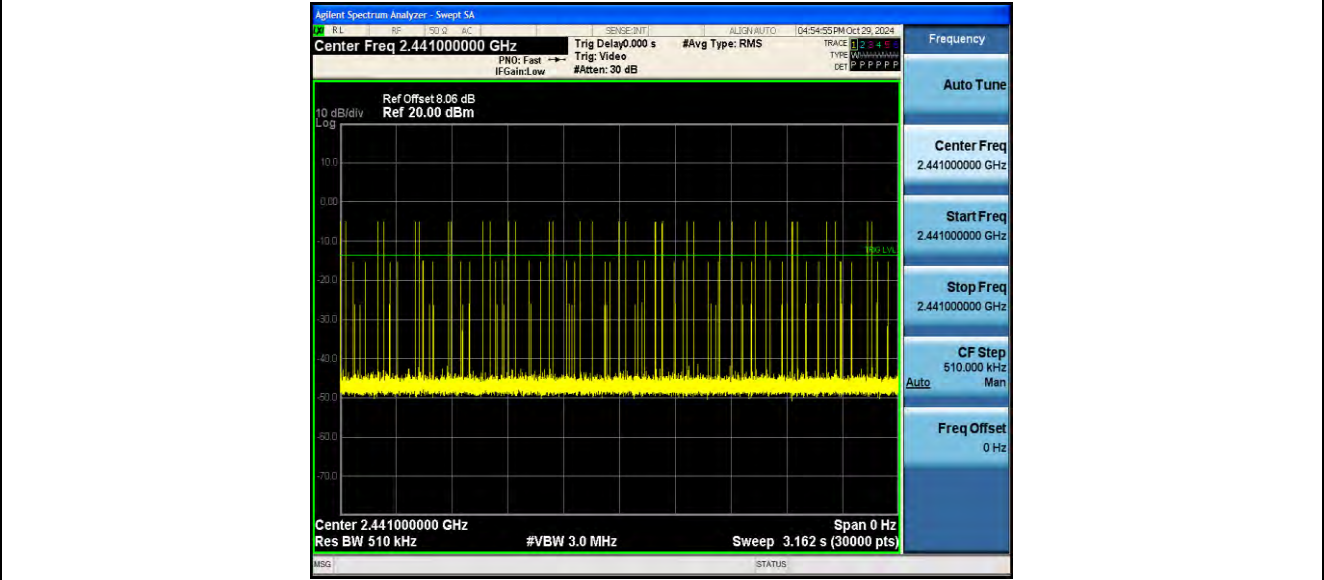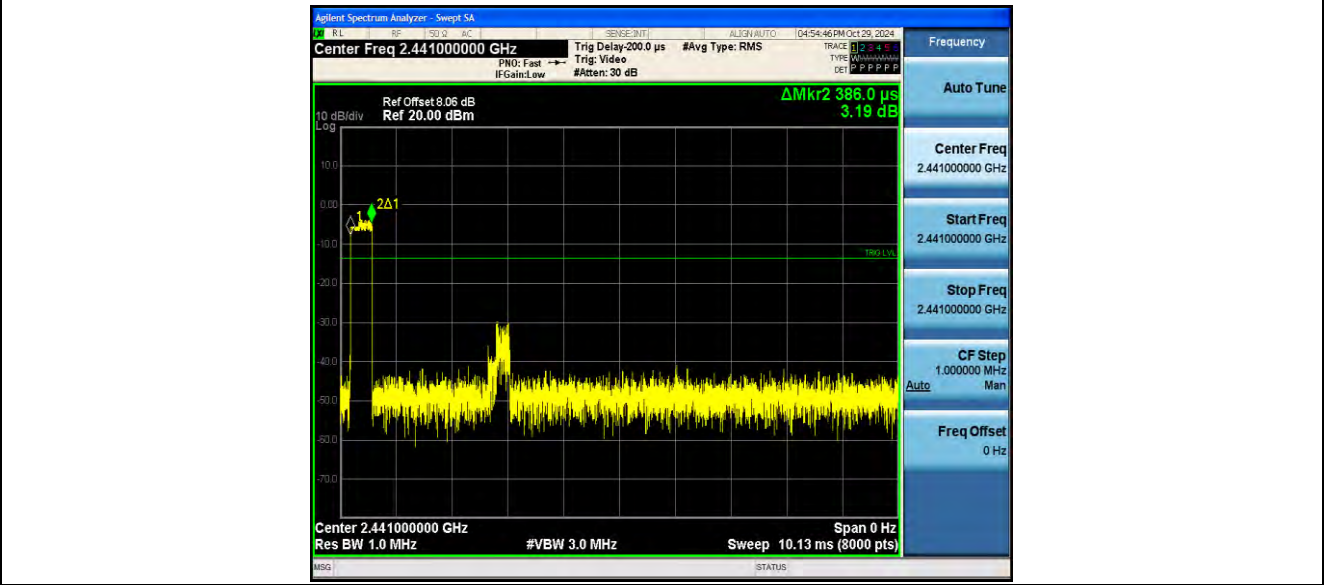


2DH3_Ant1_Hop

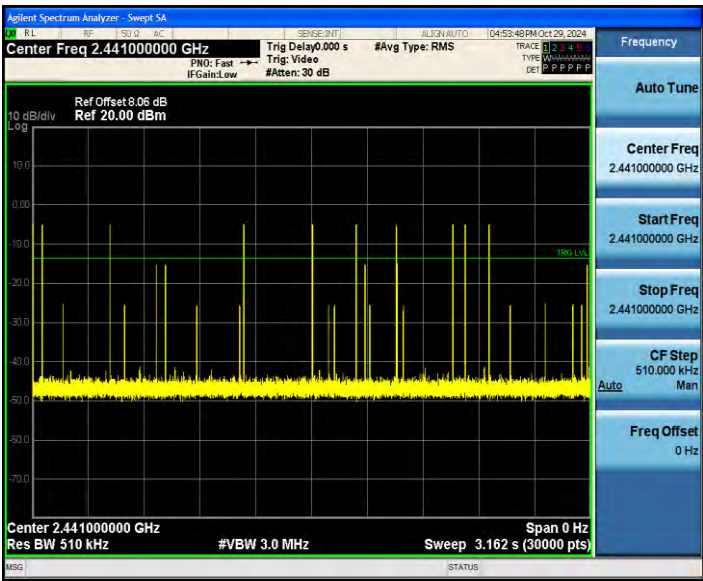


3DH1_Ant1_Hop

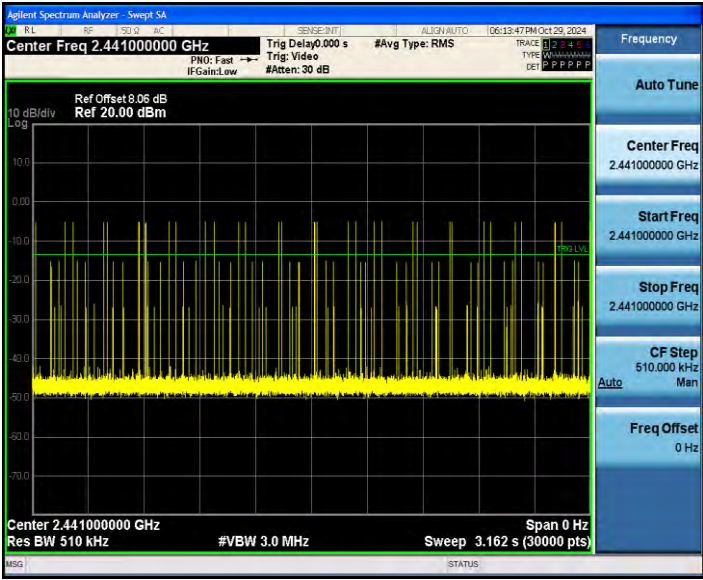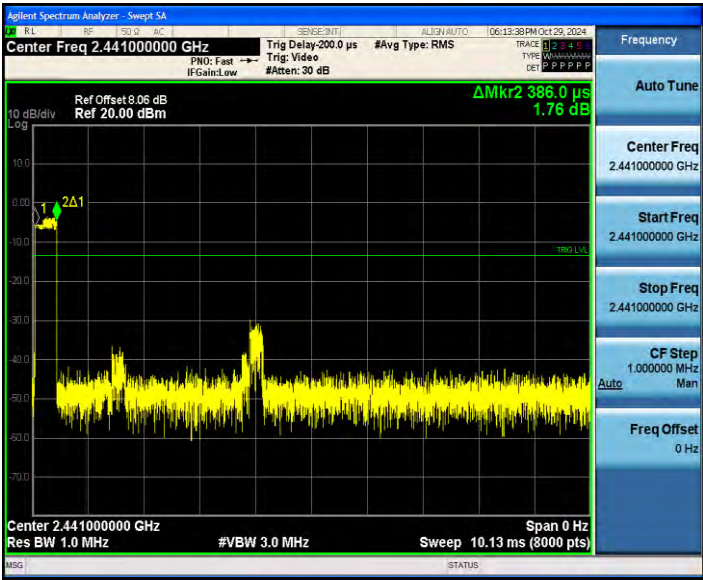

3DH3_Ant1_Hop

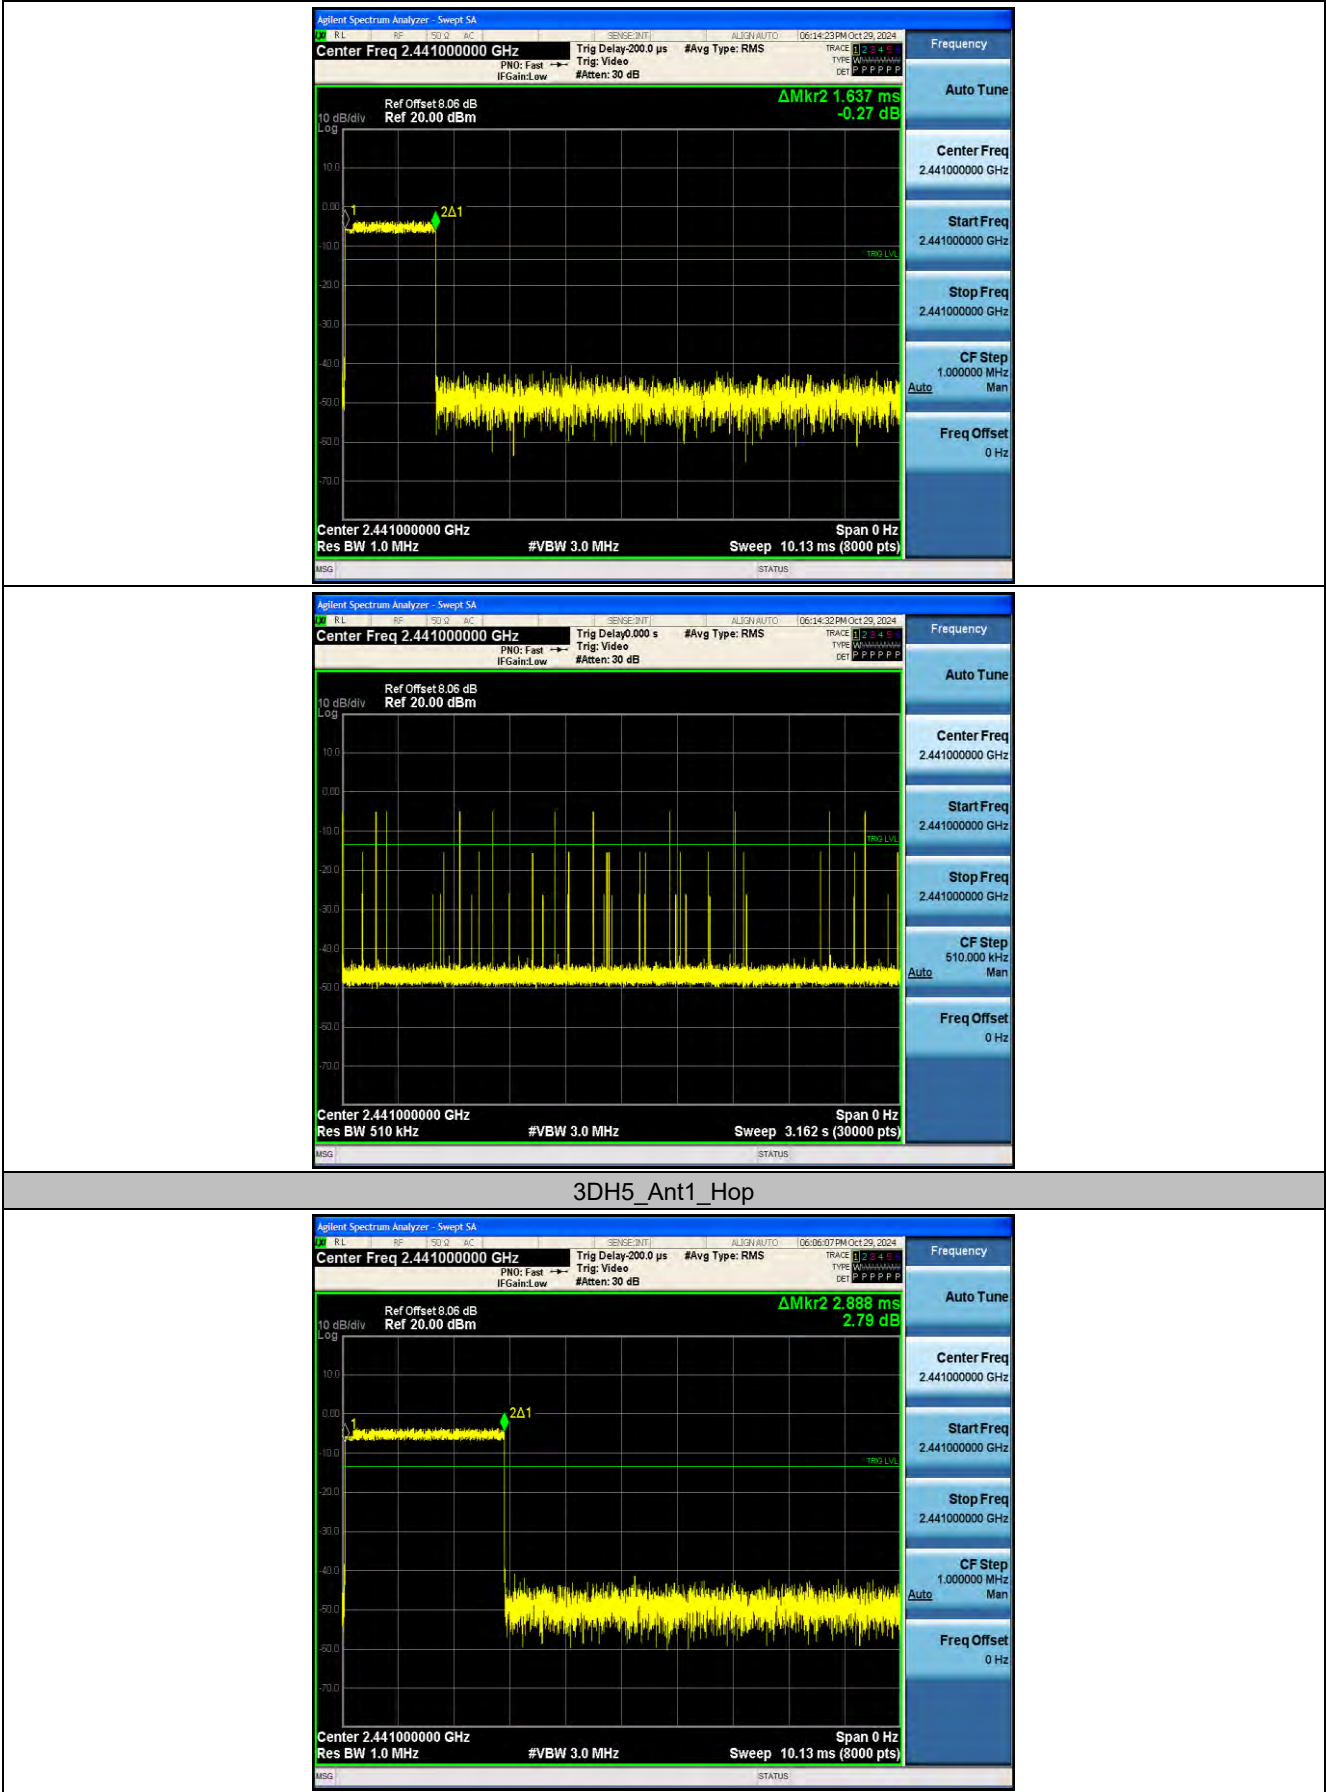

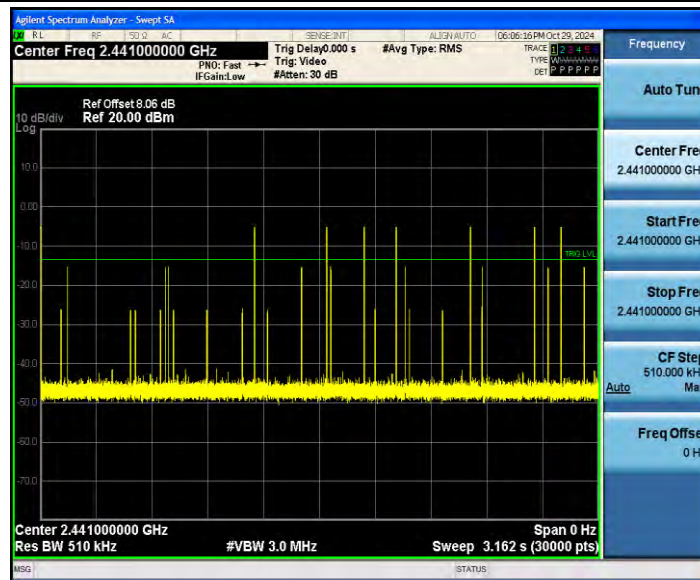



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402


Page: 82 of 102

10.6 Appendix F: Number of hopping channels

10.6.1 Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

10.6.2 Test Graphs

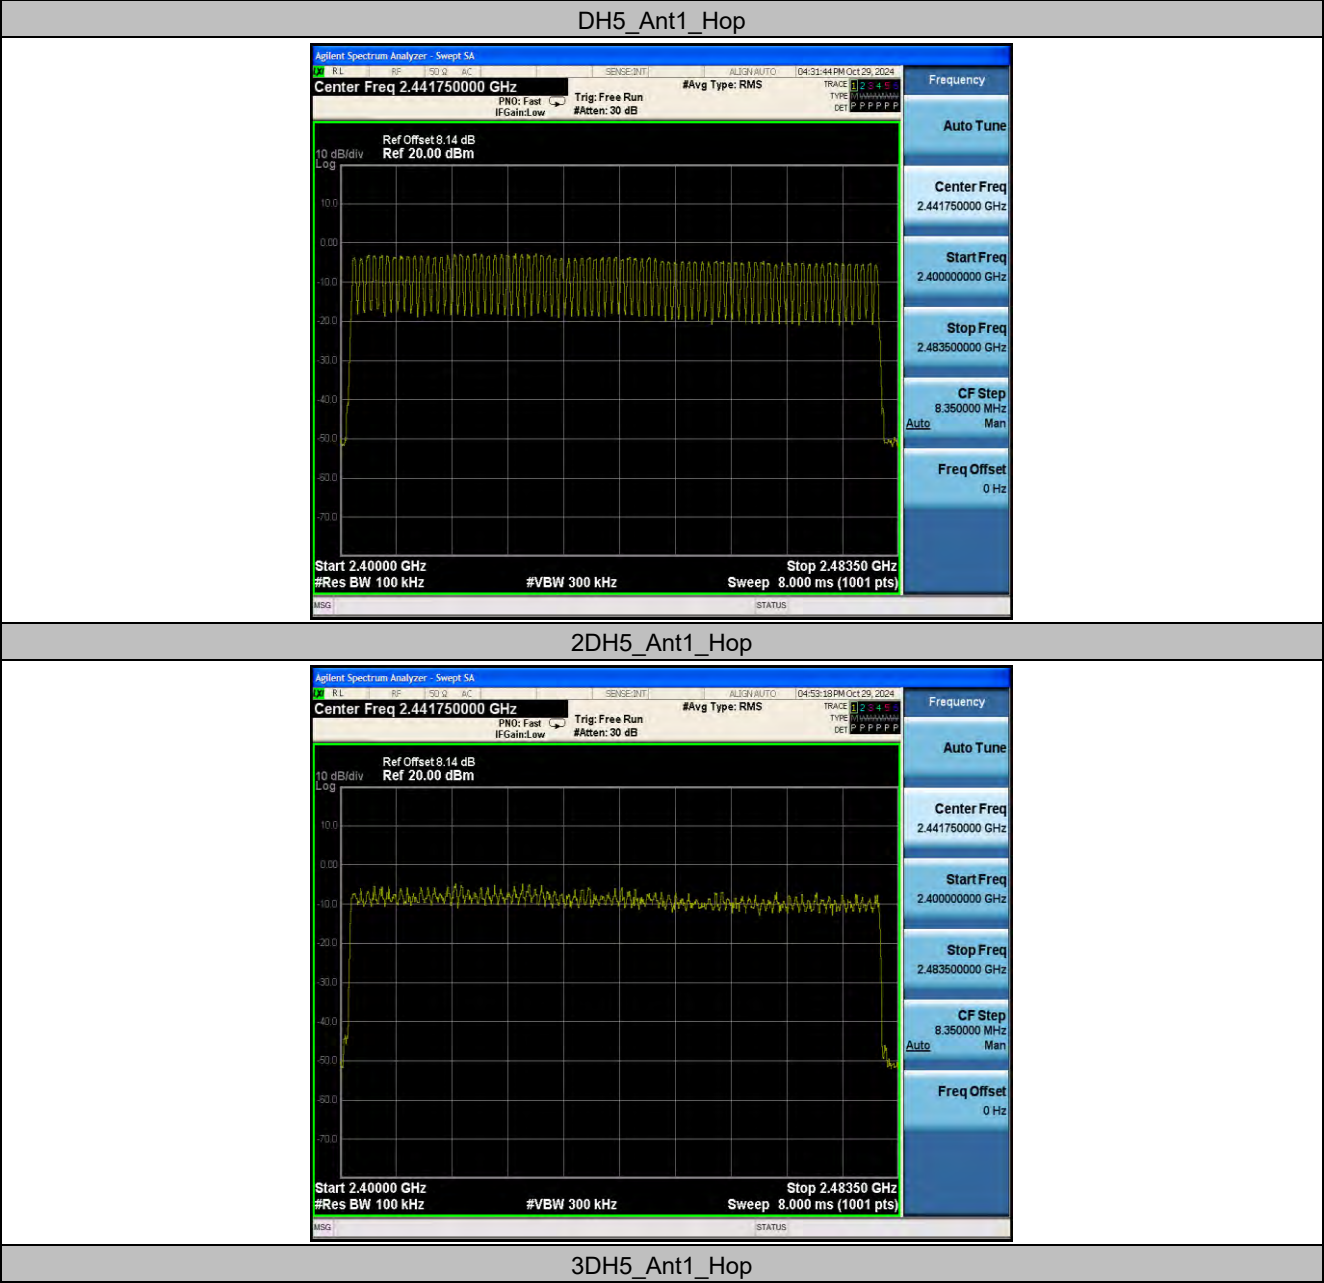




SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 84 of 102

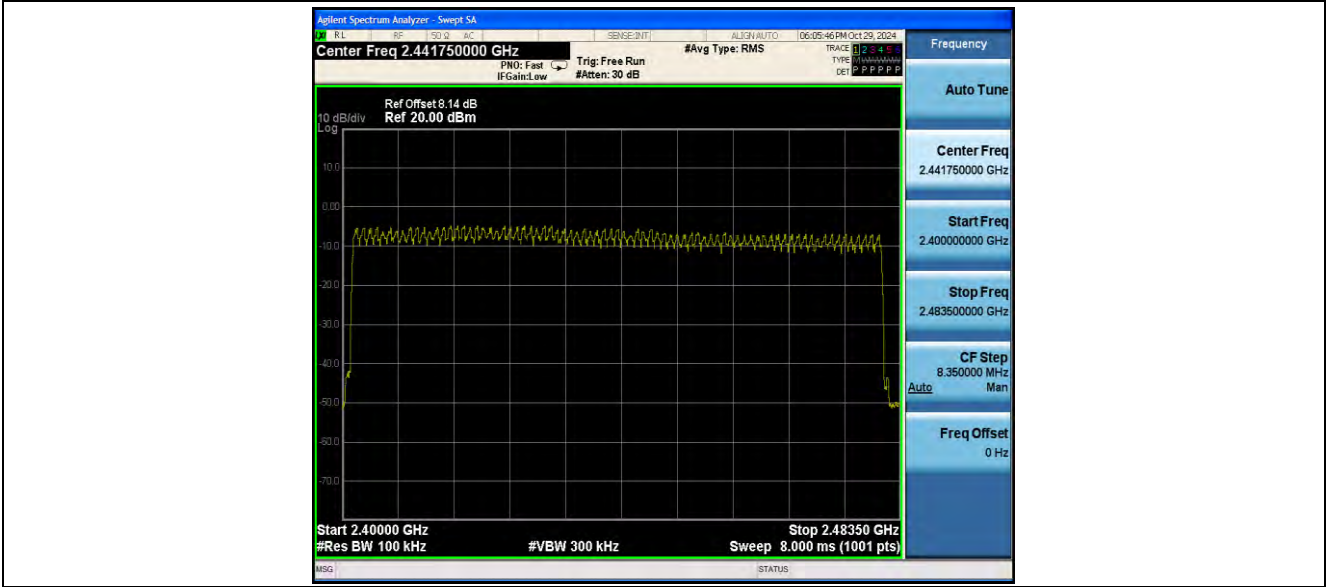



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR241000202402

Page: 85 of 102


10.7 Appendix G: Band edge measurements

10.7.1 Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-3.63	-50.1	≤-23.63	PASS
		High	2480	-5.28	-48.72	≤-25.28	PASS
		Low	Hop_2402	-2.91	-48.24	≤-22.91	PASS
		High	Hop_2480	-5.14	-49.22	≤-25.14	PASS
2DH5	Ant1	Low	2402	-5.48	-49.95	≤-25.48	PASS
		High	2480	-7.75	-49.18	≤-27.75	PASS
		Low	Hop_2402	-5.44	-49.21	≤-25.44	PASS
		High	Hop_2480	-7.71	-49.31	≤-27.71	PASS
3DH5	Ant1	Low	2402	-5.40	-49.75	≤-25.4	PASS
		High	2480	-7.20	-49.21	≤-27.2	PASS
		Low	Hop_2402	-4.46	-47.48	≤-24.46	PASS
		High	Hop_2480	-6.95	-39.16	≤-26.95	PASS

10.7.2 Test Graphs


DH5_Ant1_Low_2402

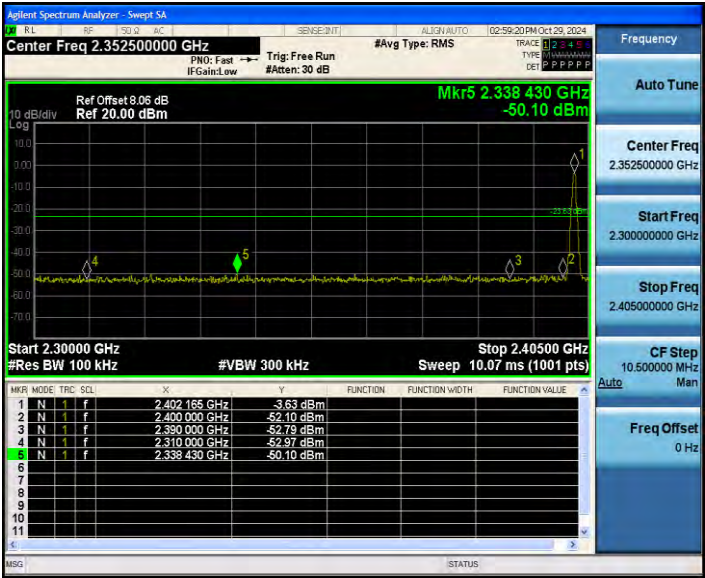


DH5_Ant1_High_2480

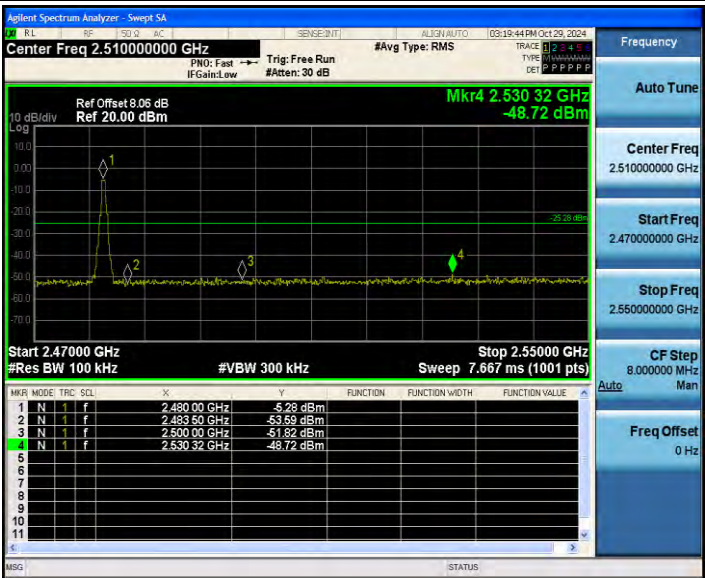

DH5_Ant1_Low_Hop_2402

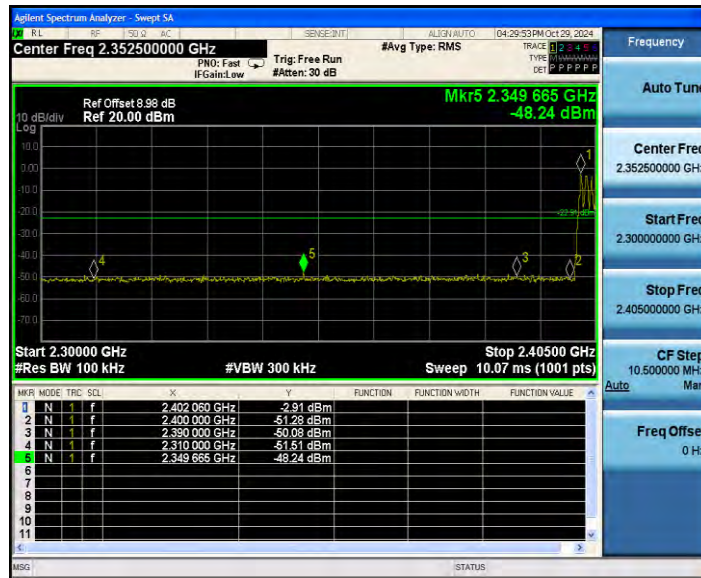


DH5_Ant1_High_Hop_2480

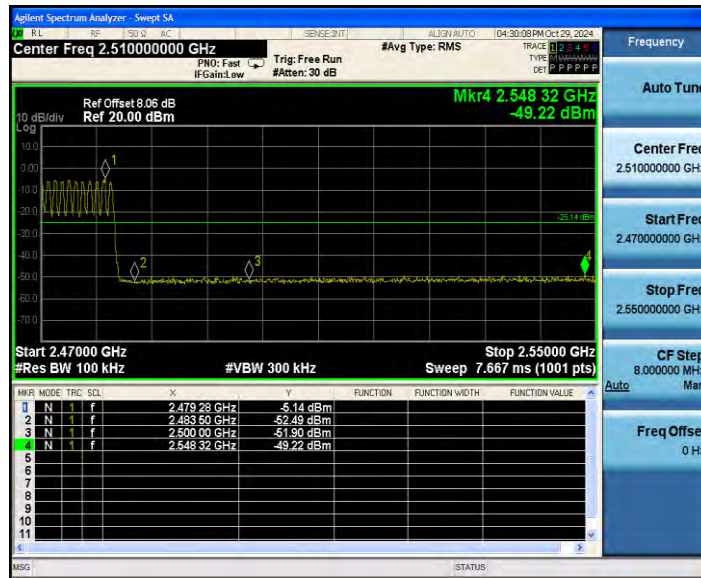


2DH5_Ant1_Low_2402




2DH5_Ant1_High_2480

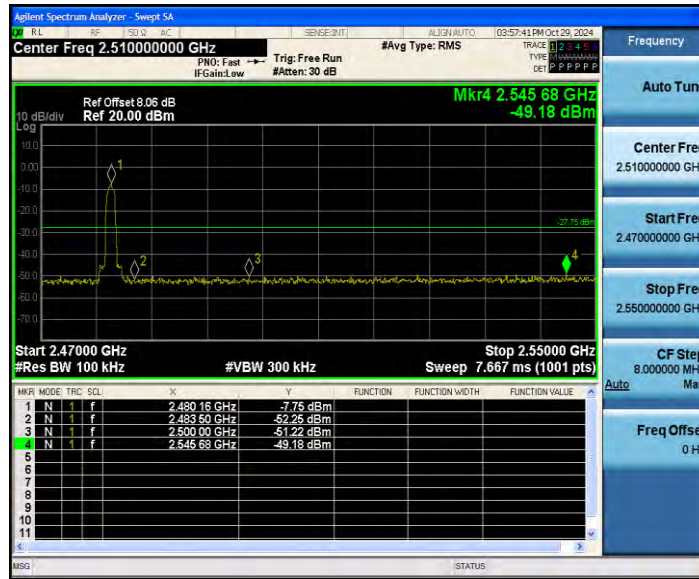


2DH5_Ant1_Low_Hop_2402

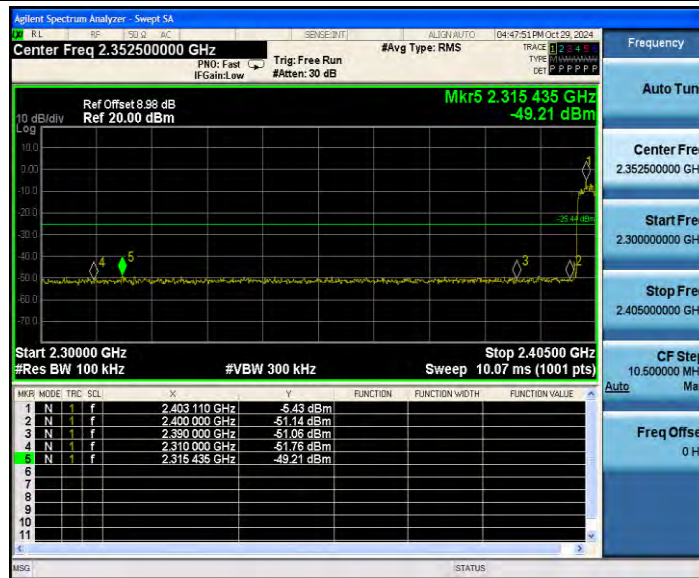


2DH5_Ant1_High_Hop_2480

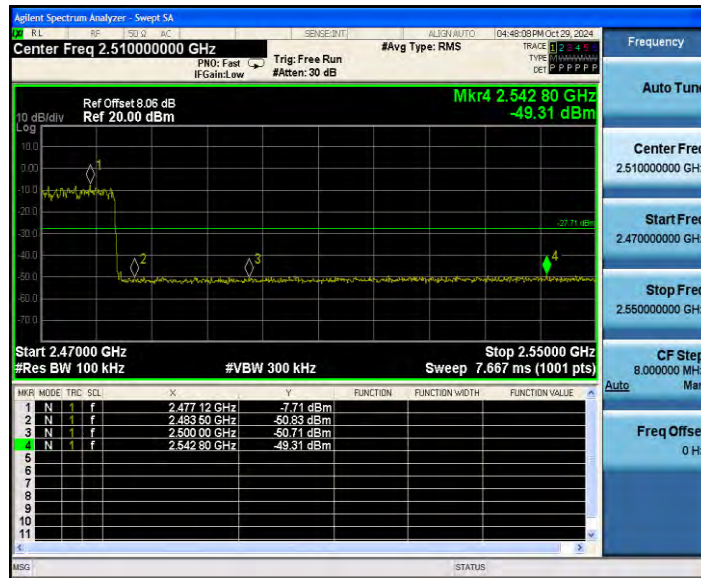

3DH5_Ant1_Low_2402

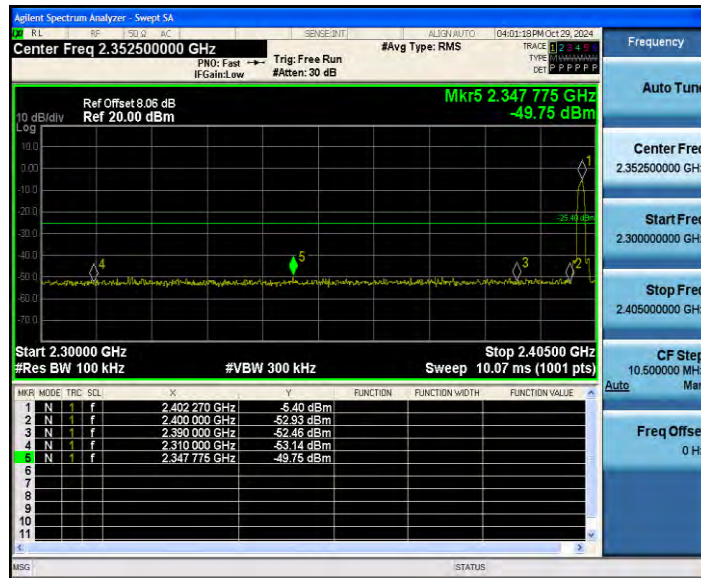


3DH5_Ant1_High_2480

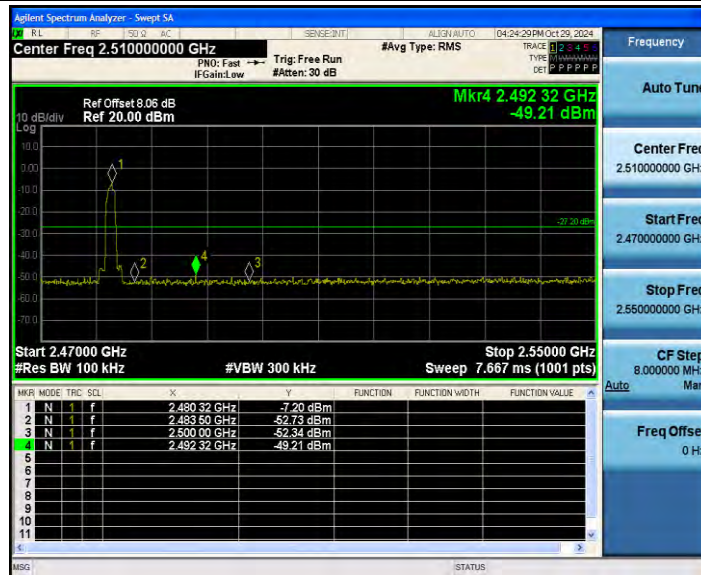

3DH5_Ant1_Low_Hop_2402



3DH5_Ant1_High_Hop_2480

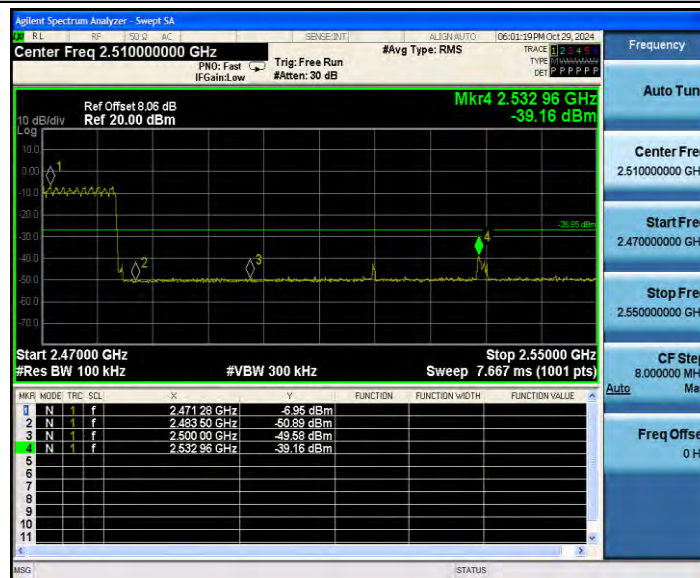

10.8 Appendix H: Conducted Spurious Emission

10.8.1 Test Result


Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-3.39	-3.39	---	PASS
			30~1000	-3.39	-60.5	≤-23.39	PASS
			1000~26500	-3.39	-42.54	≤-23.39	PASS
		2441	Reference	-3.91	-3.91	---	PASS
			30~1000	-3.91	-61.16	≤-23.91	PASS
			1000~26500	-3.91	-42.47	≤-23.91	PASS
		2480	Reference	-5.32	-5.32	---	PASS
			30~1000	-5.32	-61.39	≤-25.32	PASS
			1000~26500	-5.32	-42.4	≤-25.32	PASS
2DH5	Ant1	2402	Reference	-7.19	-7.19	---	PASS
			30~1000	-7.19	-61.28	≤-27.19	PASS
			1000~26500	-7.19	-42.95	≤-27.19	PASS
		2441	Reference	-7.72	-7.72	---	PASS
			30~1000	-7.72	-61.74	≤-27.72	PASS
			1000~26500	-7.72	-42.9	≤-27.72	PASS
		2480	Reference	-8.86	-8.86	---	PASS
			30~1000	-8.86	-60.99	≤-28.86	PASS
			1000~26500	-8.86	-42.92	≤-28.86	PASS
3DH5	Ant1	2402	Reference	-7.19	-7.19	---	PASS
			30~1000	-7.19	-60.07	≤-27.19	PASS
			1000~26500	-7.19	-42.3	≤-27.19	PASS
		2441	Reference	-6.34	-6.34	---	PASS
			30~1000	-6.34	-61.49	≤-26.34	PASS
			1000~26500	-6.34	-42.46	≤-26.34	PASS
		2480	Reference	-8.83	-8.83	---	PASS
			30~1000	-8.83	-61.08	≤-28.83	PASS
			1000~26500	-8.83	-42.46	≤-28.83	PASS

10.8.2 Test Graphs


DH5_Ant1_2402_0~Reference



DH5_Ant1_2402_30~1000

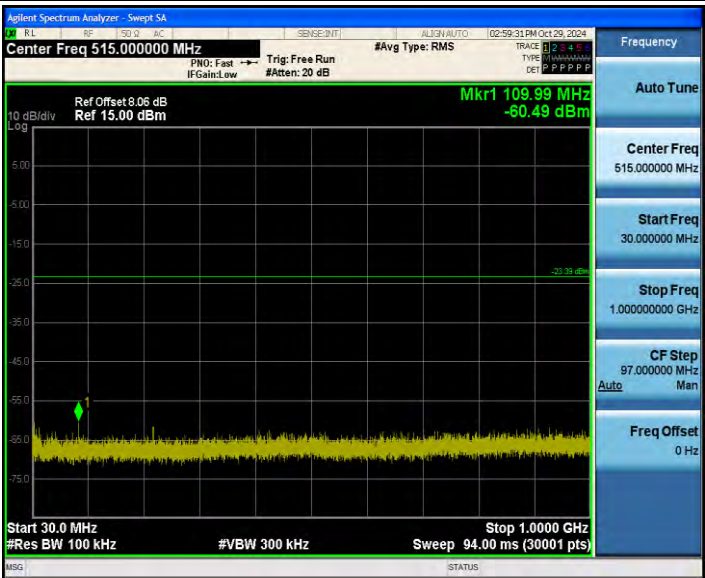


DH5_Ant1_2402_1000~26500

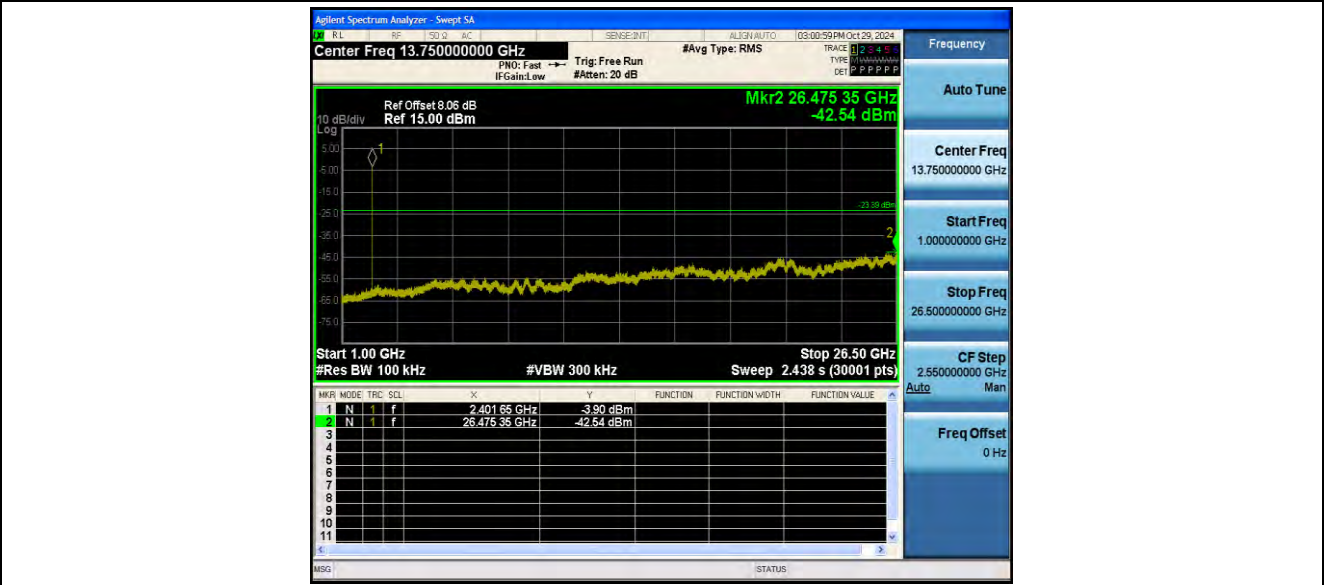


DH5_Ant1_2441_0~Reference



DH5_Ant1_2441_30~1000

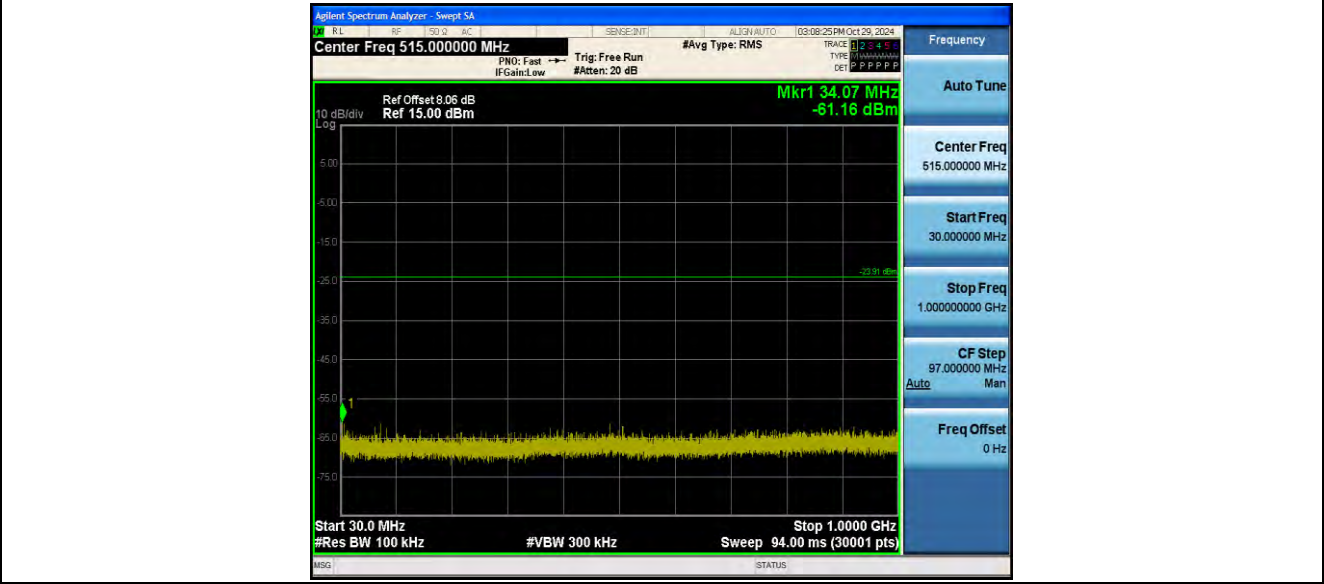


DH5_Ant1_2441_1000~26500

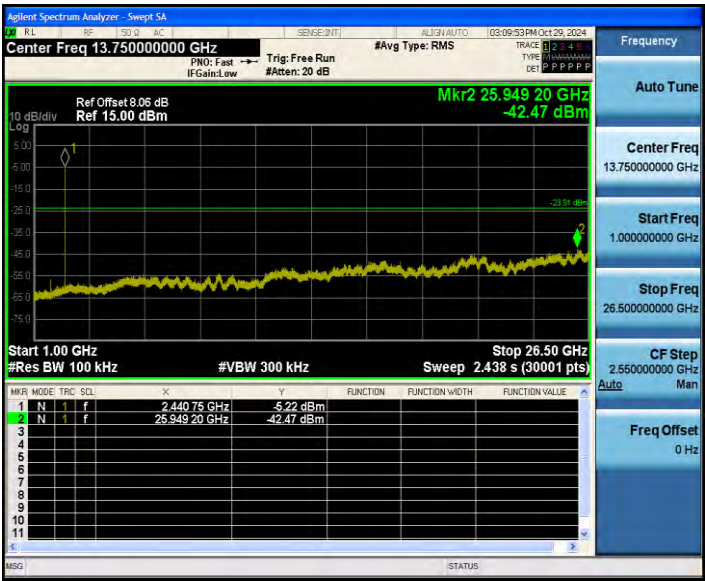

DH5_Ant1_2480_0~Reference



DH5_Ant1_2480_30~1000

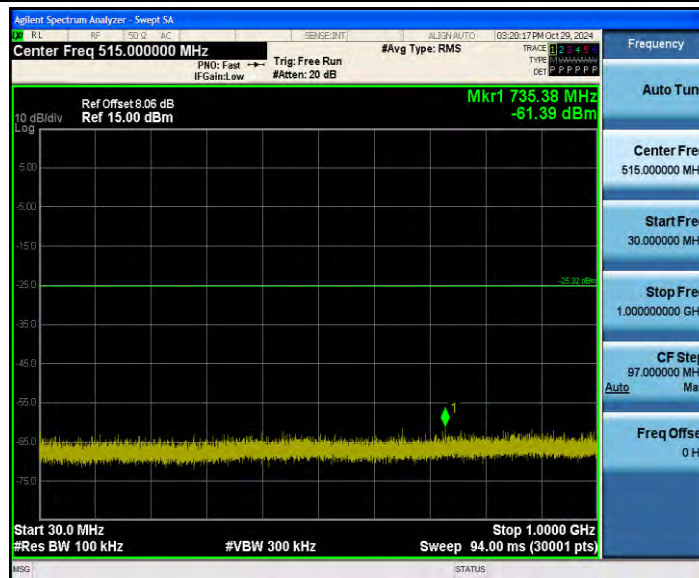


DH5_Ant1_2480_1000~26500



2DH5_Ant1_2402_0~Reference



2DH5_Ant1_2402_30~1000

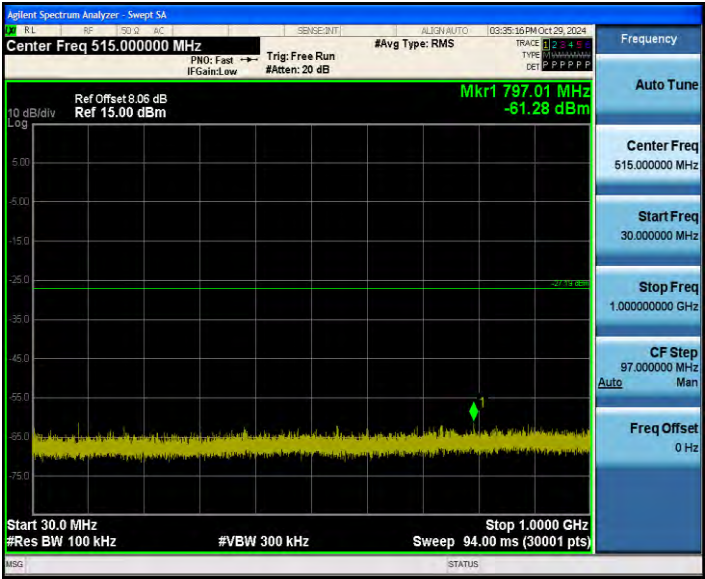


2DH5_Ant1_2402_1000~26500



2DH5_Ant1_2441_0~Reference



2DH5_Ant1_2441_30~1000

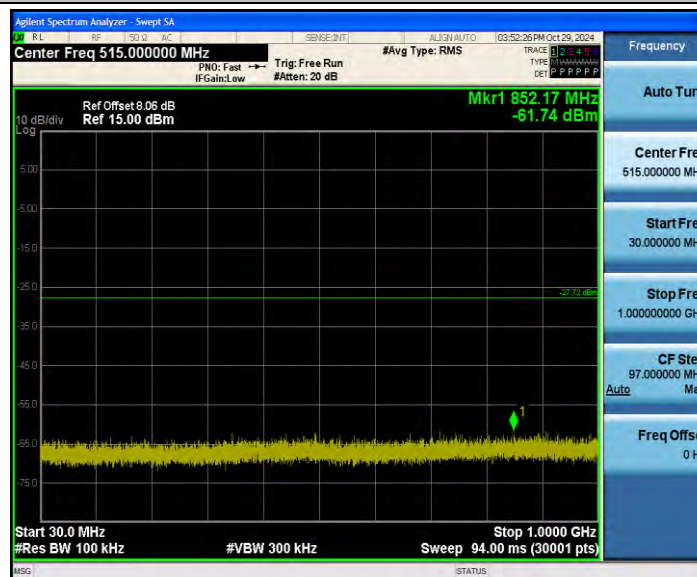


2DH5_Ant1_2441_1000~26500




2DH5_Ant1_2480_0~Reference



2DH5_Ant1_2480_30~1000

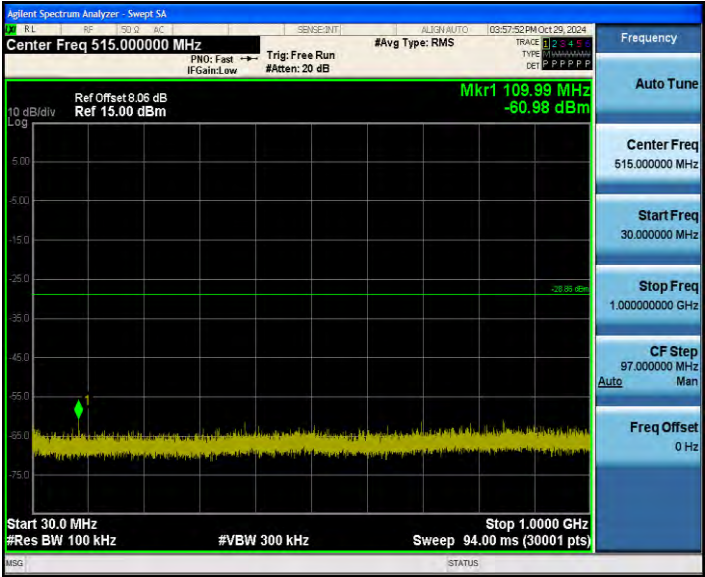


2DH5_Ant1_2480_1000~26500

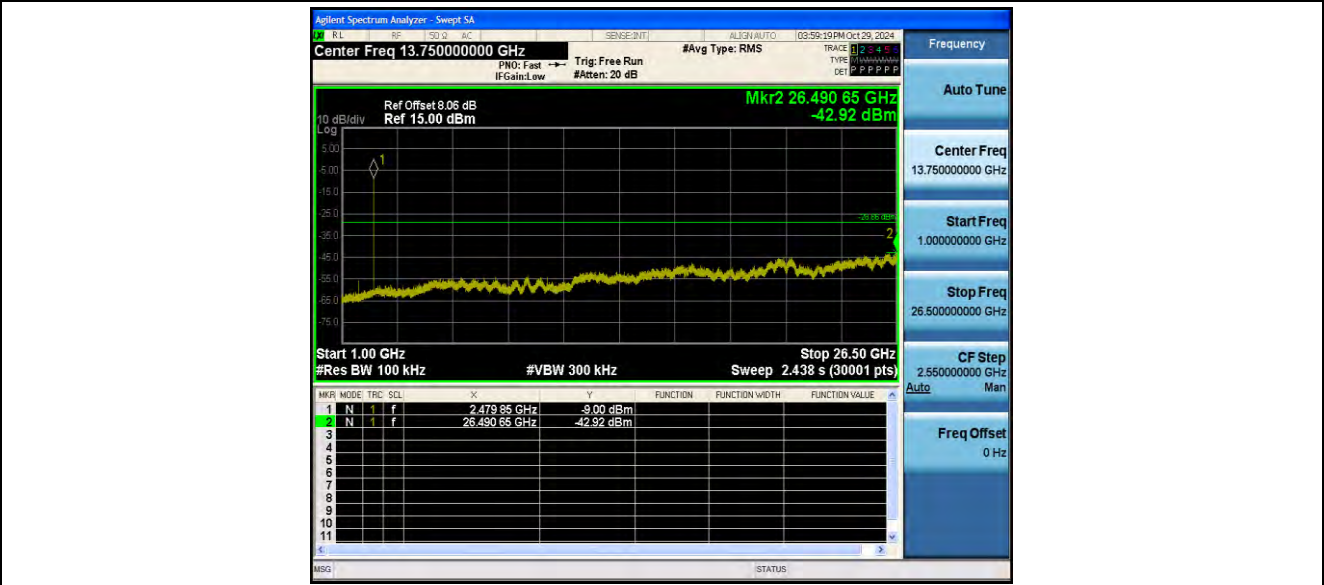


3DH5_Ant1_2402_0~Reference



3DH5_Ant1_2402_30~1000

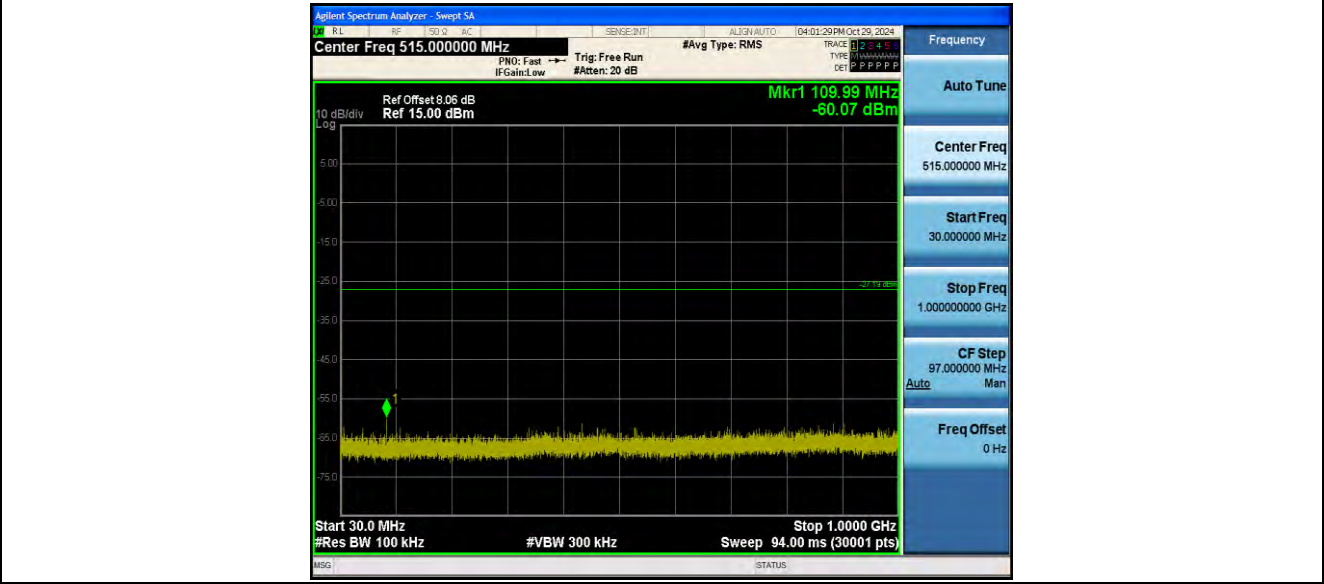


3DH5_Ant1_2402_1000~26500

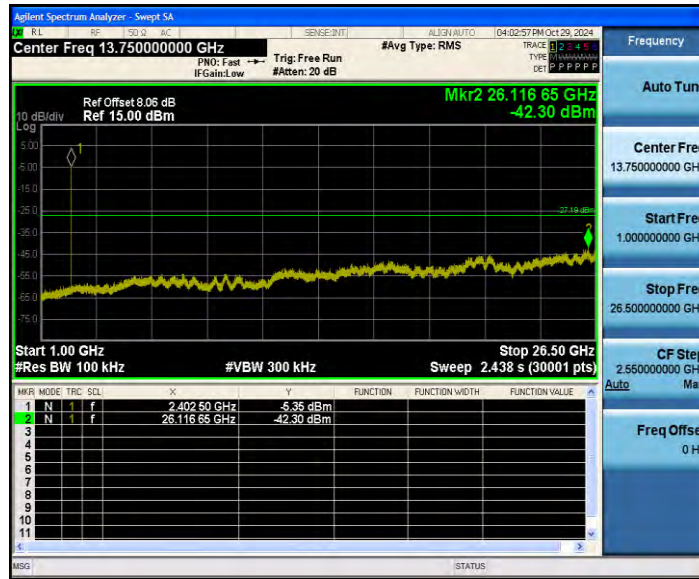

3DH5_Ant1_2441_0~Reference



3DH5_Ant1_2441_30~1000

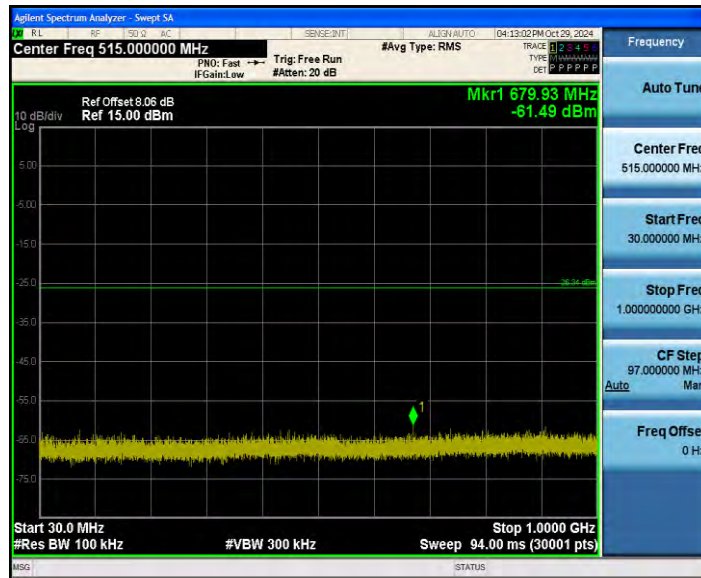


3DH5_Ant1_2441_1000~26500



3DH5_Ant1_2480_0~Reference



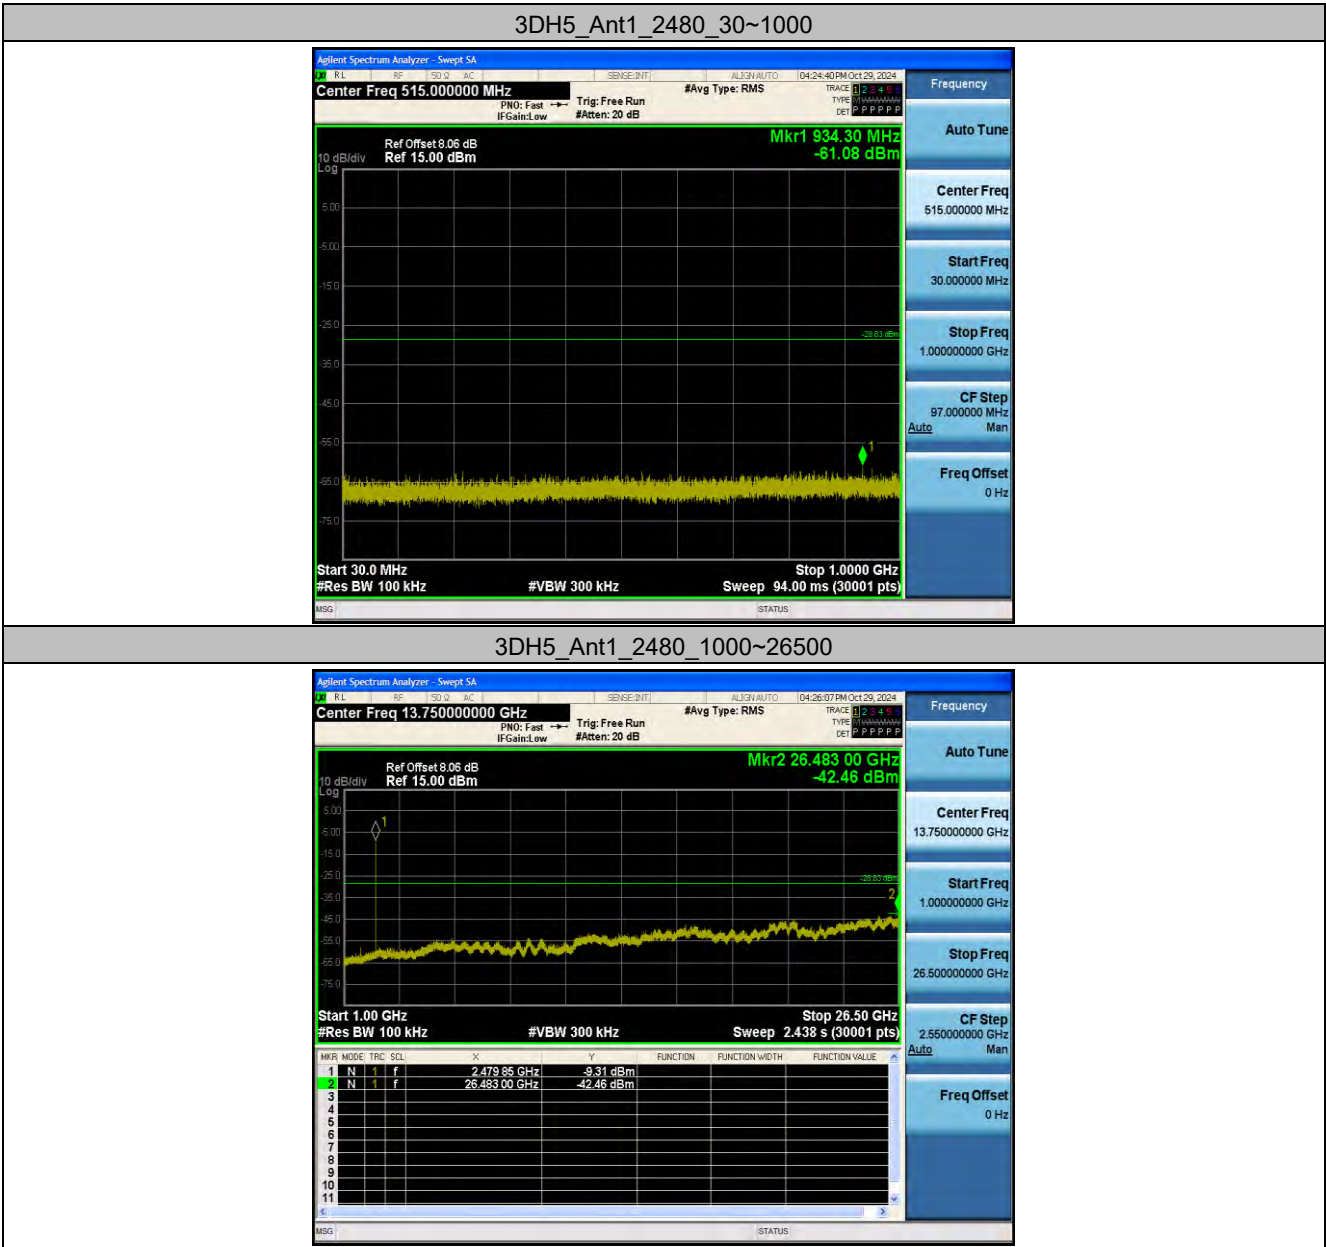

- End of the Report -