



TEST REPORT

APPLICANT : Running River LLC
PRODUCT NAME : LED Tweezer System for Eyelash Extensions
MODEL NAME : LEDTWEEZ007
BRAND NAME : Lash Plus
FCC ID : 2BRG2LPBTPDL
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2025-06-03
TEST DATE : 2025-07-11 to 2025-07-25
ISSUE DATE : 2025-08-12

Edited by:

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	4
1.2. Test Equipment List	5
1.3. Measurement Uncertainty	7
1.4. Testing Laboratory	7
2. General Description	8
2.1. Information of Applicant and Manufacturer	8
2.2. Information of EUT	8
2.3. Channel List of EUT	9
2.4. Test Configuration of EUT	10
2.5. Test Conditions	10
2.6. Test Setup Layout Diagram	10
3. Test Results	13
3.1. Antenna Requirement	13
3.2. Duty Cycle of Test Signal	14
3.3. Maximum Peak Conducted Output Power	15
3.4. Maximum Average Conducted Output Power	16
3.5. 6 dB Bandwidth	17
3.6. Conducted Spurious Emissions and Band Edge	18
3.7. Power Spectral Density	19
3.8. Conducted Emission	20
3.9. Restricted Frequency Bands	21
3.10. Radiated Emission	22
Annex A Test Data and Result	24



Change History		
Version	Date	Reason for change
1.0	2025-08-12	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Jul. 17, 2025	Li Yue	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Jul. 17, 2025	Li Yue	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Jul. 17, 2025	Li Yue	PASS	/
5	15.247(a)	Bandwidth	Jul. 17, 2025	Li Yue	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jul. 17, 2025	Li Yue	PASS	/
7	15.247(e)	Power Spectral Density	Jul. 17, 2025	Li Yue	PASS	/
8	15.207	Conducted Emission	Jul. 25, 2025	Wang Yapeng	PASS	/
9	15.247(d)	Restricted Frequency Bands	Jul. 11, 2025	Wang Deyong	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Jul. 17, 2025	Wang Deyong	PASS	/

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	101052	ESPI	R&S	2025.05.15	2026.05.14
LISN	103131	ENV 216	R&S	2025.03.20	2026.03.19
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2025.05.06	2026.05.05

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0
TS+ -[JS32-CE]	Tonscend	2.5.0.0



1.2.4 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	01267	VULB 9163	Schwarzbeck	2024.07.26	2025.07.25
				2025.07.16	2026.07.15
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna - Horn	02634	BBHA 9120D	Schwarzbeck	2025.06.29	2026.06.28
Test Antenna - Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.09.11	2025.09.10
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Running River LLC
Applicant Address:	1401 Brickell Avenue Ste 330, Miami, Florida, 33131
Manufacturer:	Running River LLC
Manufacturer Address:	1401 Brickell Avenue Ste 330, Miami, Florida, 33131

2.2. Information of EUT

Product Name:	LED Tweezer System for Eyelash Extensions
Sample No.:	4#, 5#, 6#
Hardware Version:	RX-NZD-JK V1.0
Software Version:	RX-NZD-JK-V1.0-20250620
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.3
Modulation Type:	GFSK
Data Rate:	1Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	2.34dBi

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C):	15–35
Relative Humidity (%):	30–60
Atmospheric Pressure (kPa):	86–106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

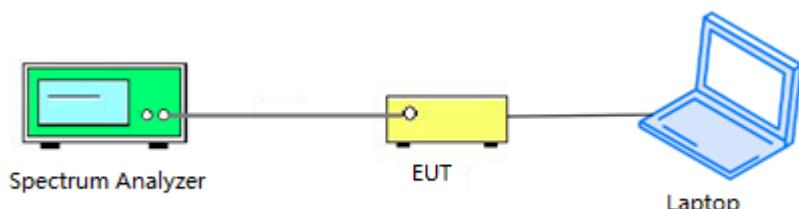


2.6.2. Conducted Emission Measurement

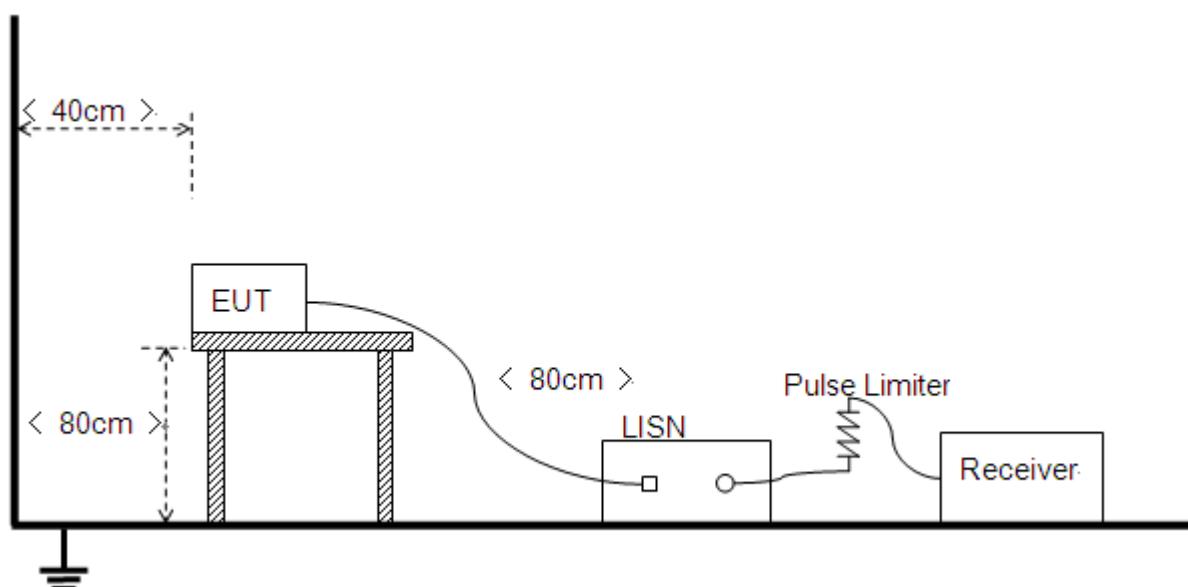


2.6.3.Radiation Measurement


- 1) For radiated emissions from 9kHz to 30MHz

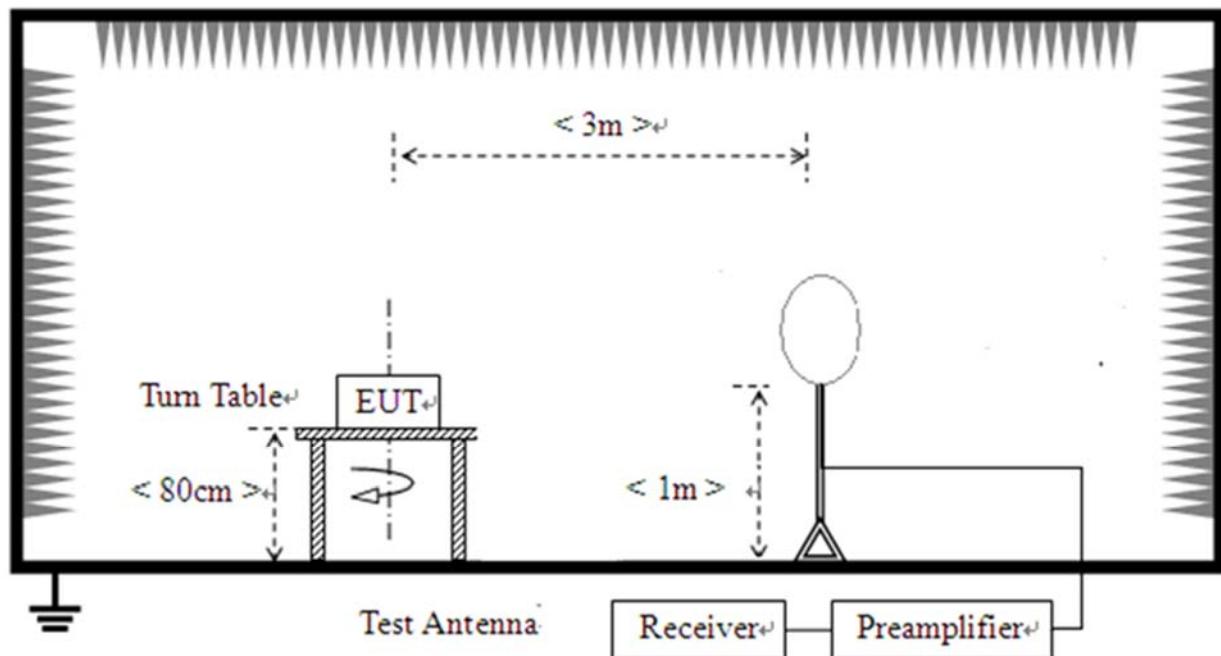

- 2) For radiated emissions from 30MHz to1GHz

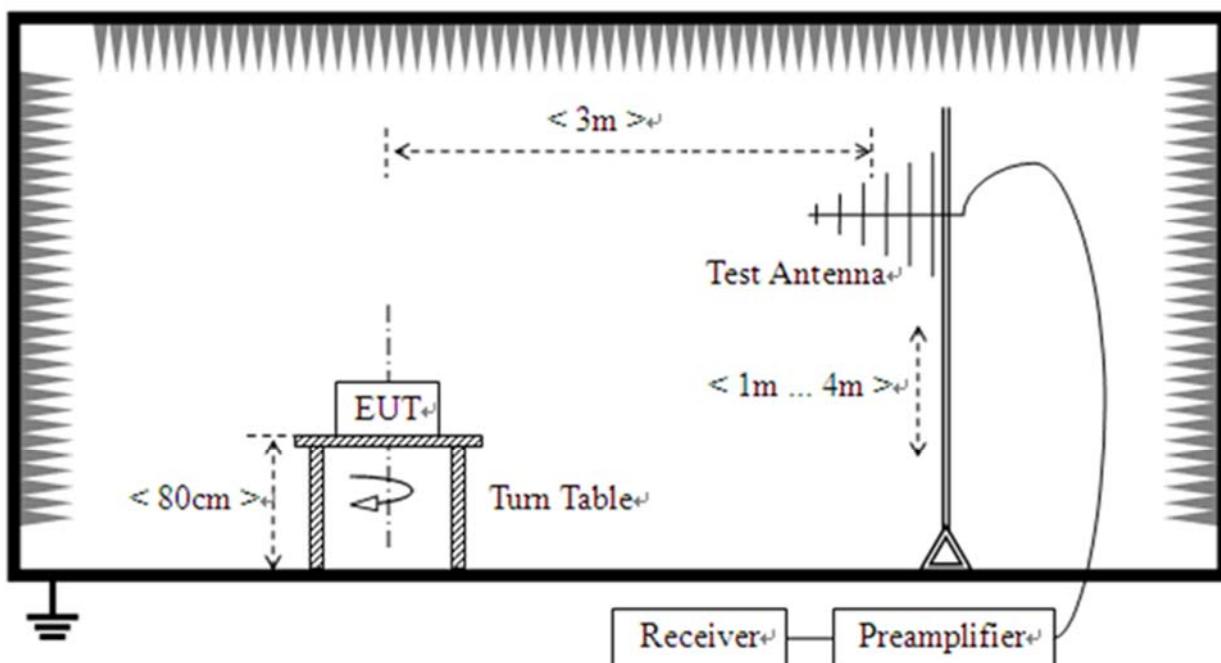

3) For radiated emissions above 1GHz

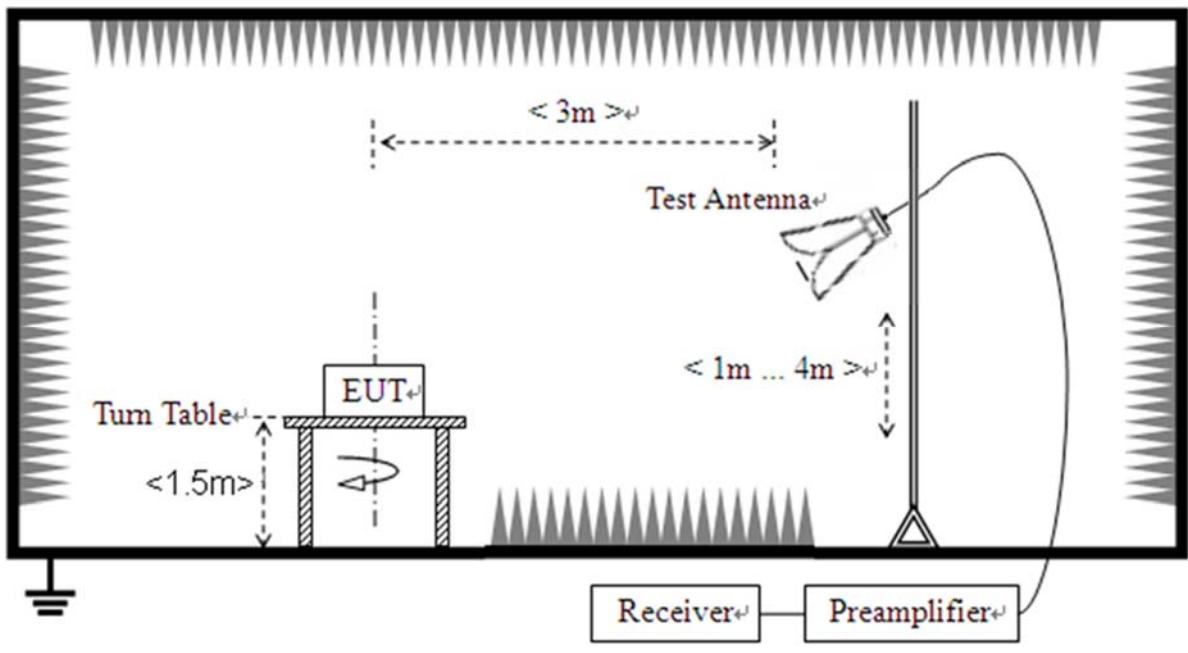



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
<input checked="" type="checkbox"/> Internal	<input type="checkbox"/> FPC Antenna <input type="checkbox"/> Spring Antenna <input type="checkbox"/> Ceramic Antenna <input type="checkbox"/> Integrated Antenna <input type="checkbox"/> Dipole Antenna <input checked="" type="checkbox"/> PCB Antenna <input type="checkbox"/> PIFA Antenna <input type="checkbox"/> ABS Antenna	<input type="checkbox"/> I-PEX Connector <input type="checkbox"/> SMA Connector <input type="checkbox"/> RP-SMA Connector <input type="checkbox"/> Metal Shrapnel <input checked="" type="checkbox"/> Layout
<input type="checkbox"/> External		



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1. Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1. Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

3.5.2. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3. Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.



3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

Refer to Annex A.8 in this report.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.9 in this report.



3.10. Radiated Emission

3.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission.

Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4. Test Result


Refer to Annex A.10 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	85.38	0.69	0.47
NVNT	BLE 1M	2440	Ant1	85.38	0.69	0.47
NVNT	BLE 1M	2480	Ant1	85.38	0.69	0.47

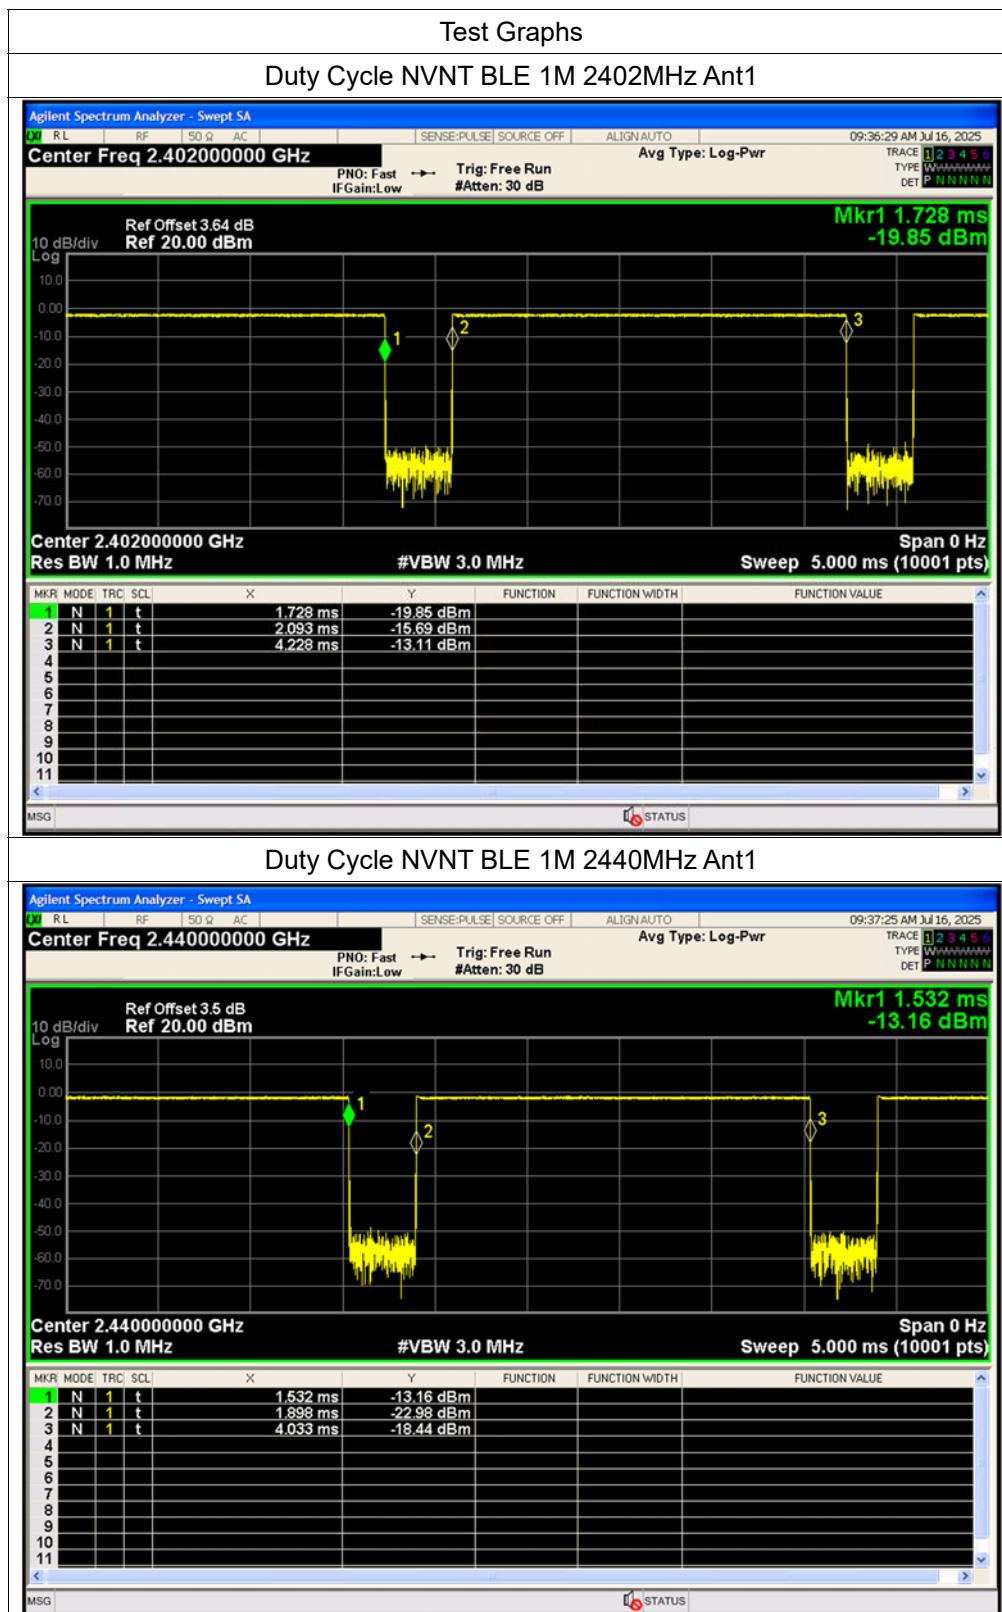



REPORT No.: SZ25070137W02

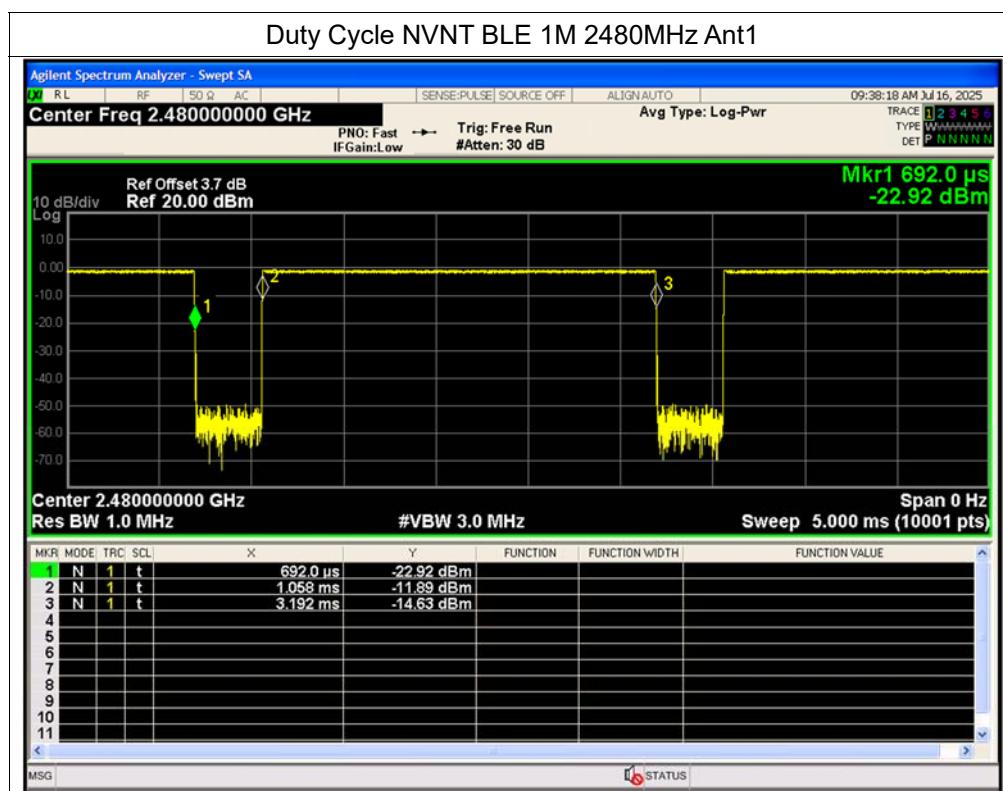

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn



REPORT No.: SZ25070137W02


A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.84	0	-1.84	0.00065	30	Pass
NVNT	BLE 1M	2440	Ant1	-1.25	0	-1.25	0.00075	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.74	0	-0.74	0.00084	30	Pass

MORLAB


Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

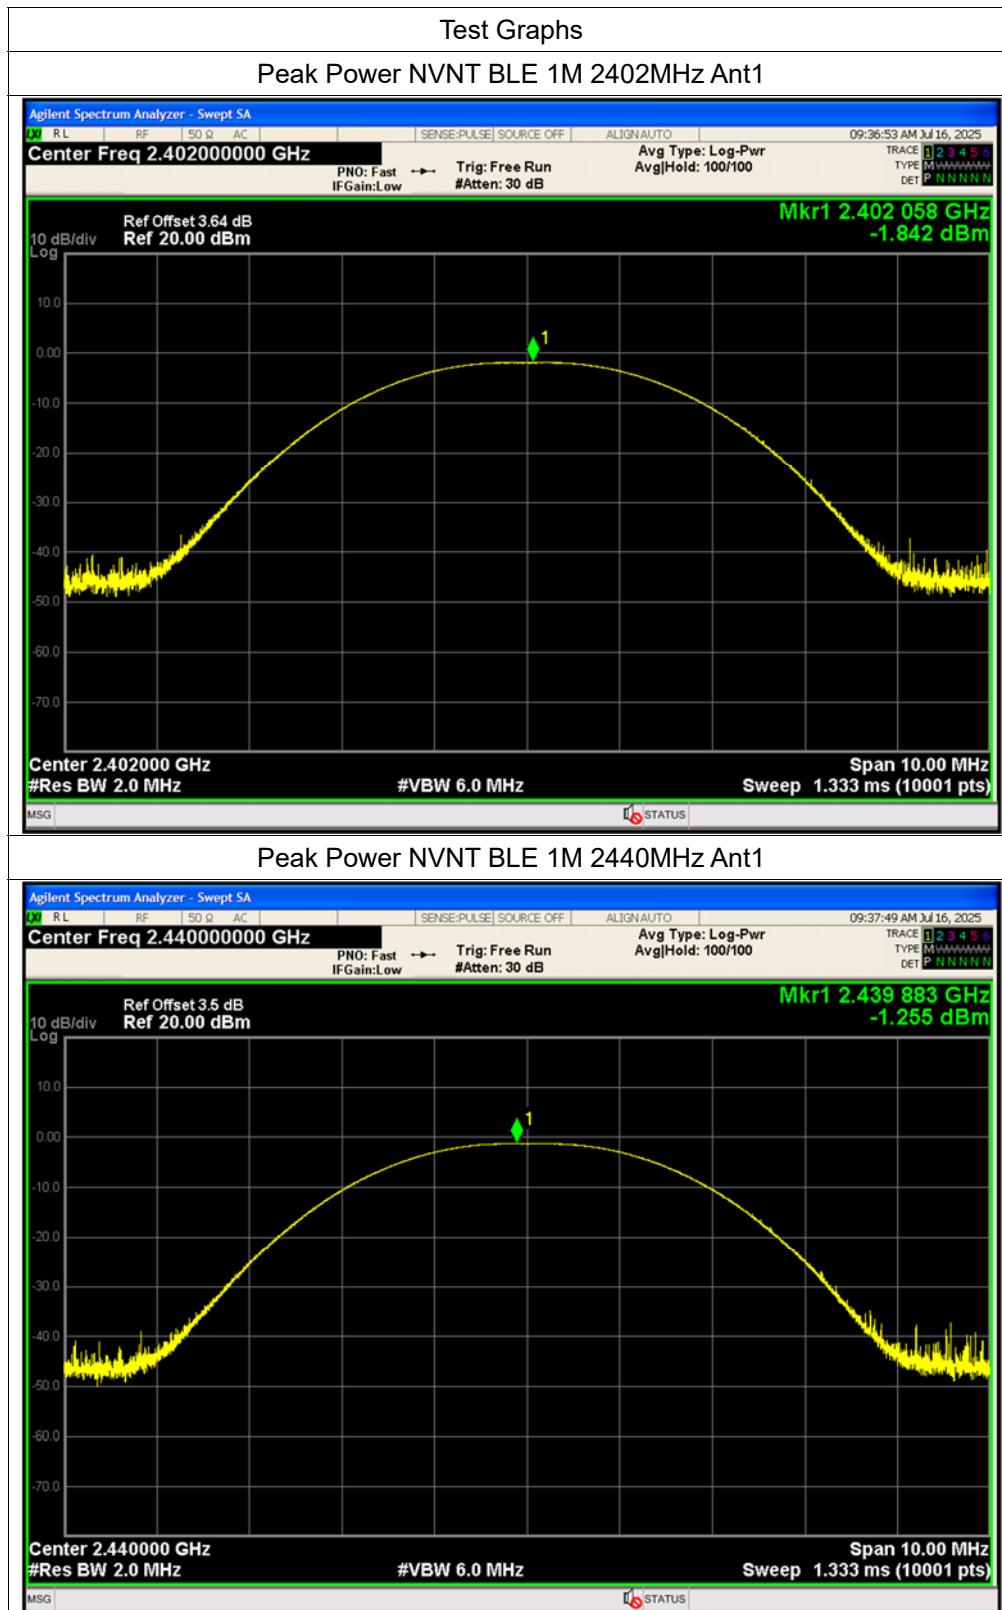



REPORT No.: SZ25070137W02

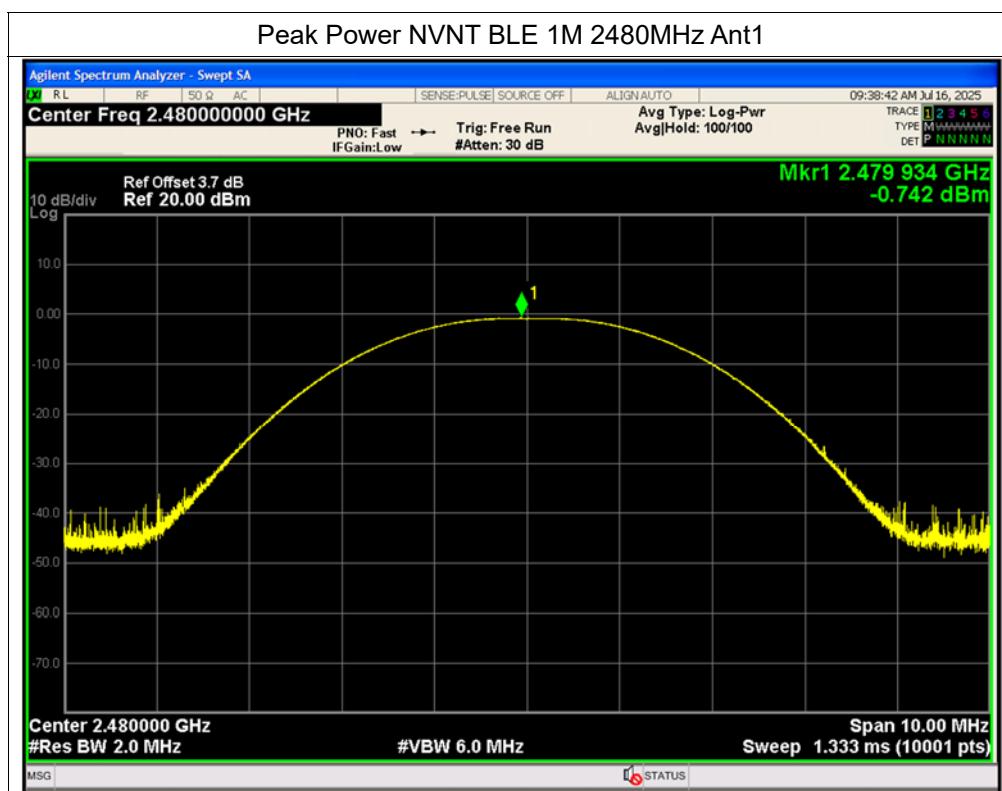


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn


**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-2.62	0.69	-1.93	0.00064	30	Pass
NVNT	BLE 1M	2440	Ant1	-2.07	0.69	-1.38	0.00073	30	Pass
NVNT	BLE 1M	2480	Ant1	-1.69	0.69	-1	0.00079	30	Pass

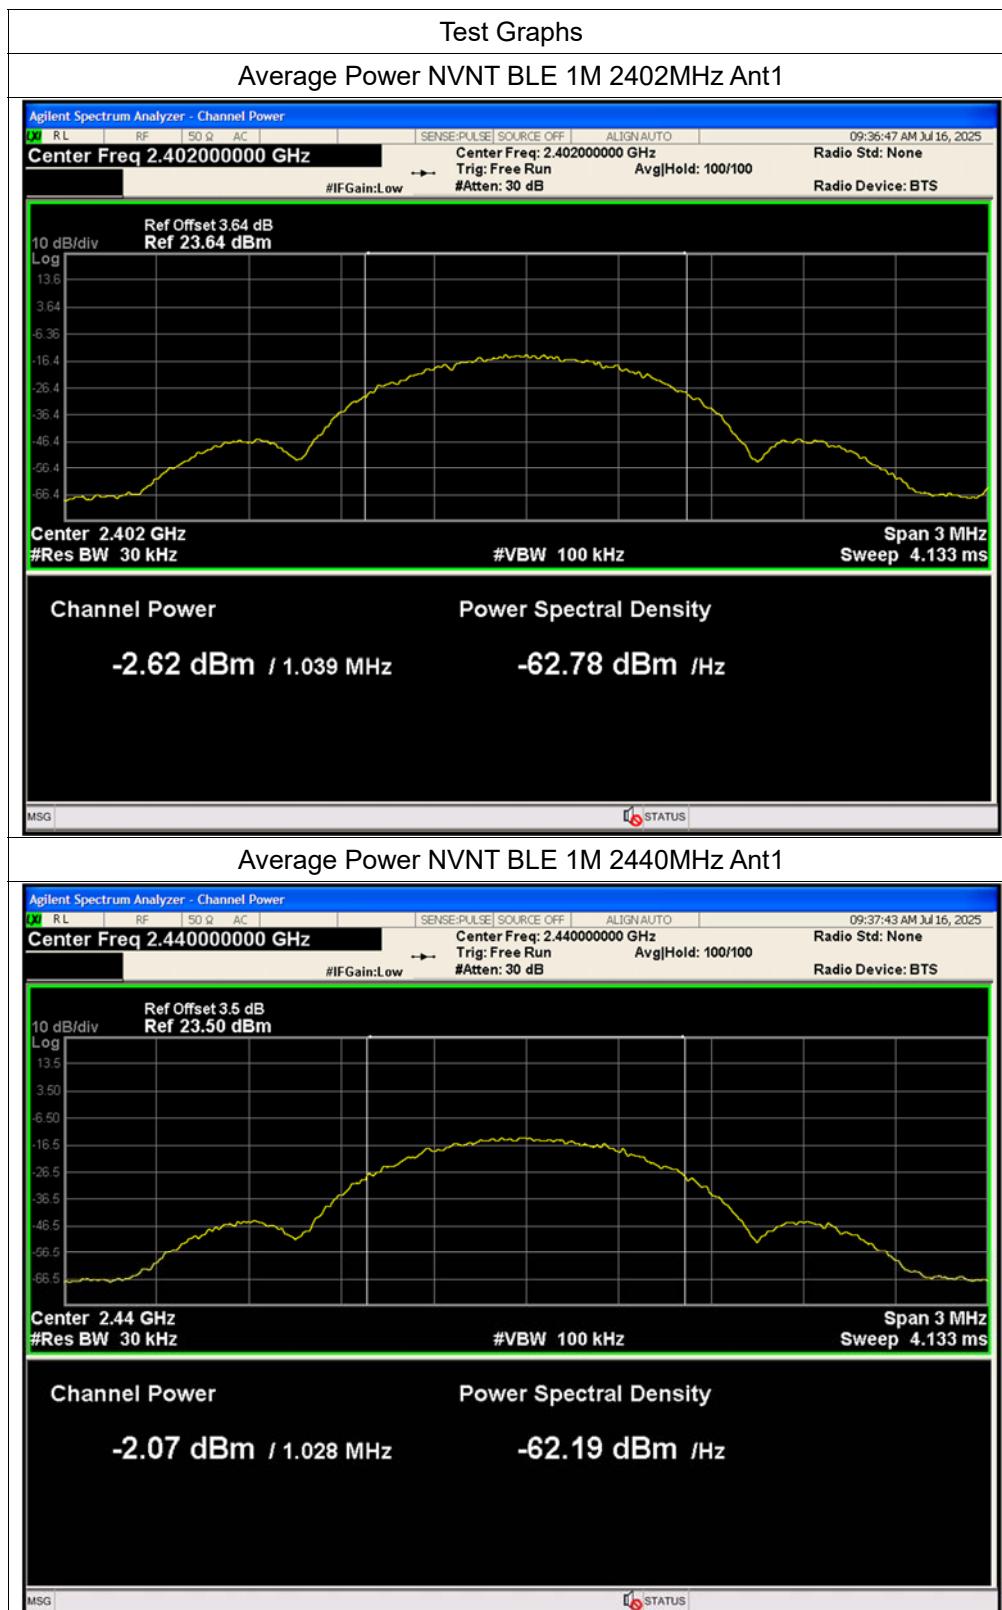



REPORT No.: SZ25070137W02

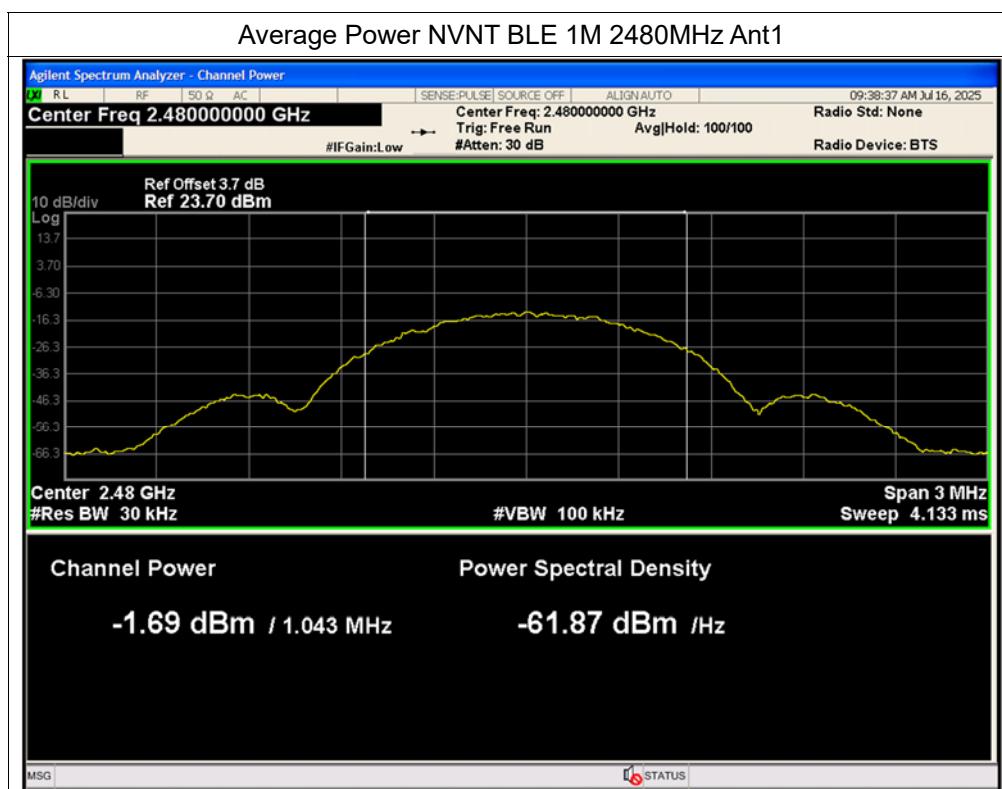

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn


**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6596	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6496	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6503	0.5	Pass





REPORT No.: SZ25070137W02

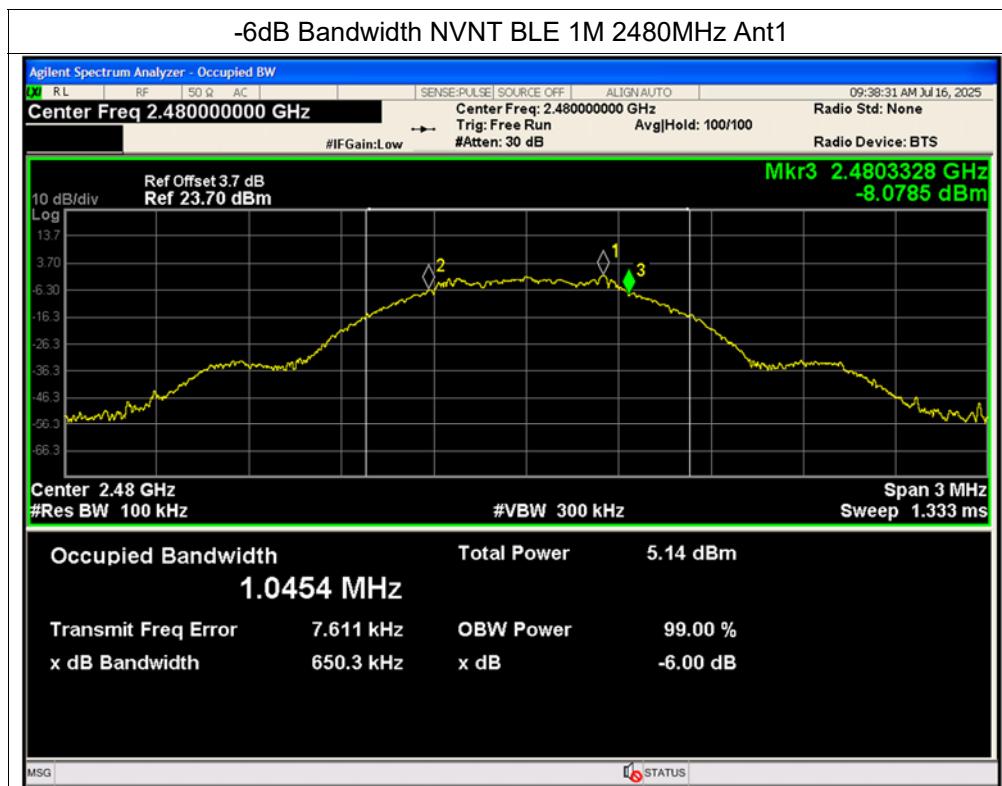

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


[Http://www.morlab.cn](http://www.morlab.cn)


E-mail: service@morlab.cn




A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-37	-20	Pass
NVNT	BLE 1M	2440	Ant1	-38.01	-20	Pass
NVNT	BLE 1M	2480	Ant1	-38.12	-20	Pass

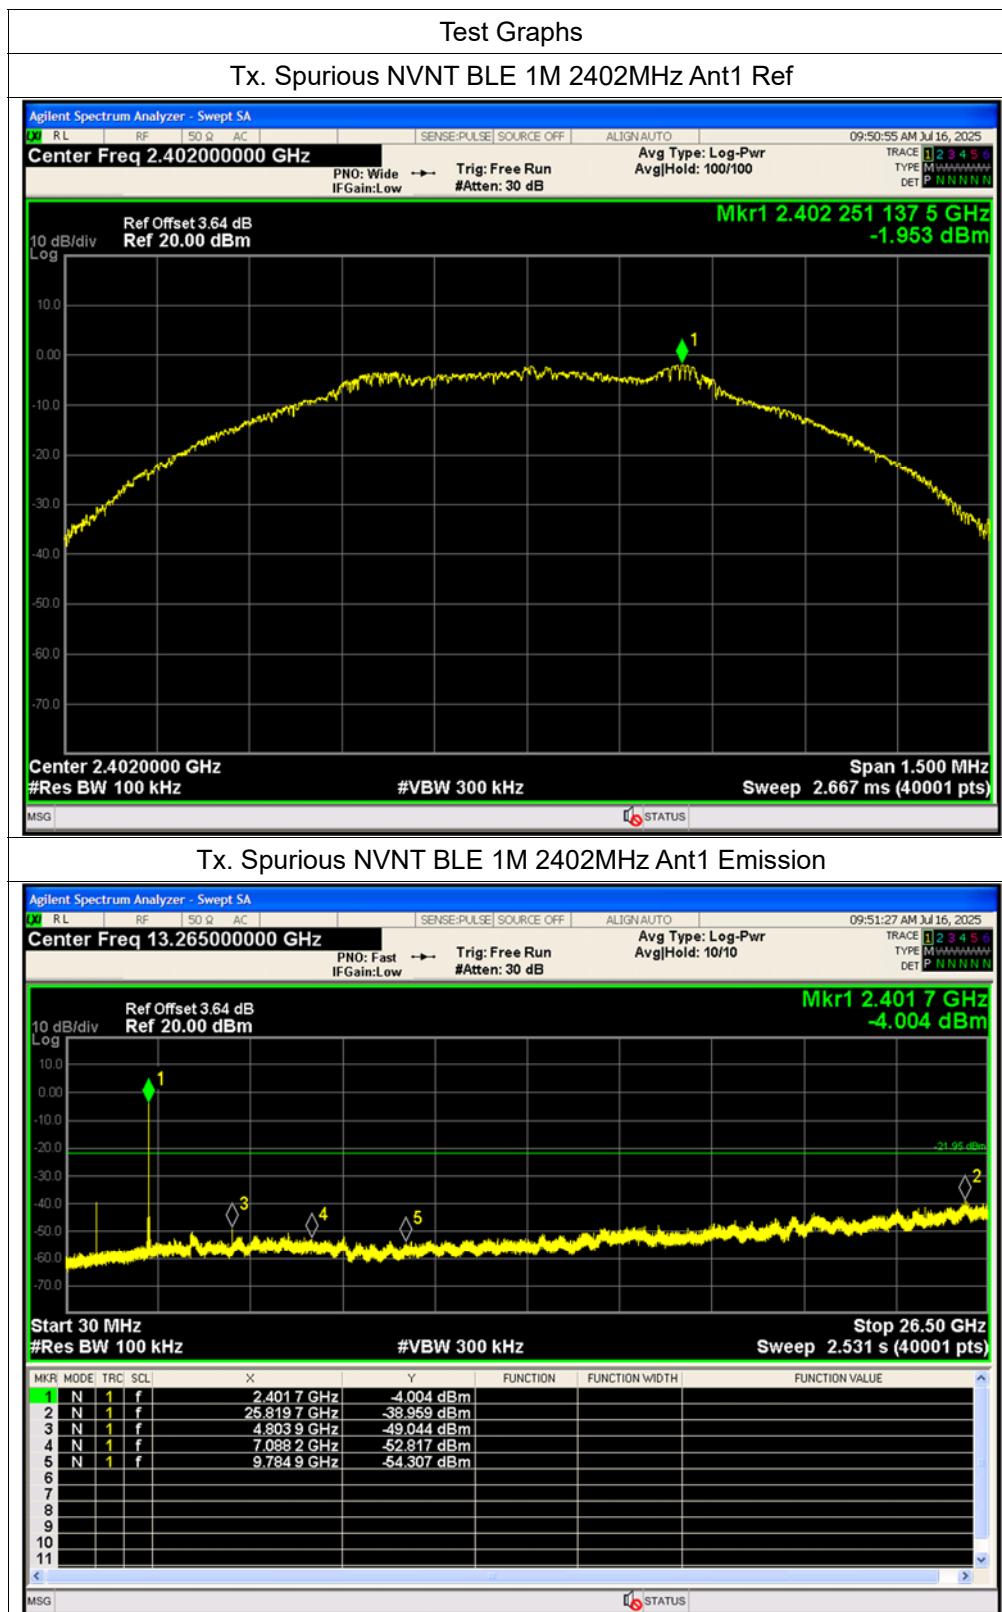

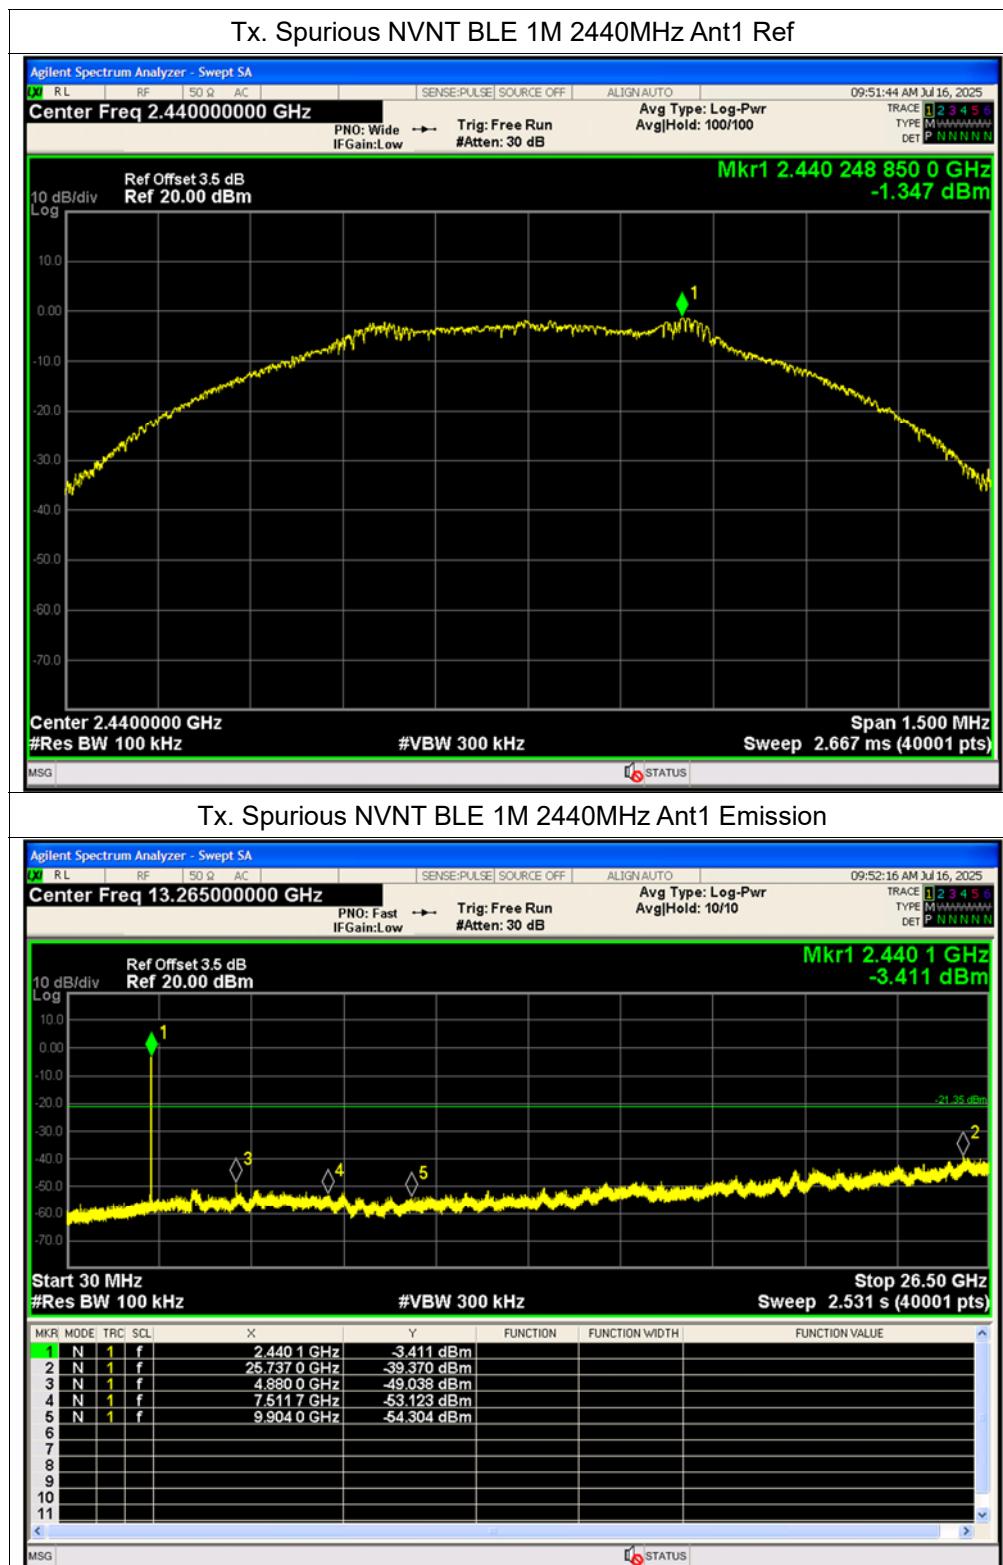

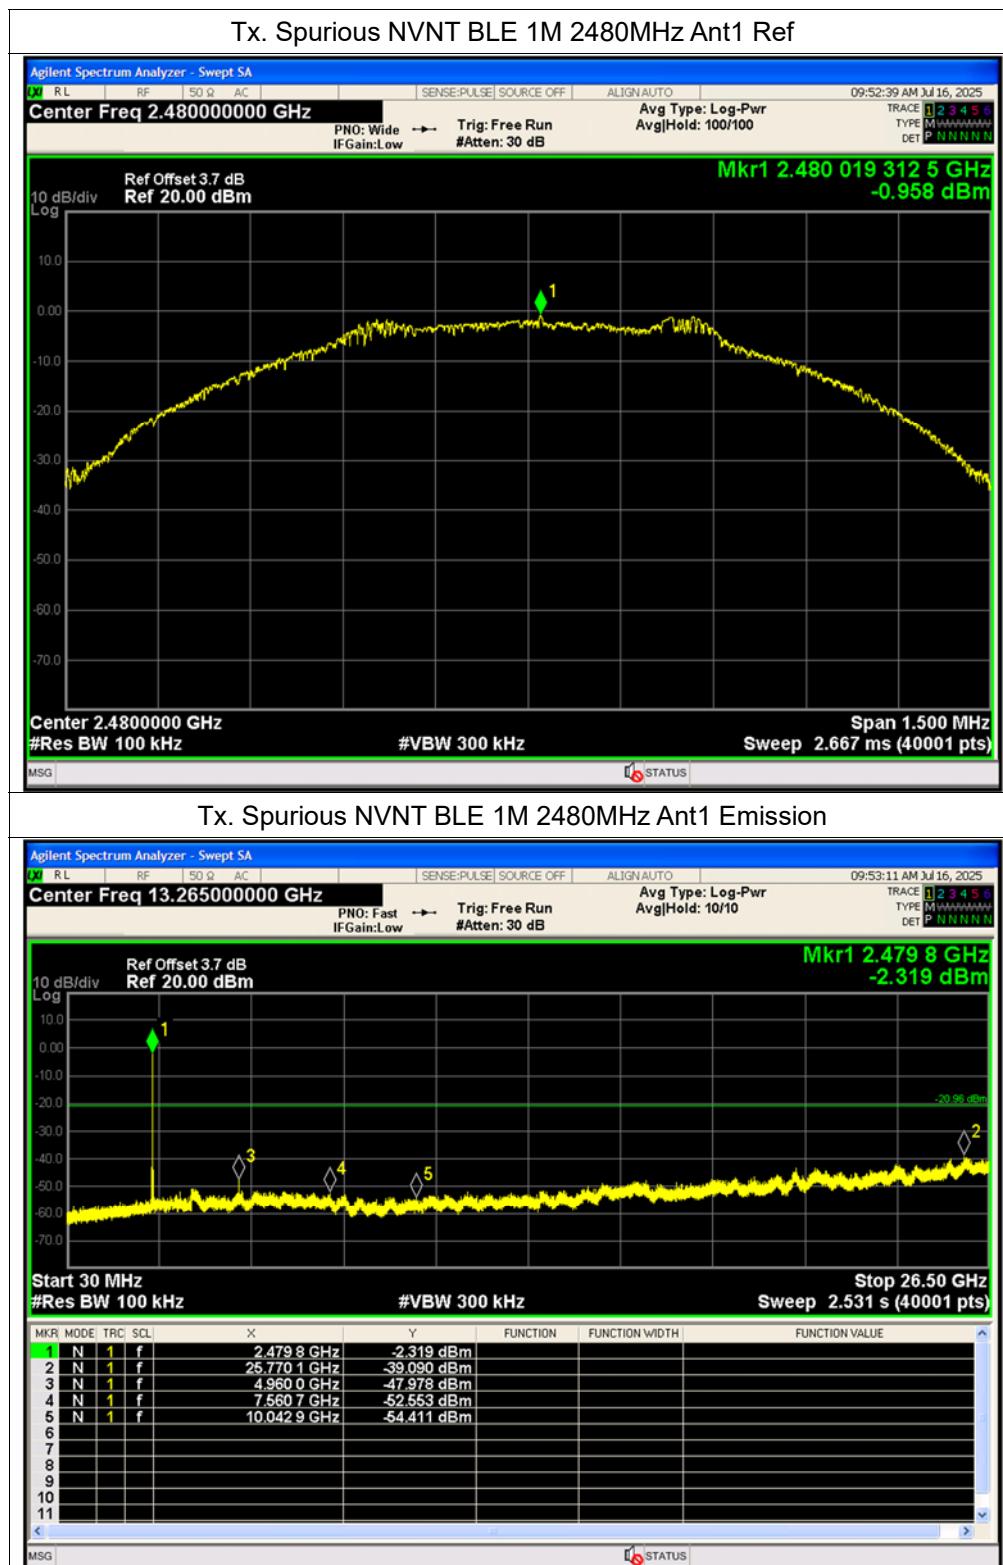



REPORT No.: SZ25070137W02


A.6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-41.76	-20	Pass
NVNT	BLE 1M	2480	Ant1	-48.12	-20	Pass

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

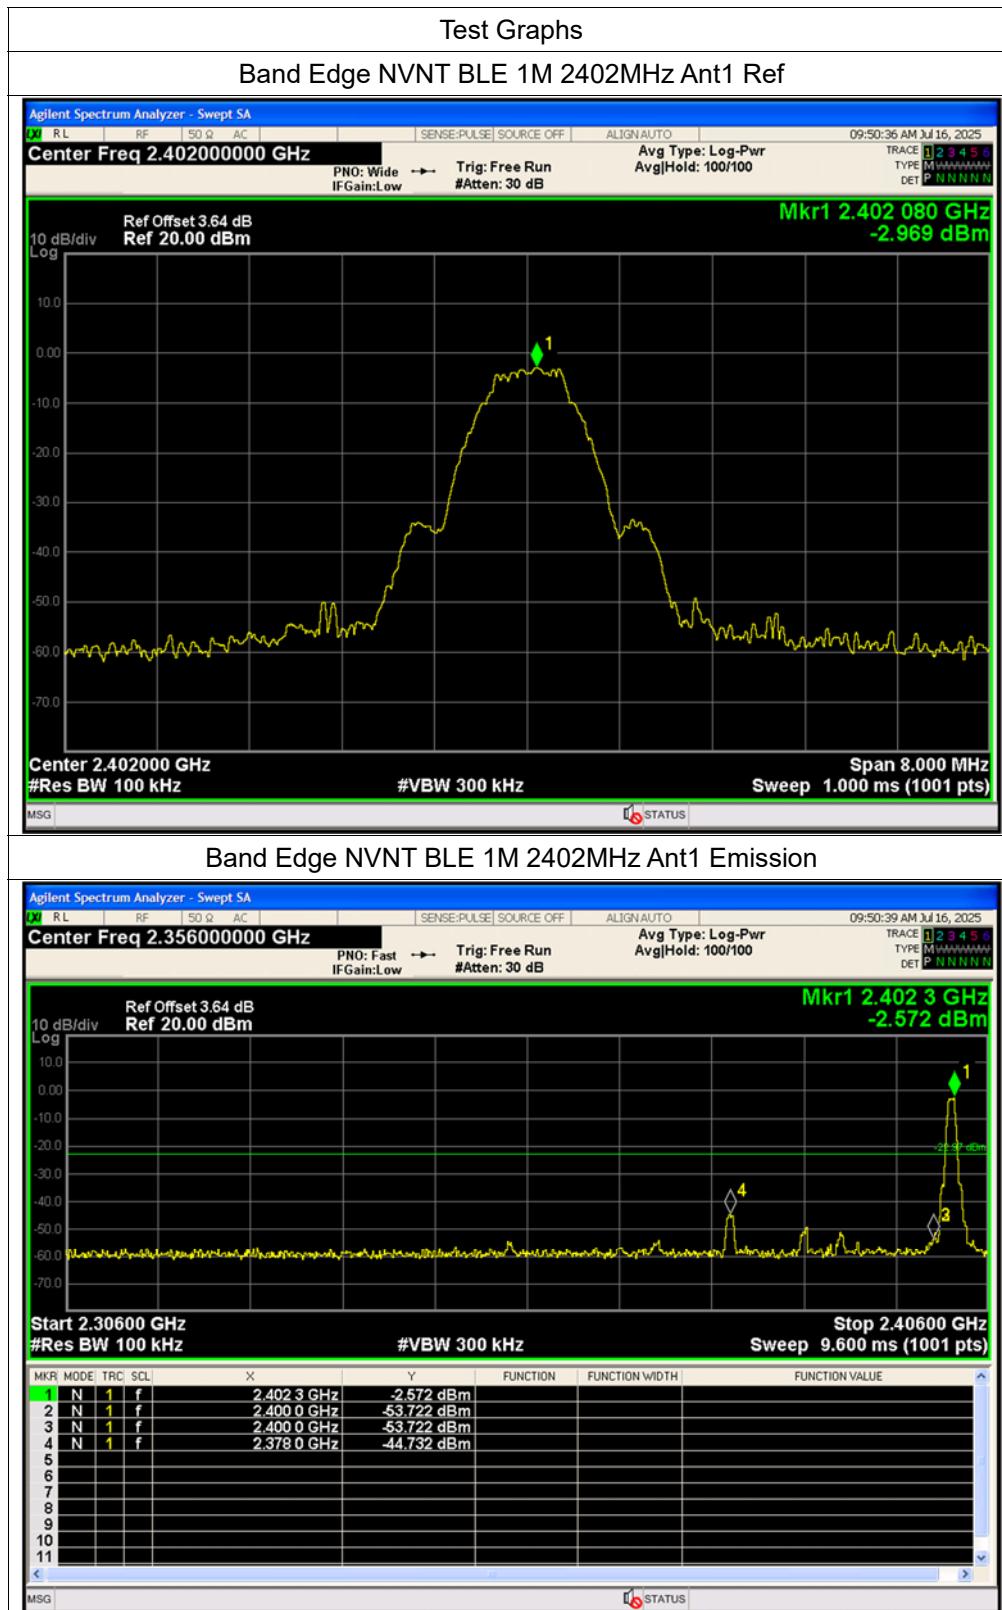


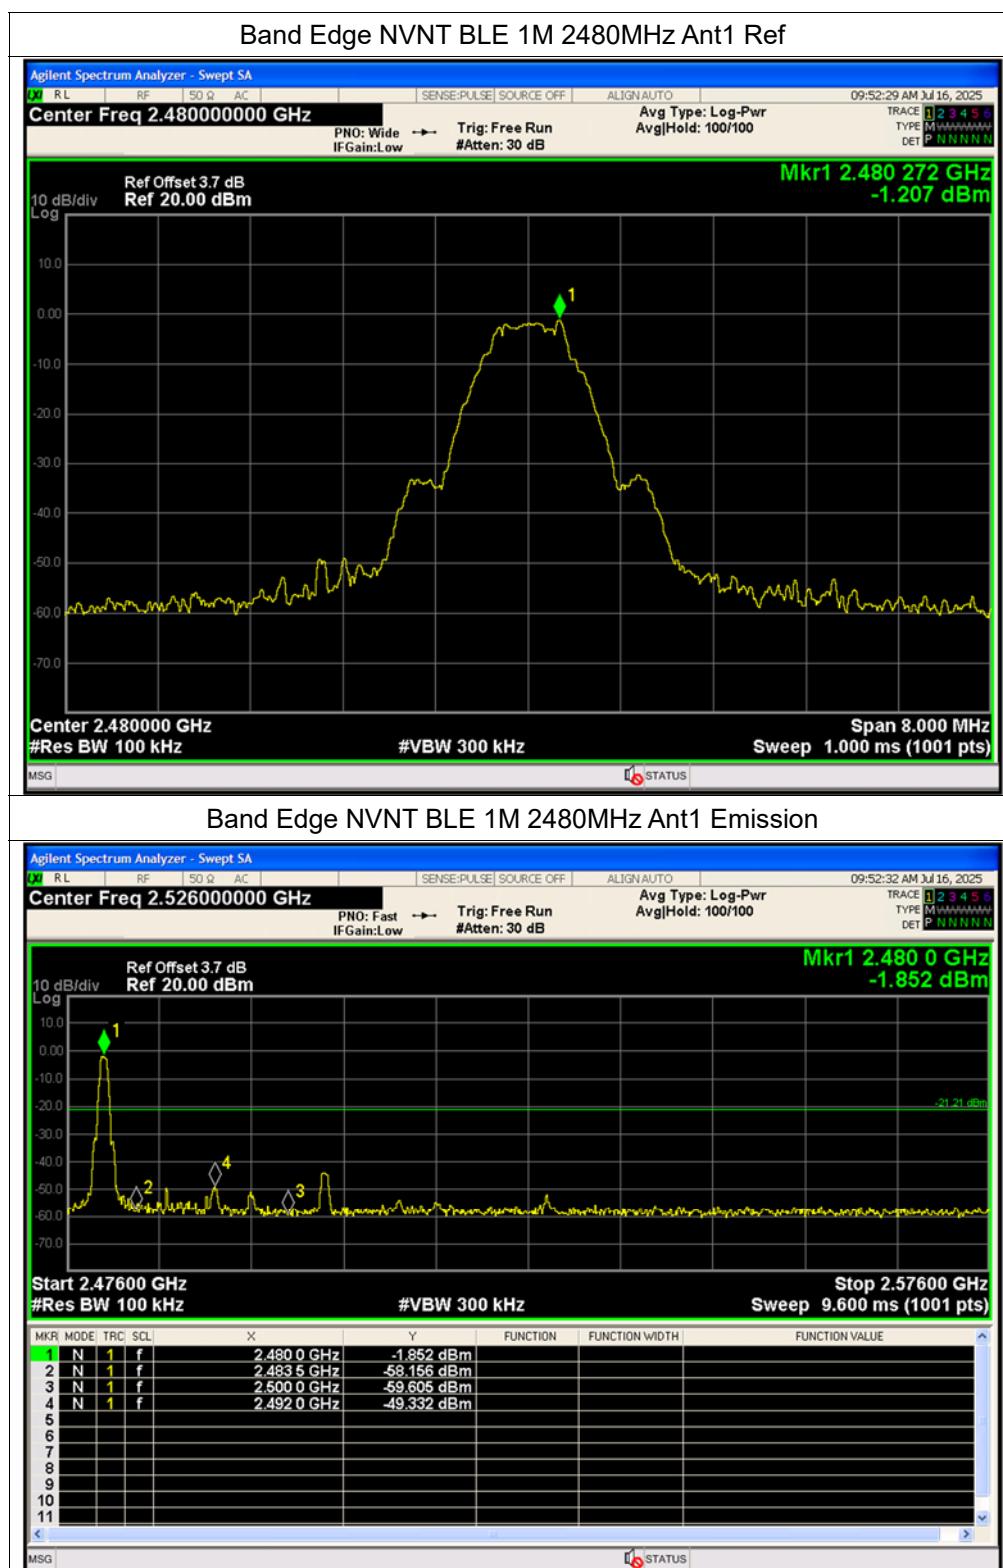




A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-17.81	0	-17.81	8	Pass
NVNT	BLE 1M	2440	Ant1	-17.33	0	-17.33	8	Pass
NVNT	BLE 1M	2480	Ant1	-16.87	0	-16.87	8	Pass

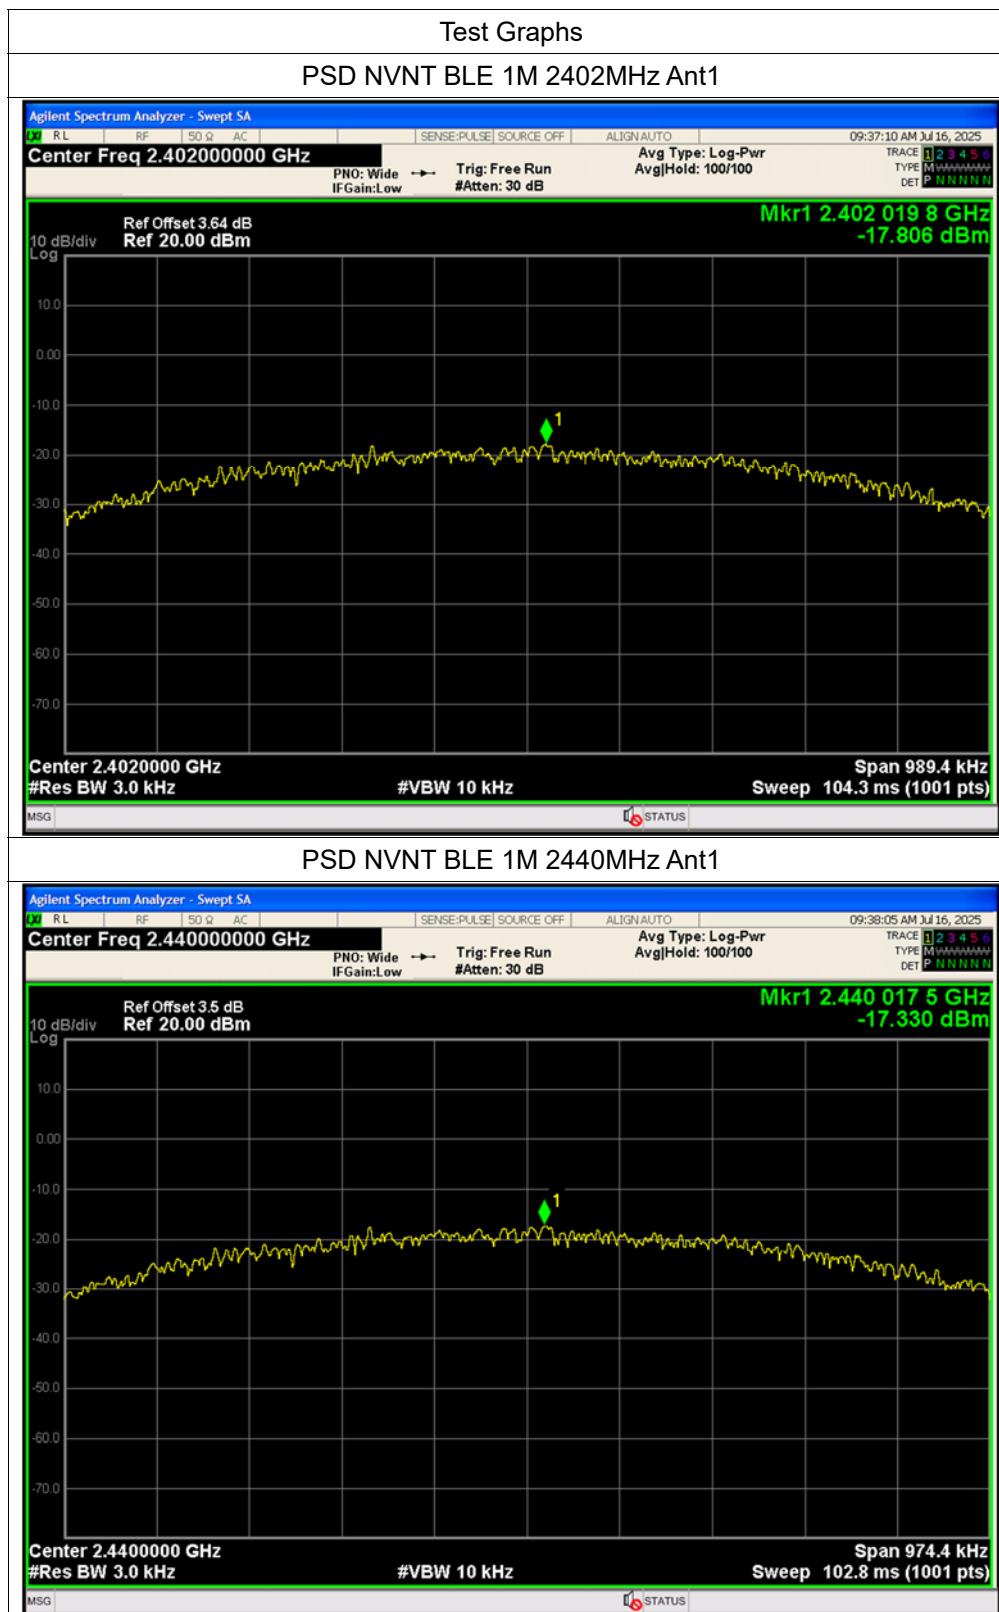



REPORT No.: SZ25070137W02

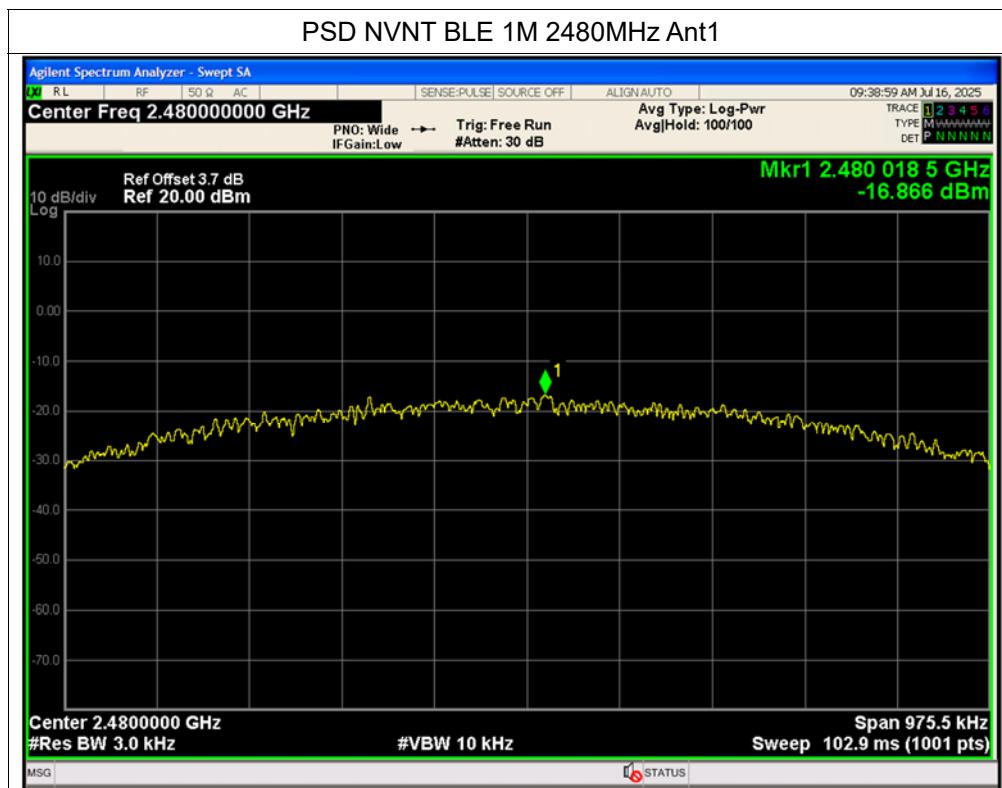

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+Adapter+Data cable+BT TX


Test voltage: AC 120V/60Hz

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}}$$


U_R : Receiver Reading

A_{Factor} : Voltage division factor of LISN

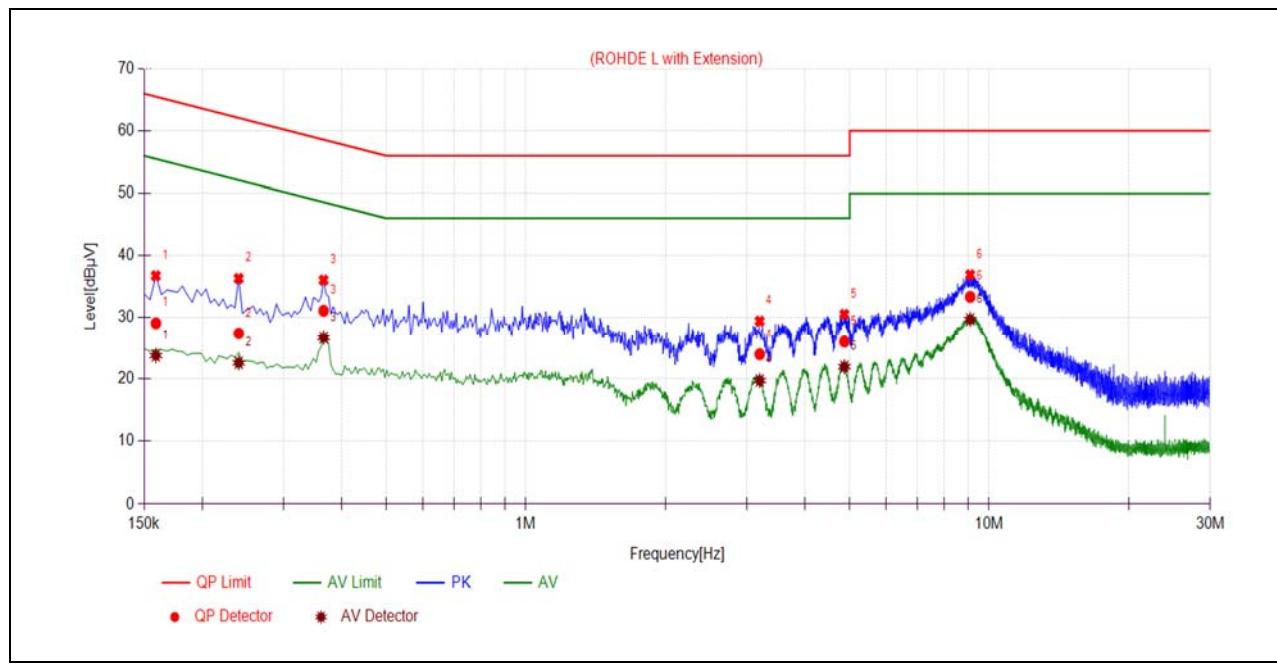B. Test Plot:


(L Phase)

No.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1590	29.10	23.79	65.52	55.52	Line	PASS
2	0.2400	27.41	22.61	62.10	52.10		PASS
3	0.3660	31.12	26.71	58.59	48.59		PASS
4	3.1965	24.00	19.77	56.00	46.00		PASS
5	4.8704	26.04	21.98	56.00	46.00		PASS
6	9.1011	33.36	29.73	60.00	50.00		PASS

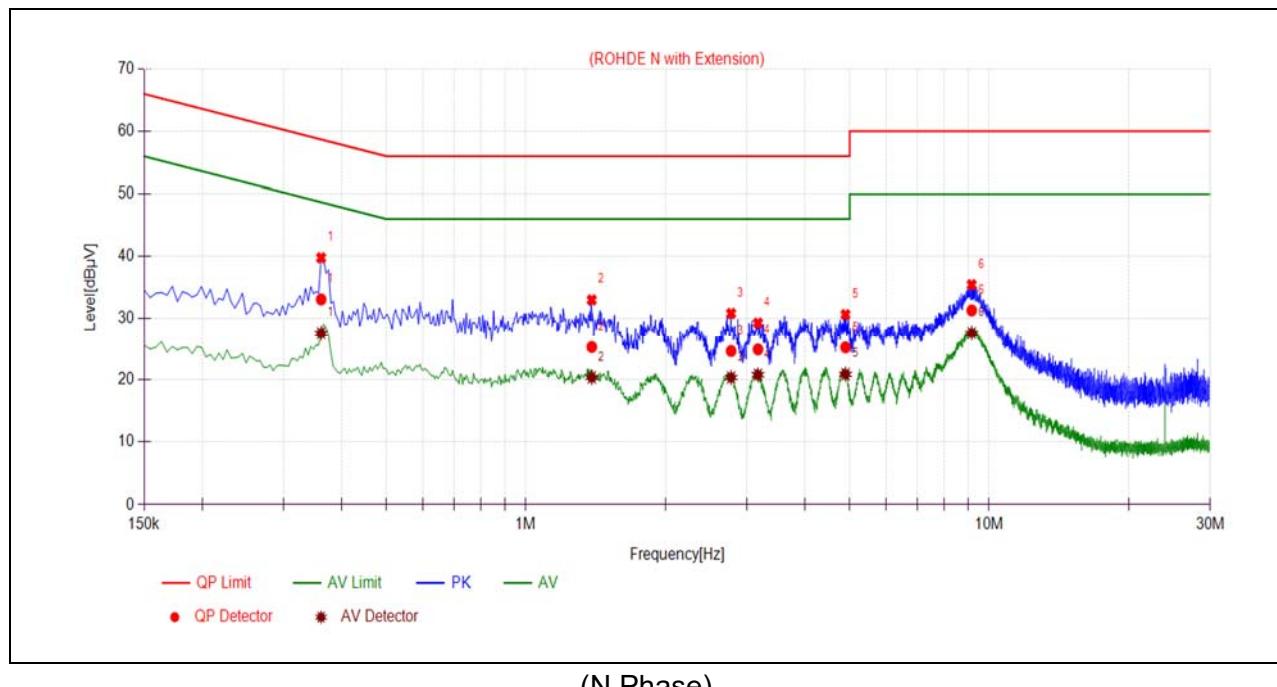


No.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.3615	33.11	27.62	58.69	48.69	Neutral	PASS
2	1.3876	25.33	20.40	56.00	46.00		PASS
3	2.7737	24.68	20.39	56.00	46.00		PASS
4	3.1693	24.93	20.82	56.00	46.00		PASS
5	4.8973	25.27	20.91	56.00	46.00		PASS
6	9.1687	31.34	27.65	60.00	50.00		PASS

A.9. Restricted Frequency Bands


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.

Plot for Channel 0

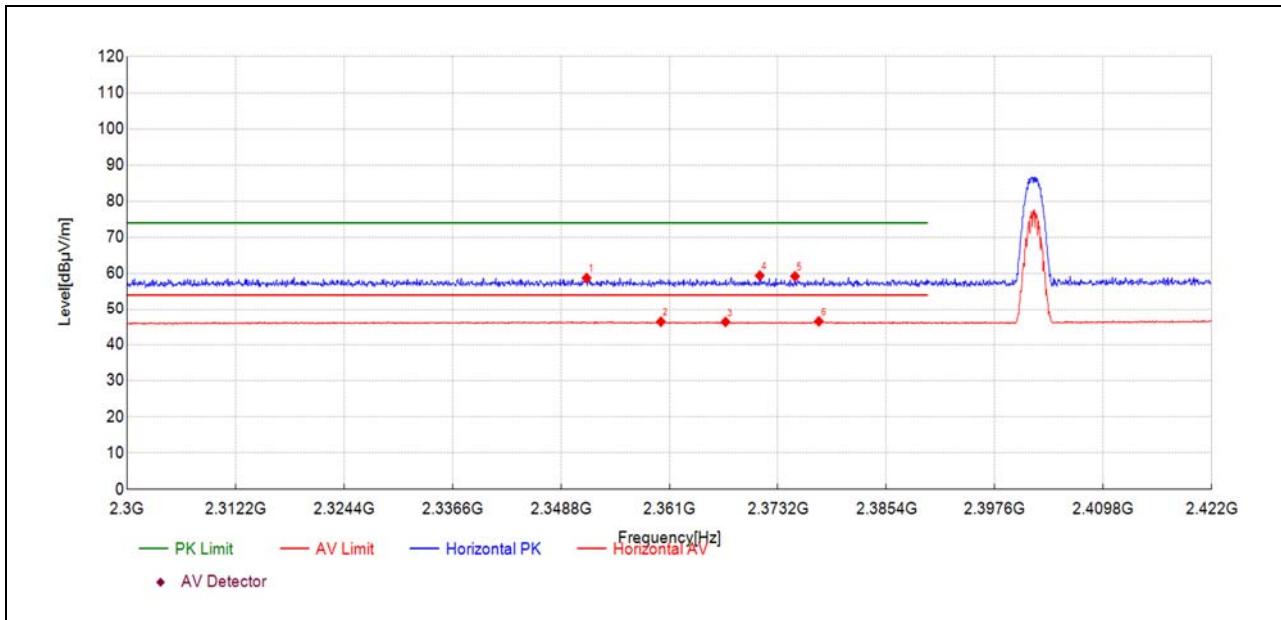

Fre. (MHz)	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
2351.69	21.3	58.76	37.460	74.00	15.24	172	PK	PASS
2360.05	8.9	46.38	37.460	54.00	7.62	191	AV	PASS
2367.32	8.9	46.34	37.470	54.00	7.66	181	AV	PASS
2371.16	22.0	59.42	37.470	74.00	14.58	322	PK	PASS
2375.13	21.8	59.25	37.480	74.00	14.75	186	PK	PASS
2377.81	9.0	46.49	37.480	54.00	7.51	158	AV	PASS

Plot for Channel 39

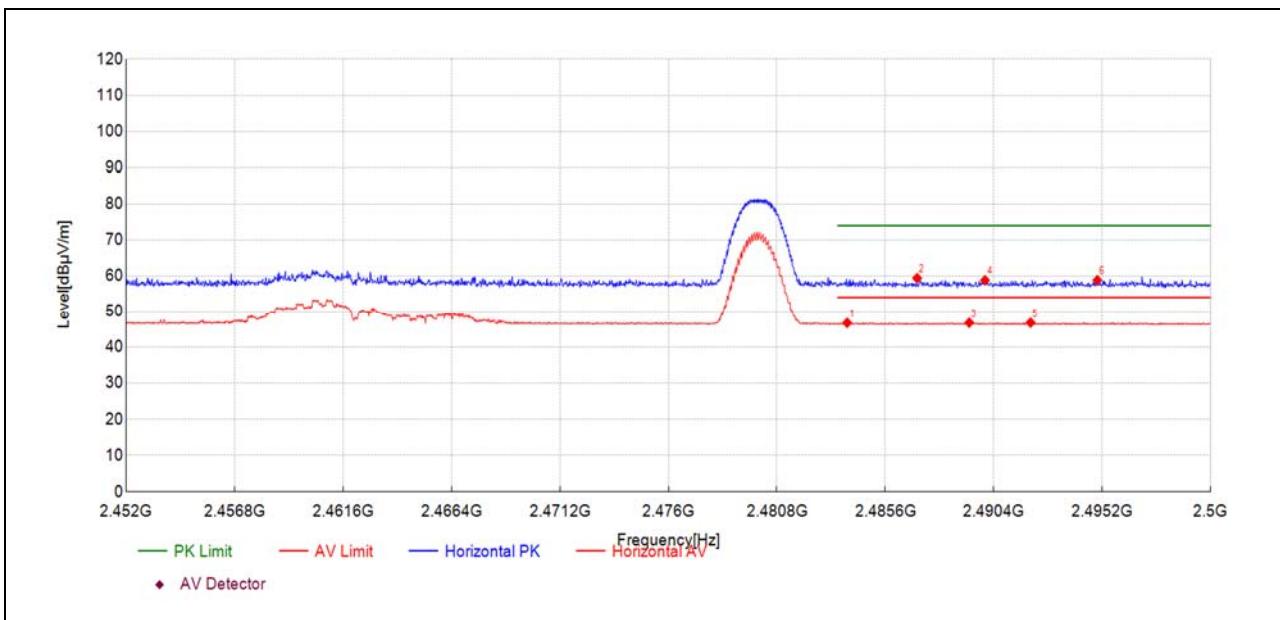

Fre. (MHz)	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
2483.91	8.5	46.79	38.270	54.00	7.21	247	AV	PASS
2487.01	21.1	59.41	38.270	74.00	14.59	182	PK	PASS
2489.31	8.6	46.82	38.260	54.00	7.18	341	AV	PASS
2490.01	20.6	58.84	38.270	74.00	15.16	19	PK	PASS
2492.03	8.6	46.84	38.260	54.00	7.16	23	AV	PASS
2494.98	20.6	58.86	38.260	74.00	15.14	219	PK	PASS



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable\ loss} [dB] - G_{preamp} [dB]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Plot for Channel 0

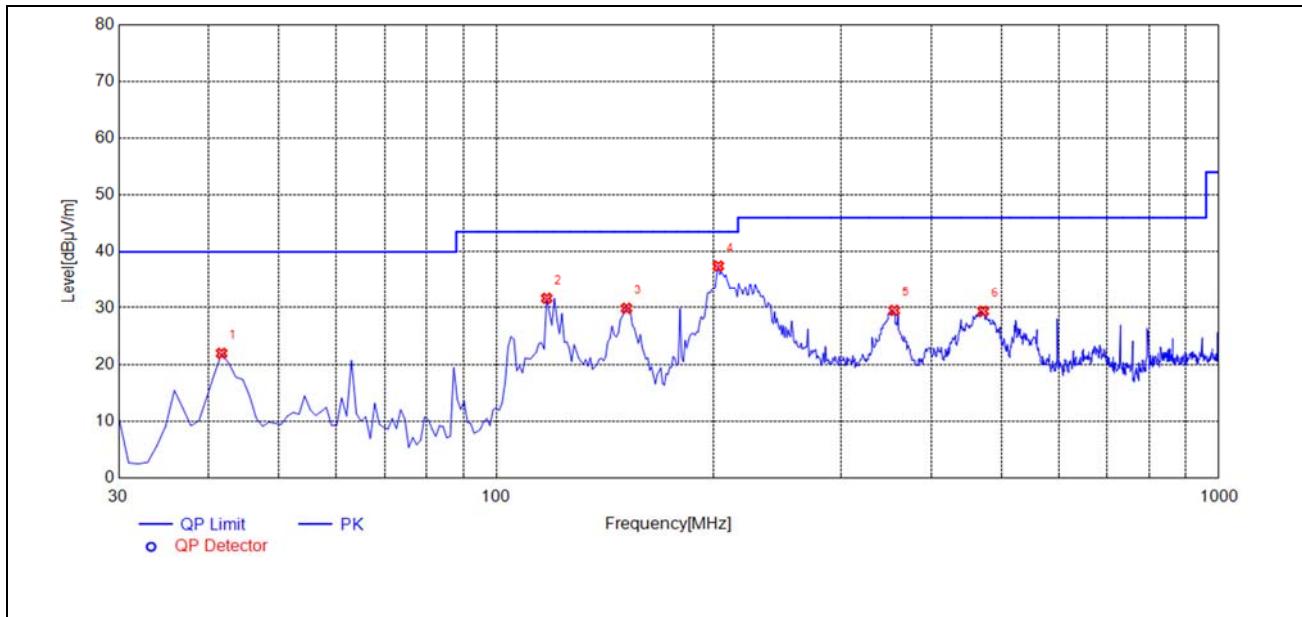


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
41.6517	21.95	-29.90	40.00	18.05	150	216	PK	PASS
117.3874	31.64	-32.50	43.50	11.86	150	310	PK	PASS
151.3714	29.88	-34.36	43.50	13.62	150	285	PK	PASS
202.8328	37.49	-32.37	43.50	6.01	150	302	PK	PASS
355.2753	29.50	-25.85	46.00	16.50	150	164	PK	PASS
471.7918	29.35	-24.20	46.00	16.65	150	267	PK	PASS

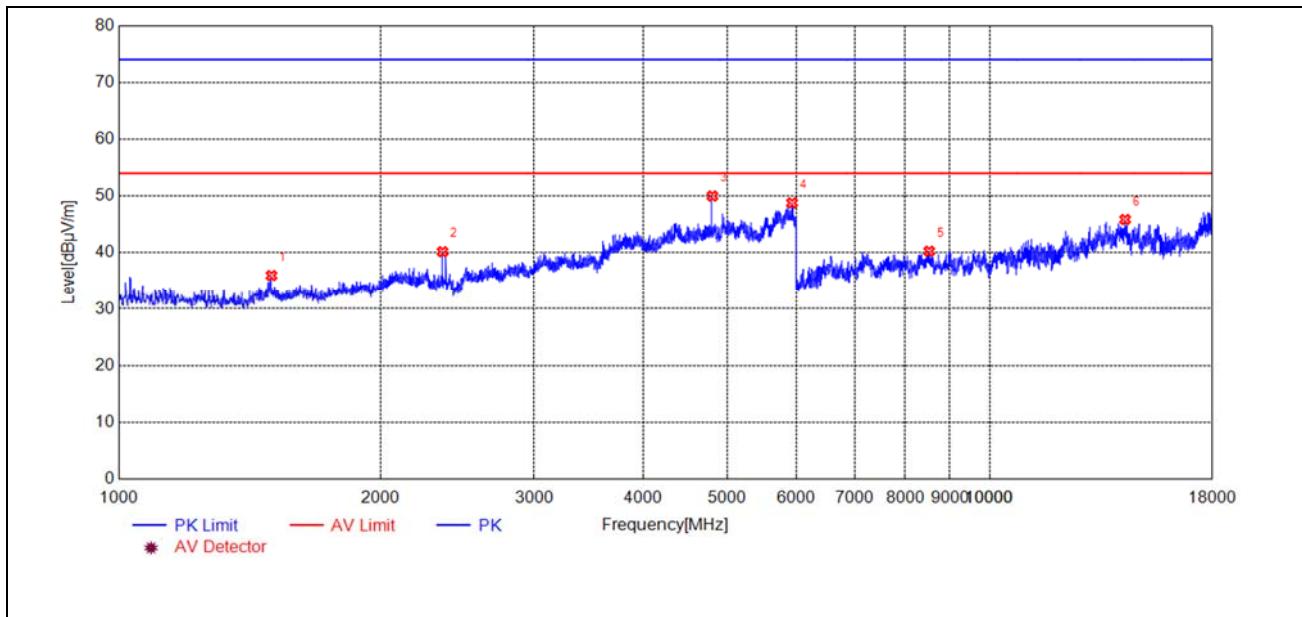


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1498.0996	35.98	-23.00	74.00	38.02	150	40	PK	PASS
2354.2709	40.19	-21.27	74.00	33.81	150	281	PK	PASS
4803.7608	49.99	-10.54	74.00	24.01	150	343	PK	PASS
5929.9860	48.79	-6.58	74.00	25.21	150	281	PK	PASS
8520.5041	40.28	-1.43	74.00	33.72	150	250	PK	PASS
14298.4597	45.86	7.71	74.00	28.14	150	159	PK	PASS

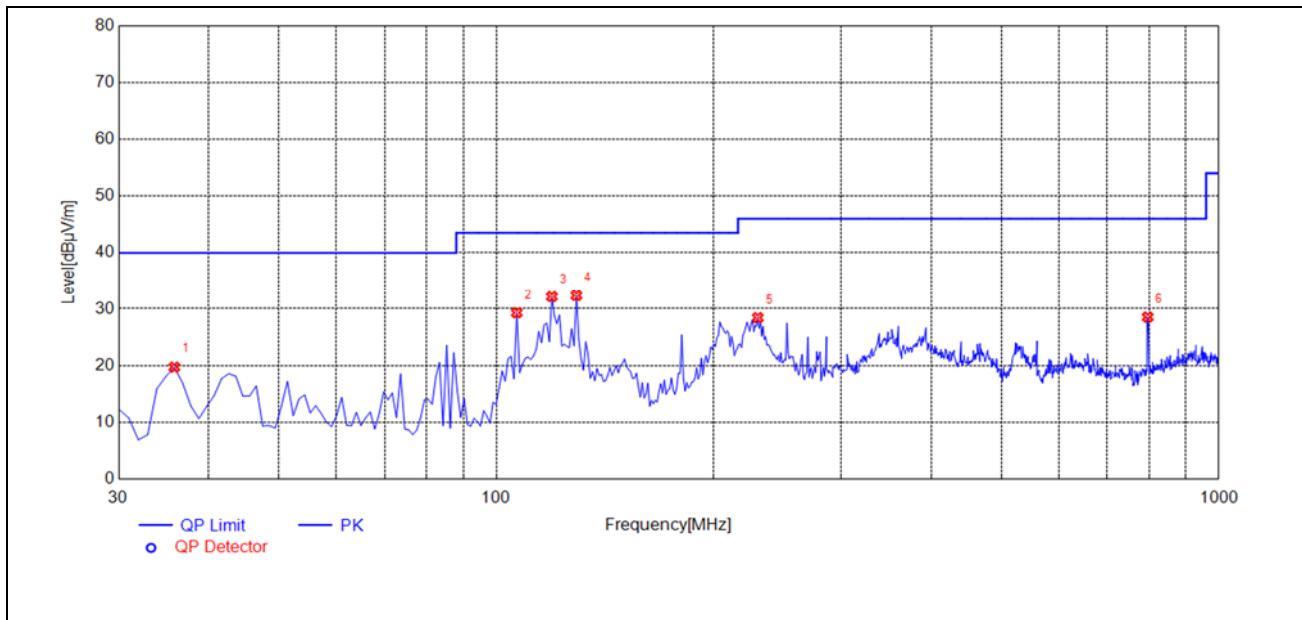

(Antenna Vertical, 30MHz to 1GHz)


Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
35.8258	19.70	-36.91	40.00	20.30	150	109	PK	PASS
106.7067	29.29	-30.84	43.50	14.21	150	186	PK	PASS
119.3293	32.15	-32.43	43.50	11.35	150	272	PK	PASS
129.0390	32.34	-32.25	43.50	11.16	150	100	PK	PASS
230.0200	28.42	-30.71	46.00	17.58	150	246	PK	PASS
797.0671	28.52	-20.48	46.00	17.48	150	264	PK	PASS

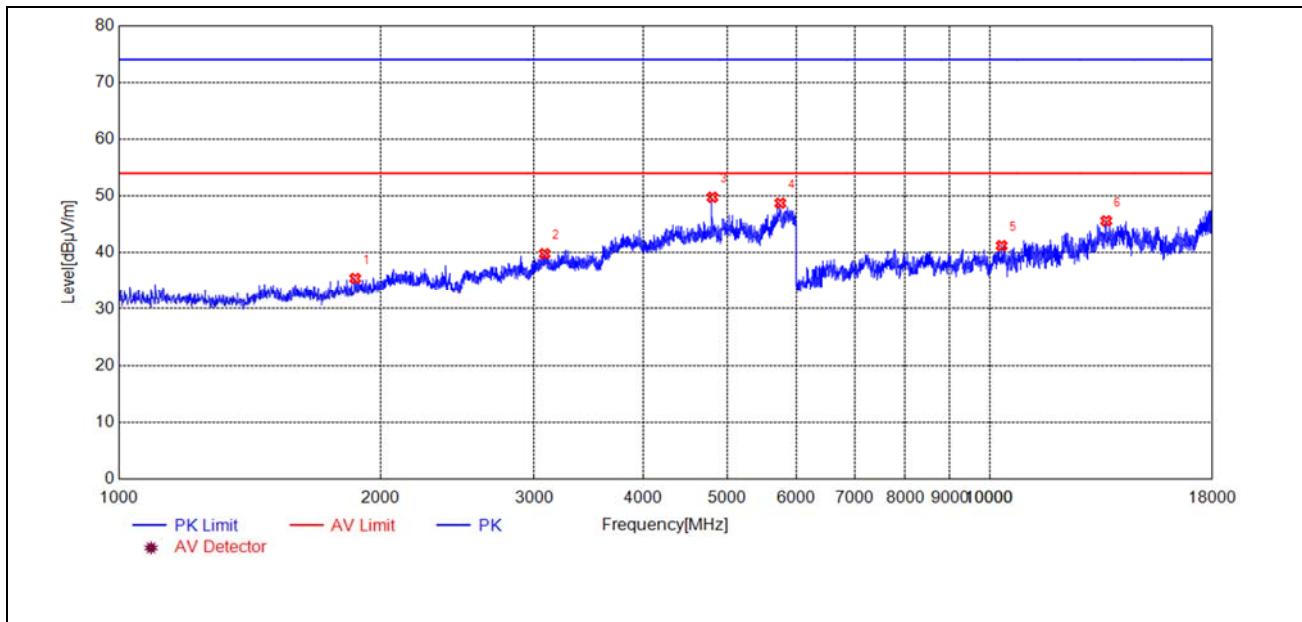

(Antenna Vertical, 1GHz to 18GHz)


Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1869.1738	35.49	-22.49	74.00	38.51	150	31	PK	PASS
3083.4167	39.84	-17.06	74.00	34.16	150	143	PK	PASS
4803.7608	49.78	-10.54	74.00	24.22	150	343	PK	PASS
5748.9498	48.74	-6.75	74.00	25.26	150	323	PK	PASS
10318.4637	41.26	1.01	74.00	32.74	150	128	PK	PASS
13604.7209	45.62	7.40	74.00	28.38	150	269	PK	PASS

Plot for Channel 19

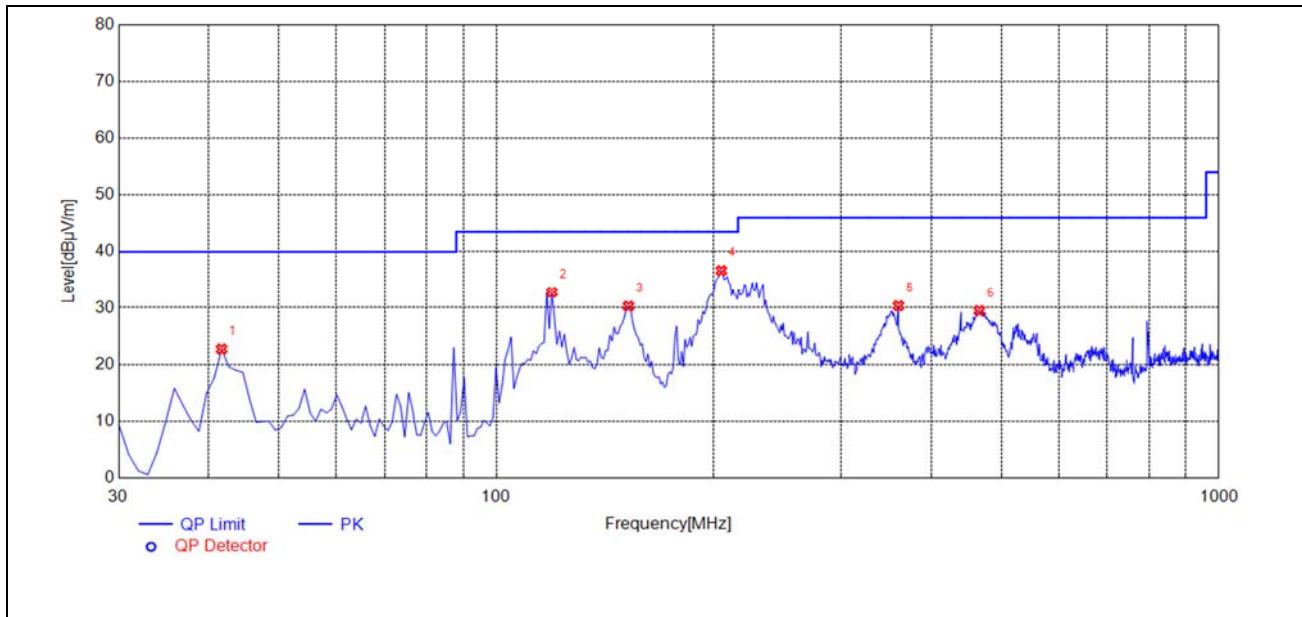


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
41.6517	22.70	-29.90	40.00	17.30	150	38	PK	PASS
119.3293	32.79	-32.43	43.50	10.71	150	340	PK	PASS
152.3423	30.26	-34.27	43.50	13.24	150	295	PK	PASS
204.7748	36.66	-32.32	43.50	6.84	150	295	PK	PASS
360.1301	30.34	-26.34	46.00	15.66	150	183	PK	PASS
465.9660	29.48	-23.84	46.00	16.52	150	270	PK	PASS

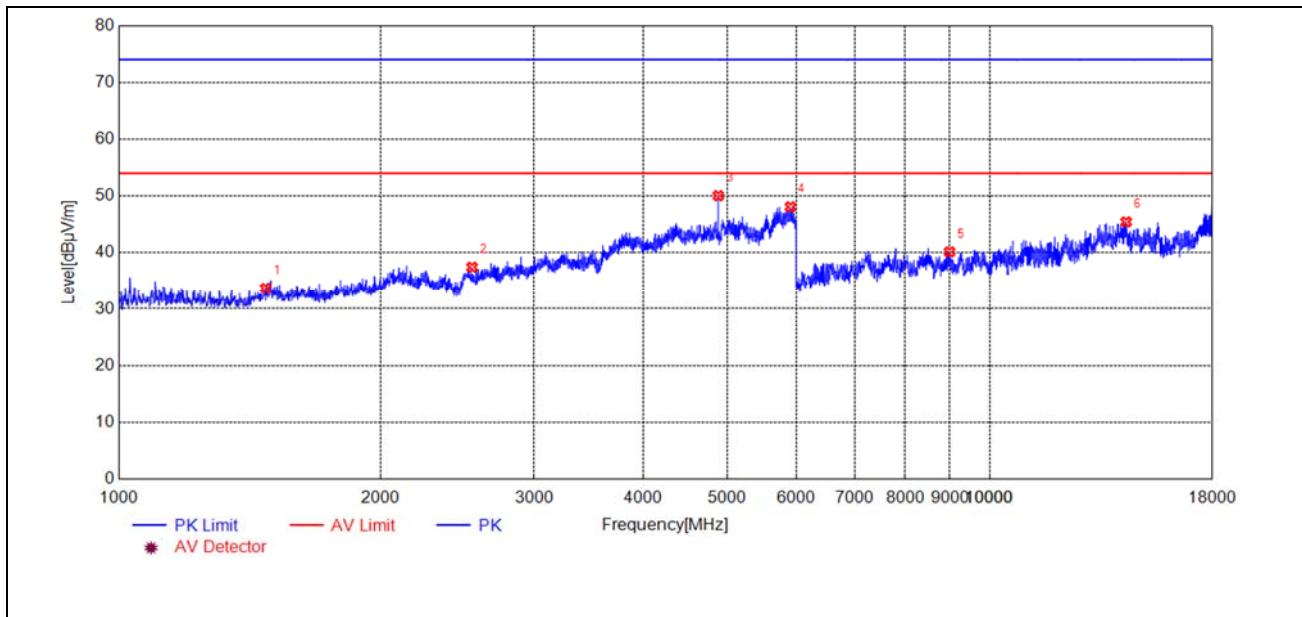


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1475.0950	33.70	-23.38	74.00	40.30	150	249	PK	PASS
2545.3091	37.47	-19.94	74.00	36.53	150	168	PK	PASS
4879.7760	50.05	-11.01	74.00	23.95	150	18	PK	PASS
5904.9810	48.09	-6.95	74.00	25.91	150	78	PK	PASS
8990.9982	40.16	-0.86	74.00	33.84	150	40	PK	PASS
14339.2679	45.44	7.56	74.00	28.56	150	91	PK	PASS

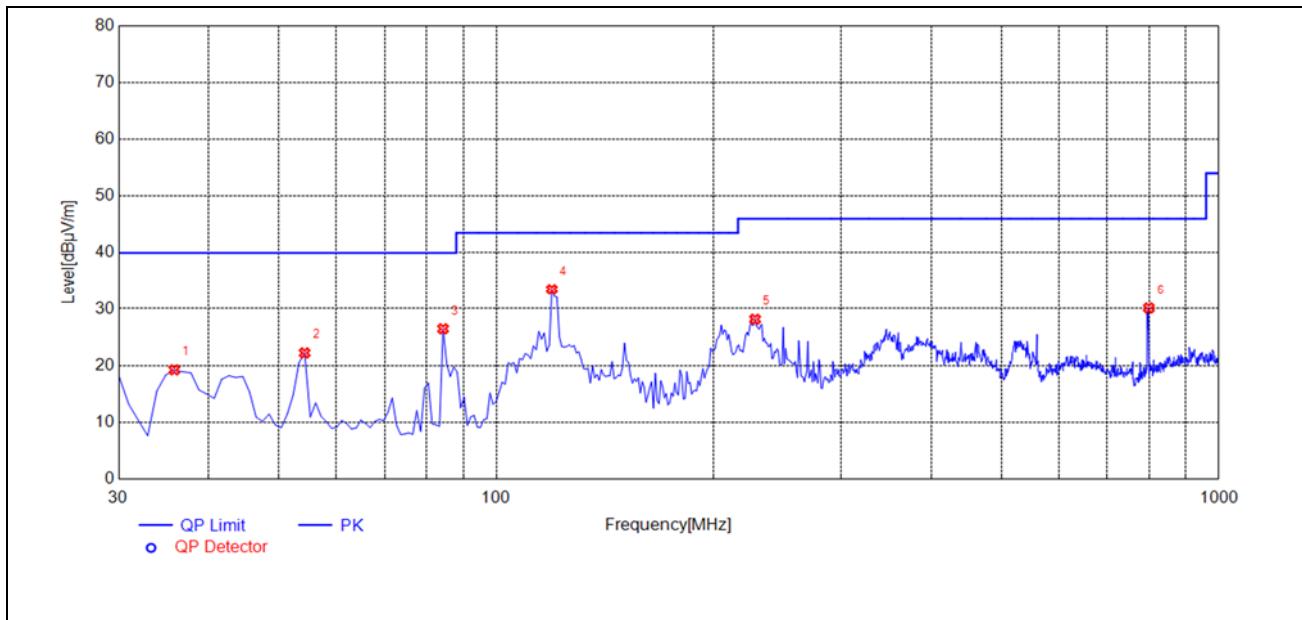

(Antenna Vertical, 30MHz to 1GHz)


Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
35.8258	19.22	-36.91	40.00	20.78	150	123	PK	PASS
54.2743	22.21	-29.08	40.00	17.79	150	328	PK	PASS
84.3744	26.45	-33.56	40.00	13.55	150	149	PK	PASS
119.3293	33.49	-32.43	43.50	10.01	150	234	PK	PASS
228.0781	28.14	-31.16	46.00	17.86	150	260	PK	PASS
799.9800	30.12	-20.18	46.00	15.88	150	320	PK	PASS

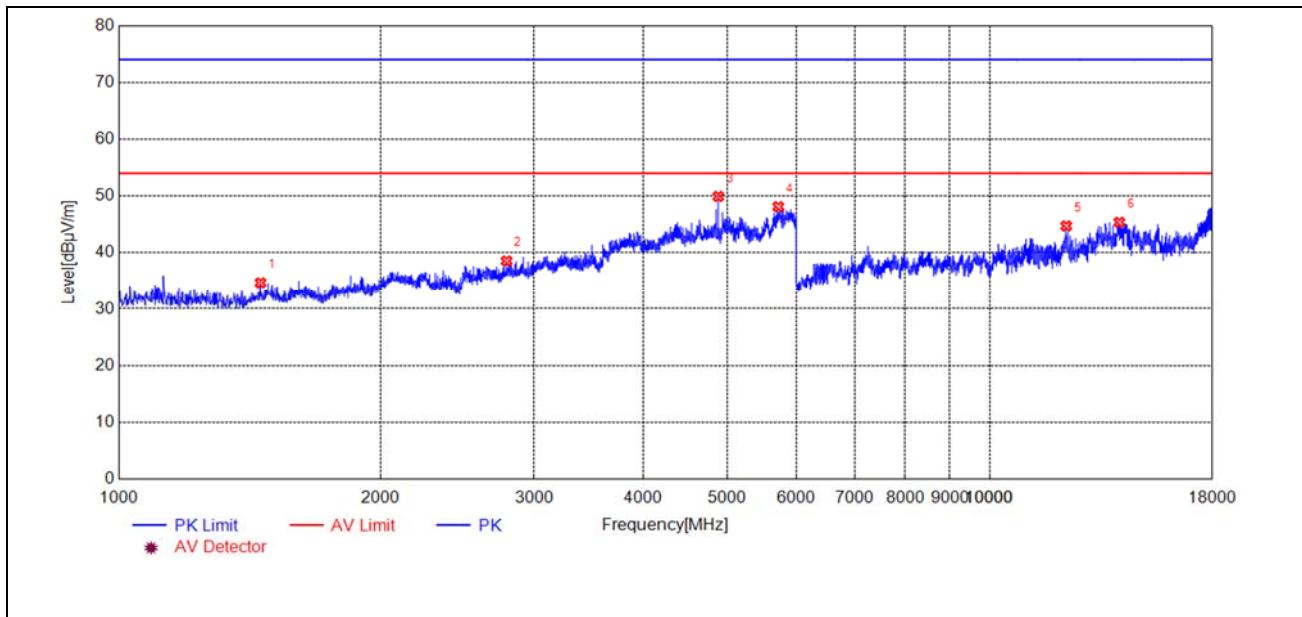

(Antenna Vertical, 1GHz to 18GHz)


Fre. (MHz)	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1455.0910	34.70	-23.72	74.00	39.30	150	149	PK	PASS
2788.3577	38.57	-19.01	74.00	35.43	150	129	PK	PASS
4879.7760	49.93	-11.01	74.00	24.07	150	299	PK	PASS
5717.9436	48.12	-7.25	74.00	25.88	150	319	PK	PASS
12238.8478	44.73	5.07	74.00	29.27	150	150	PK	PASS
14082.4165	45.38	6.84	74.00	28.62	150	17	PK	PASS

Plot for Channel 39

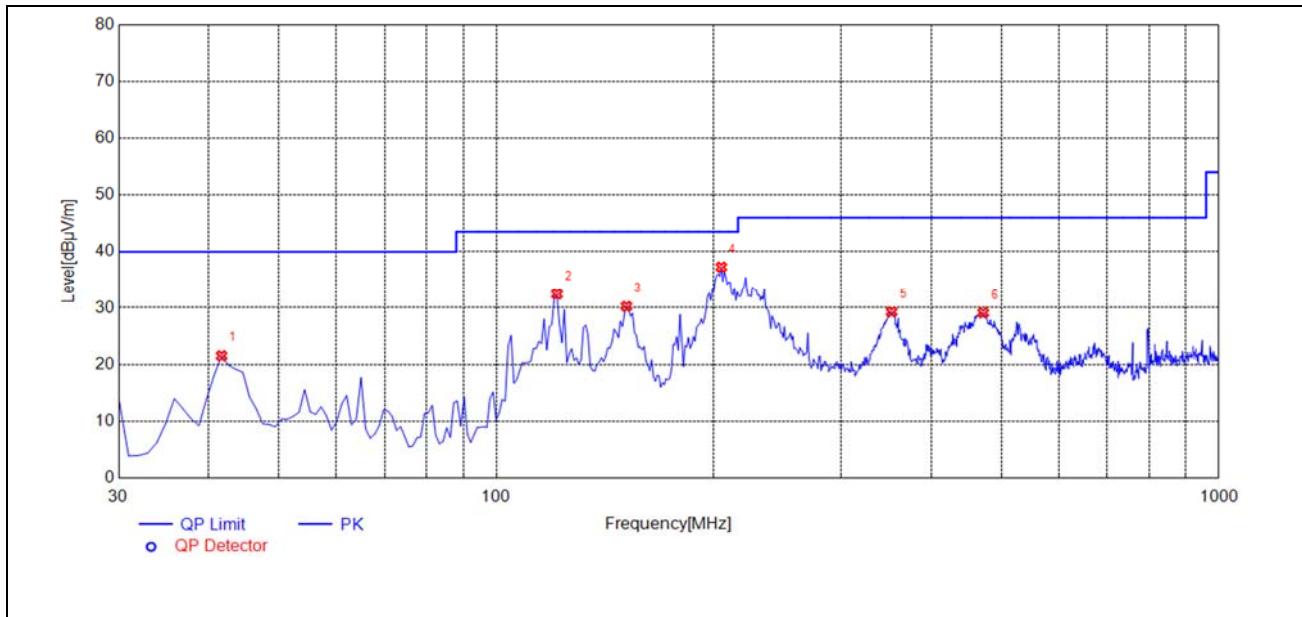

(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
41.6517	21.52	-29.90	40.00	18.48	150	38	PK	PASS
121.2713	32.43	-32.61	43.50	11.07	150	20	PK	PASS
151.3714	30.23	-34.36	43.50	13.27	150	270	PK	PASS
204.7748	37.28	-32.32	43.50	6.22	150	279	PK	PASS
352.3624	29.26	-26.27	46.00	16.74	150	159	PK	PASS
471.7918	29.09	-24.20	46.00	16.91	150	279	PK	PASS

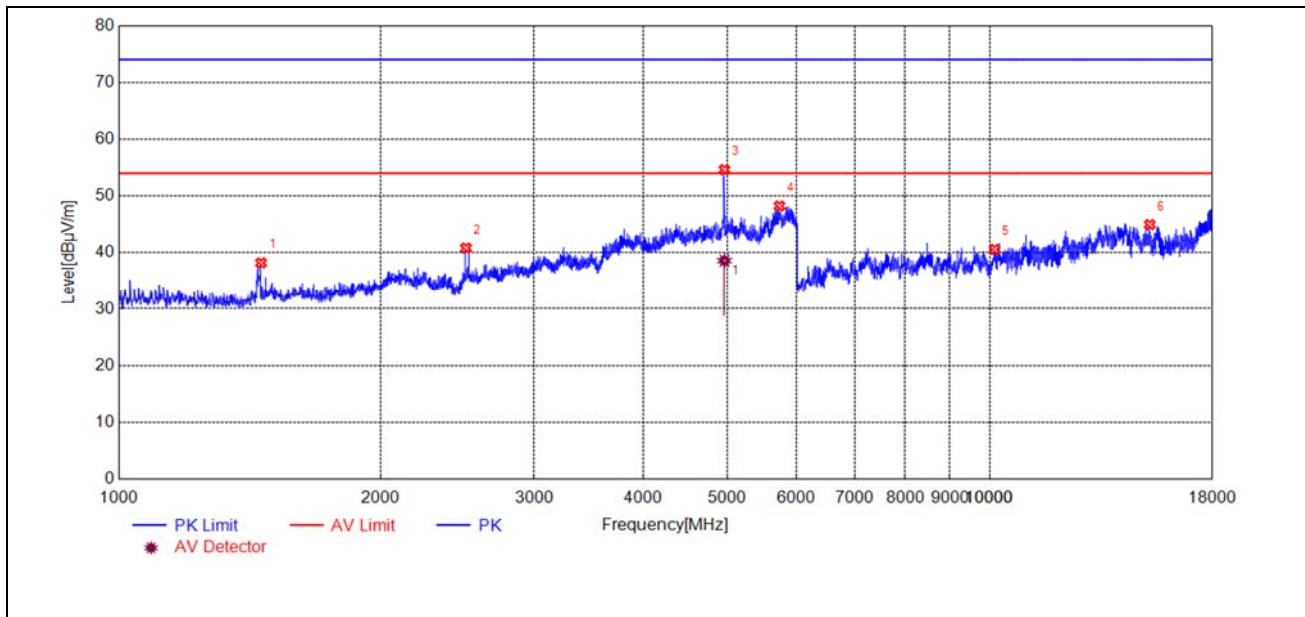


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1457.0914	38.22	-23.68	74.00	35.78	150	18	PK	PASS
2504.3009	40.85	-19.55	74.00	33.15	150	299	PK	PASS
4959.7920	54.64	-9.63	74.00	19.36	150	18	PK	PASS
5735.9472	48.24	-6.96	74.00	25.76	150	117	PK	PASS
10126.4253	40.60	1.84	74.00	33.40	150	88	PK	PASS
15263.4527	44.96	7.15	74.00	29.04	150	262	PK	PASS


Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
4959.7474	-9.64	150	360	Horizontal

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
4959.7474	-9.64	38.61	54.00	15.39	150	360	PK	PASS

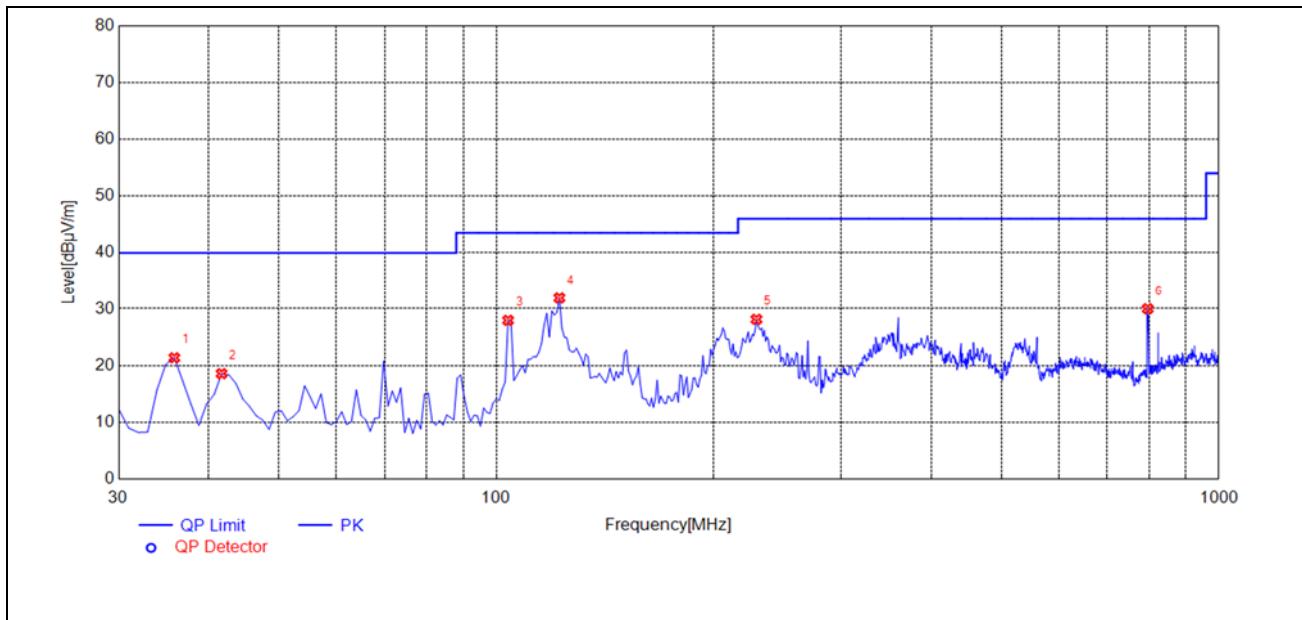

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
35.8258	21.35	-36.91	40.00	18.65	150	270	PK	PASS
41.6517	18.56	-29.90	40.00	21.44	150	75	PK	PASS
103.7938	27.94	-30.69	43.50	15.56	150	340	PK	PASS
122.2422	31.89	-32.80	43.50	11.61	150	340	PK	PASS
229.0490	28.12	-30.93	46.00	17.88	150	304	PK	PASS
797.0671	29.99	-20.48	46.00	16.01	150	321	PK	PASS

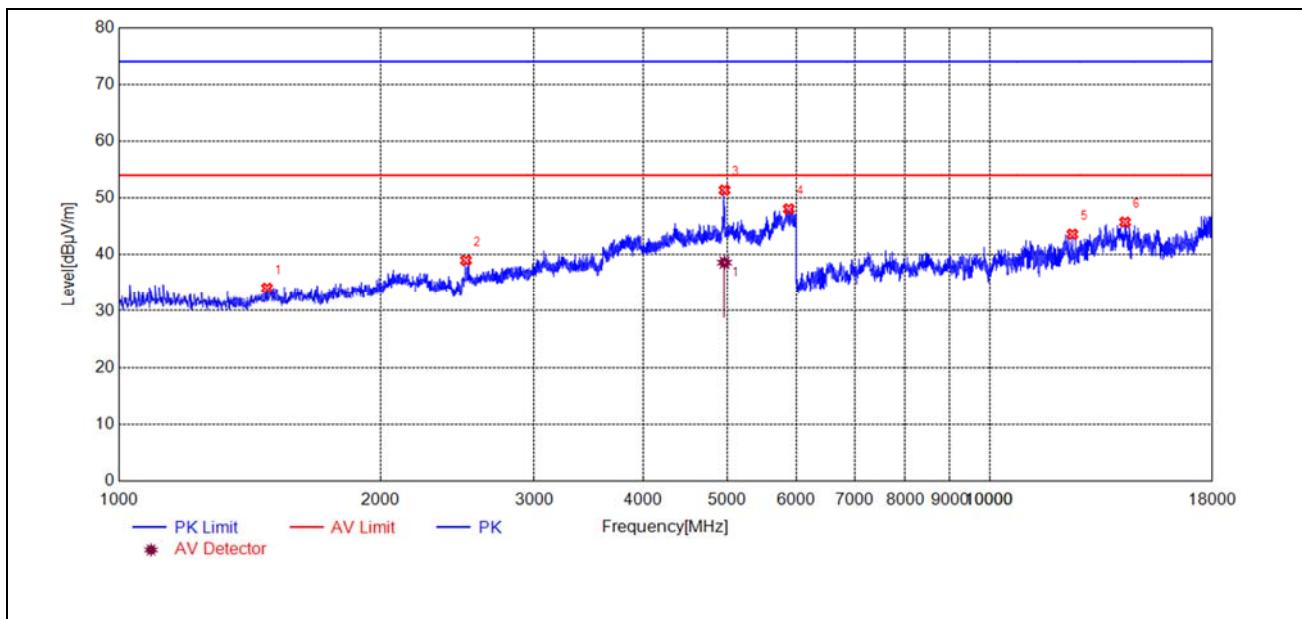

(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
1480.0960	34.09	-23.30	74.00	39.91	150	240	PK	PASS
2504.3009	39.03	-19.55	74.00	34.97	150	280	PK	PASS
4959.7920	51.40	-9.63	74.00	22.60	150	360	PK	PASS
5877.9756	48.08	-6.98	74.00	25.92	150	290	PK	PASS
12440.4881	43.62	4.53	74.00	30.38	150	231	PK	PASS
14296.0592	45.75	7.59	74.00	28.25	150	140	PK	PASS

Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
4959.8664	-9.64	150	350	Vertical

Fre. (MHz)	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
4959.8664	-9.64	38.63	54.00	15.37	150	350	PK	PASS

END OF REPORT