



RADIO TEST REPORT

Applicant	:	VONDERFUL INC.
Address of Applicant	:	262 Chapman Rd, Ste 240, Newark DE 19702 USA
Manufacturer	:	VONDERFUL INC.
Address of Manufacturer	:	262 Chapman Rd, Ste 240, Newark DE 19702 USA
Equipment under Test	:	Vonder AI Smart Glasses
Model No.	:	V1253
FCC ID	:	2BRGZ-V1253
IC	:	34395-V1253
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE25042820-1E01
Issue Date	:	2025/09/09
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	20 dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	21
5.1.	Block diagram of test setup	21
5.2.	Limits	21
5.3.	Test procedure	21
5.4.	Test result.....	22
5.5.	Test graphs	23
6.	Maximum Peak Output Power.....	29
6.1.	Block diagram of test setup	29
6.2.	Limits	29
6.3.	Test procedure	29
6.4.	Test result.....	30
6.5.	Test graphs	31
7.	Carrier Frequency Separation	37
7.1.	Block diagram of test setup	37
7.2.	Limits	37
7.3.	Test procedure	37
7.4.	Test result.....	38
7.5.	Test graphs	39
8.	Dwell Time.....	41

8.1.	Block diagram of test setup	41
8.2.	Limits	41
8.3.	Test procedure	41
8.4.	Test result.....	42
8.5.	Test graphs	43
9.	Number of Hopping Channel.....	55
9.1.	Block diagram of test setup	55
9.2.	Limits	55
9.3.	Test procedure	55
9.4.	Test result.....	56
9.5.	Test graphs	57
10.	Band Edge Compliance (Conducted Method).....	59
10.1.	Block diagram of test setup	59
10.2.	Limit.....	59
10.3.	Test procedure	59
10.4.	Test result.....	60
10.5.	Test graphs	61
11.	RF Conducted Spurious Emissions.....	69
11.1.	Block diagram of test setup	69
11.2.	Limits	69
11.3.	Test procedure	69
11.4.	Test result.....	70
11.5.	Test graphs	71
12.	Duty cycle.....	89
12.1.	Block diagram of test setup	89
12.2.	Limit.....	89
12.3.	Test procedure	89
12.4.	Test result.....	90
12.5.	Test graphs	91
13.	Antenna Requirements.....	97
13.1.	Limit.....	97
13.2.	Result	97
14.	Radiated Emission	98
14.1.	Test equipment.....	98
14.2.	Block diagram of test setup	99
14.3.	Limits	100
14.4.	Assistant equipment used for test	102
14.5.	Test procedure	102

14.6.	Test result.....	103
14.7.	Test data	104
15.	Band Edge Compliance.....	120
15.1.	Test equipment.....	120
15.2.	Block diagram of test setup	121
15.3.	Limits	121
15.4.	Assistant equipment used for test	121
15.5.	Test procedure	121
15.6.	Test result.....	121
15.7.	Test data	122
16.	Power Line Conducted Emissions.....	146
16.1.	Test equipment.....	146
16.2.	Block diagram of test setup	146
16.3.	Limits	146
16.4.	Assistant equipment used for test	146
16.5.	Test procedure	146
16.6.	Test result.....	147
16.7.	Test data	148
17.	Test Setup Photograph	150
18.	Photos of the EUT	152

Test Report Declare

Applicant	:	VONDERFUL INC.
Address of Applicant	:	262 Chapman Rd, Ste 240, Newark DE 19702 USA
Equipment under Test	:	Vonder AI Smart Glasses
Model No.	:	V1253
Manufacturer	:	VONDERFUL INC.
Address of Manufacturer	:	262 Chapman Rd, Ste 240, Newark DE 19702 USA

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25042820-1E01		
Date of Receipt:	2025/07/02	Date of Test:	2025/07/02 - 2025/08/15

Created: Chen Ziqin	Reviewed: Zoe Peng	Approved: Damon Hu
		
2025/08/15	2025/09/09	2025/09/09

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/09/09	Damon Hu

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247 Issue 3 clause 5.4(b)	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(a)	/	Pass
3	99% Bandwidth	RSS-Gen Issue 5 clause 6.7	/	Pass
4	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(b)	/	Pass
5	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
6	Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
7	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
8	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
9	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
10	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
11	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: Vonder AI Smart Glasses
Model Number	: V1253
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V from USB port or DC 3.8V built-in battery
Hardware Version	: R2_L_E1_V1.1 R2_R_E1_V1.2
Software Version	: 1.1.29.20250815
Antenna Type	: FPC Antenna
Max Antenna Gain(dBi)	: L: -1.75 R: -1.42

Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz to 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK

Bluetooth BR/EDR Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475

20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	/	
26	2428	53	2455	/	

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Charging cable	N/A	N/A	Length: 0.2m

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: BQB.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Tested mode	Tx Power Setting	Channel	Frequency (MHz)
GFSK hopping on Tx mode	5	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	5	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	5	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	5	CH0	2402
	5	CH39	2441

	5	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	5	CH0	2402
	5	CH39	2441
	5	CH78	2480
8DPSK hopping off Tx mode	5	CH0	2402
	5	CH39	2441
	5	CH78	2480
Note 1: According exploratory test, EUT will have maximum output power in those data rate, worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5 Note 2: Ant1 is for left side and Ant2 is for right side			

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2026/03/28
Wideband Radio Communication Tester	R&S	CMW500	168801	2026/03/28
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2026/03/28
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2025/08/25
RF Control Unit	Tonscend	JS0806-2	2118060485	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

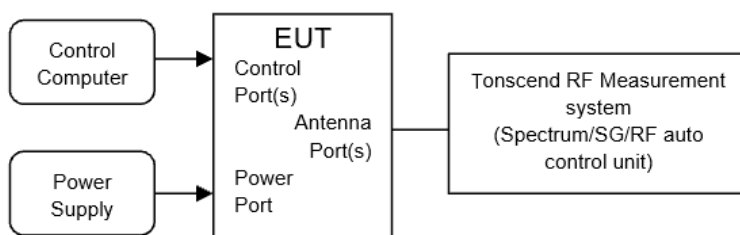

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold

- (5) Measure and record the results in the report.

4.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement System 4#
Ambient Condition:	22.8-26.3℃,41.5-48.7%RH	Test Date:	2025.07.16-2025.07.22
Test Power Supply:	Battery	Sample Number:	S25042820-016

Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant1	2402	0.95
	Ant2	2402	0.96
	Ant1	2441	0.95
	Ant2	2441	0.95
	Ant1	2480	0.95
	Ant2	2480	0.95
2DH5	Ant1	2402	1.34
	Ant2	2402	1.36
	Ant1	2441	1.34
	Ant2	2441	1.34
	Ant1	2480	1.36
	Ant2	2480	1.35
3DH5	Ant1	2402	1.33
	Ant2	2402	1.30
	Ant1	2441	1.31
	Ant2	2441	1.34
	Ant1	2480	1.35
	Ant2	2480	1.33


4.5. Test graphs










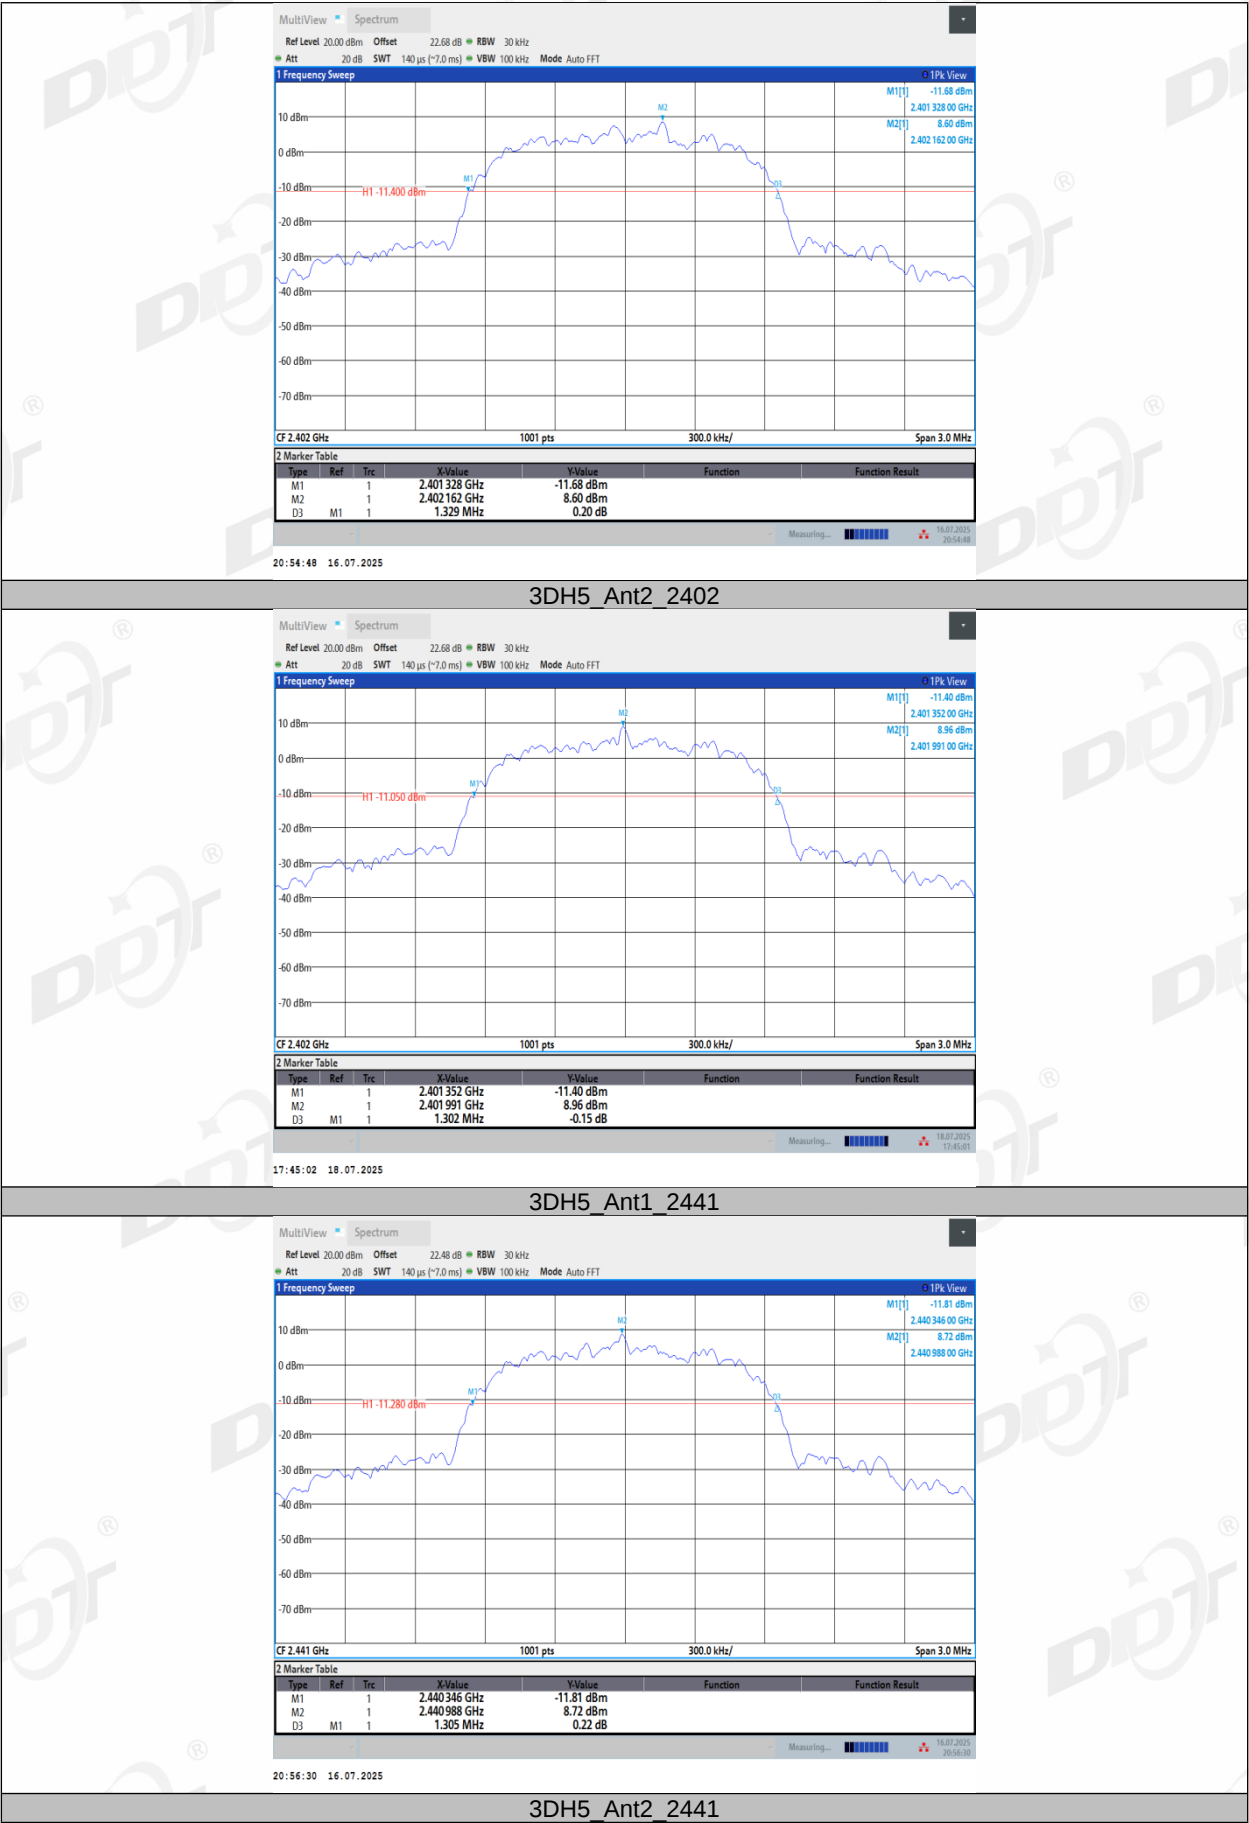



5. 99% Bandwidth

5.1. Block diagram of test setup

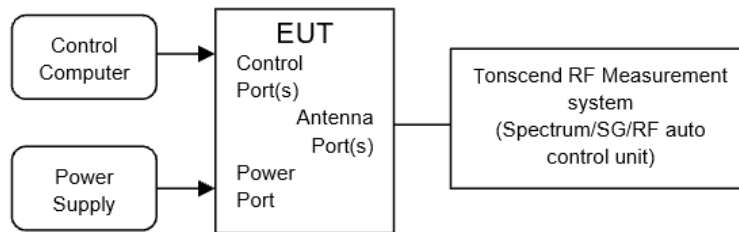

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.

5.4. Test result


Test Engineer:	Huang Yanwen	Test Site:	RF Measurement System 4#
Ambient Condition:	22.8-26.3℃,41.5-48.7%RH	Test Date:	2025.07.16-2025.07.22
Test Power Supply:	Battery	Sample Number:	S25042820-016

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant1	2402	0.86735	2401.5625	2402.4298
	Ant2	2402	0.86778	2401.5669	2402.4347
	Ant1	2441	0.86710	2440.5613	2441.4284
	Ant2	2441	0.86278	2440.5694	2441.4322
	Ant1	2480	0.85932	2479.5652	2480.4245
	Ant2	2480	0.85947	2479.5699	2480.4294
2DH5	Ant1	2402	1.1894	2401.4022	2402.5916
	Ant2	2402	1.1920	2401.4066	2402.5987
	Ant1	2441	1.1942	2440.4000	2441.5942
	Ant2	2441	1.1976	2440.4049	2441.6025
	Ant1	2480	1.1897	2479.4035	2480.5932
	Ant2	2480	1.1970	2479.4052	2480.6022
3DH5	Ant1	2402	1.1911	2401.4012	2402.5923
	Ant2	2402	1.1994	2401.4007	2402.6001
	Ant1	2441	1.1895	2440.4031	2441.5926
	Ant2	2441	1.2007	2440.4008	2441.6015
	Ant1	2480	1.1853	2479.4021	2480.5874
	Ant2	2480	1.2015	2479.4004	2480.6019


5.5. Test graphs






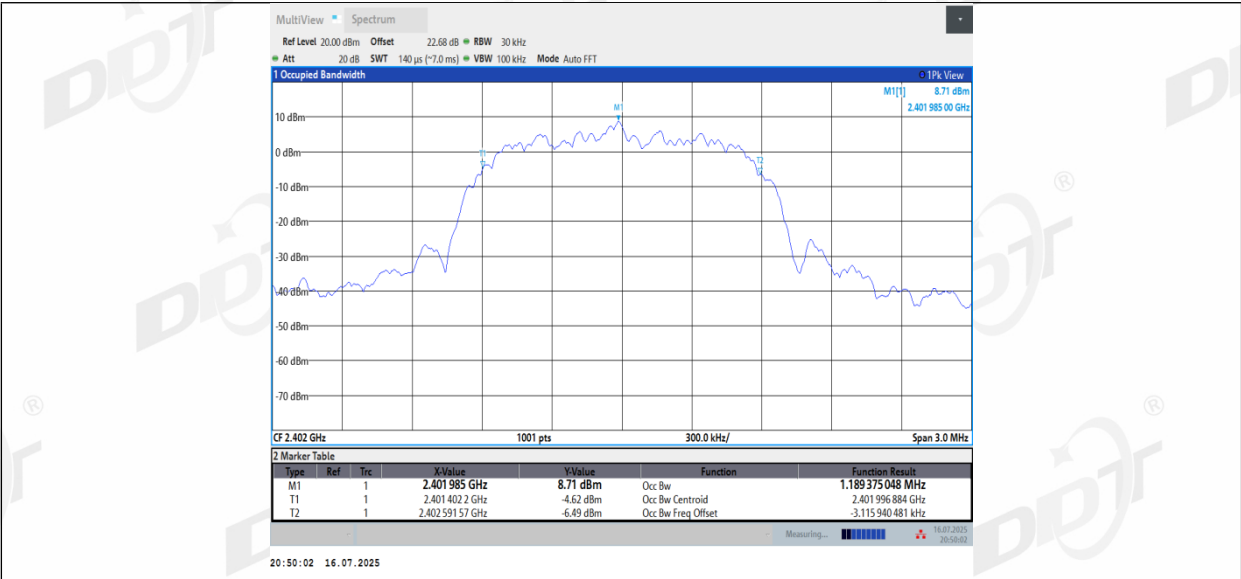


2DH5_Ant2_2402

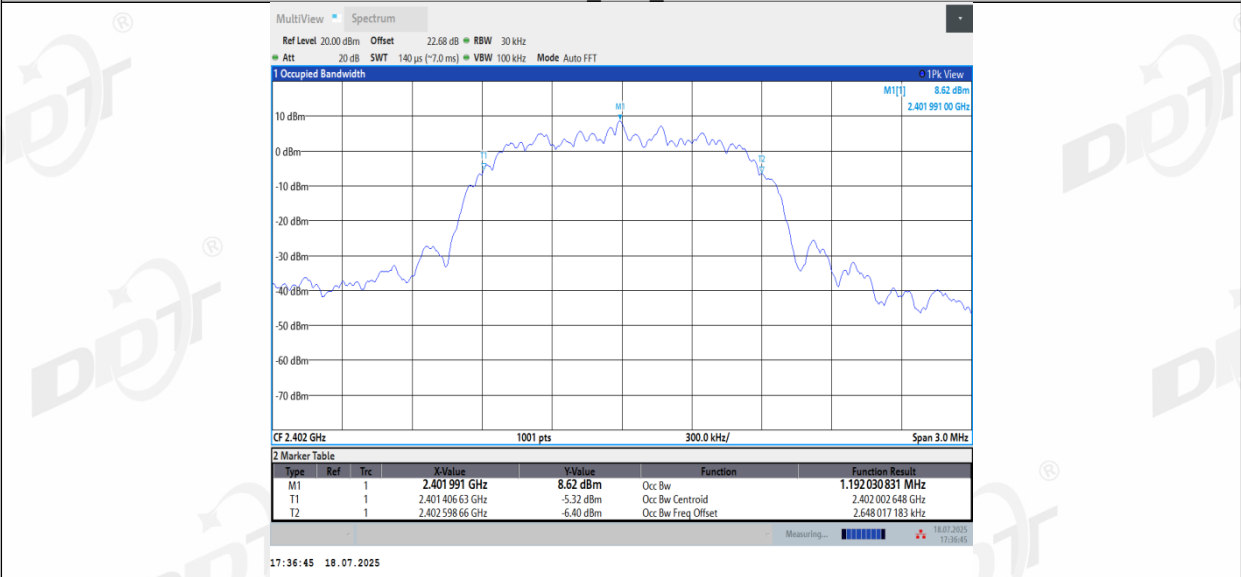


2DH5_Ant1_2441

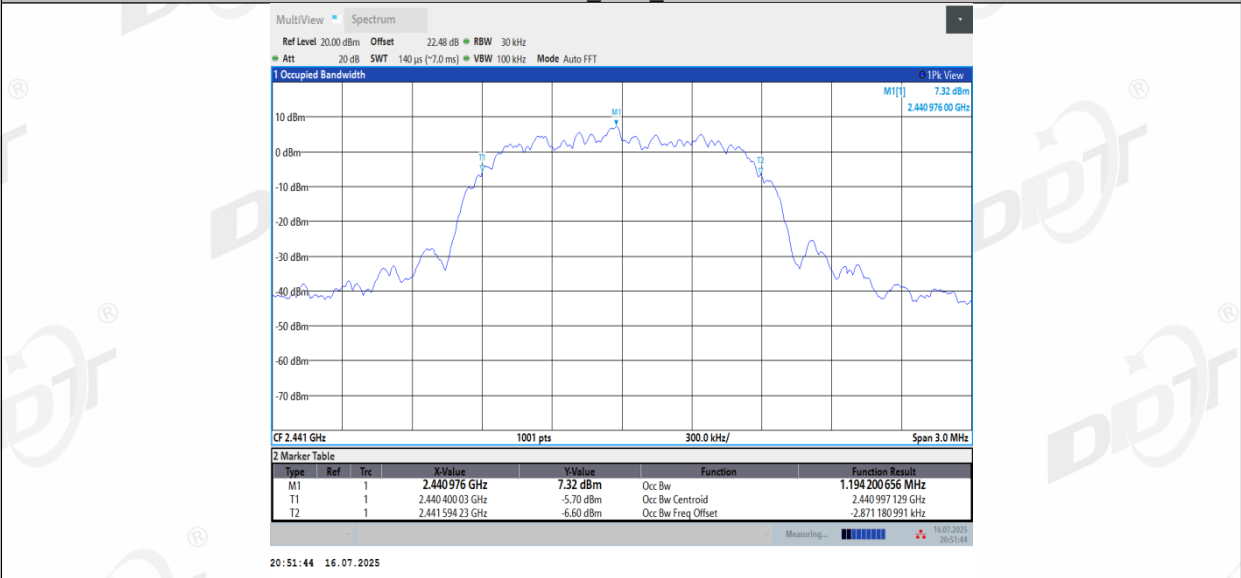


2DH5_Ant2_2441

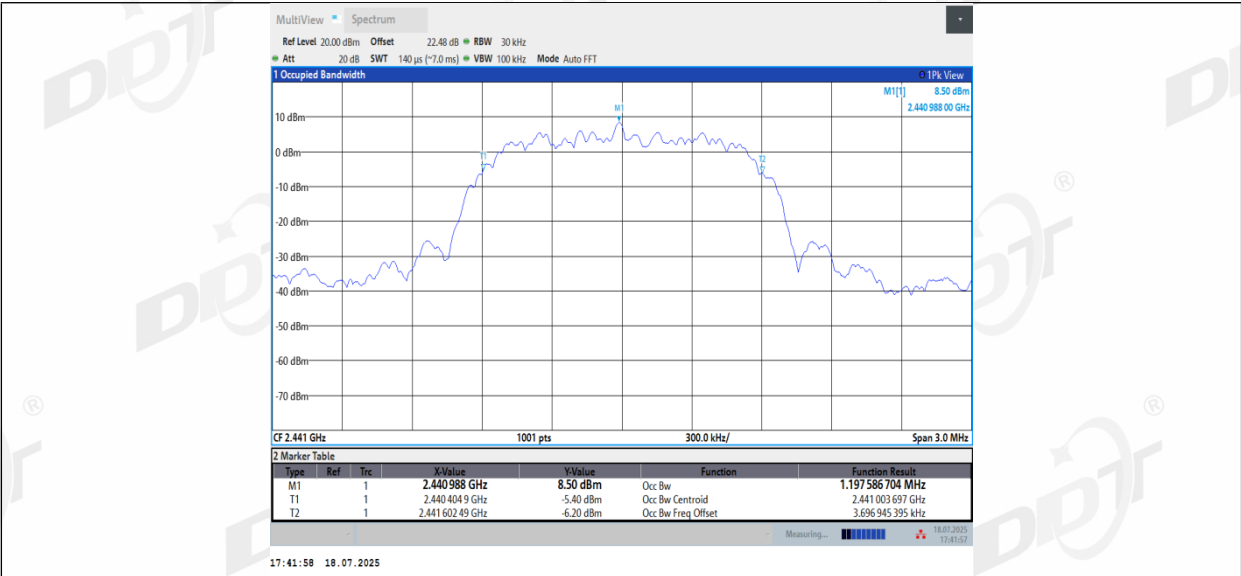


2DH5_Ant1_2480

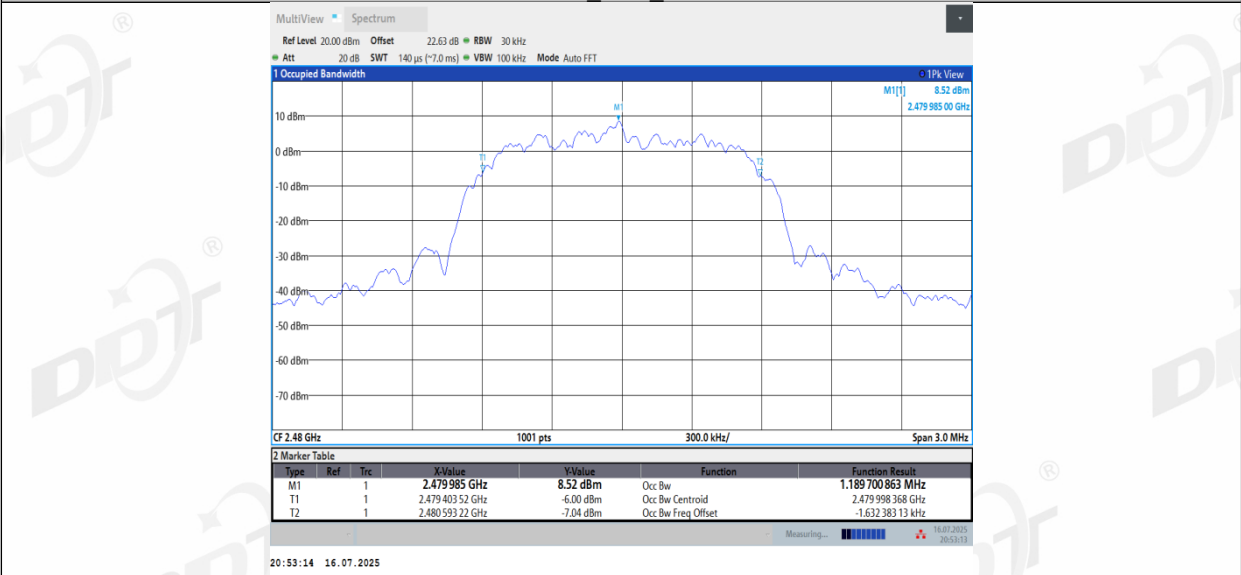


2DH5_Ant2_2480

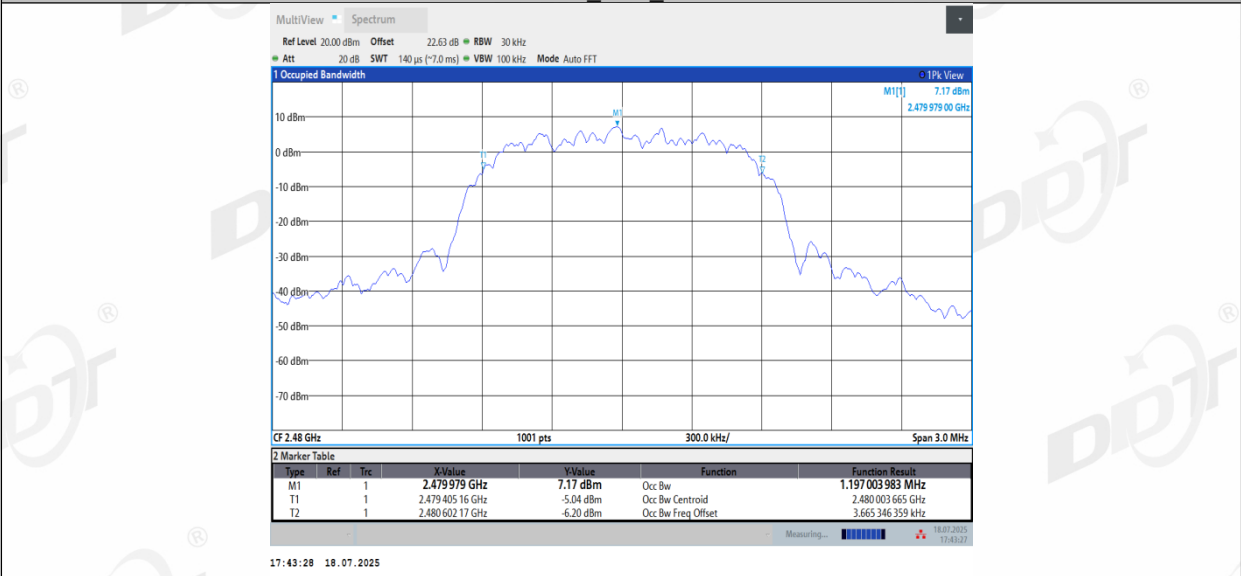


3DH5_Ant1_2402

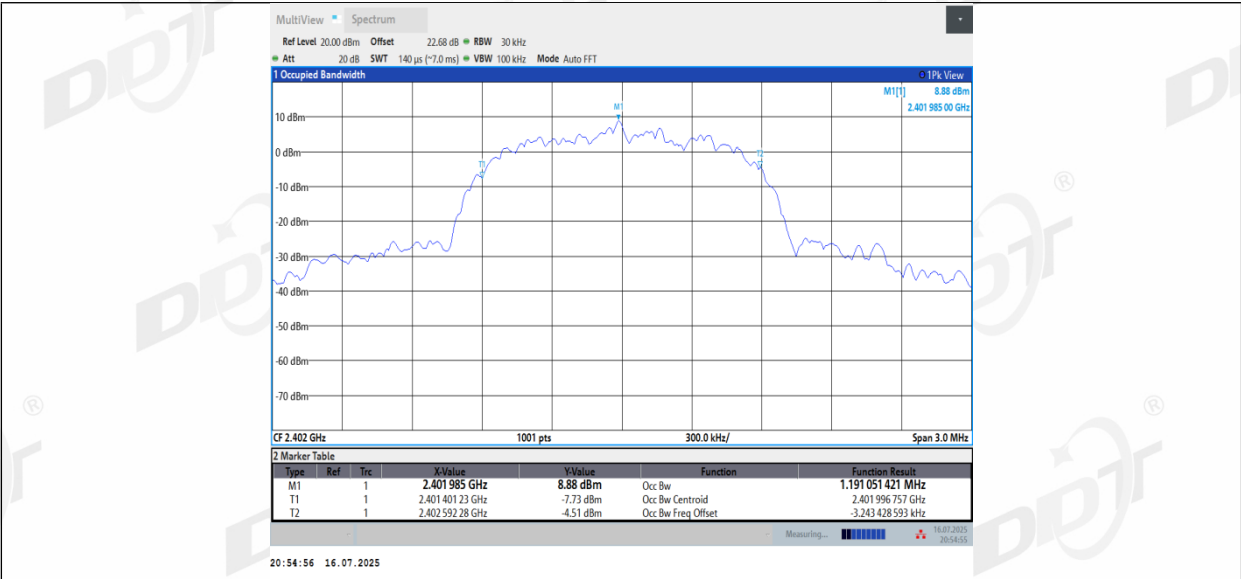


3DH5_Ant2_2402

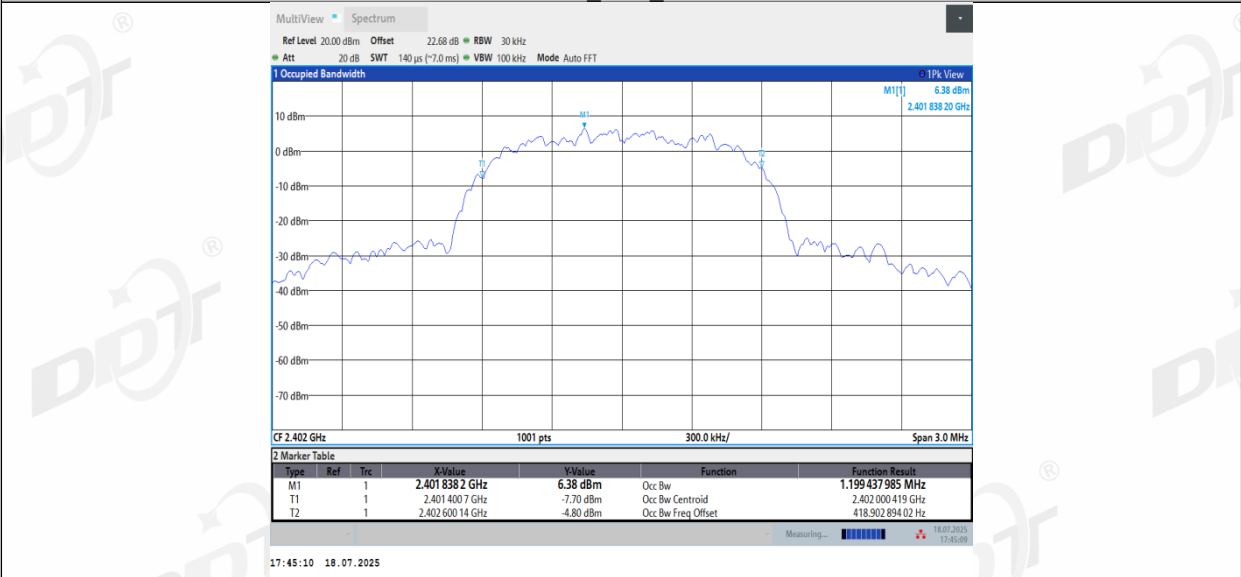


3DH5_Ant1_2441

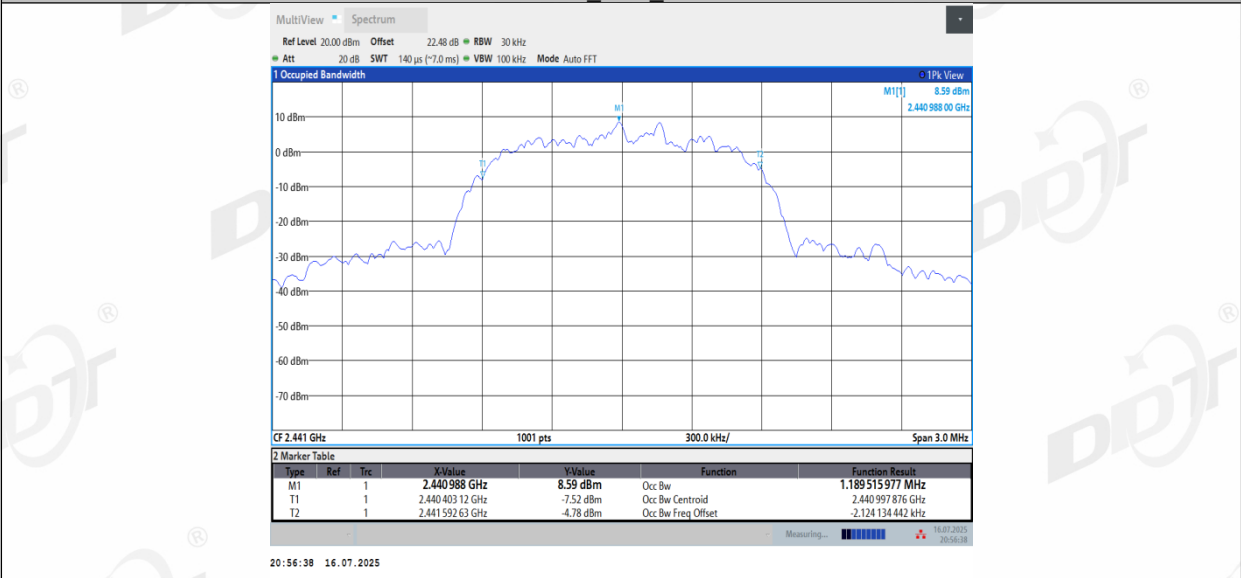


3DH5_Ant2_2441

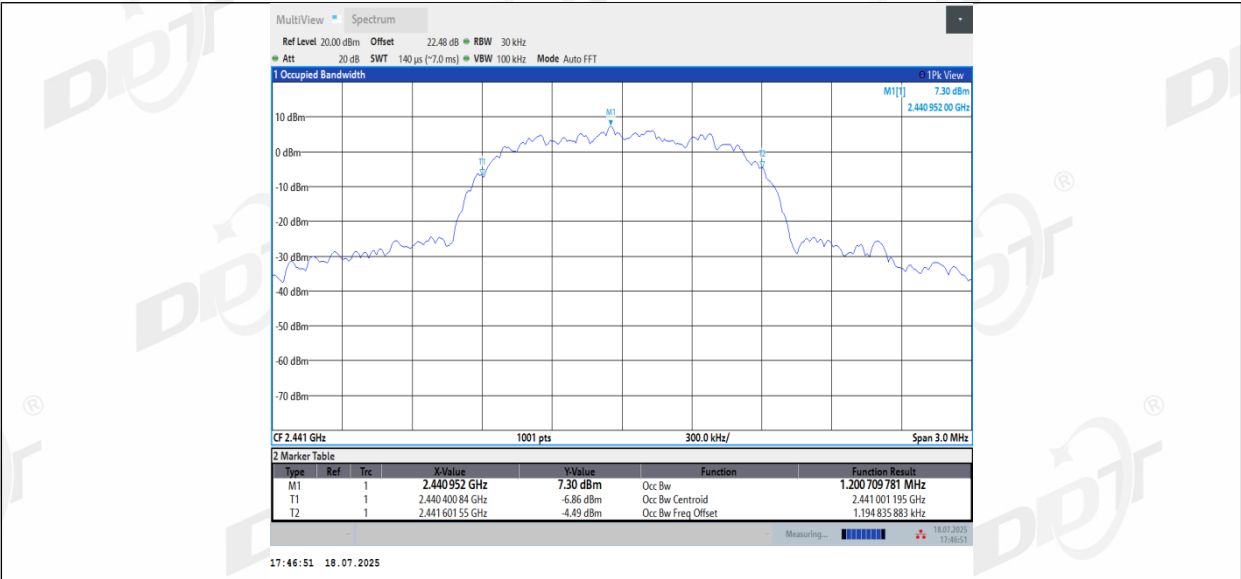

3DH5_Ant1_2480

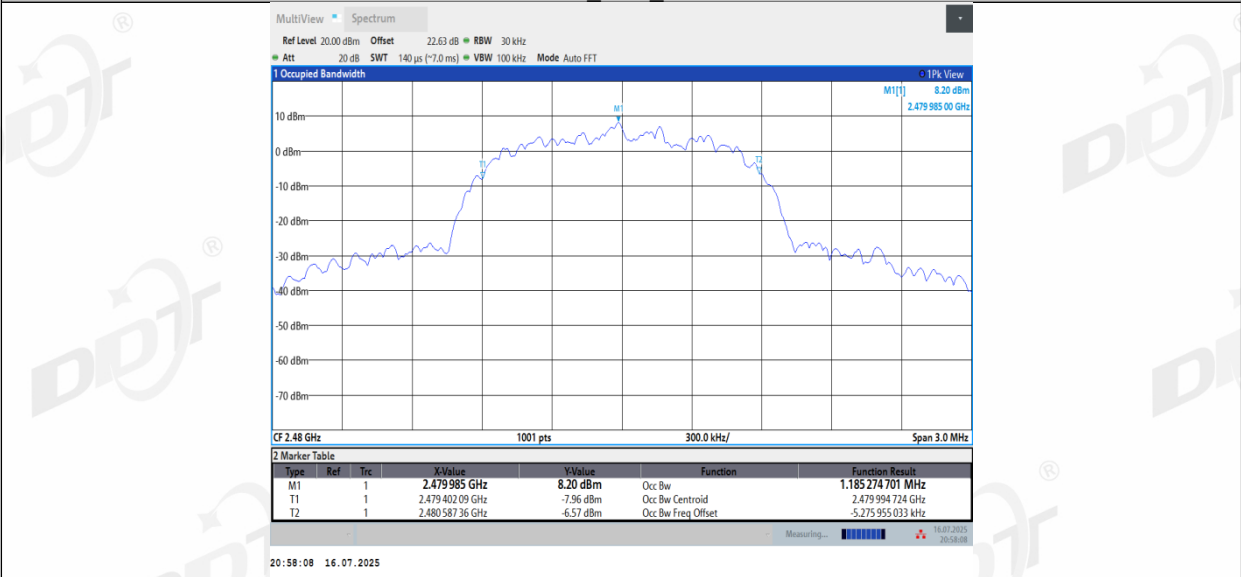


3DH5_Ant2_2480

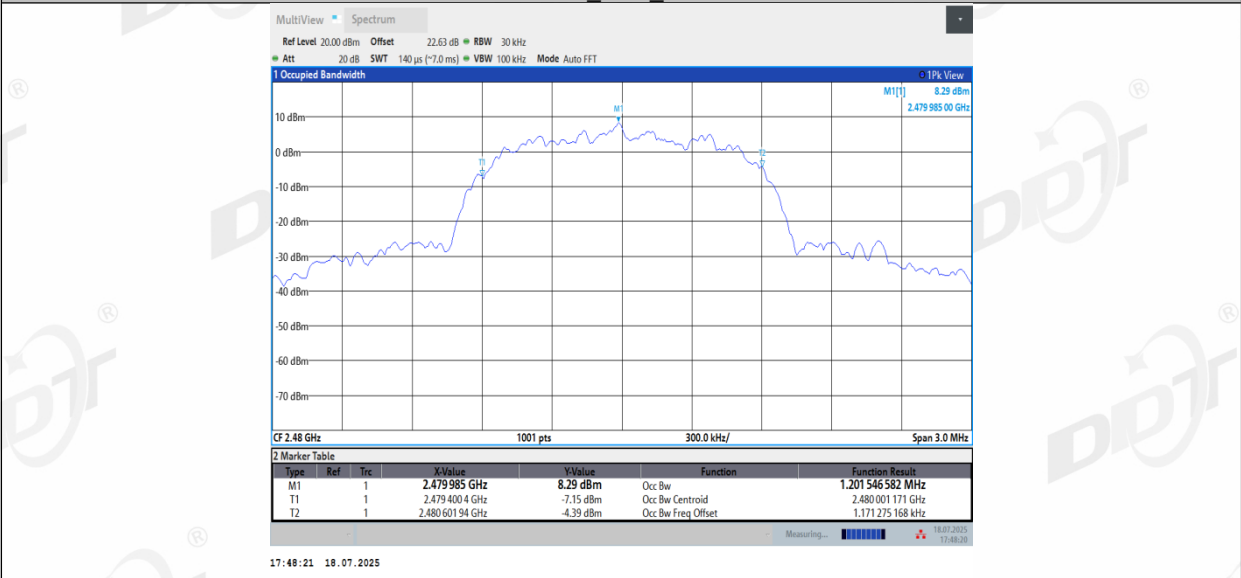

6. Maximum Peak Output Power

6.1. Block diagram of test setup

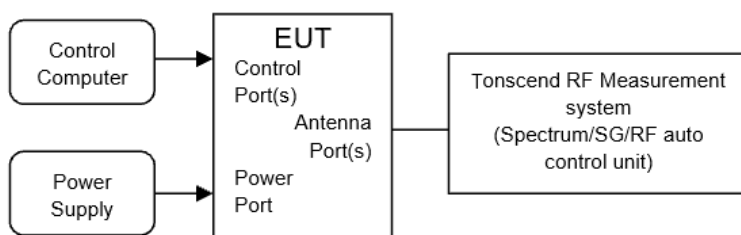

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	VBW $\geq$ RBW.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.


6.4. Test result


Test Engineer:	Huang Yanwen	Test Site:	RF Measurement System 4#
Ambient Condition:	22.8-26.3℃,41.5-48.7%RH	Test Date:	2025.07.16-2025.07.22
Test Power Supply:	Battery	Sample Number:	S25042820-016

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	15.85	≤20.97	14.10	≤30	PASS
	Ant2	2402	15.83	≤20.97	14.41	≤30	PASS
	Ant1	2441	15.35	≤20.97	13.60	≤30	PASS
	Ant2	2441	16.06	≤20.97	14.64	≤30	PASS
	Ant1	2480	15.16	≤20.97	13.41	≤30	PASS
	Ant2	2480	15.67	≤20.97	14.25	≤30	PASS
2DH5	Ant1	2402	14.98	≤20.97	13.23	≤30	PASS
	Ant2	2402	14.81	≤20.97	13.39	≤30	PASS
	Ant1	2441	14.62	≤20.97	12.87	≤30	PASS
	Ant2	2441	15.29	≤20.97	13.87	≤30	PASS
	Ant1	2480	14.44	≤20.97	12.69	≤30	PASS
	Ant2	2480	14.92	≤20.97	13.50	≤30	PASS
3DH5	Ant1	2402	15.65	≤20.97	13.90	≤30	PASS
	Ant2	2402	15.57	≤20.97	14.15	≤30	PASS
	Ant1	2441	15.26	≤20.97	13.51	≤30	PASS
	Ant2	2441	15.91	≤20.97	14.49	≤30	PASS
	Ant1	2480	15.14	≤20.97	13.39	≤30	PASS
	Ant2	2480	15.53	≤20.97	14.11	≤30	PASS


6.5. Test graphs

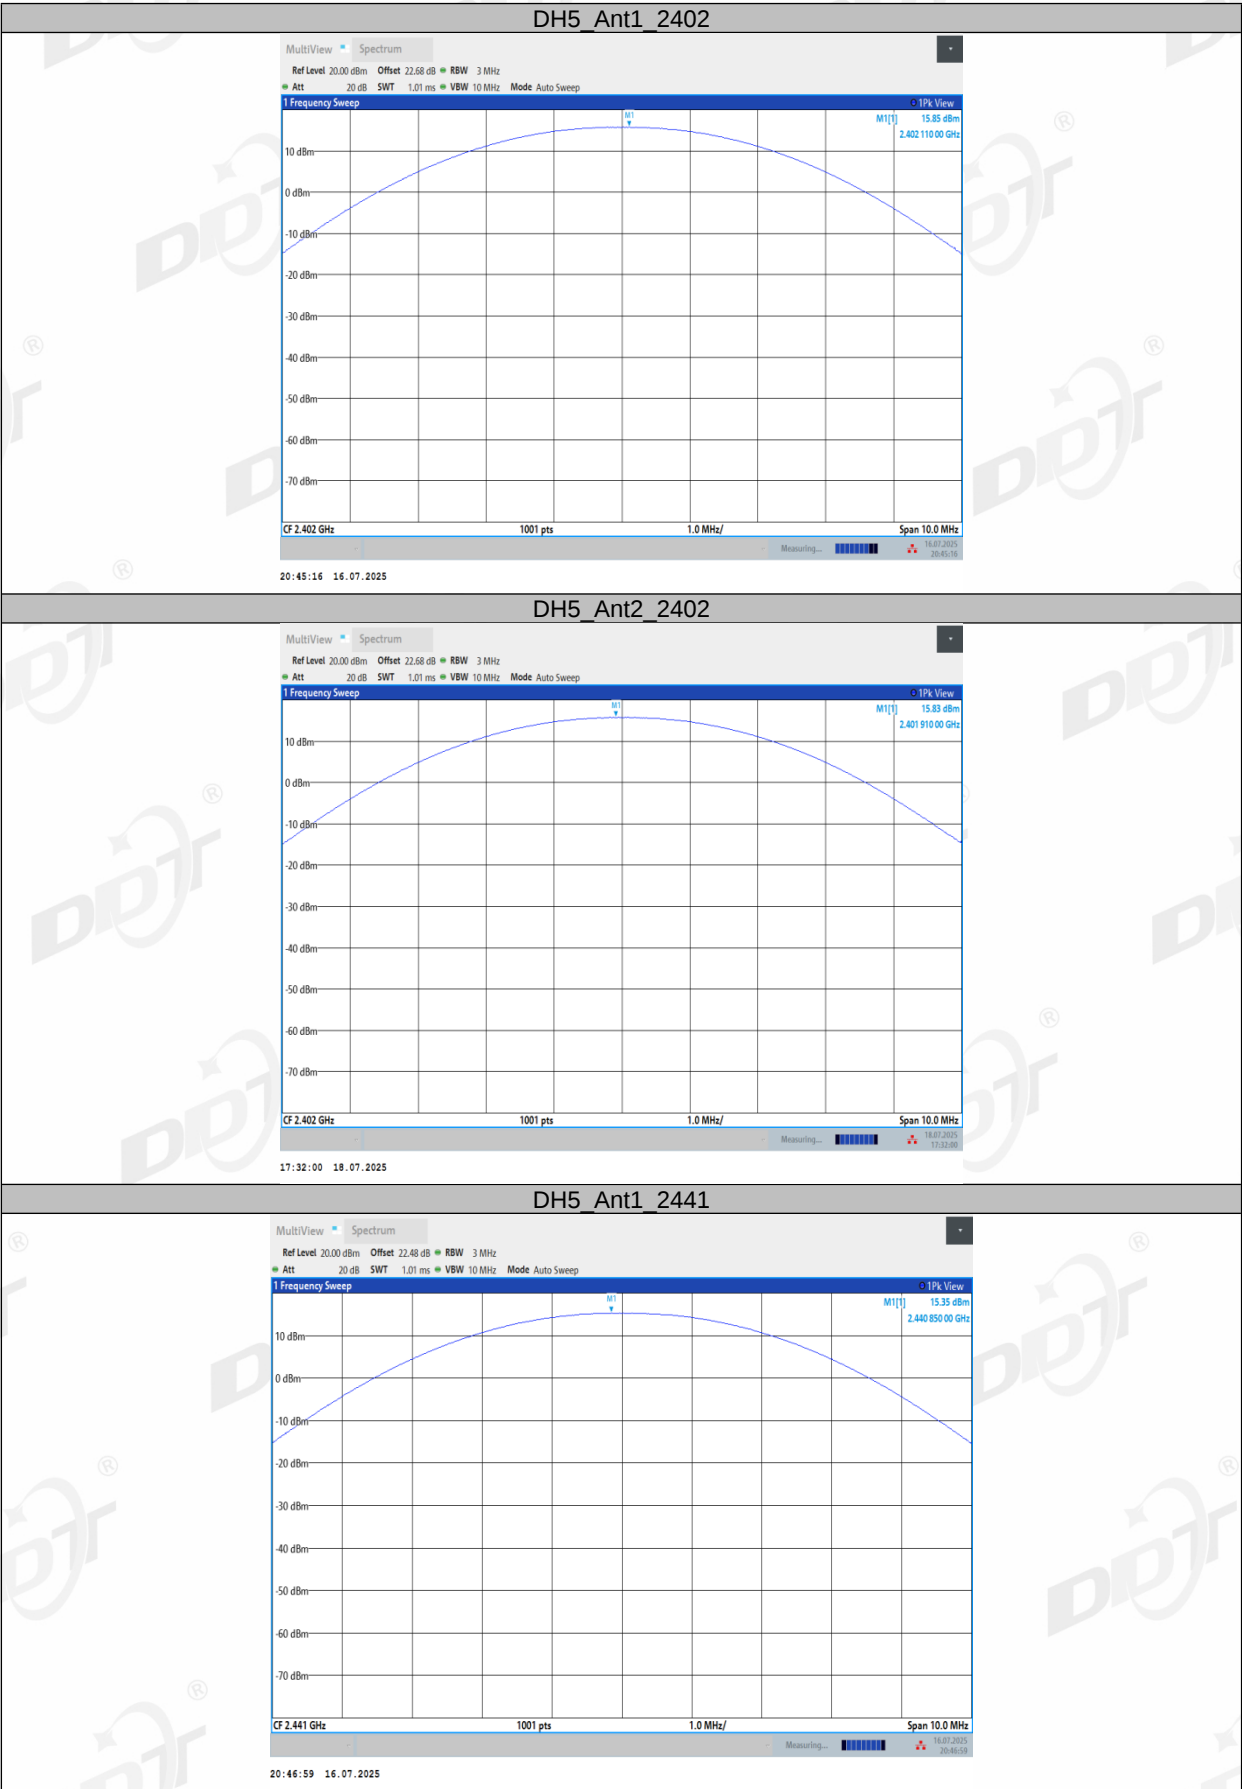

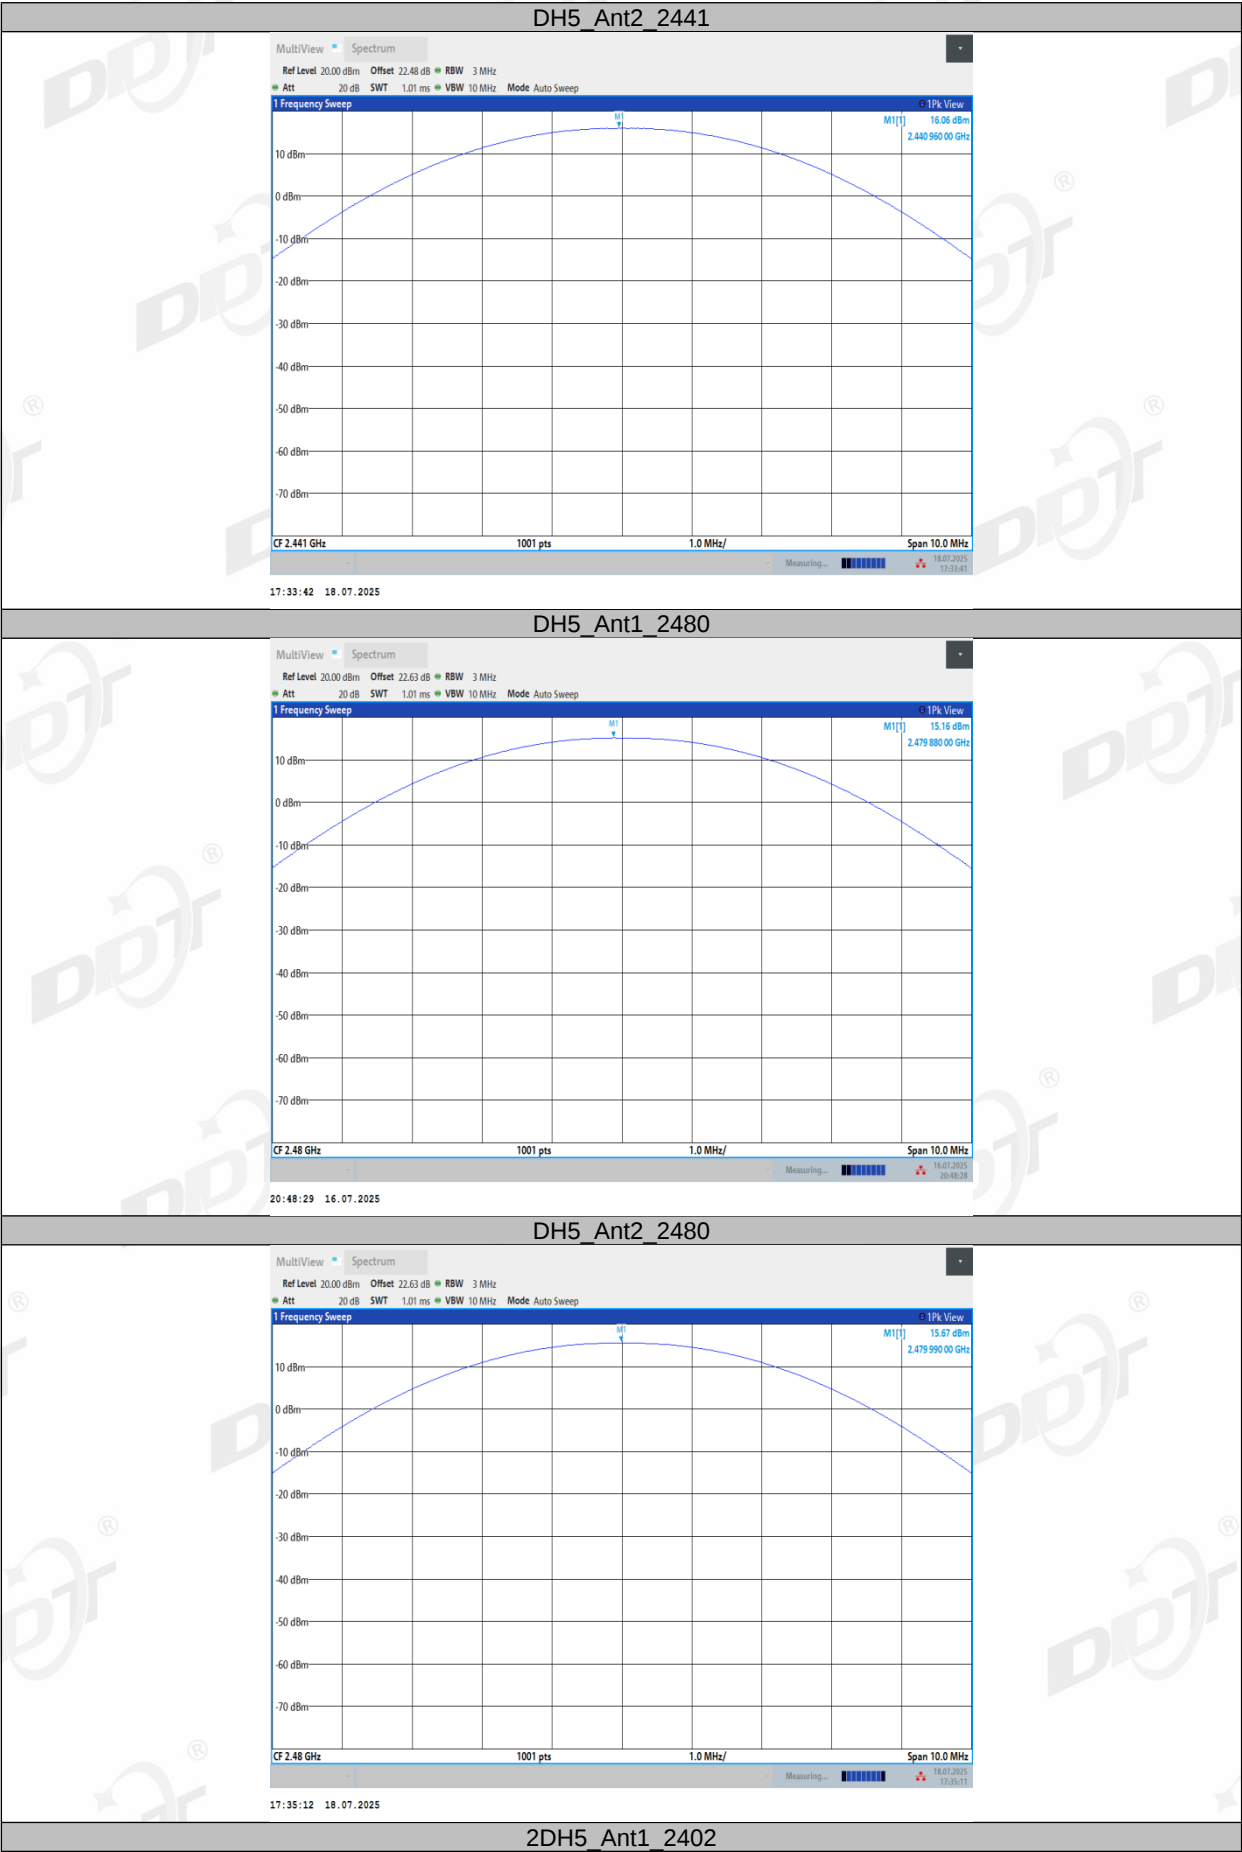


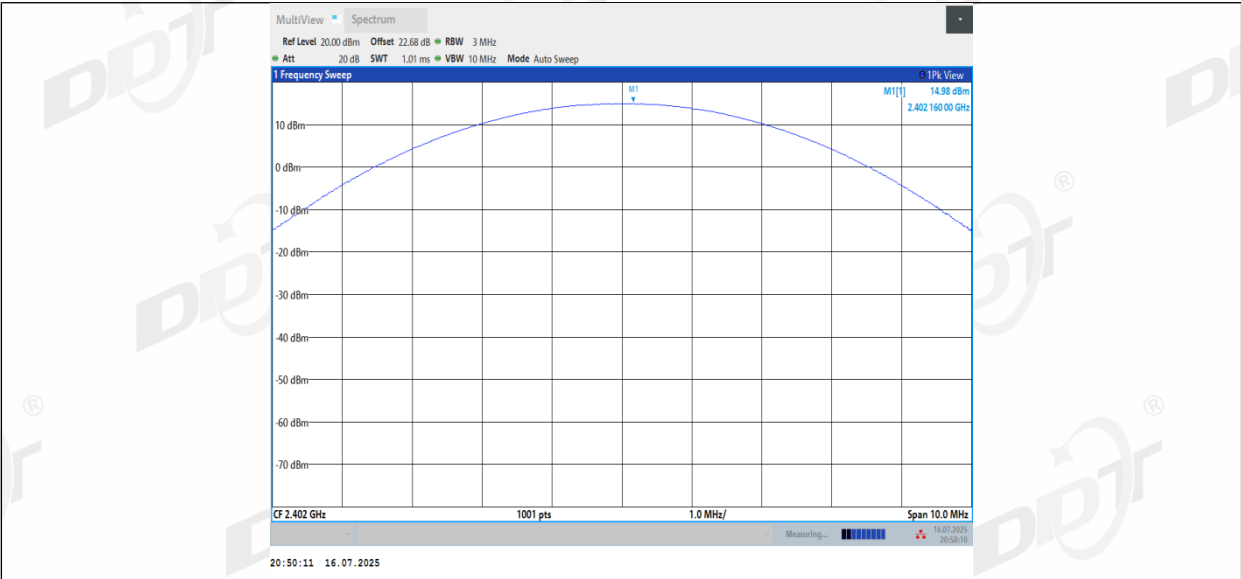


2DH5_Ant2_2402

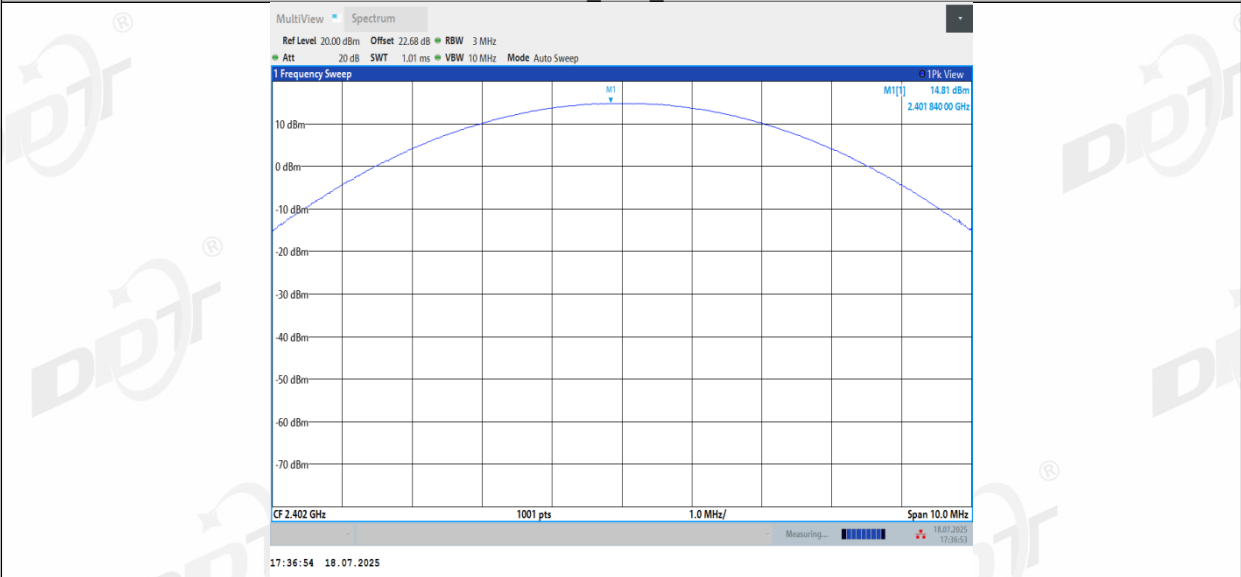


2DH5_Ant1_2441

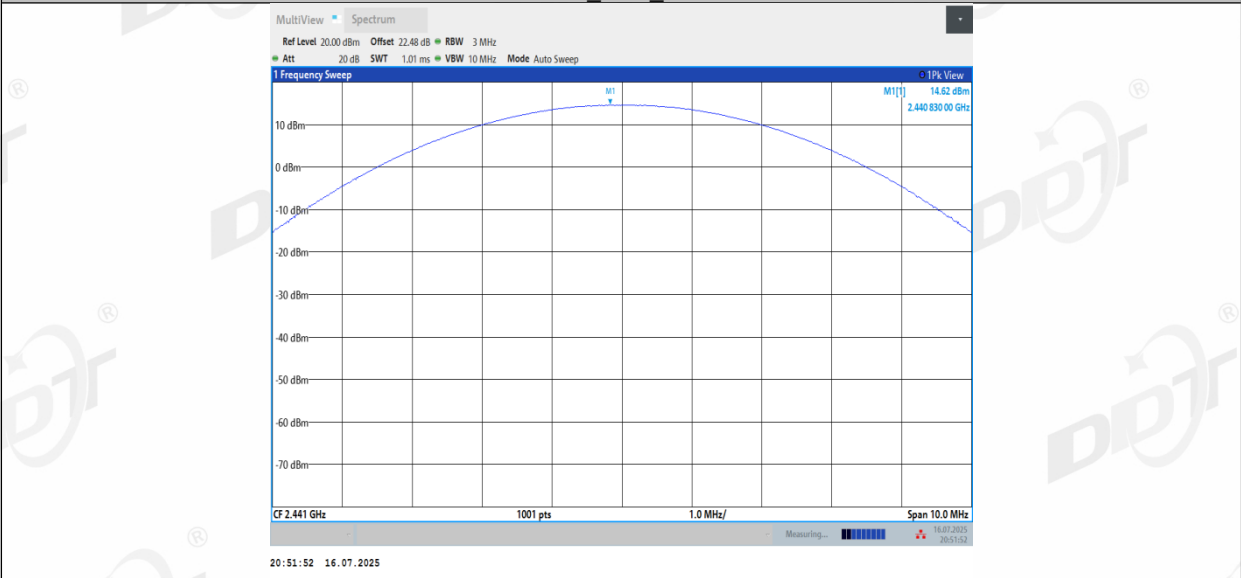


2DH5_Ant2_2441

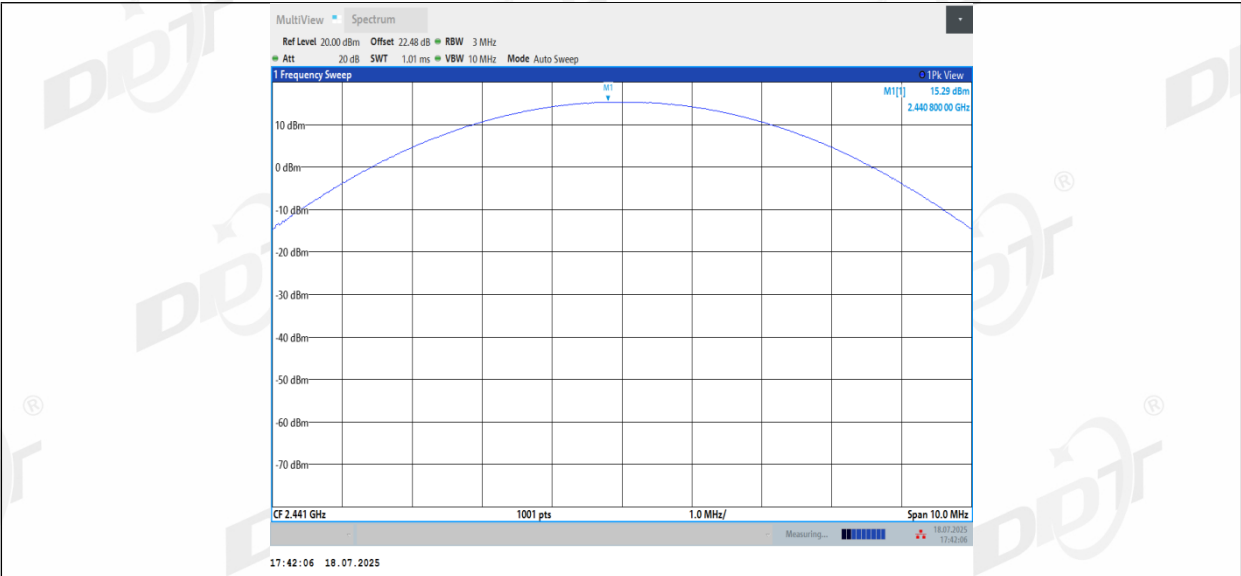


2DH5_Ant1_2480

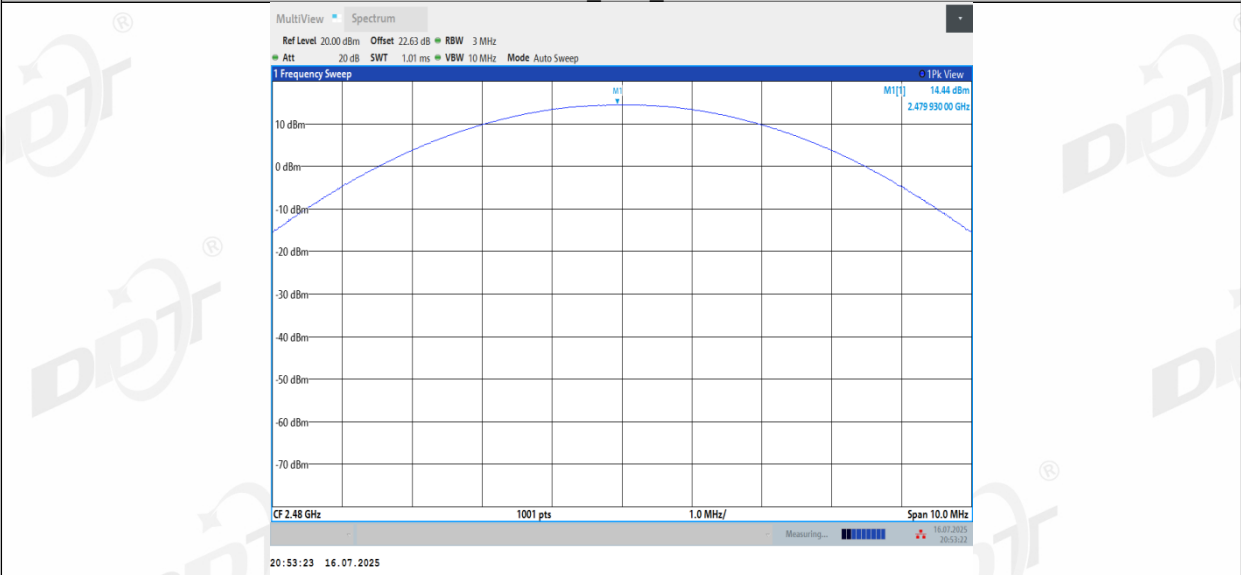


2DH5_Ant2_2480

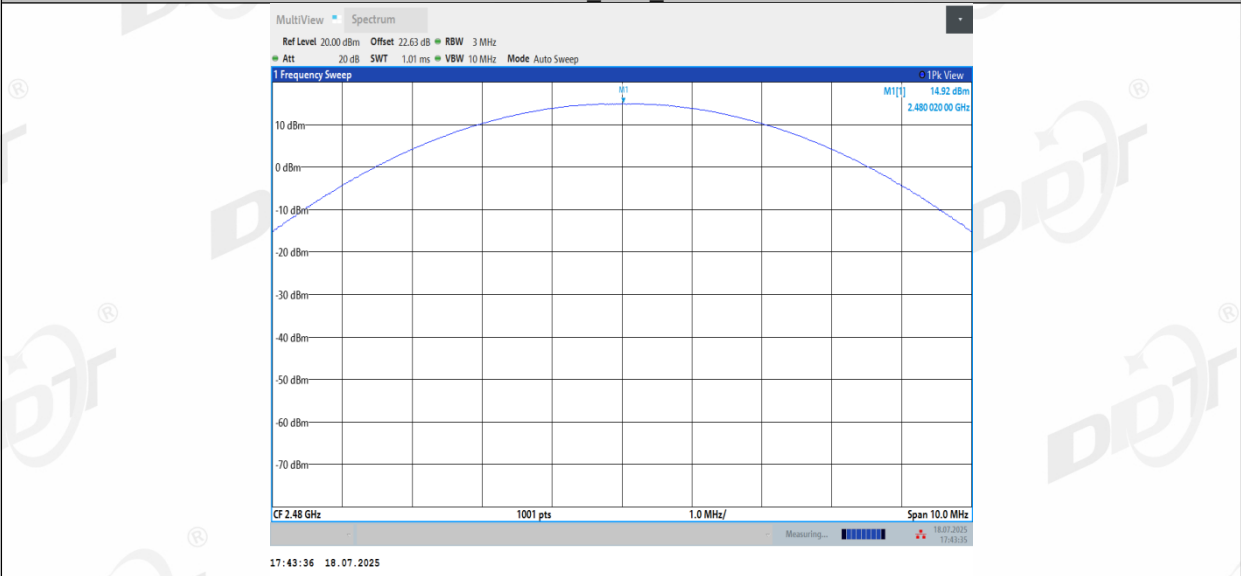


3DH5_Ant1_2402

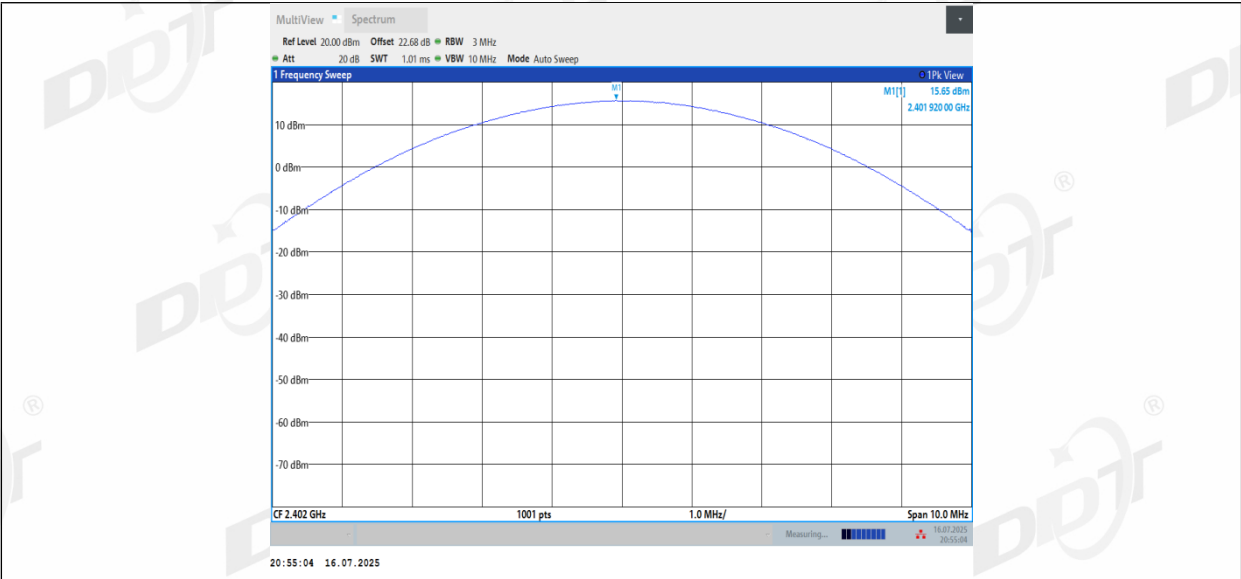


3DH5_Ant2_2402

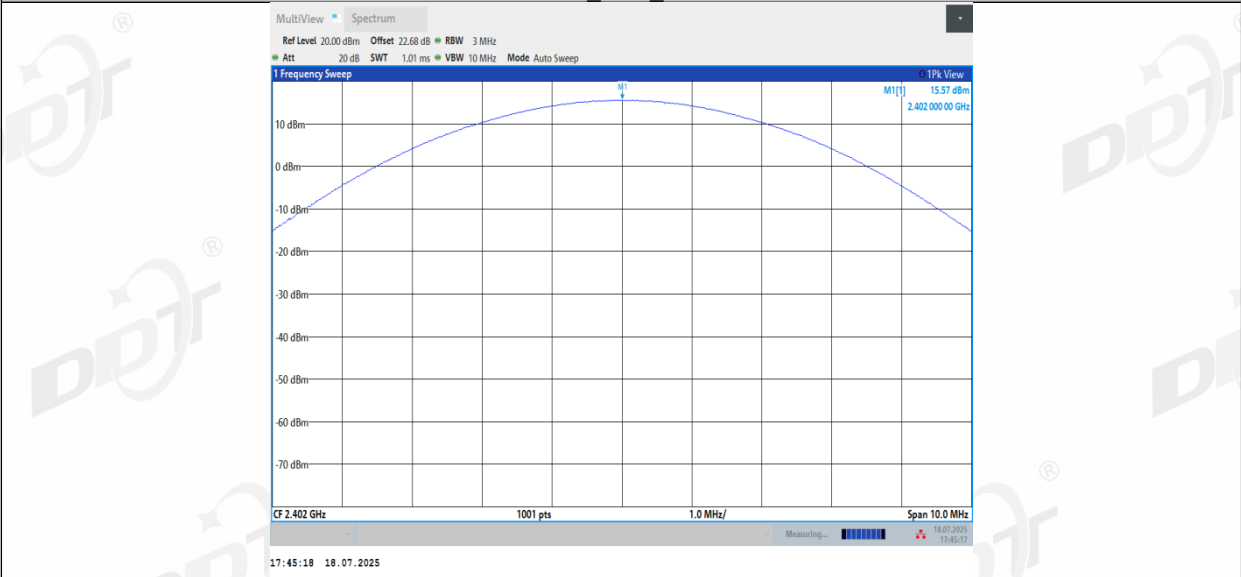


3DH5_Ant1_2441

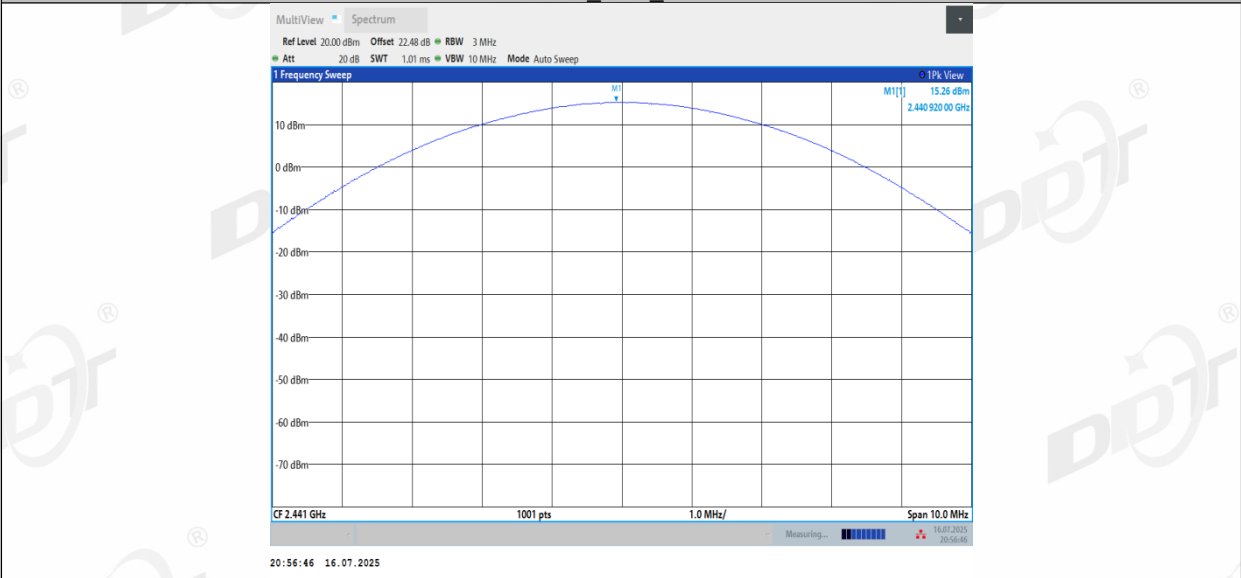


3DH5_Ant2_2441

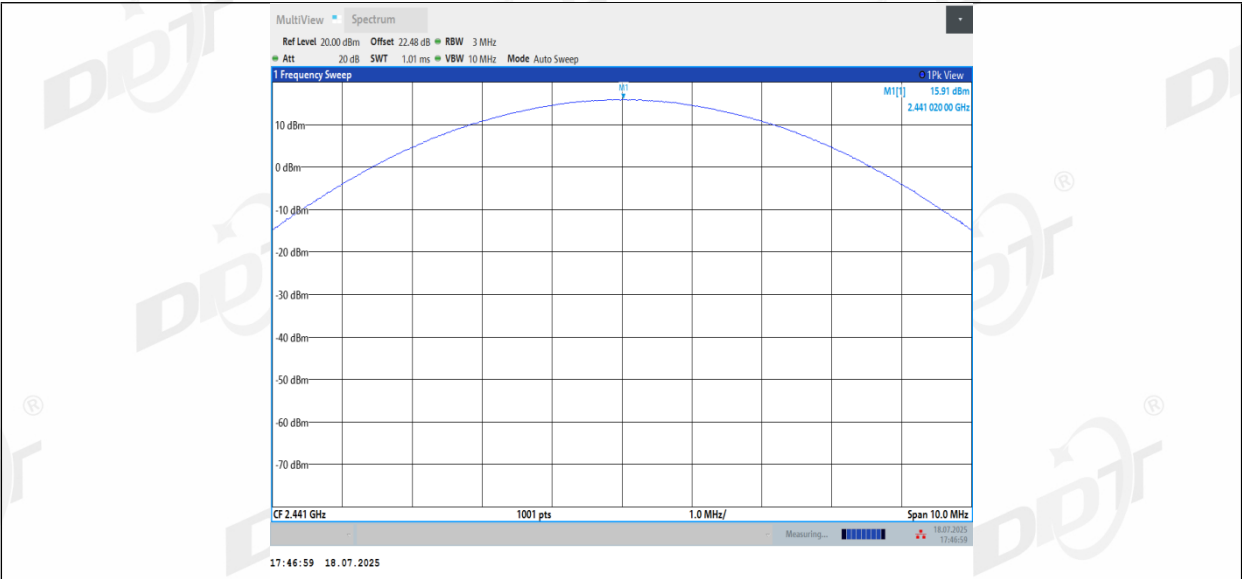

3DH5_Ant1_2480

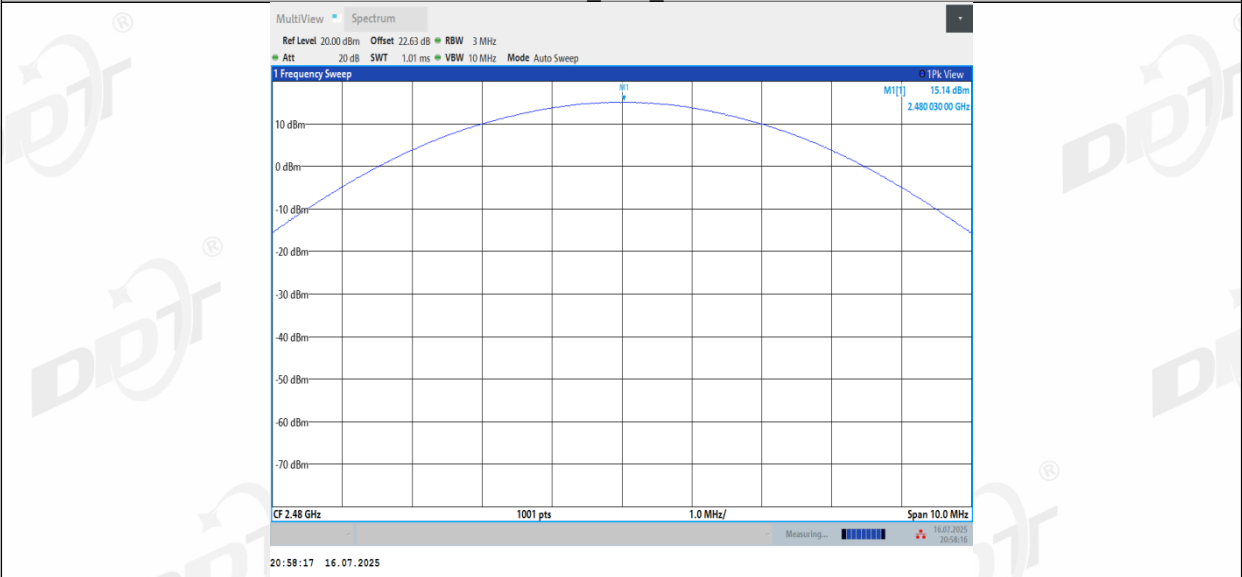


3DH5_Ant2_2480

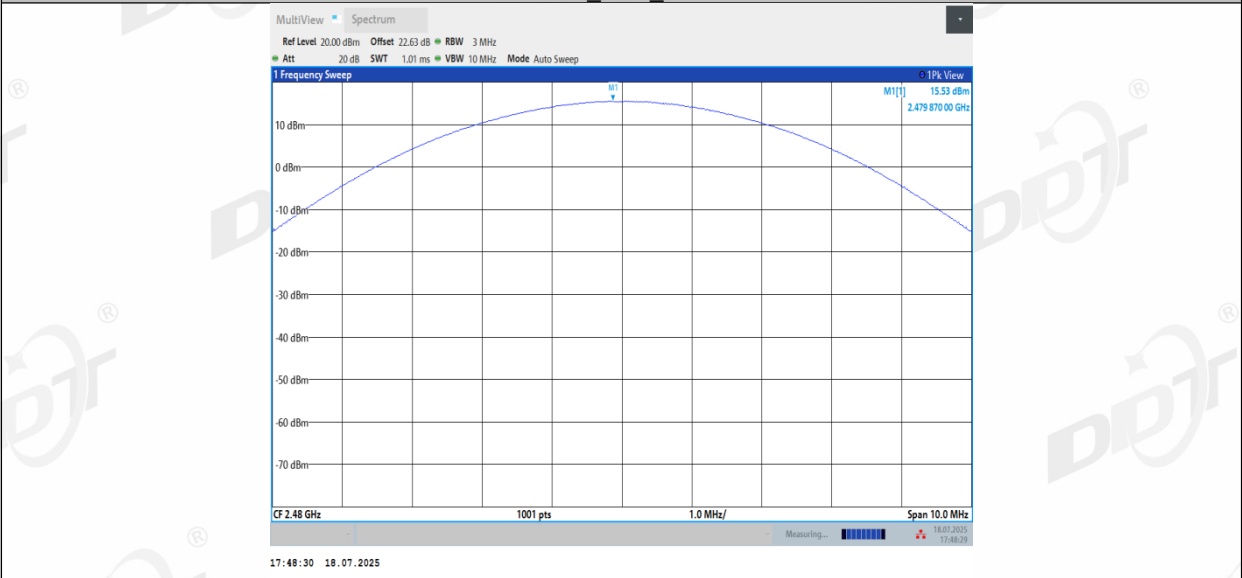

7. Carrier Frequency Separation

7.1. Block diagram of test setup

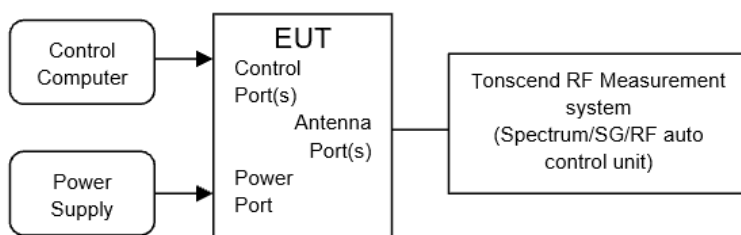

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	approximately 30% of the channel spacing
VBW:	$VBW \geq RBW$.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.


7.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement System 4#
Ambient Condition:	22.8-26.3℃,41.5-48.7%RH	Test Date:	2025.07.16-2025.07.22
Test Power Supply:	Battery	Sample Number:	S25042820-016

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	0.992	≥0.950	PASS
	Ant2	Hop	0.992	≥0.960	PASS
2DH5	Ant1	Hop	1.008	≥0.907	PASS
	Ant2	Hop	1.004	≥0.907	PASS
3DH5	Ant1	Hop	1.006	≥0.900	PASS
	Ant2	Hop	0.996	≥0.893	PASS


7.5. Test graphs

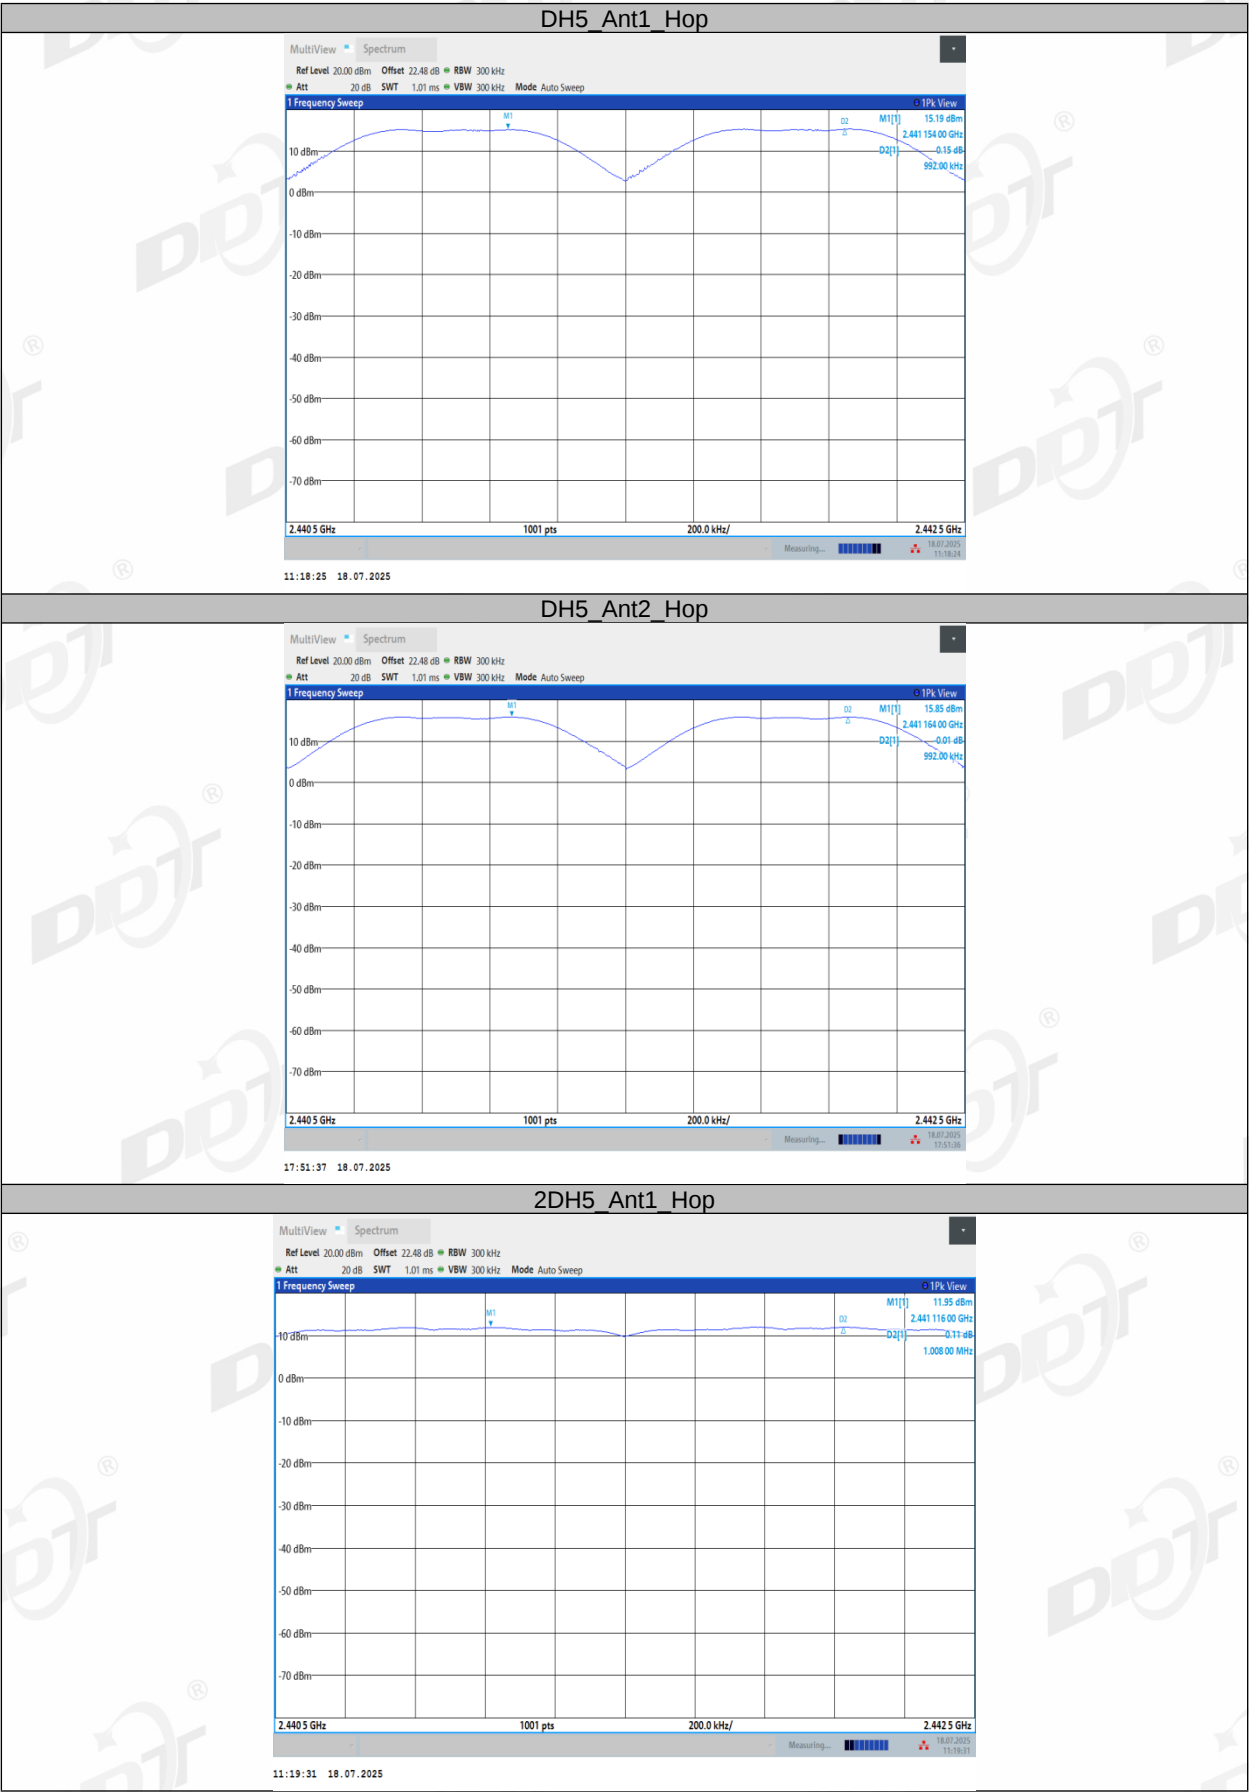

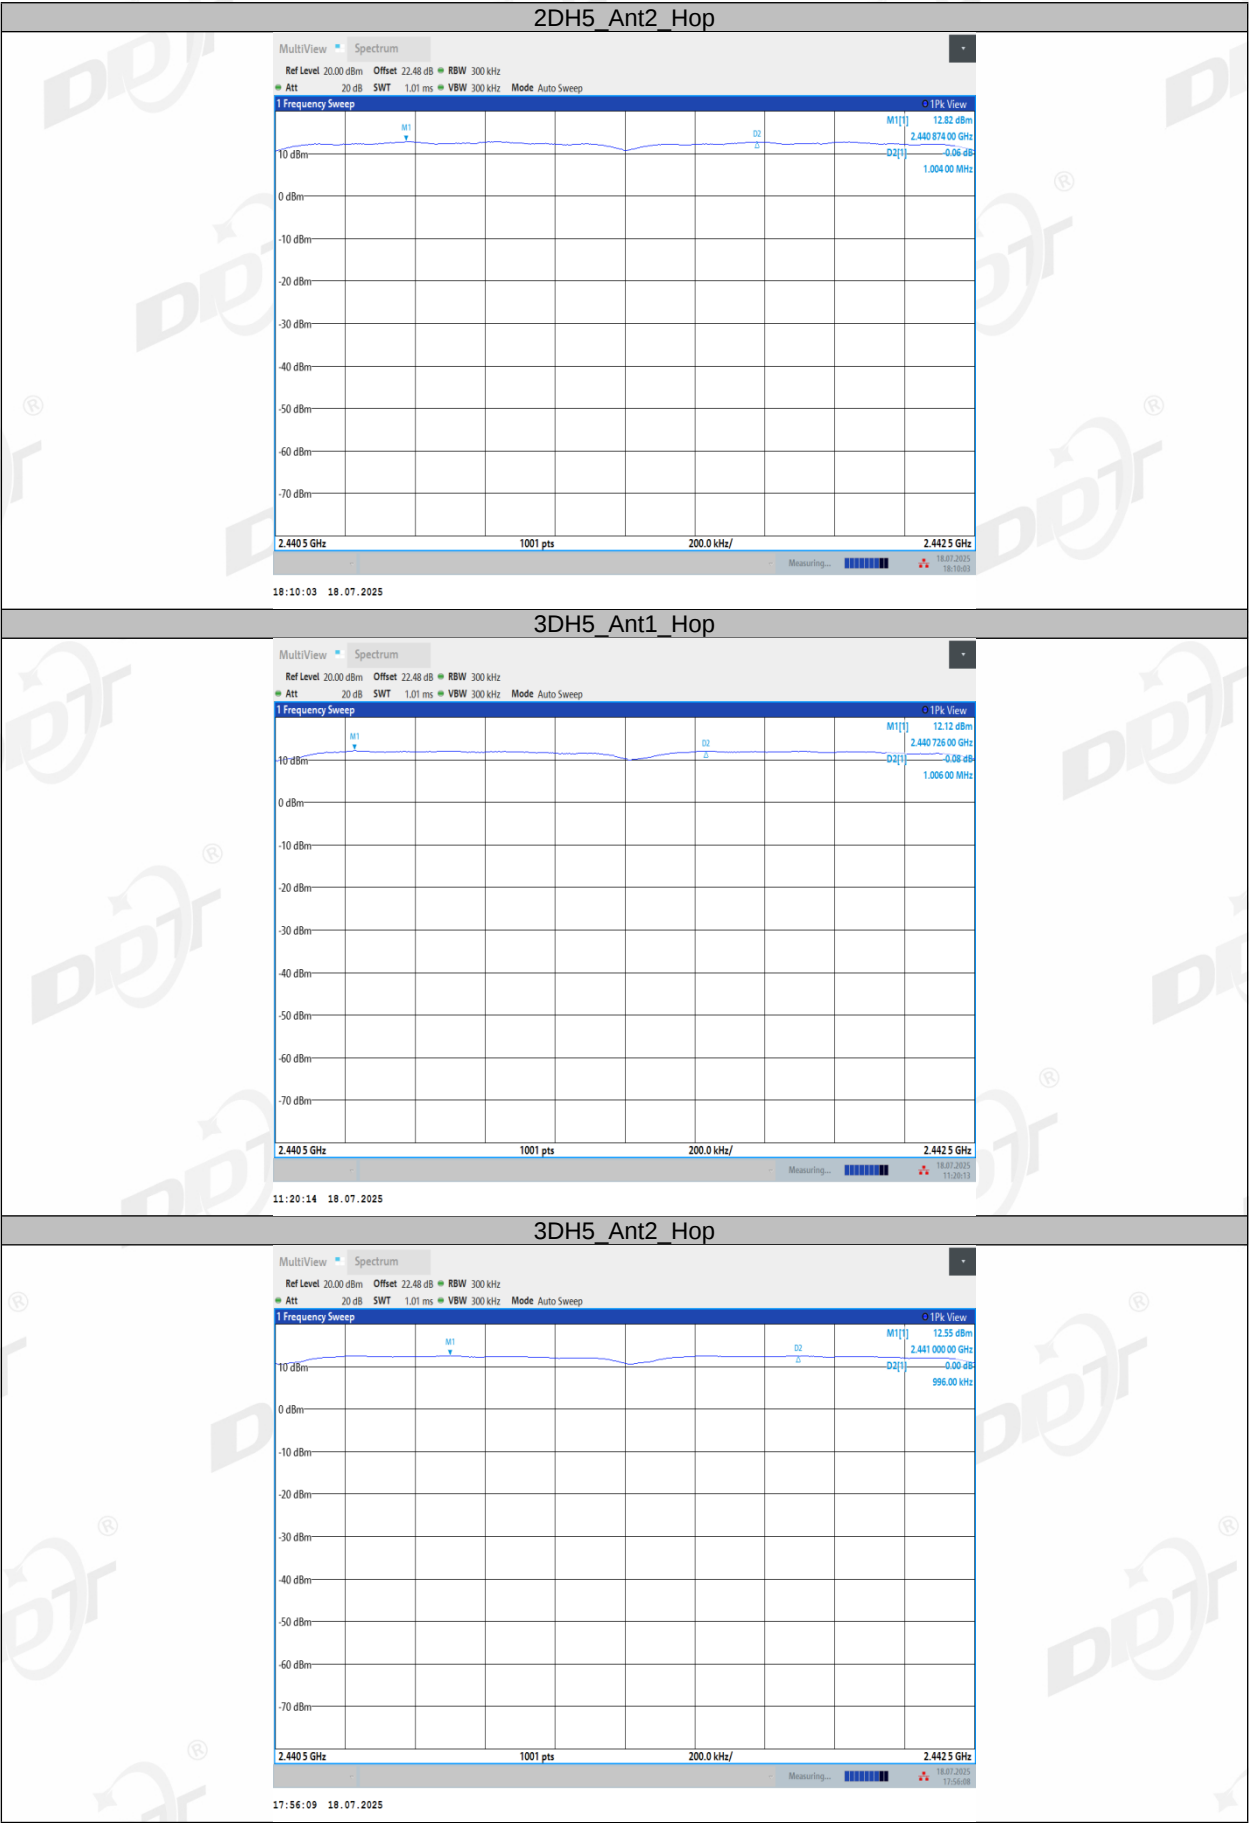

8. Dwell Time

8.1. Block diagram of test setup

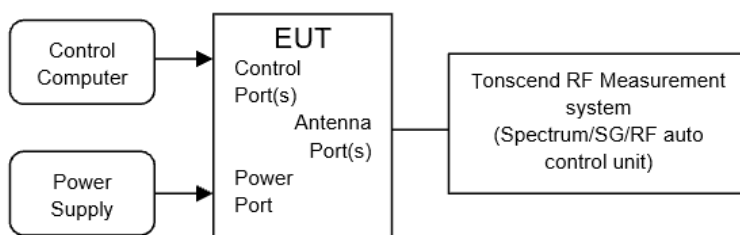

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	≤ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.


8.4. Test result

Test Engineer:	Huang Yanwen	Test Site:	RF Measurement System 4#
Ambient Condition:	22.8-26.3℃,41.5-48.7%RH	Test Date:	2025.07.16-2025.07.22
Test Power Supply:	Battery	Sample Number:	S25042820-016


Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.360	314	0.113	≤0.4	PASS
	Ant2	Hop	0.360	319	0.115	≤0.4	PASS
DH3	Ant1	Hop	1.620	165	0.267	≤0.4	PASS
	Ant2	Hop	1.620	155	0.251	≤0.4	PASS
DH5	Ant1	Hop	2.870	103	0.296	≤0.4	PASS
	Ant2	Hop	2.870	111	0.319	≤0.4	PASS
2DH1	Ant1	Hop	0.370	317	0.117	≤0.4	PASS
	Ant2	Hop	0.370	318	0.118	≤0.4	PASS
2DH3	Ant1	Hop	1.620	146	0.237	≤0.4	PASS
	Ant2	Hop	1.620	154	0.249	≤0.4	PASS
2DH5	Ant1	Hop	2.880	117	0.337	≤0.4	PASS
	Ant2	Hop	2.870	115	0.33	≤0.4	PASS
3DH1	Ant1	Hop	0.370	317	0.117	≤0.4	PASS
	Ant2	Hop	0.370	316	0.117	≤0.4	PASS
3DH3	Ant1	Hop	1.630	150	0.245	≤0.4	PASS
	Ant2	Hop	1.620	155	0.251	≤0.4	PASS
3DH5	Ant1	Hop	2.870	98	0.281	≤0.4	PASS
	Ant2	Hop	2.880	109	0.314	≤0.4	PASS

8.5. Test graphs

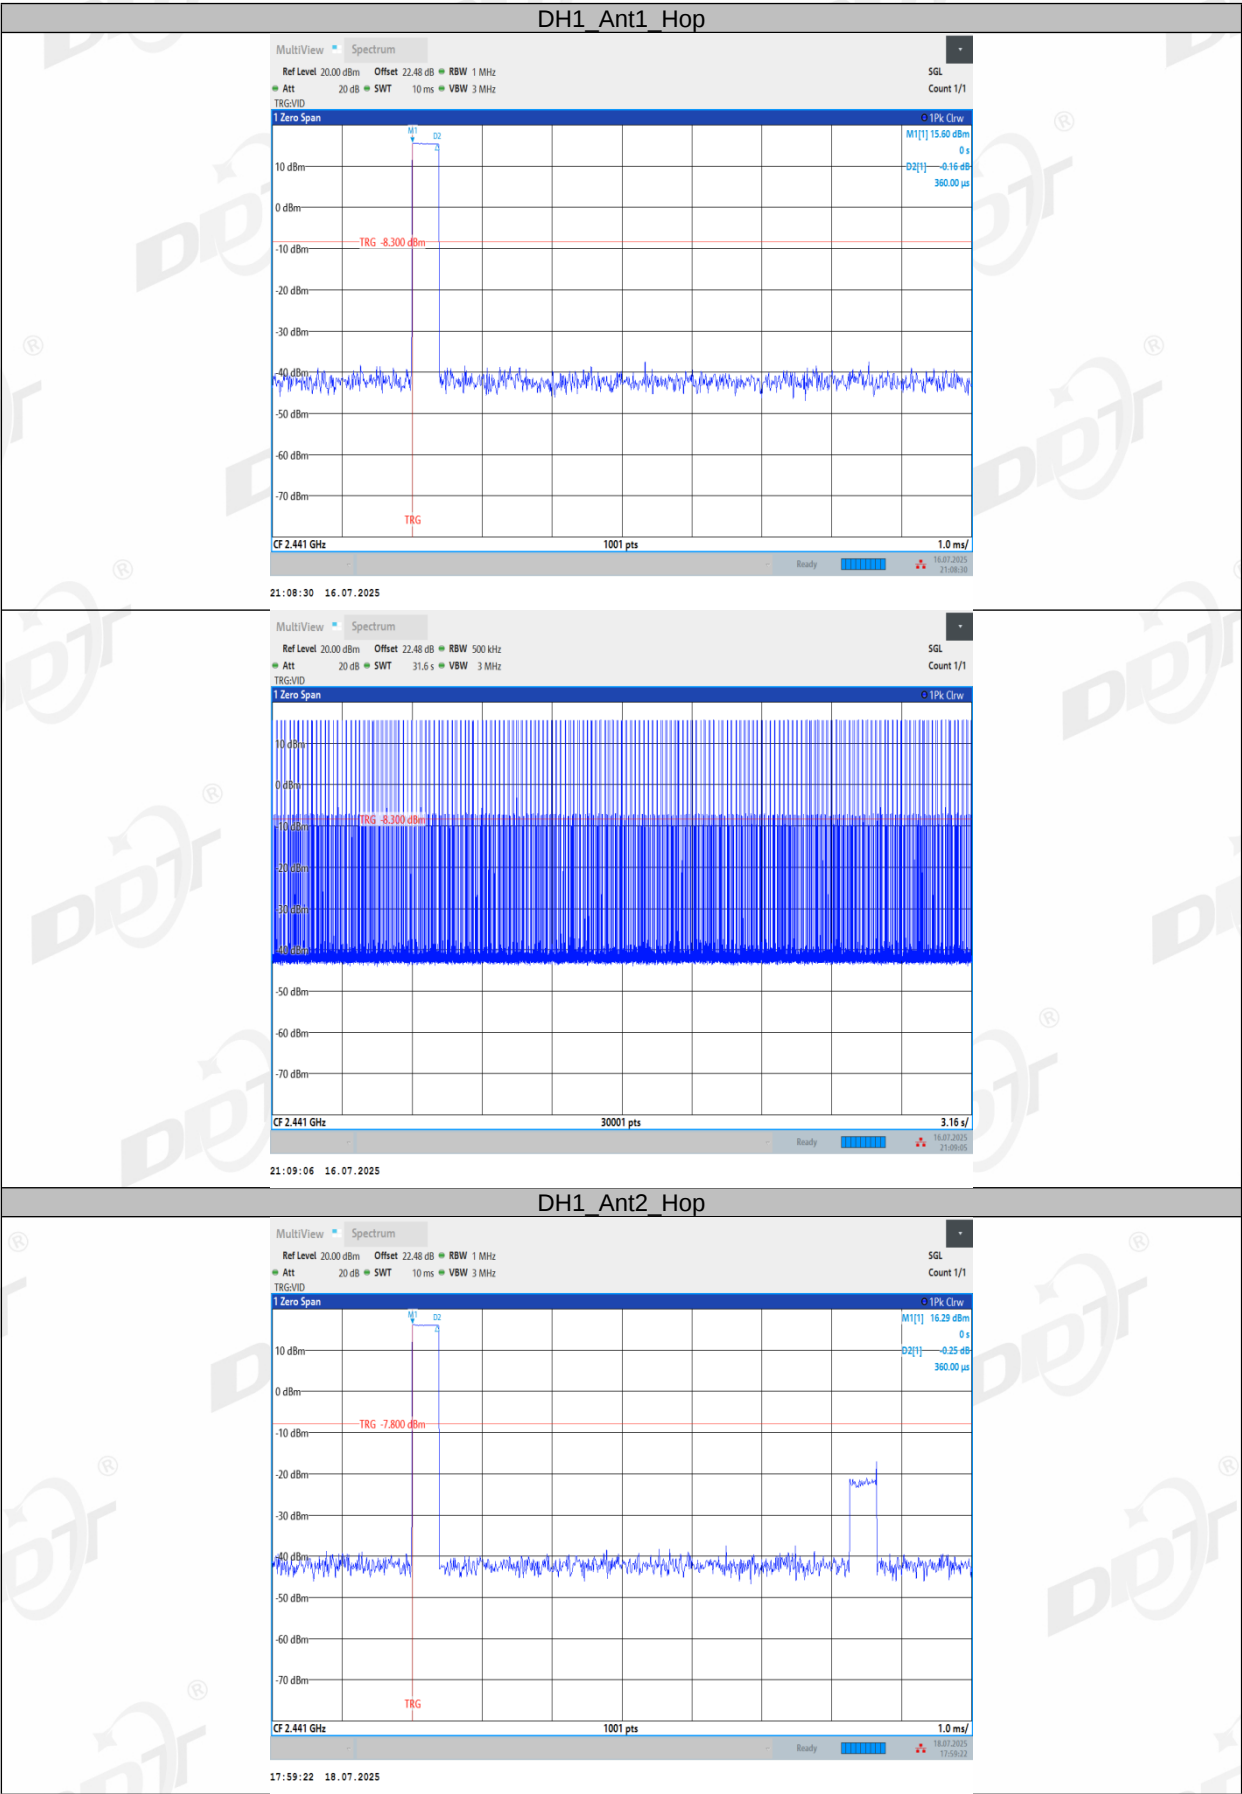


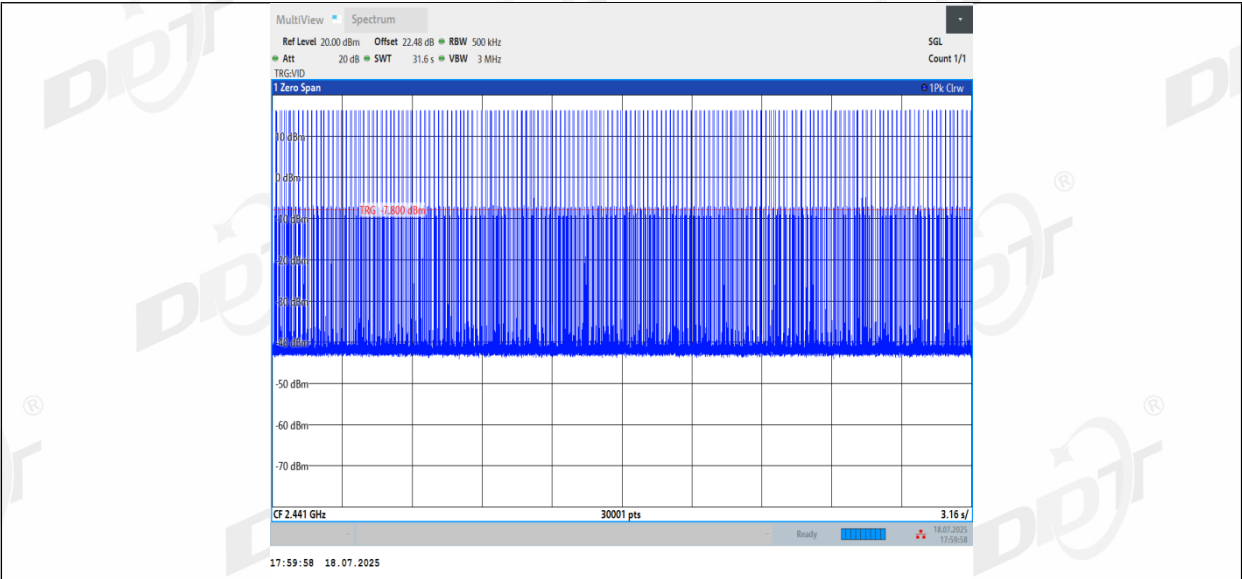

DH3_Ant1_Hop

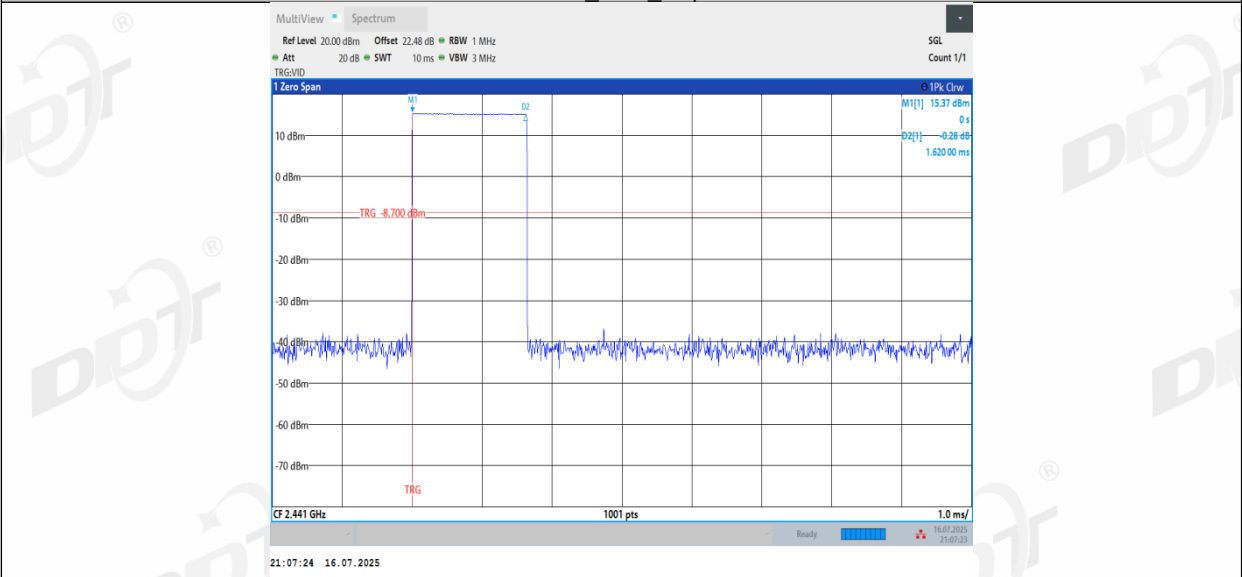

DH3_Ant1_Hop

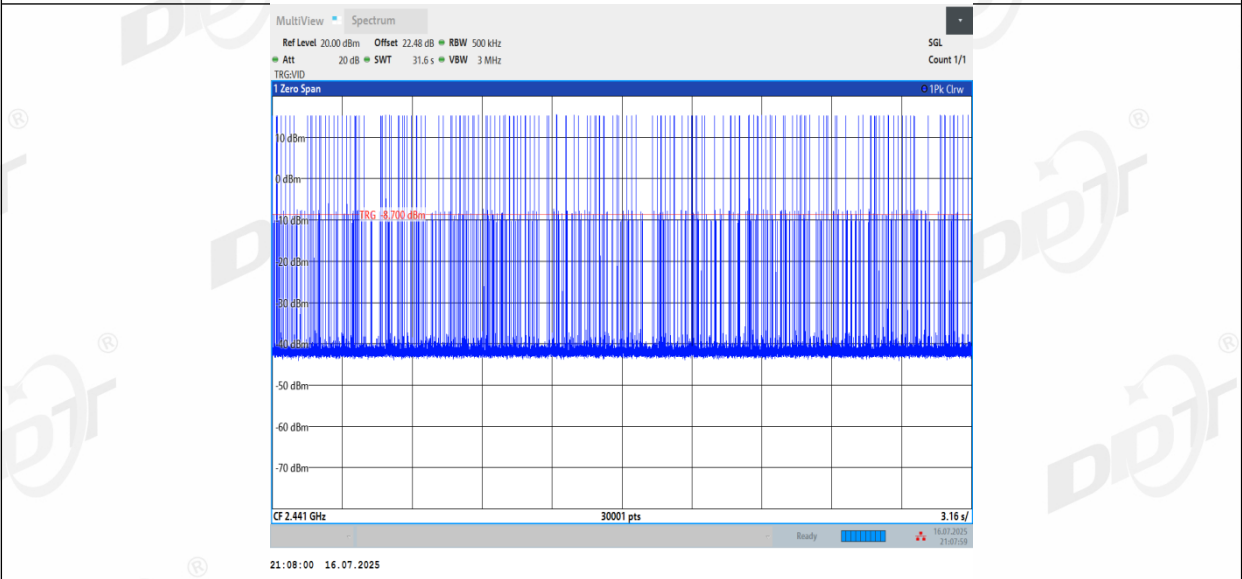

DH3_Ant2_Hop

