

JiangYin KaiBo Communication Technology CO.,LTD.



Antenna Specification

Specifications


	Specification
Working Frequency Range	2400 ~ 2500 MHz
Gain	3.0 dBi (Typical)
VSWR	2.0 max.
Polarization	Linear
Azimuth Beamwidth	Omn-directional
Impedance	50Ω
Rated Power (max.)	3 Watts
Maximum Input Power	5 Watts for 5 minutes
Operation Temperature	-40°C ~ +85°C




技术要求:
2400-2500MHz, wifi PCB天线
天线增益2dBi 全向
效率>50%
驻波比<1.5
PCB, 42.4*8.6*0.8mm
馈线0.1.13mm白色/L=250mm
MHF1代端子

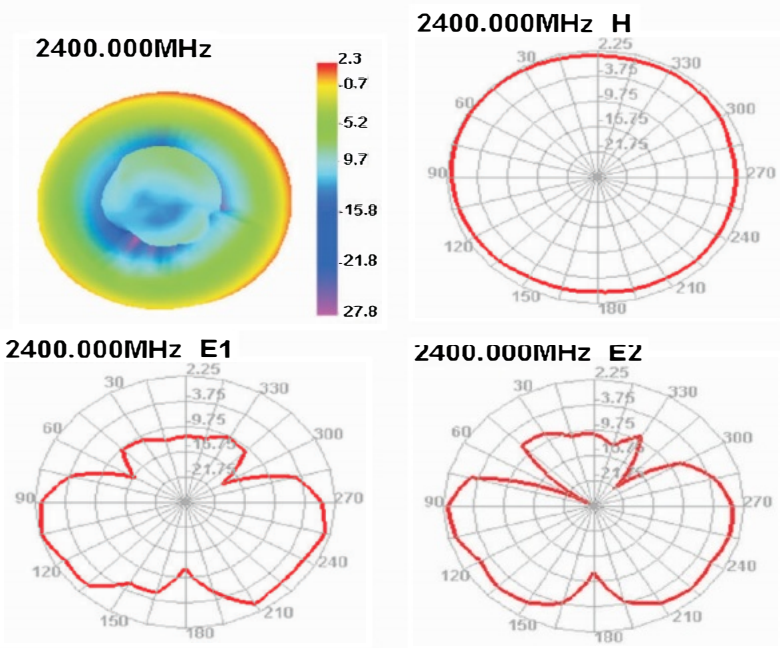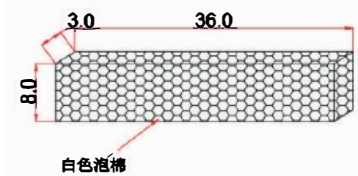


2450.000MHz

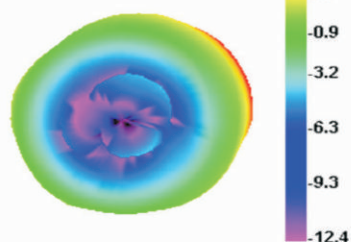


2450.000MHz H

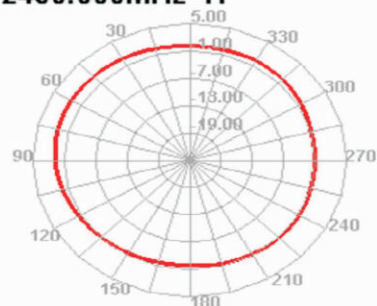


2450.000MHz E1

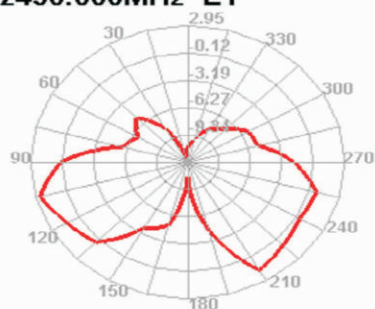


2450.000MHz E2

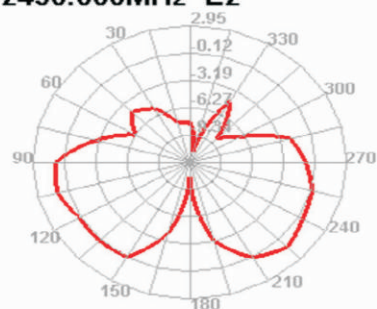


2500.000MHz

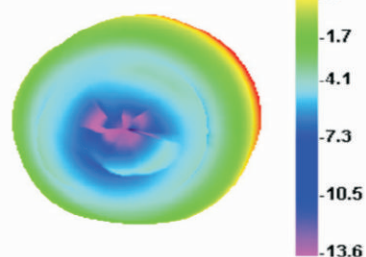

2500.000MHz H

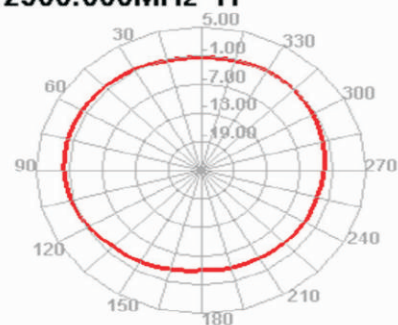

2500.000MHz E1

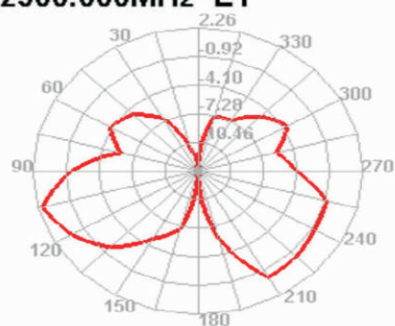

2500.000MHz E2

