



## product standard

## 一、product size

No.	Item	specification
A	Inside the coil, it is long.	$34 \pm 0.5$ mm
B	Inner width of the coil	$17.5 \pm 0.5$ mm
C	Inner width of the lower ring	$17.5 \pm 0.5$ mm
D	Inner diameter of the lower coil	$26.5 \pm 0.5$ mm
E	Total length of the coil	/
F	Total length of the dual magnetic discs	$93 \pm 1$ mm
G	Outer length of the coil	$54.0 \pm 1$ mm
H	Outer width of the coil	$37.5 \pm 1$ mm
I	Outer length of the lower ring	$46.0 \pm 1$ mm
J	Outer width of the lower ring	$40.0 \pm 1$ mm
K	The distance between the lower coil and the magnetic plate	$5.0 \pm 0.5$ mm
L	wire length	$32.5 \pm 2$ mm
M	Disk width	$51.5 \pm 0.5$ mm
N	The distance between the lower coil and the edge of the magnetic plate	$7.0 \pm 0.5$ mm
O	The distance between the coil and the magnetic plate	$3.0 \pm 0.5$ mm
P	The thickness of the copper wire diameter	$1.0 \pm 0.2$
/	gum	Backside is covered with vinyl.


## 二、Winding parameters

terminal	wire diameter		number of turns	direction of winding
S	F	Silk braided cable 0.08 * 105P	9TS	CCW

## 三、electrical specification

No.	Item	terminal	Standard	test condition	test instrument
1	IND.	S-F	Install the coil: $7.3 \pm 10\%$ UH Lower coil: $6.7 \pm 10\%$ UH	100KHz/1.0V	Digital bridge 2811C

## 四、Product physical picture

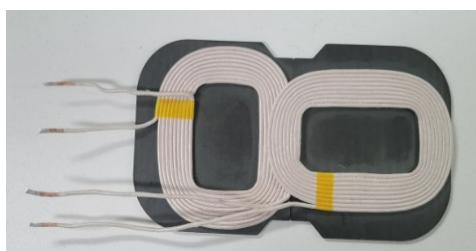

Company Name: Dongguan Jinghong Technology Co., Ltd.

Company Address: Building D, 4th Floor, Yuanfeng Industrial Zone, No. 2 Shuixin Industrial Road, Fenggang Town, Dongguan City