



13. AC Power Line Conducted Emission Test


13.1 Measurement Limit

Fraguanay	Maximum RF Line Voltage			
Frequency	Q.P. (dBμV)	Average (dBμV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2 Measurement Setup (Block Diagram of Configuration)

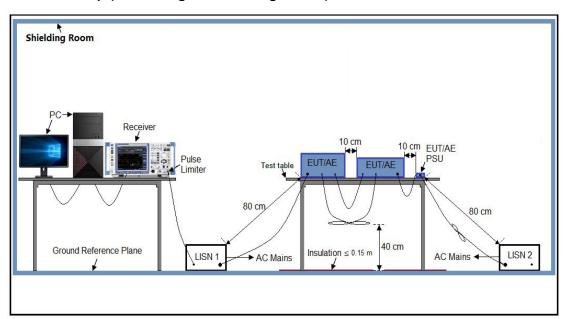



Report No.: AGC00806250807FR01

Page 75 of 79

13.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side).
- Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 8. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 9. During the above scans, the emissions were maximized by cable manipulation.
- 10. The test mode(s) were scanned during the preliminary test.
- 11. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- 3. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 4. The test data of the worst case condition(s) was reported on the Summary Data page.
- 5. A conducted emission is calculated by the following equation:
 - Measurement Level (dBµV) = Receiver reading (dBµV) + Transd (dB)
 - Transd (dB)= AMN Factor(dB)+Cable Loss(dB)+Attenuation(dB)
 - Margin= Limit-Level

13.5 Measurement Result



		AOTOW	er Line Cond				
lode	Mode 1			LIS	N Line	Hot Side	;
Leve	el [dBµV]						
80						,-,-,	
70			- <u> </u>			i-i-i	ii
60			- <u> </u>	<u> </u>		1 1 1	
50						1 1 1	1 1
40							 -
30	many many	Monyothangen	A CONTRACTOR OF THE PARTY OF TH				
20 ==		minimized the			Marie Marie Marie Marie		1
10					A DESCRIPTION OF THE PROPERTY		
0				 		 ! ! !	7
-10 15	0k 300k 400k	600k 800k		M 3M	4M 5M 6M 8	BM 10M 2	20M 30M
			Frequ	ency [Hz]			
x x x M	ES agc_fin						
Box visible	Something to the control of the cont	Mark State Committee	-F. Proptite Decrease a	s. constant the			
MEA	SUREMENT	RESULT	: "agc_:	fin"			
2025	5/8/14 9:5	И					
	requency	Level	Transd	Limit	Margin	Detector	Line
	TOURCITO'S	TOVOT	TTOILISO				
		dBuV				Decededi	ттие
	MHZ	dΒμV	dB	dΒμV	dB	2000001	птие
		dBμV 23.20				QP	L1
	MHz	2-28/07/05/0	dB	dΒμV	dB		
	MHz 0.362000	23.20	dB 9.9	dBµV 59	dB 35.5	QP	L1
	MHz 0.362000 0.654000	23.20	dB 9.9 9.9	dΒμV 59 56	35.5 33.8	QP QP	L1 L1
	MHz 0.362000 0.654000 1.278000	23.20 22.20 24.10	dB 9.9 9.9 9.9	dBμV 59 56 56	dB 35.5 33.8 31.9	QP QP QP	L1 L1 L1
	MHz 0.362000 0.654000 1.278000 2.142000	23.20 22.20 24.10 18.60	dB 9.9 9.9 9.9 9.9	dBμV 59 56 56 56	35.5 33.8 31.9 37.4	QP QP QP QP	L1 L1 L1
	MHz 0.362000 0.654000 1.278000 2.142000 5.298000	23.20 22.20 24.10 18.60 12.40	dB 9.9 9.9 9.9 9.9	dBμV 59 56 56 56 60	dB 35.5 33.8 31.9 37.4 47.6	QP QP QP QP QP	L1 L1 L1 L1
	MHz 0.362000 0.654000 1.278000 2.142000 5.298000	23.20 22.20 24.10 18.60 12.40	dB 9.9 9.9 9.9 9.9	dBμV 59 56 56 56 60	dB 35.5 33.8 31.9 37.4 47.6	QP QP QP QP QP	L1 L1 L1 L1
	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000	23.20 22.20 24.10 18.60 12.40 11.50	9.9 9.9 9.9 9.9 10.0	dBμV 59 56 56 56 60 60	dB 35.5 33.8 31.9 37.4 47.6	QP QP QP QP QP	L1 L1 L1 L1
	MHz 0.362000 0.654000 1.278000 2.142000 5.298000	23.20 22.20 24.10 18.60 12.40 11.50	9.9 9.9 9.9 9.9 10.0	dBμV 59 56 56 56 60 60	dB 35.5 33.8 31.9 37.4 47.6	QP QP QP QP QP	L1 L1 L1 L1
MEA	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000	23.20 22.20 24.10 18.60 12.40 11.50	9.9 9.9 9.9 9.9 10.0	dBμV 59 56 56 56 60 60	dB 35.5 33.8 31.9 37.4 47.6	QP QP QP QP QP	L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000	23.20 22.20 24.10 18.60 12.40 11.50	dB 9.9 9.9 9.9 10.0 10.2	dBμV 59 56 56 60 60	dB 35.5 33.8 31.9 37.4 47.6 48.5	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000	23.20 22.20 24.10 18.60 12.40 11.50 RESULT 4 Level	dB 9.9 9.9 9.9 10.0 10.2	dBµV 59 56 56 60 60	dB 35.5 33.8 31.9 37.4 47.6 48.5	QP QP QP QP QP	L1 L1 L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000 SUREMENT 5/8/14 9:5 Frequency	23.20 22.20 24.10 18.60 12.40 11.50	dB 9.9 9.9 9.9 10.0 10.2	dBμV 59 56 56 60 60	dB 35.5 33.8 31.9 37.4 47.6 48.5	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000 SUREMENT 5/8/14 9:5 Frequency	23.20 22.20 24.10 18.60 12.40 11.50 RESULT	dB 9.9 9.9 9.9 10.0 10.2	dBµV 59 56 56 60 60	dB 35.5 33.8 31.9 37.4 47.6 48.5 Margin dB	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000 SUREMENT 5/8/14 9:5 Frequency MHz	23.20 22.20 24.10 18.60 12.40 11.50 RESULT 4 Level	dB 9.9 9.9 9.9 10.0 10.2 : "agc_: Transd dB	dBμV 59 56 56 56 60 60 fin2" Limit dBμV	dB 35.5 33.8 31.9 37.4 47.6 48.5	QP QP QP QP QP QP AV	L1 L1 L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000 SUREMENT 5/8/14 9:5 Frequency MHz 0.362000	23.20 22.20 24.10 18.60 12.40 11.50 RESULT 4 Level dBµV 19.70	dB 9.9 9.9 9.9 10.0 10.2 Transd dB 9.9	dBµV 59 56 56 60 60 fin2" Limit dBµV 49	dB 35.5 33.8 31.9 37.4 47.6 48.5 Margin dB 29.0 23.3	QP QP QP QP QP QP AV	L1 L1 L1 L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000 SUREMENT 5/8/14 9:5 Frequency MHz 0.362000 0.778000	23.20 22.20 24.10 18.60 12.40 11.50 RESULT 4 Level dBuV 19.70 22.70	dB 9.9 9.9 9.9 10.0 10.2 ************************************	dBμV 59 56 56 56 60 60 49 49	dB 35.5 33.8 31.9 37.4 47.6 48.5 Margin dB 29.0 23.3 26.9	QP QP QP QP QP QP AV AV	L1 L1 L1 L1 L1 L1 L1 L1 L1
MEA 2025	MHz 0.362000 0.654000 1.278000 2.142000 5.298000 9.202000 SUREMENT 6/8/14 9:5 Frequency MHz 0.362000 0.778000 1.282000	23.20 22.20 24.10 18.60 12.40 11.50 RESULT 4 Level dBµV 19.70 22.70 19.10	dB 9.9 9.9 9.9 10.0 10.2 Transd dB 9.9 9.9	dBµV 59 56 56 60 60 60 Limit dBµV 49 46 46 46	dB 35.5 33.8 31.9 37.4 47.6 48.5 Margin dB 29.0 23.3 26.9	QP QP QP QP QP QP AV AV AV	L1 L1 L1 L1 L1 L1 L1 L1

RESULT: PASS



		AG FUW	er Line Cond				
Mode	Mode 1			LIS	N Line	Neutral S	Side
Leve	I [dΒμV]						
80				-,,	,,,		, <u>.</u>
70			_ <u> </u>	.ļļ		<u> </u>	ii
60	L		_Ļ	_		111	1
50						1 1 1	1
40	i i i			-		1	44
30	- Americano		ELDEGE TET				
20 ==	- X	X	1 X	With the Park of the Line of t	والمراجع المنافية	i i i Na balanca kama men	i decesed
10				Application of the last of the	×		X
0			- 	-ii			
-10	2001 400		1	1 1 2M 3M	4M 5M 6M 8	1 1 1	014 2014
15	0k 300k 400l	600k 800k		2M 3M uency [Hz]	4M 5M 6M 8	BM 10M 2	OM 30M
x x x M	ES agc fin		•				
MEA.	SUREMENT	RESULT	: "agc	fin"			
			-				
	/8/14 9:5	1					
F	requency	Level	Transd	Limit	Margin	Detector	Line
	MHz	dBµV	dB	dBµV	dB		
		5212 12121	1024 82	2020	12121 2		
	0.350000	23.80	9.9	59	35.2	QP	N
	0.470000	22.50	9.9	57	34.0	QP	N
	1.274000	24.20	9.9	56	31.8	QP	N
	2.230000	17.90	9.9	56	38.1	QP	N
	4.218000	14.40	10.0	56	41.6	QP	N
2	9.046000	12.00					
2		12.00	11.2	60	48.0	QP	N
2	2.01000	12.00	11.2	60	48.0	QP	
2		12.00	11.2	60	48.0	QP	
	SUREMENT			60 fin2"	48.0	QP	
MEA:		RESULT			48.0	QP	
MEA :	SUREMENT	RESULT	: " <mark>agc</mark> _	fin2"		QP Detector	N
MEA :	SUREMENT /8/14 9:5	RESULT	: " <mark>agc</mark> _	fin2"			N
MEA : 2025	SUREMENT /8/14 9:5 requency MHz	RESULT 1 Level dBµV	: "agc_ Transd dB	fin2" Limit dBµV	Margin dB	Detector	N
MEA 2025 F	SUREMENT /8/14 9:5 requency MHz 0.362000	RESULT	: "agc_ Transd dB 9.9	fin2" Limit dBµV	Margin dB 29.0	Detector	N Line
MEA : 2025 F	SUREMENT /8/14 9:5 requency MHz 0.362000 0.774000	RESULT	: "agc_ Transd dB 9.9 9.9	fin2" Limit dBµV 49 46	Margin dB 29.0 24.0	Detector AV AV	N Line N N
MEA : 2025 F	SUREMENT /8/14 9:5 requency MHz 0.362000 0.774000 1.274000	RESULT 1 Level dBμV 19.70 22.00 19.10	: "agc_ Transd dB 9.9 9.9 9.9	fin2" Limit dBµV 49 46 46	Margin dB 29.0 24.0 26.9	Detector AV AV AV	N Line N N
MEA . 2025	SUREMENT /8/14 9:5 requency MHz 0.362000 0.774000 1.274000 2.170000	RESULT 1 Level dBµV 19.70 22.00 19.10 14.20	: "agc_ Transd dB 9.9 9.9 9.9 9.9	fin2" Limit dBµV 49 46 46 46	Margin dB 29.0 24.0 26.9 31.8	Detector AV AV AV AV	N Line N N N
MEA 2025 F	SUREMENT /8/14 9:5 requency MHz 0.362000 0.774000 1.274000 2.170000	RESULT 1 Level dBµV 19.70 22.00 19.10 14.20	: "agc_ Transd dB 9.9 9.9 9.9	fin2" Limit dBµV 49 46 46	Margin dB 29.0 24.0 26.9 31.8 42.4	Detector AV AV AV AV AV	N Line N N

RESULT: PASS



Report No.: AGC00806250807FR01

Page 78 of 79

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC00806250807AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC00806250807AP02



Report No.: AGC00806250807FR01

Page 79 of 79

Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----End of Report----