

PRODUCT SPECIFICATION


1、PRODUCT TECHNICAL SPECIFICATION

Electrical Specifications	
Frequency Range (MHz)	2400-2500
Bandwidth (MHz)	100
Input Impedence (Ω)	50
V.S.W.R	≤ 2
Gain (dBi)	$0 \pm 0.8\text{dBi}$
Polarization Type	Vertical
Lightning Protection	AC to ground
Power Capacity (w)	0.5
Mechanical Specifications	
Antenna Length (mm)	$\varnothing 1.5 \times 33$ & $\varnothing 1.5 \times 80$
Radiator	Cu
Connect Type	solder
Working Temp($^{\circ}\text{C}$)	-40~65
Storage Temperature($^{\circ}\text{C}$)	-40~80
Color	transparency
Weight (g)	0.37g(8cm)&0.15g(3.3cm)


2、PRODUCT PICTURE




3、PRODUCT SPECIFICATION CHART

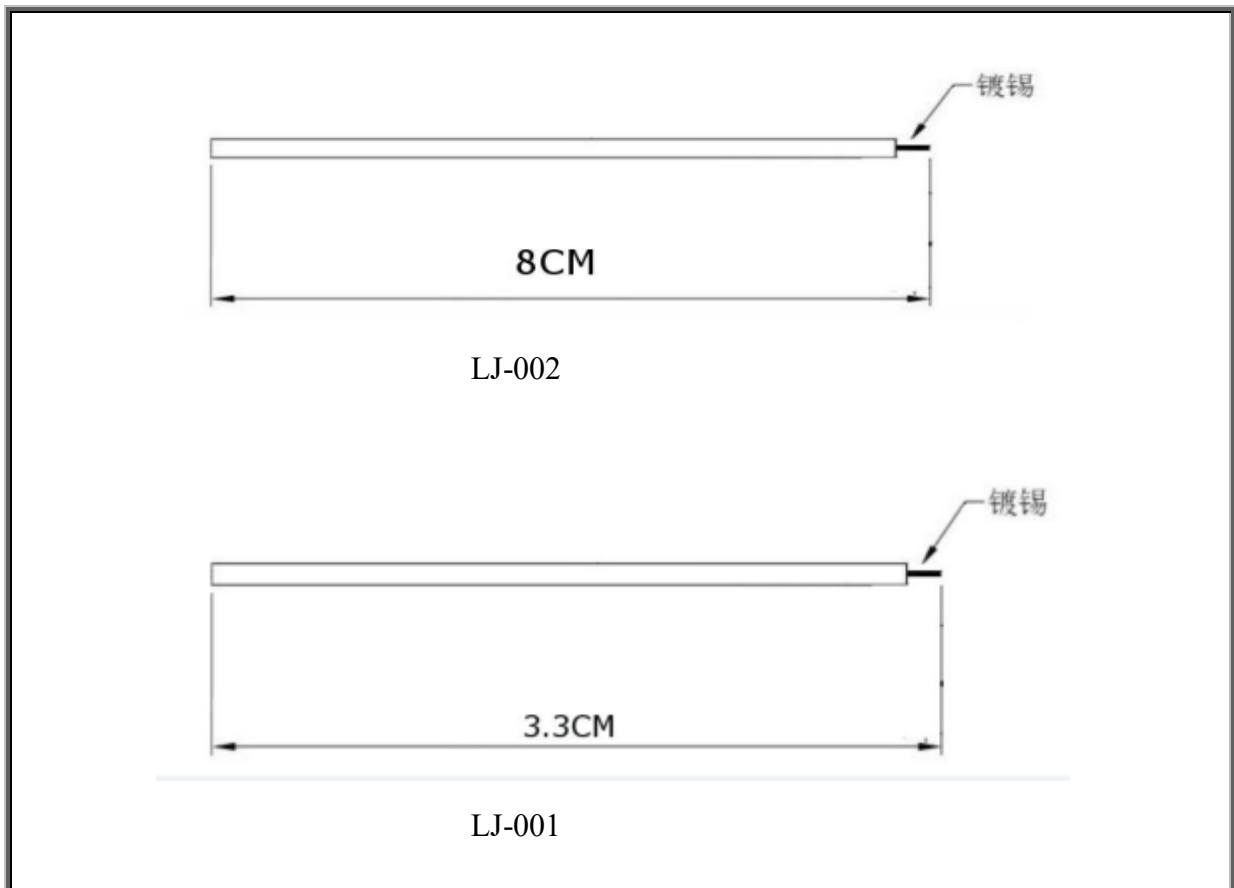


4、STATIONARY WAVE PATTERN

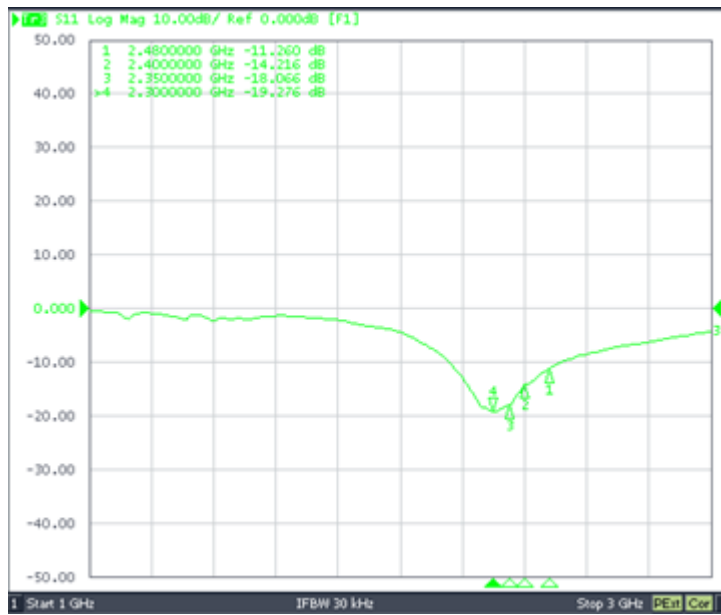

5、Gain

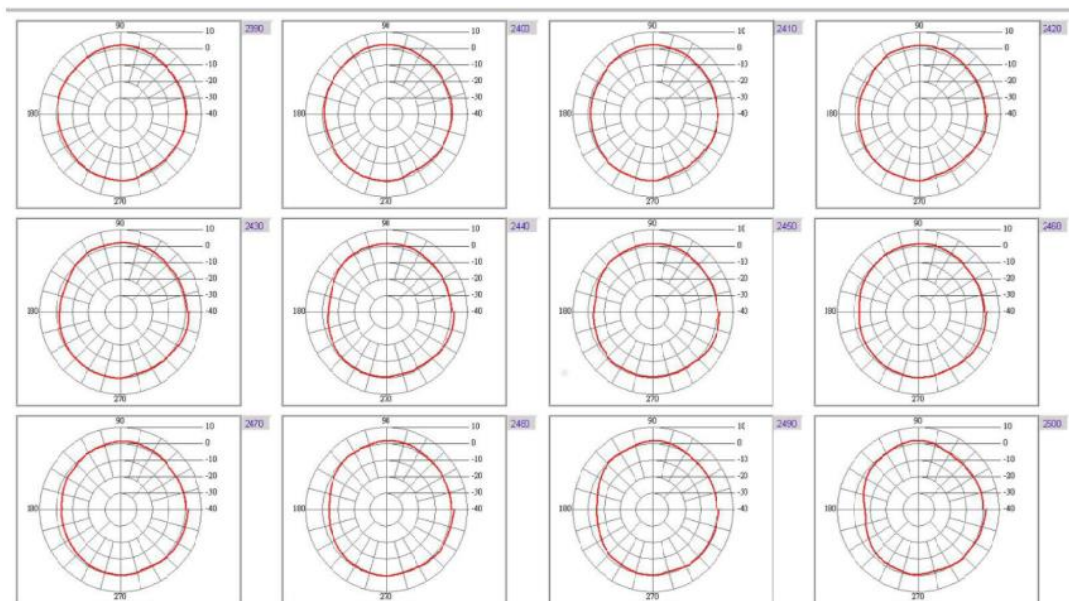

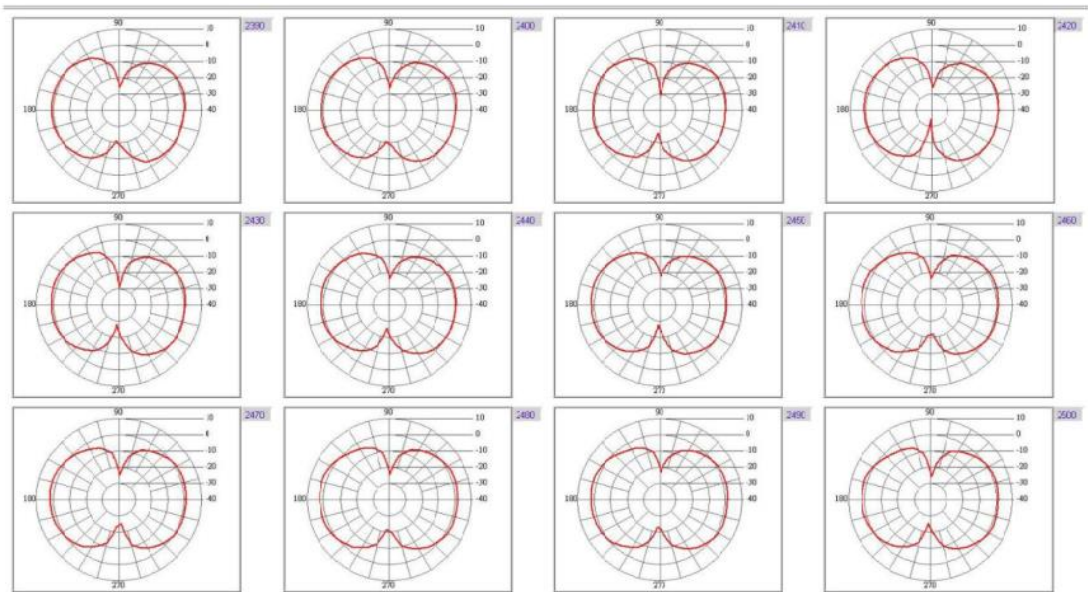

date: 2024-4-29