




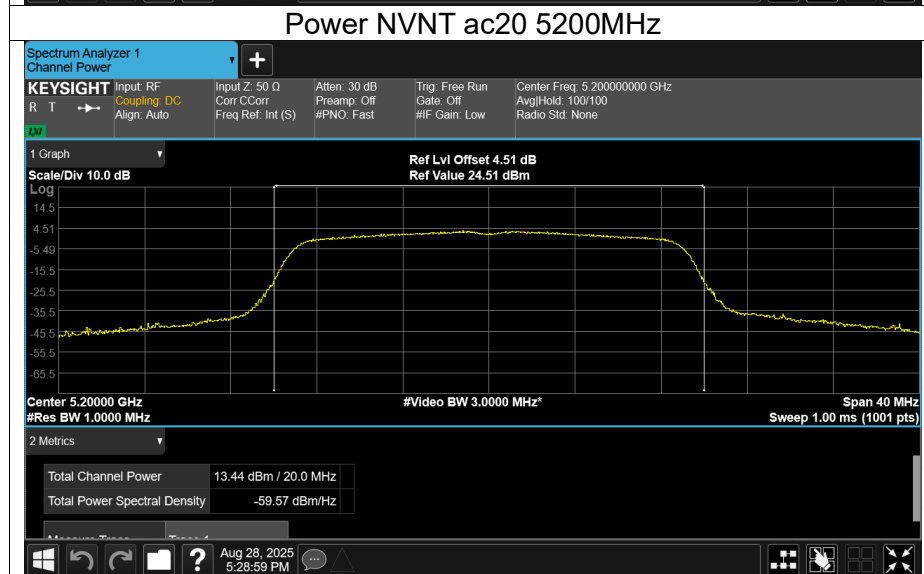
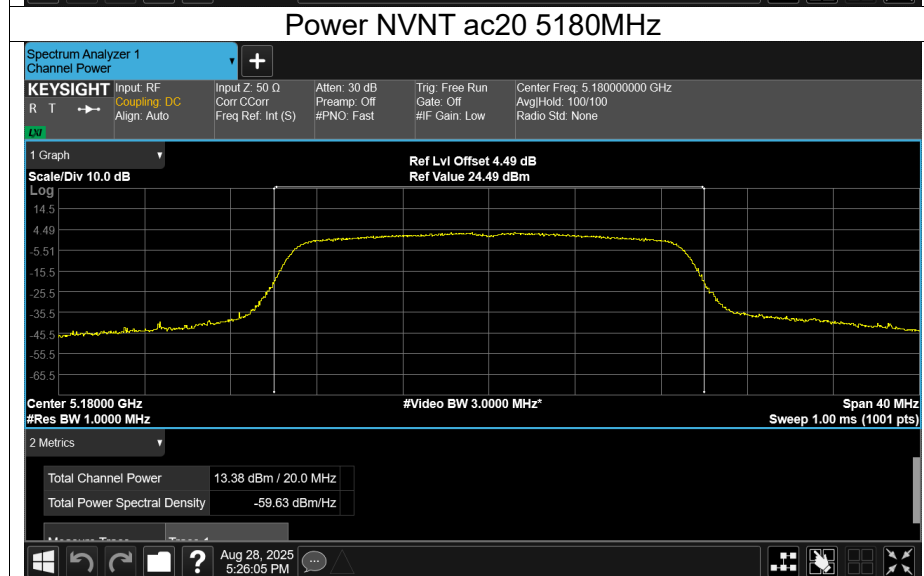
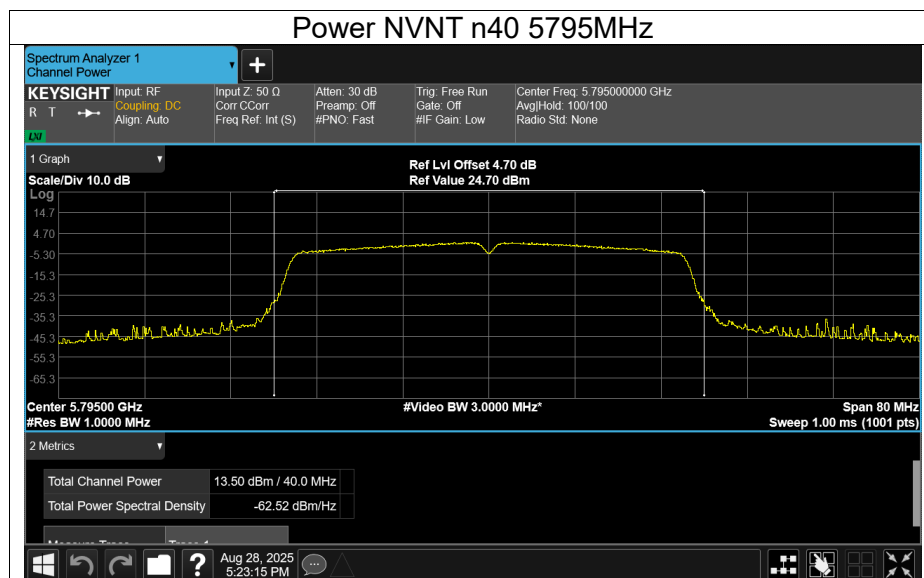
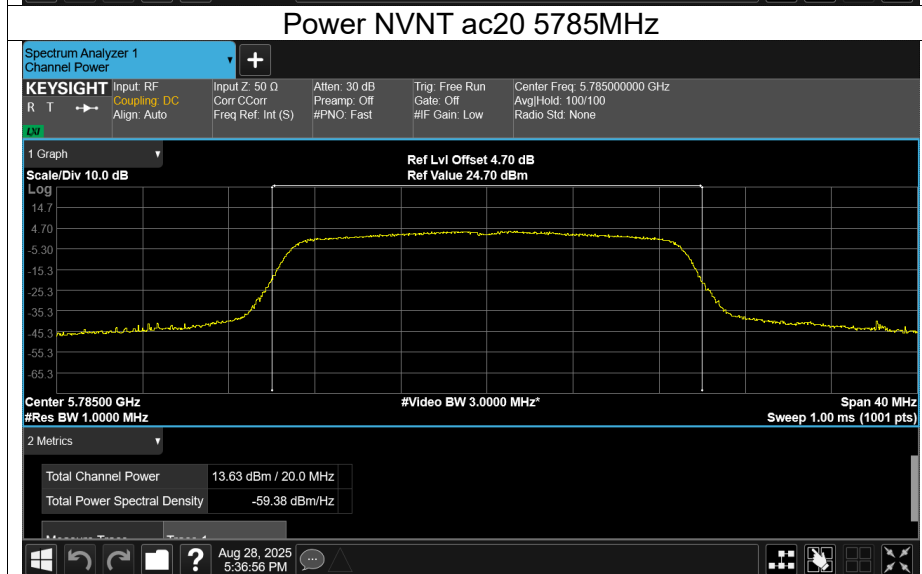
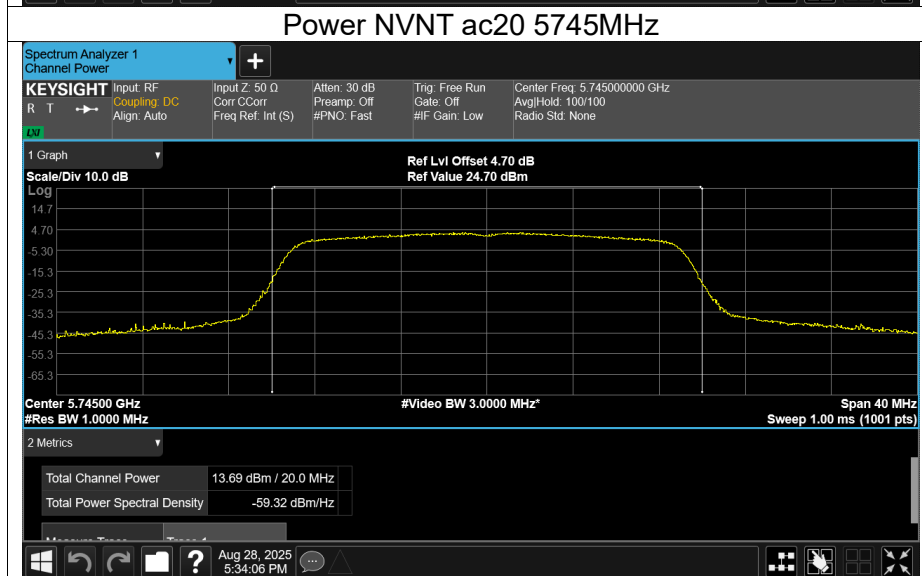
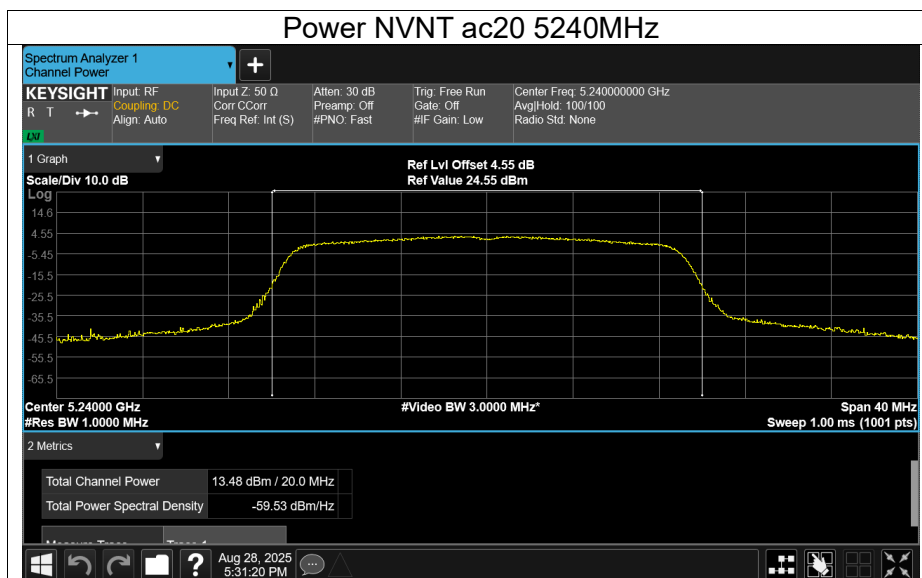
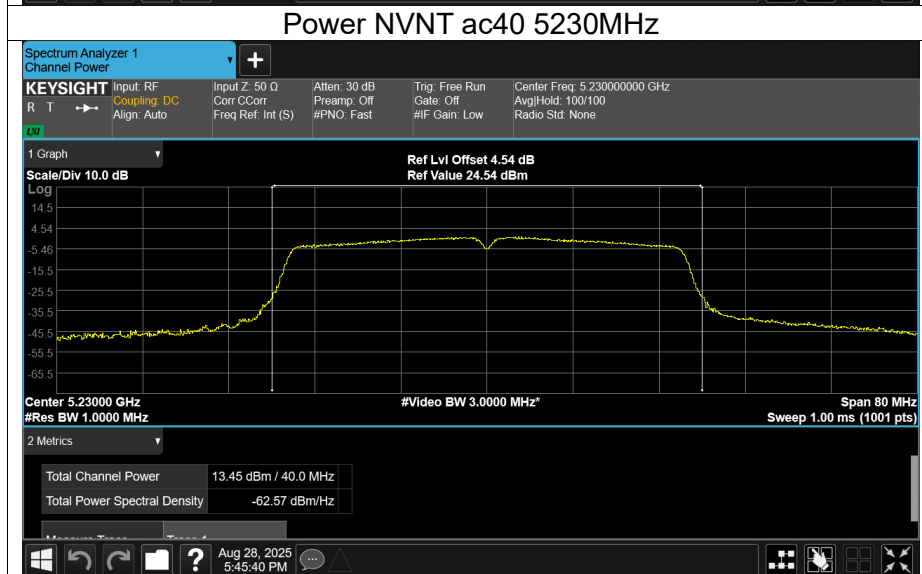
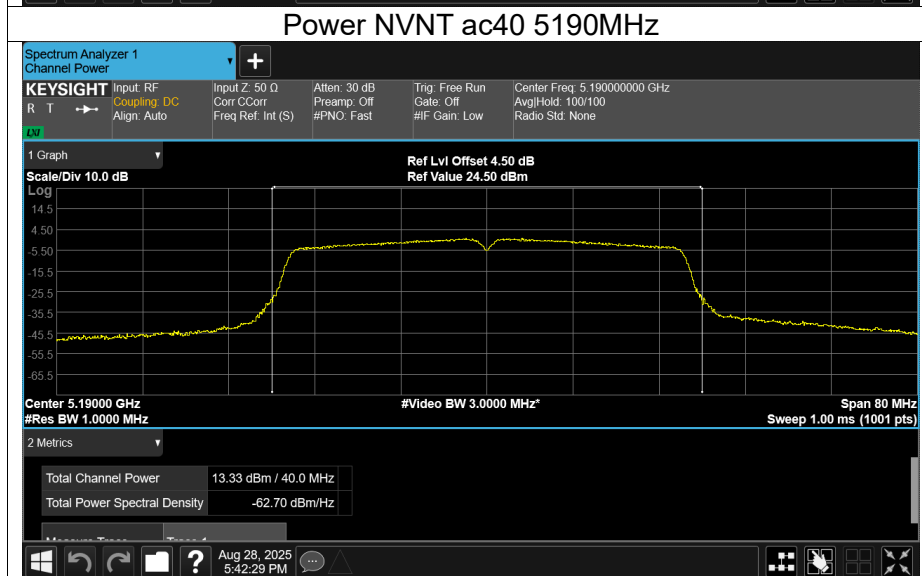


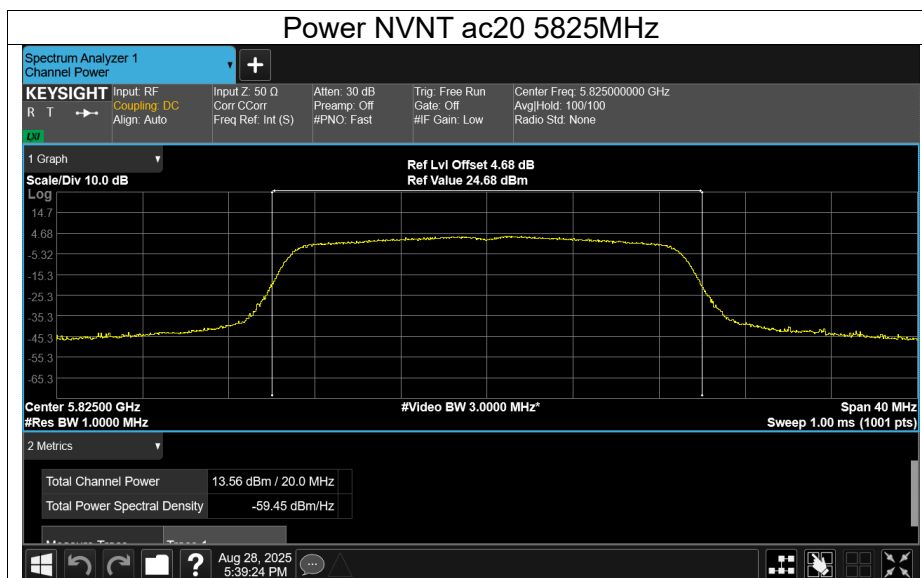

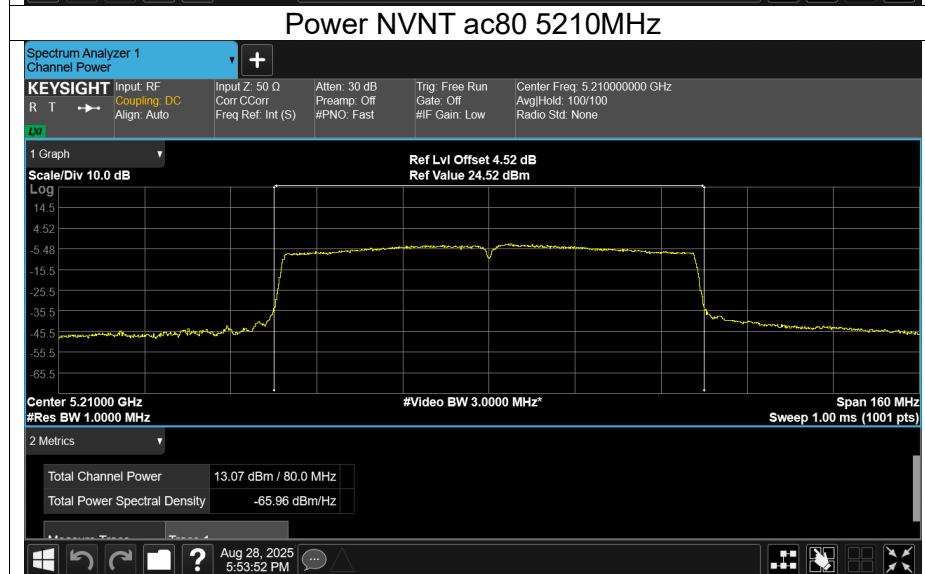

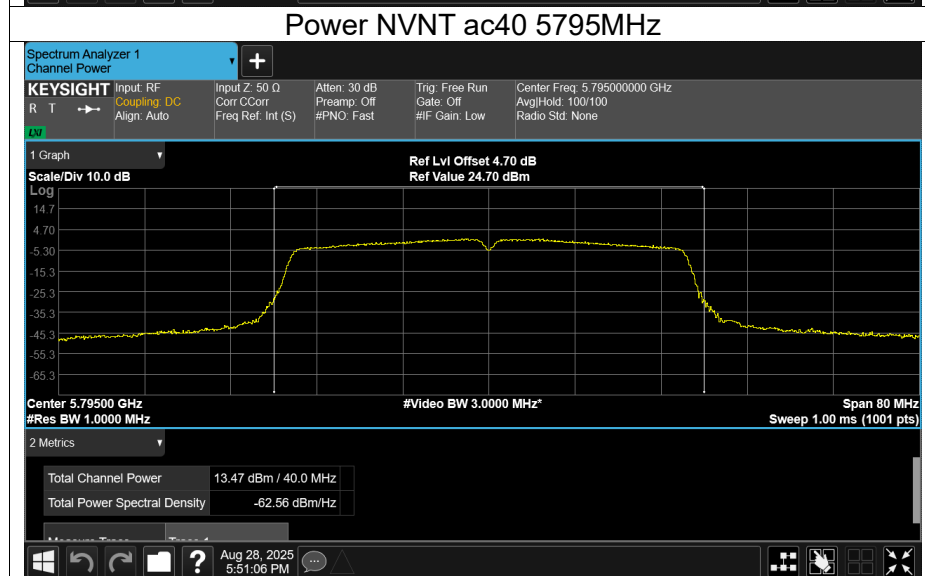

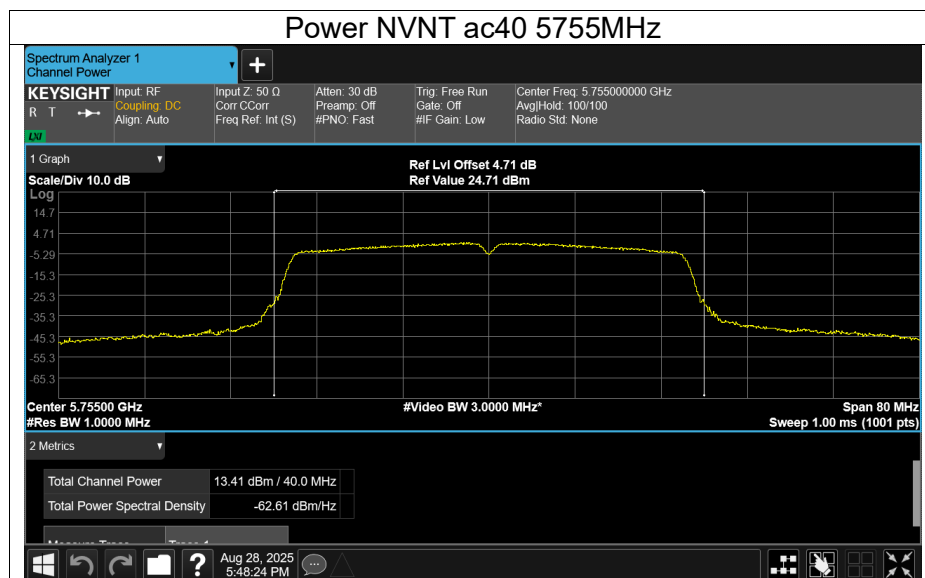

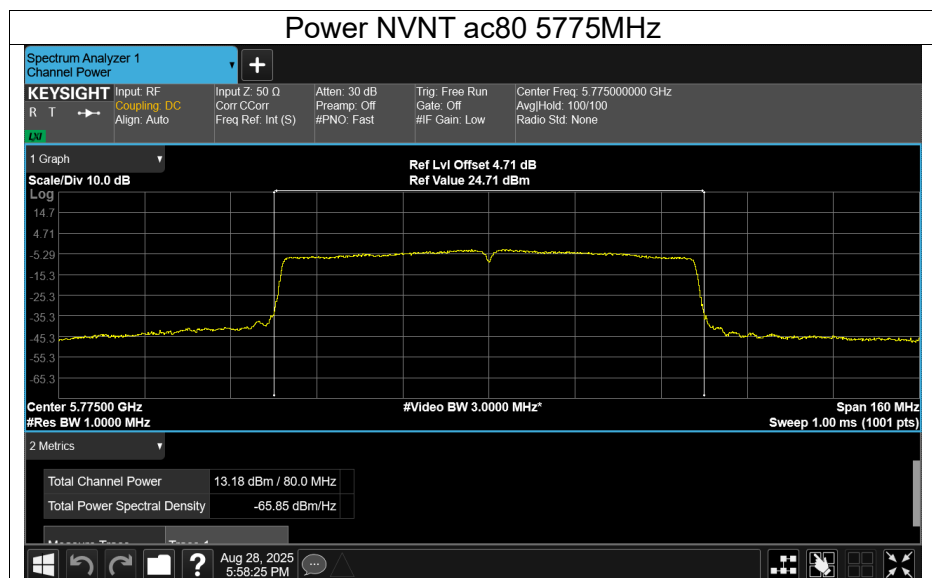




Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	3.18	0.13	3.31	11	Pass
NVNT	a	5200	3.56	0.13	3.69	11	Pass
NVNT	a	5240	3.06	0.13	3.19	11	Pass
NVNT	n20	5180	1.8	0.14	1.94	11	Pass
NVNT	n20	5200	1.82	0.14	1.96	11	Pass
NVNT	n20	5240	1.56	0.14	1.7	11	Pass
NVNT	n40	5190	-1.65	0.29	-1.36	11	Pass
NVNT	n40	5230	-2.25	0.29	-1.96	11	Pass
NVNT	ac20	5180	1.88	0.14	2.02	11	Pass
NVNT	ac20	5200	2.13	0.15	2.28	11	Pass
NVNT	ac20	5240	1.75	0.15	1.9	11	Pass
NVNT	ac40	5190	-1.86	0.28	-1.58	11	Pass
NVNT	ac40	5230	-2.11	0.28	-1.83	11	Pass
NVNT	ac80	5210	-5.15	0.55	-4.6	11	Pass


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510kHz)	Conducted PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	-0.25	-0.34	0.14	-0.20	30	Pass
NVNT	a	5785	-0.86	-0.95	0.13	-0.82	30	Pass
NVNT	a	5825	-0.98	-1.07	0.13	-0.94	30	Pass
NVNT	n20	5745	-1.66	-1.75	0.14	-1.61	30	Pass
NVNT	n20	5785	-1.82	-1.91	0.14	-1.77	30	Pass
NVNT	n20	5825	-1.49	-1.58	0.14	-1.44	30	Pass
NVNT	n40	5755	-5.25	-5.34	0.29	-5.05	30	Pass
NVNT	n40	5795	-5.37	-5.46	0.29	-5.17	30	Pass
NVNT	ac20	5745	-1.38	-1.47	0.14	-1.33	30	Pass
NVNT	ac20	5785	-1.61	-1.70	0.14	-1.56	30	Pass
NVNT	ac20	5825	-1.82	-1.91	0.14	-1.77	30	Pass
NVNT	ac40	5755	-4.05	-4.14	0.28	-3.86	30	Pass
NVNT	ac40	5795	-5.47	-5.56	0.28	-5.28	30	Pass
NVNT	ac80	5775	-8	-8.09	0.57	-7.52	30	Pass


Note:

1. Conducted PSD (dBm/500kHz) = Conducted PSD (dBm/510kHz) + $10 \cdot \log(500/510)$
2. Total PSD (dBm/500kHz) = Conducted PSD (dBm/500kHz) + Duty Factor (dB)
3. Input compensation coefficient (dB) = Cable Loss (dB)

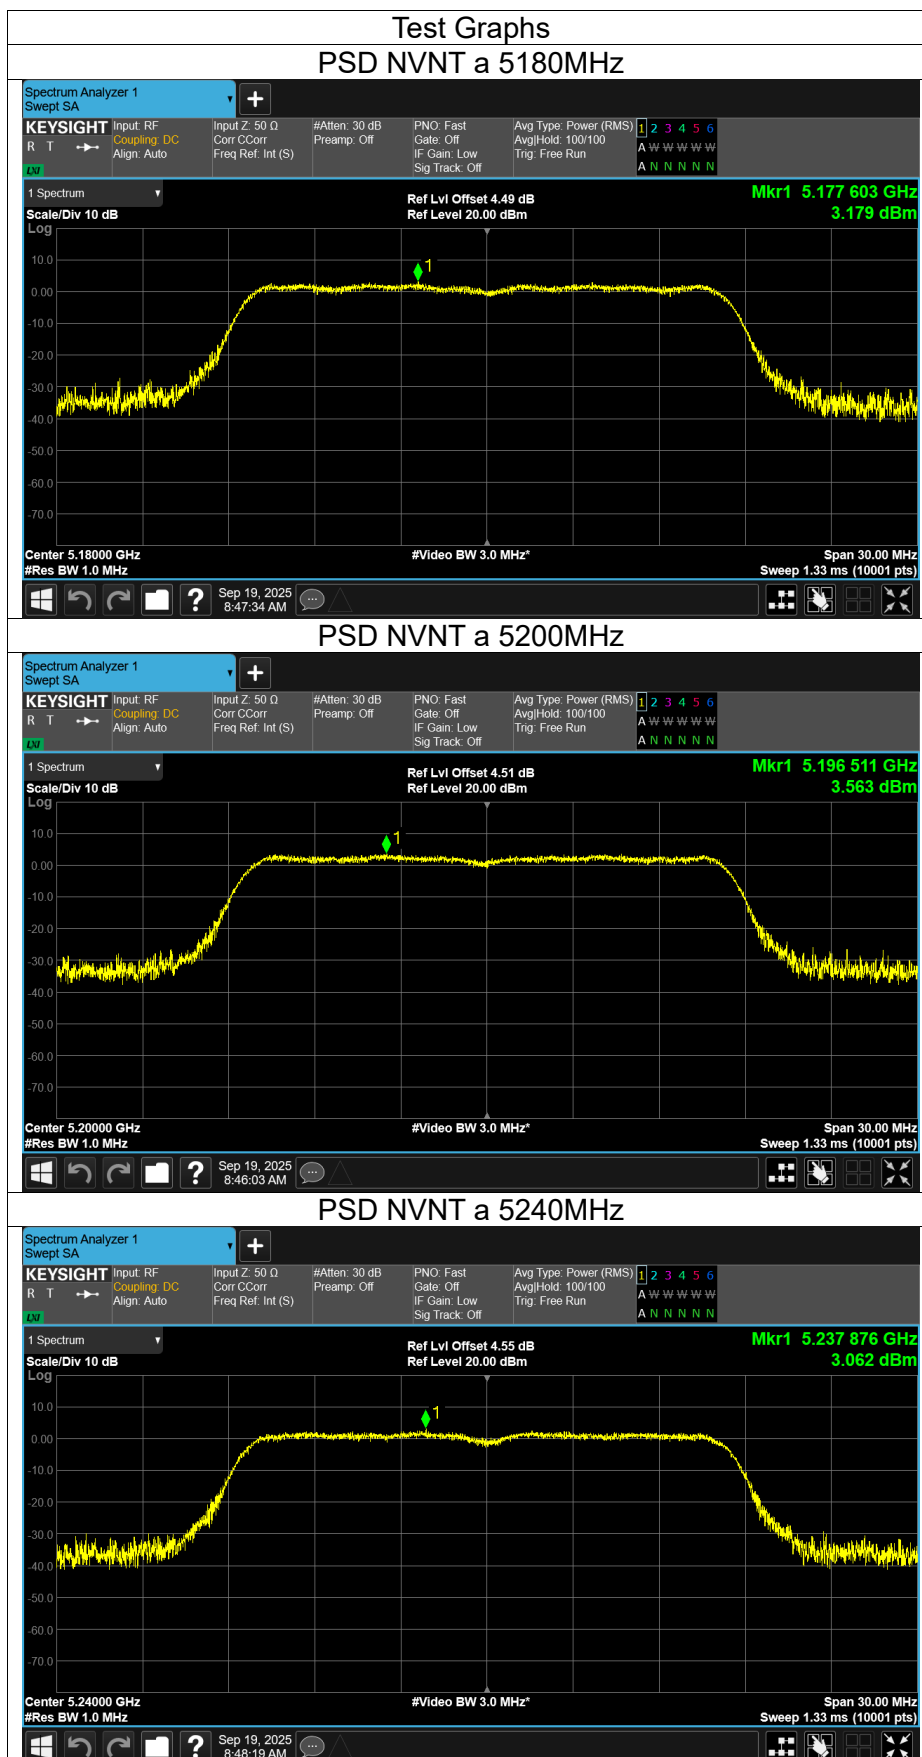


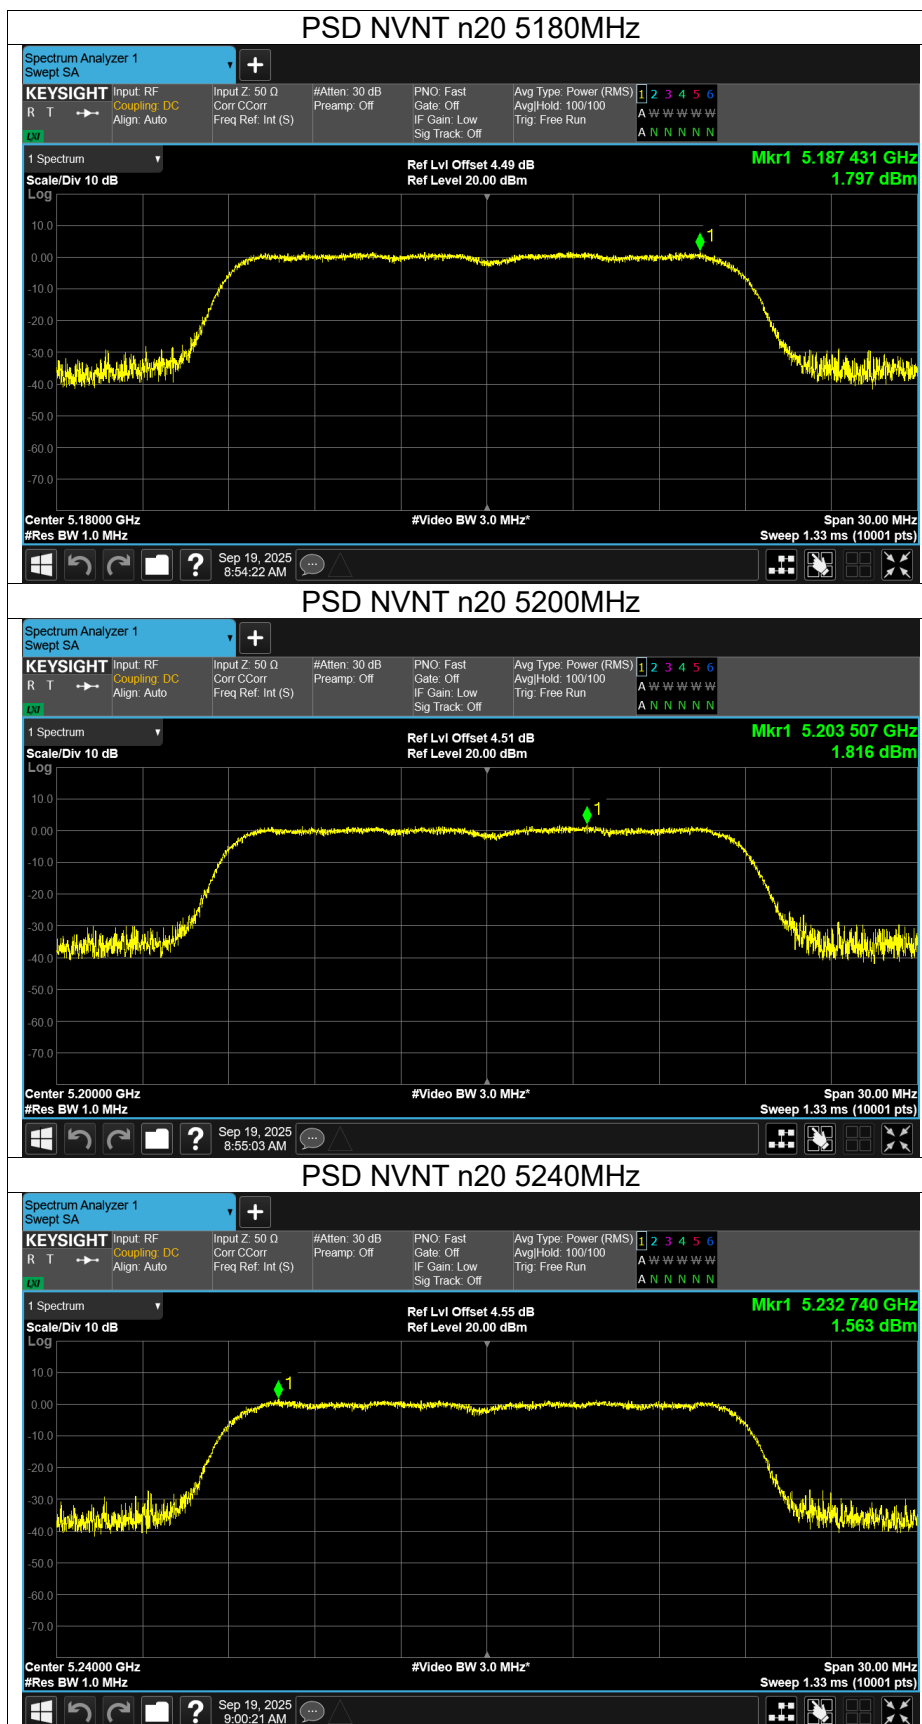


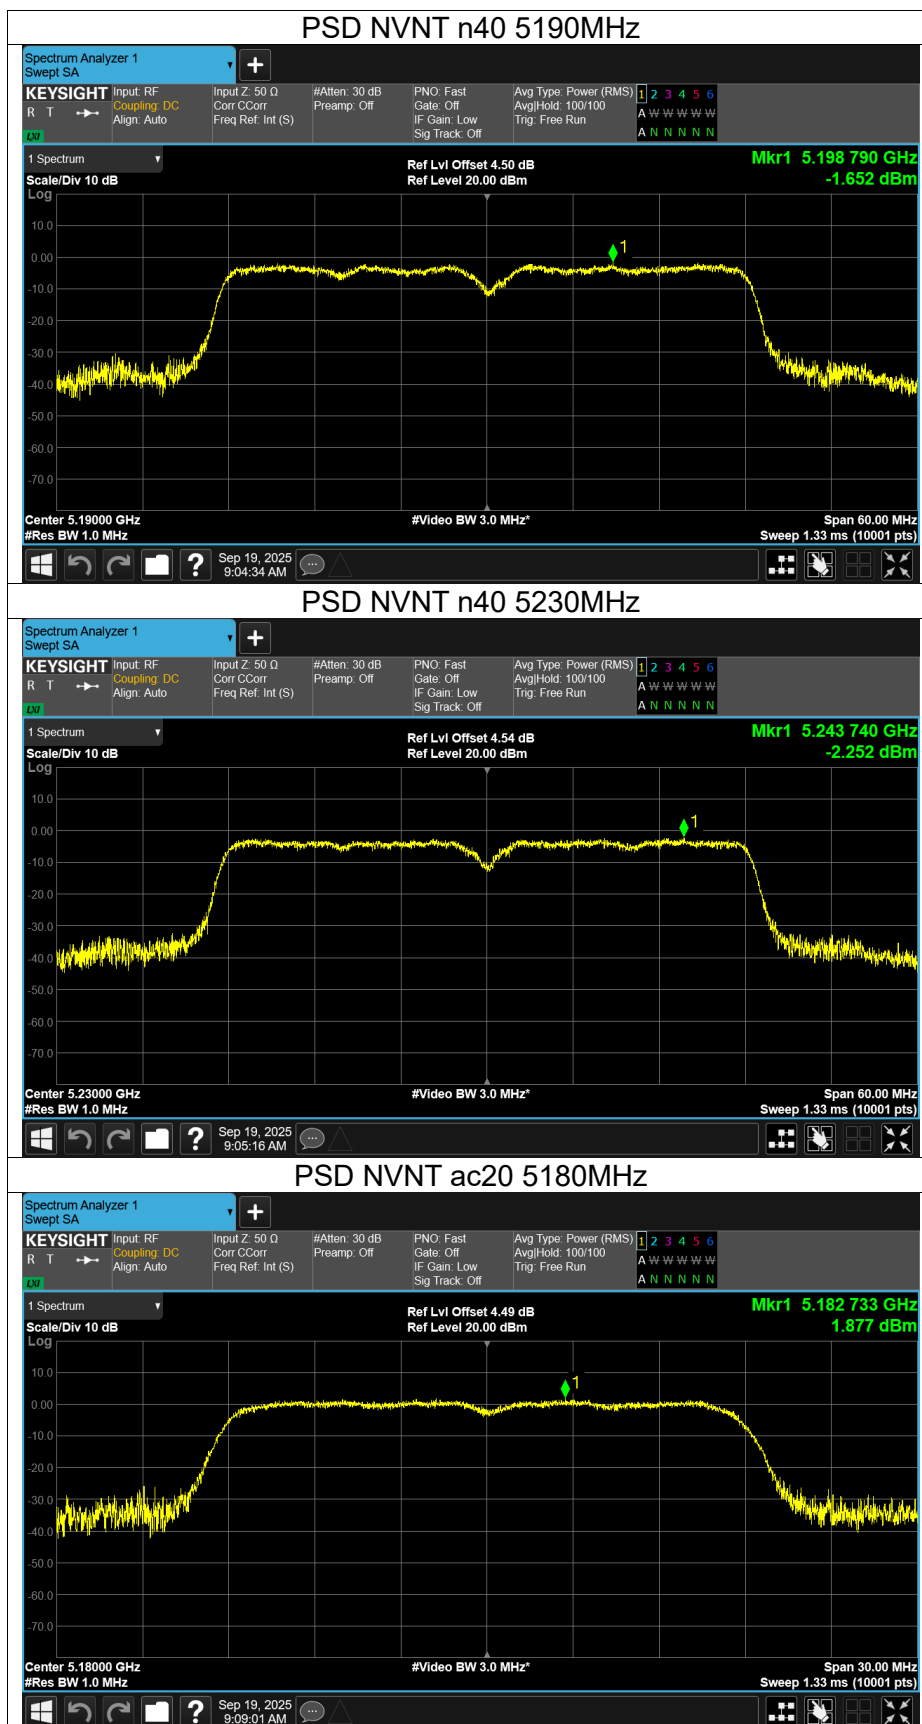


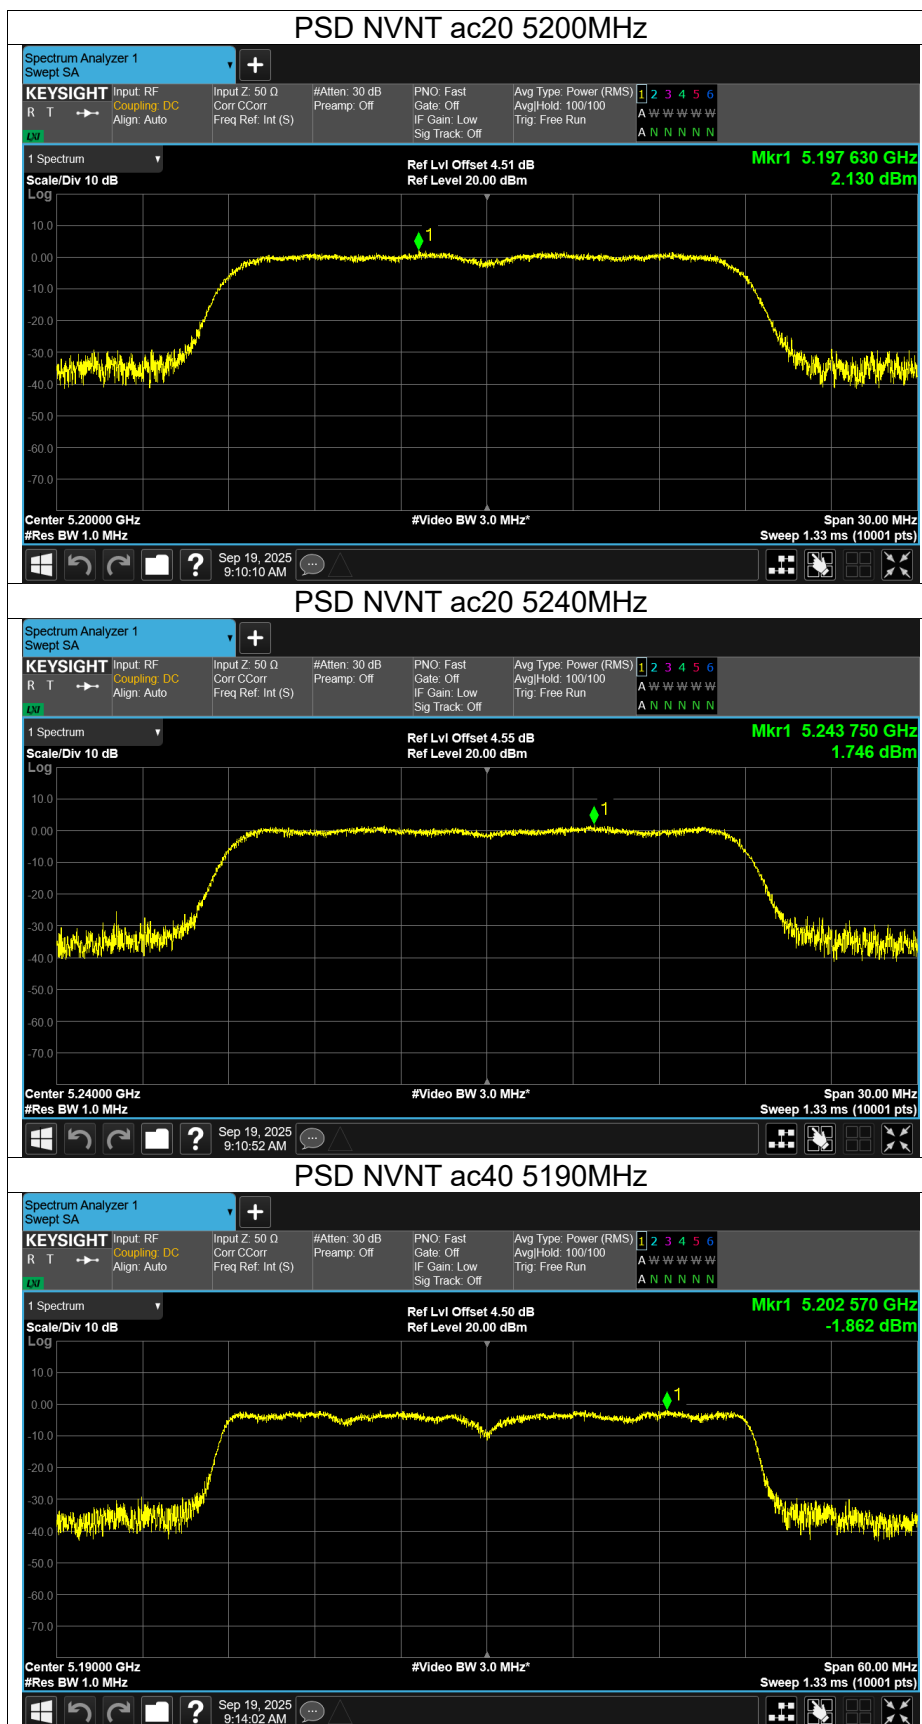





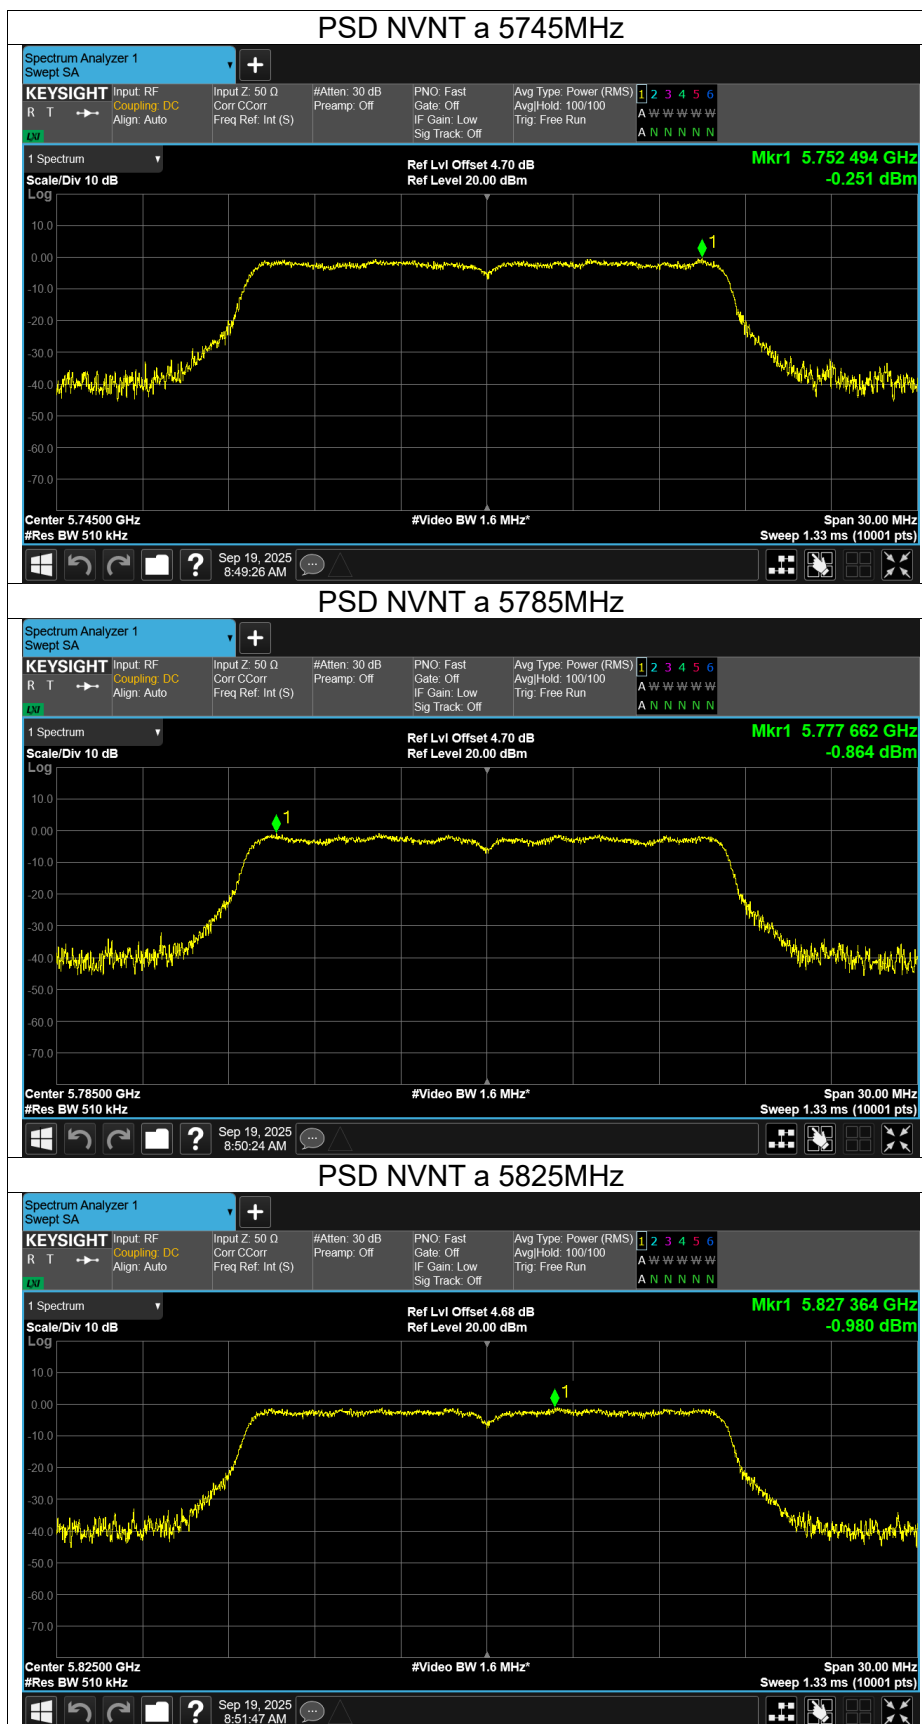

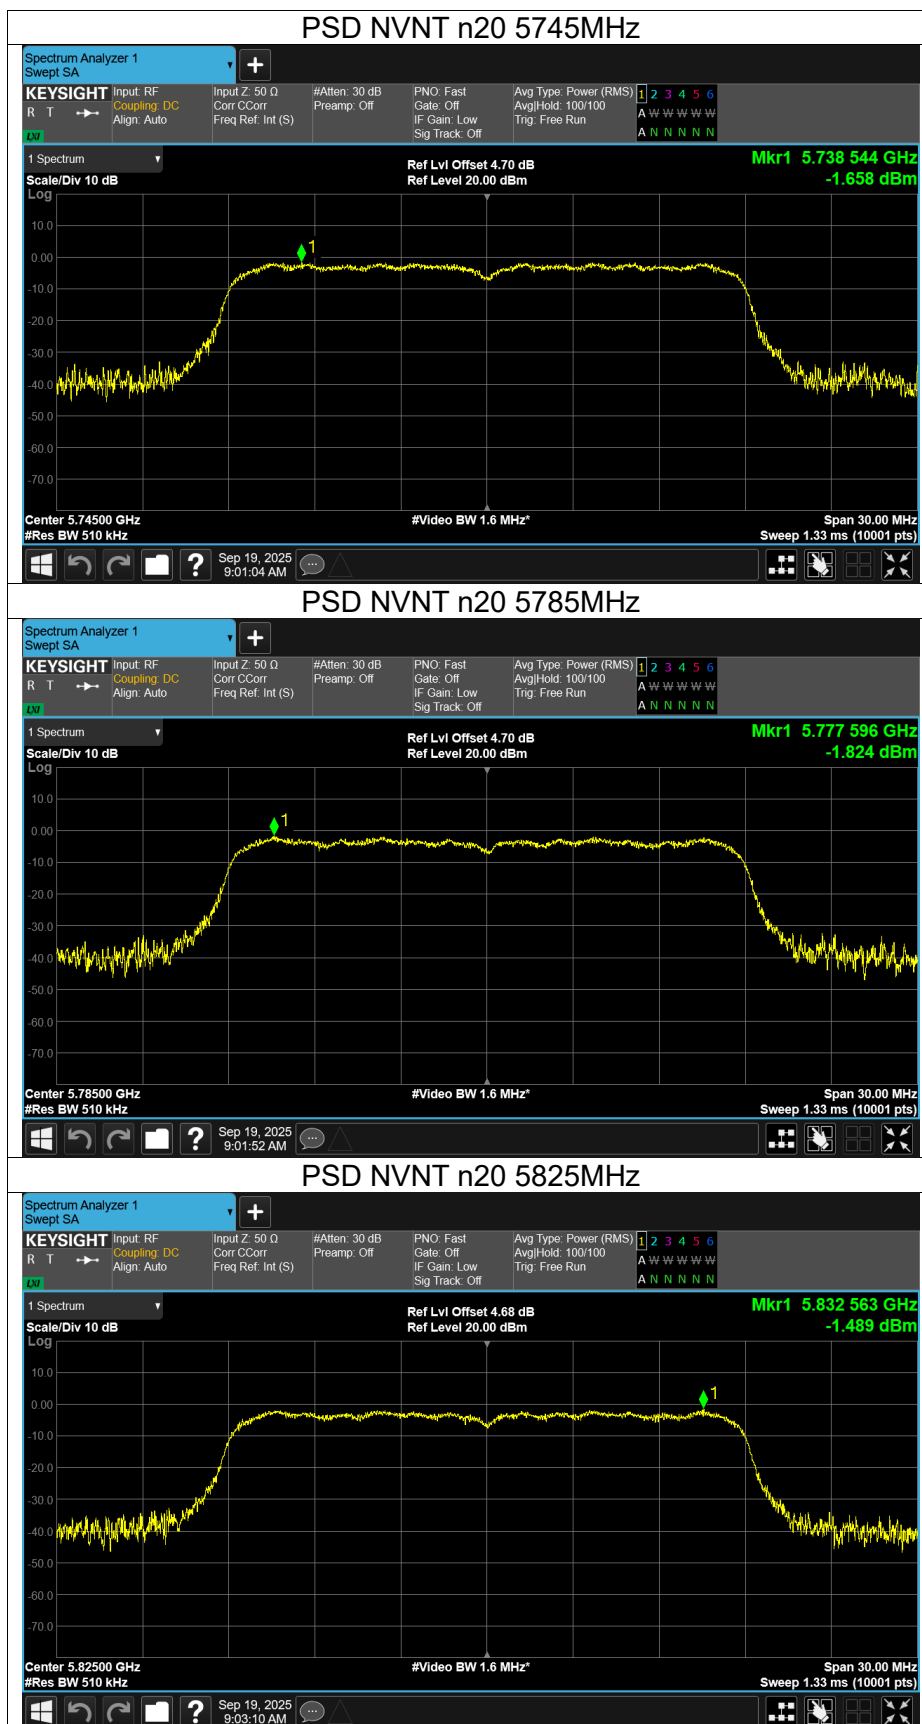

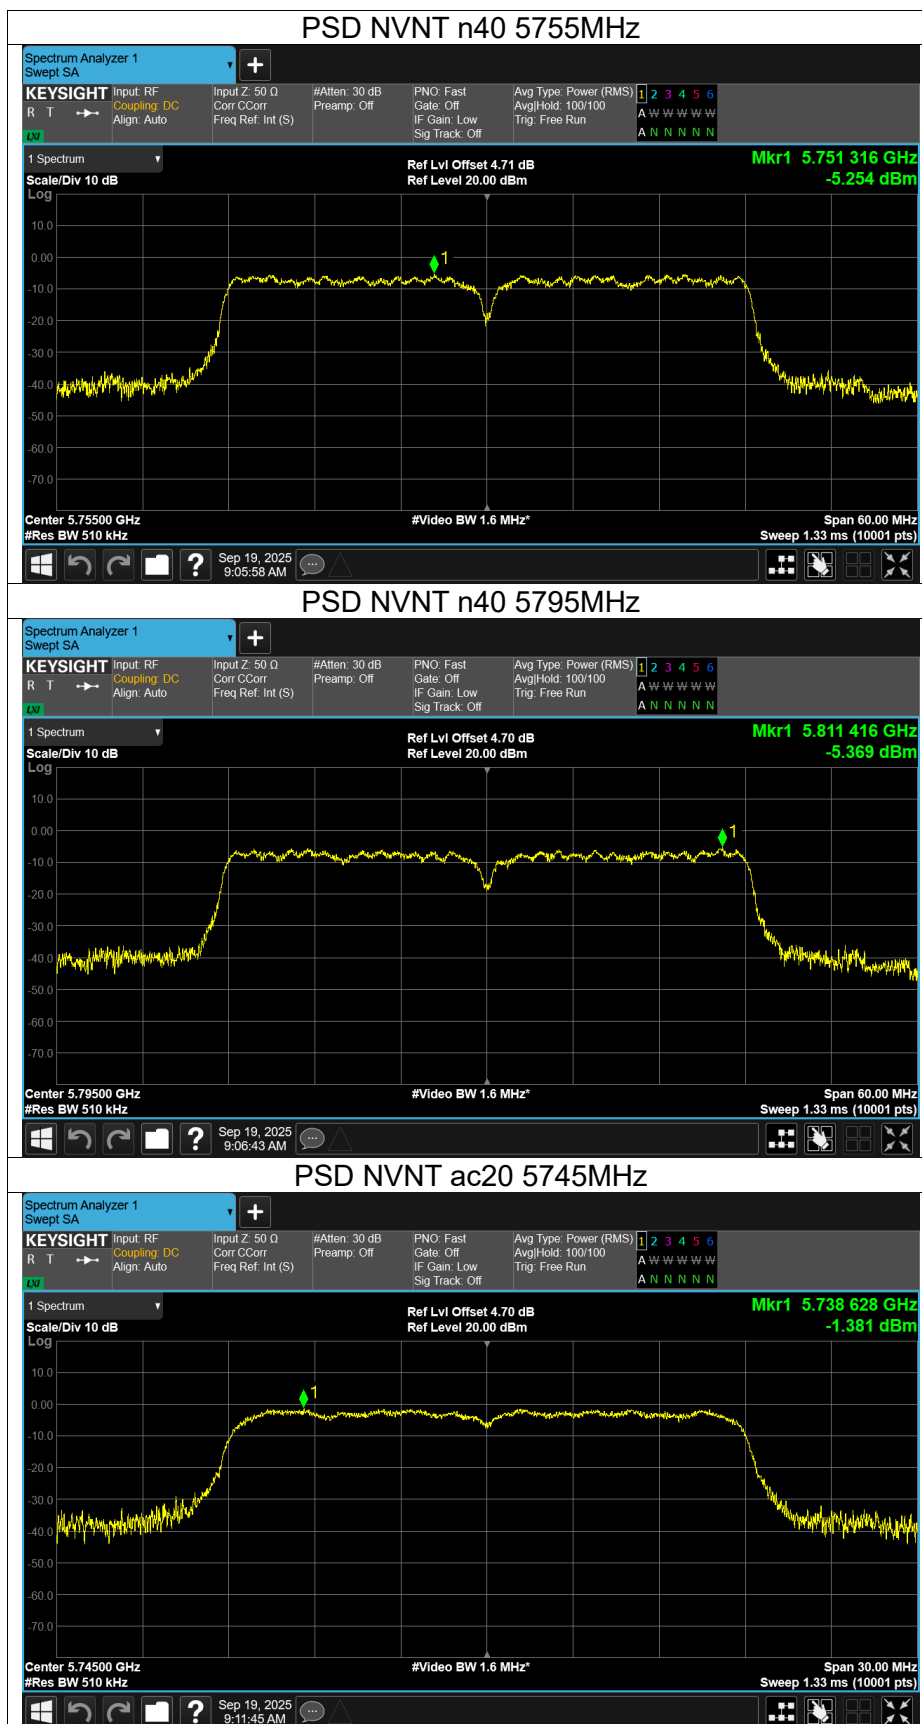

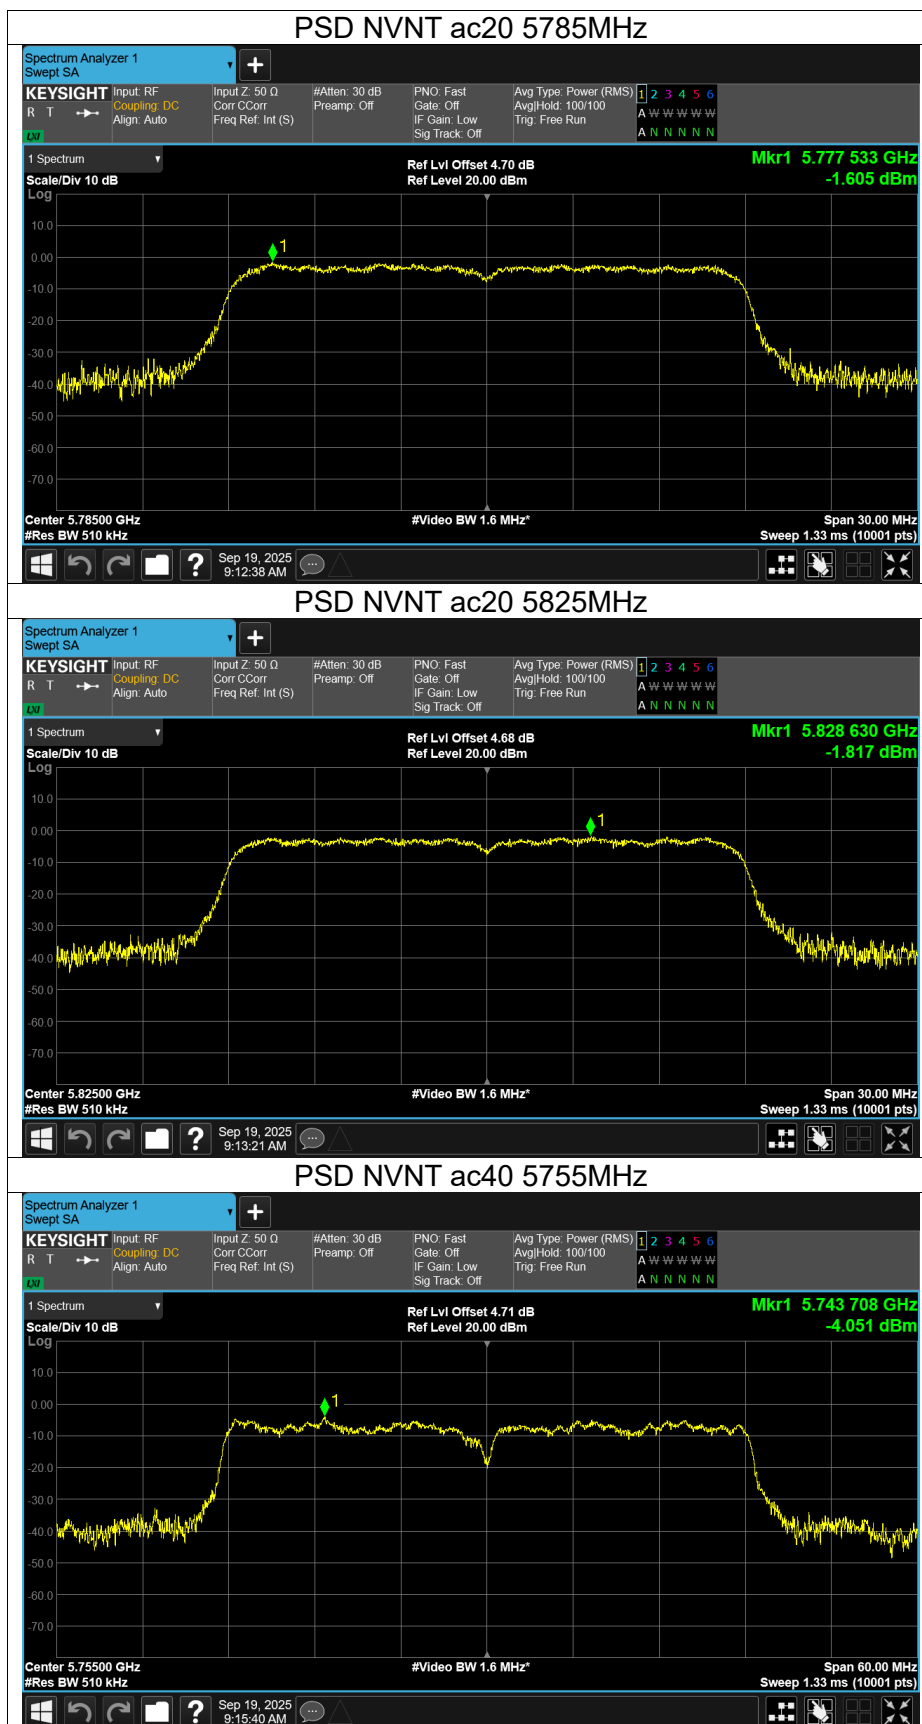

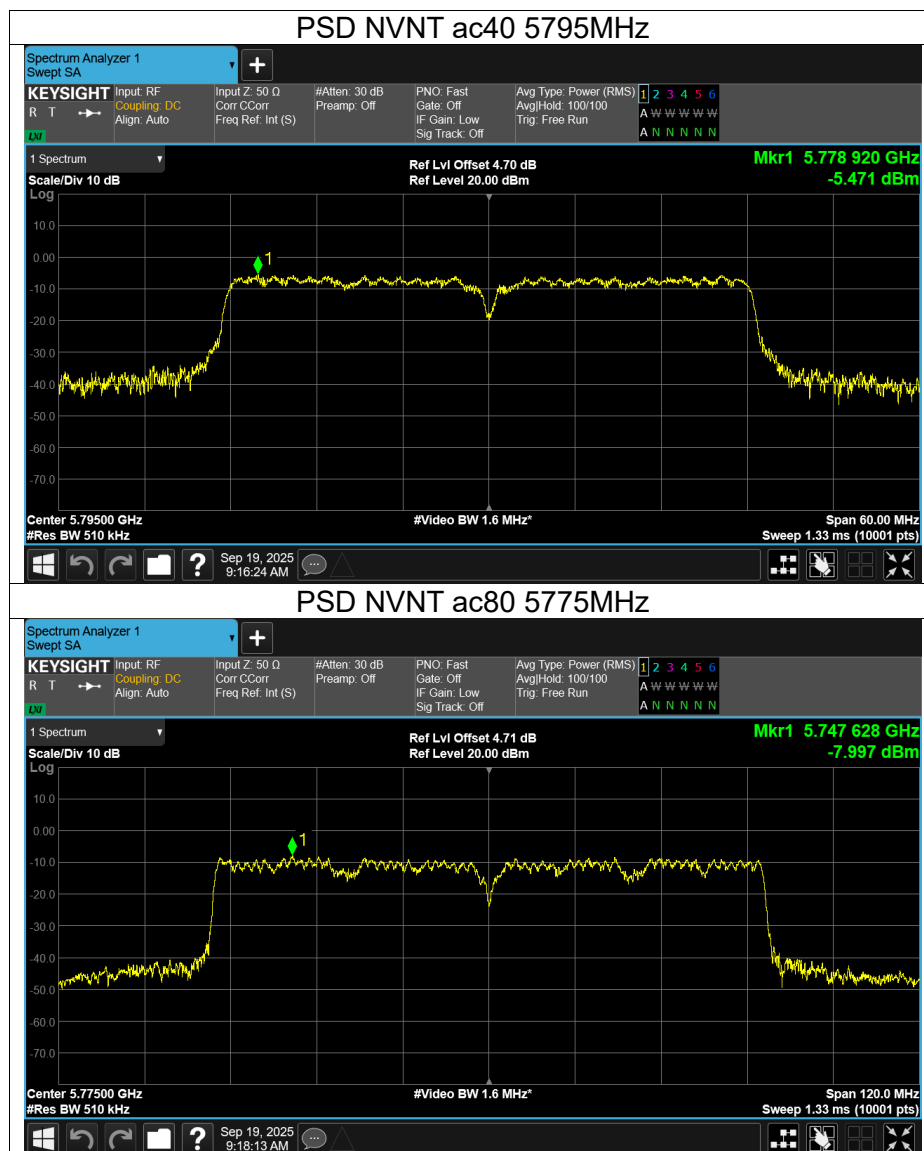





Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	-34.68	-27	Pass
NVNT	a	5240	-40.45	-27	Pass
NVNT	n20	5180	-33.59	-27	Pass
NVNT	n20	5240	-40.58	-27	Pass
NVNT	n40	5190	-29.14	-27	Pass
NVNT	n40	5230	-40.95	-27	Pass
NVNT	ac20	5180	-36.52	-27	Pass
NVNT	ac20	5240	-40.81	-27	Pass
NVNT	ac40	5190	-27.82	-27	Pass
NVNT	ac40	5230	-41.35	-27	Pass
NVNT	ac80	5210	-29.72	-27	Pass


Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	-26.67	15.6	Pass
NVNT	a	5825	-31.71	15.6	Pass
NVNT	n20	5745	-20.59	15.6	Pass
NVNT	n20	5825	-26.55	15.6	Pass
NVNT	n40	5755	-16.52	15.6	Pass
NVNT	n40	5795	-31.01	15.6	Pass
NVNT	ac20	5745	-27.42	15.6	Pass
NVNT	ac20	5825	-31.49	15.6	Pass
NVNT	ac40	5755	-28.19	15.6	Pass
NVNT	ac40	5795	-35.37	15.6	Pass
NVNT	ac80	5775	-27.01	15.6	Pass

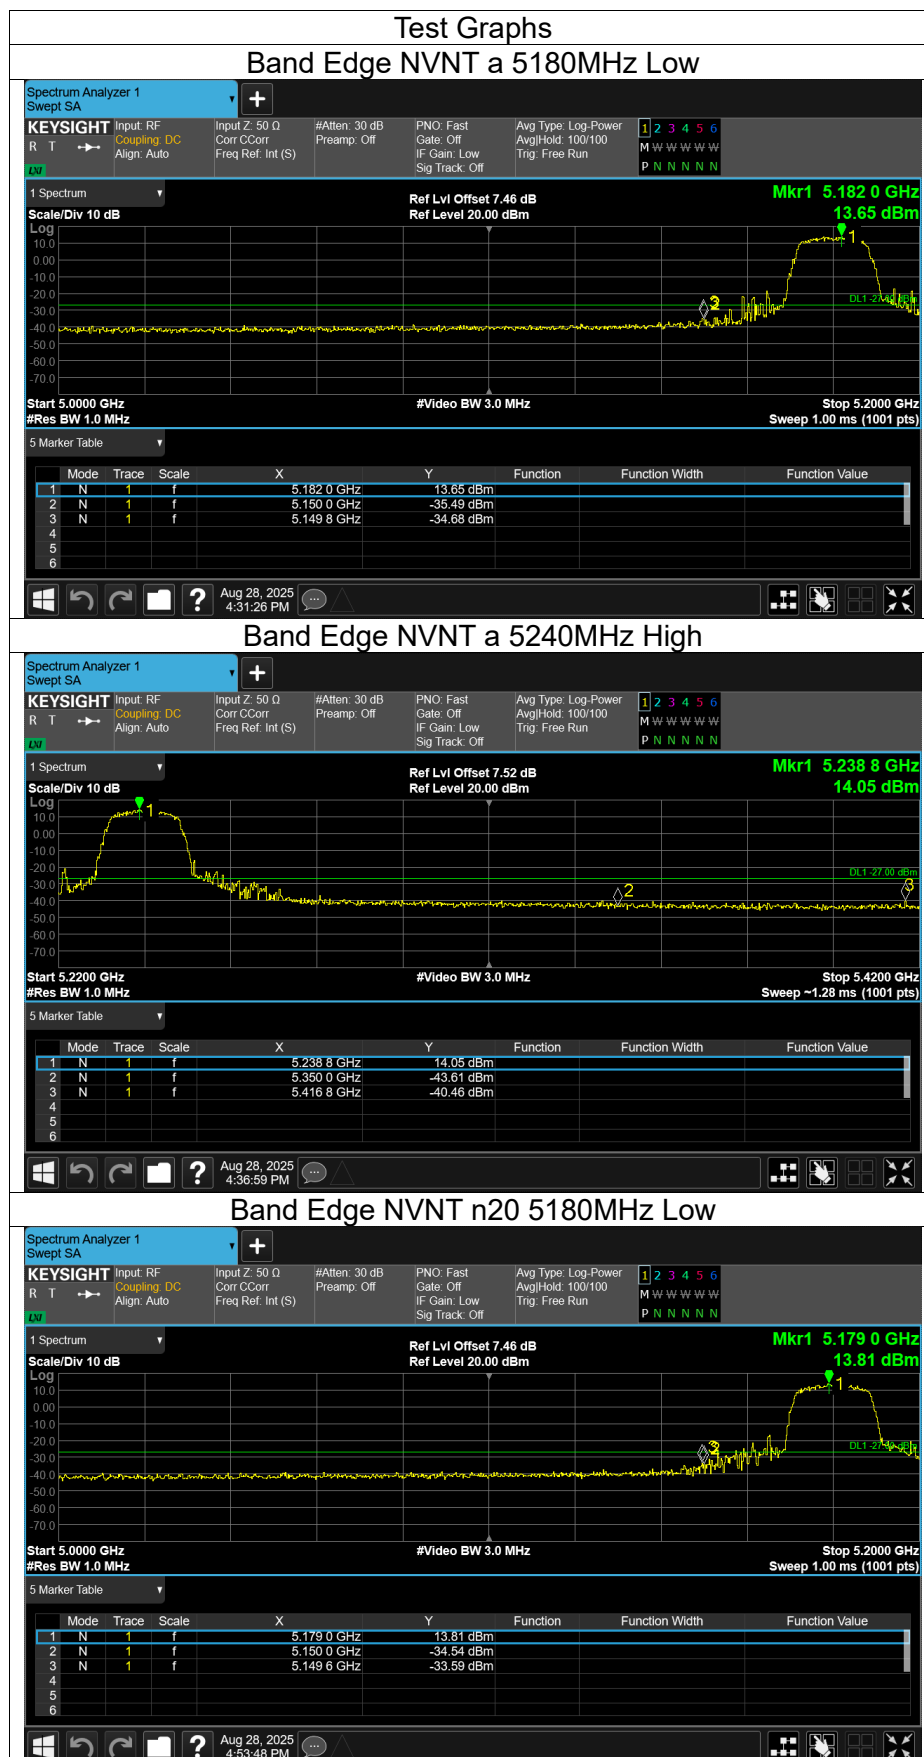




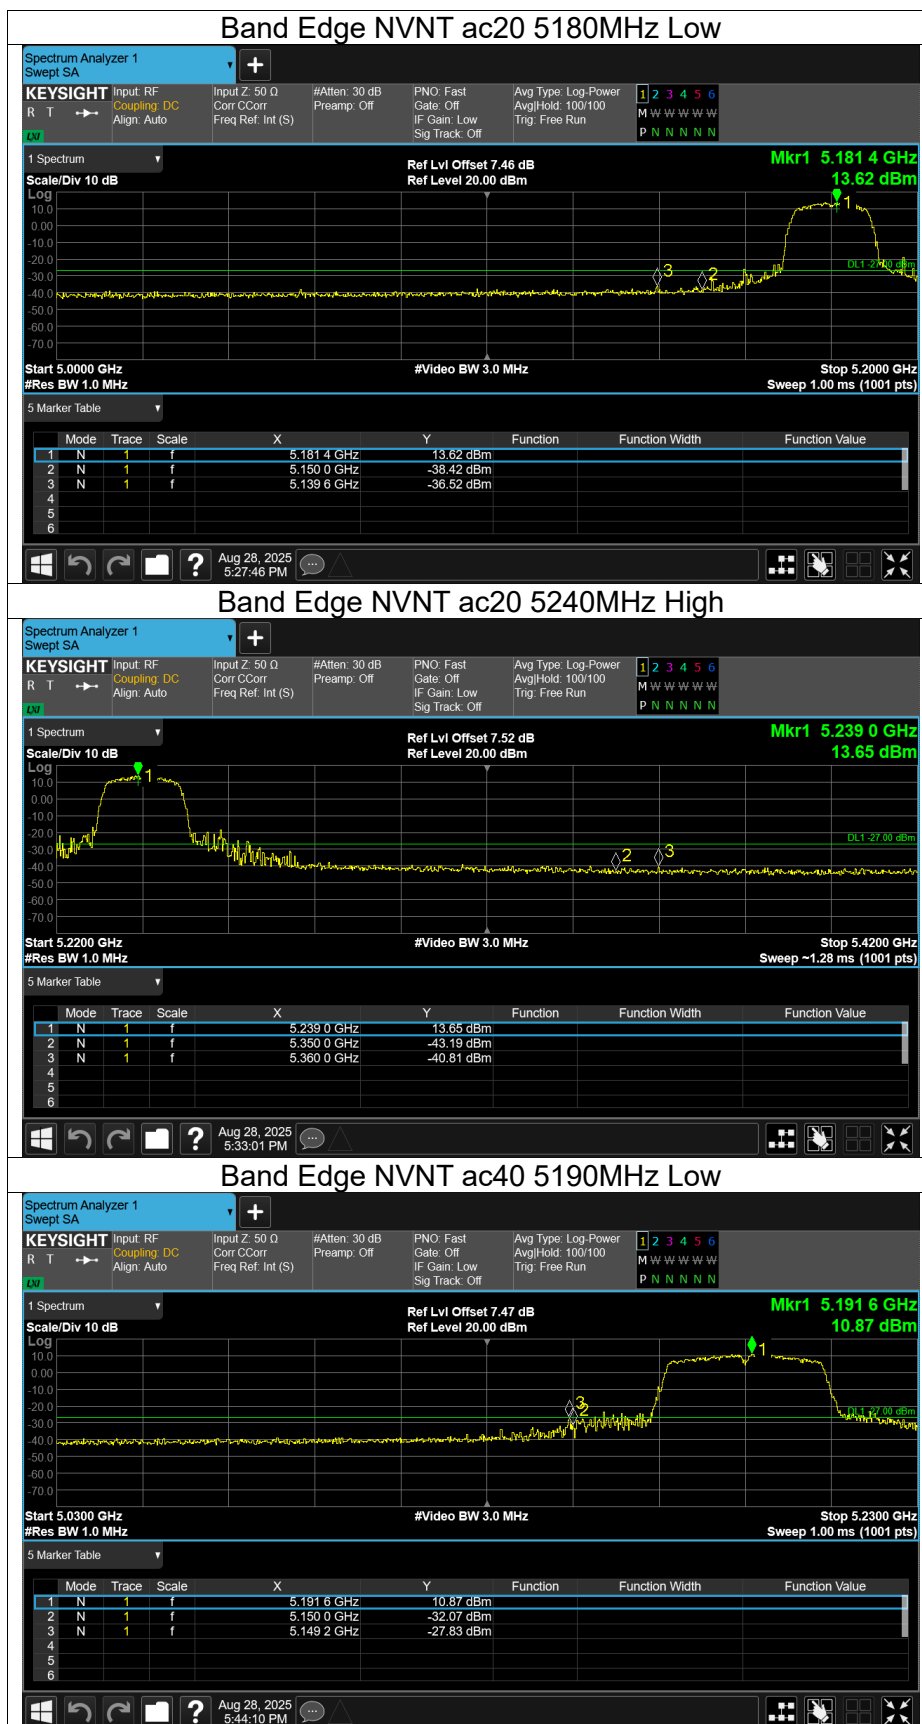


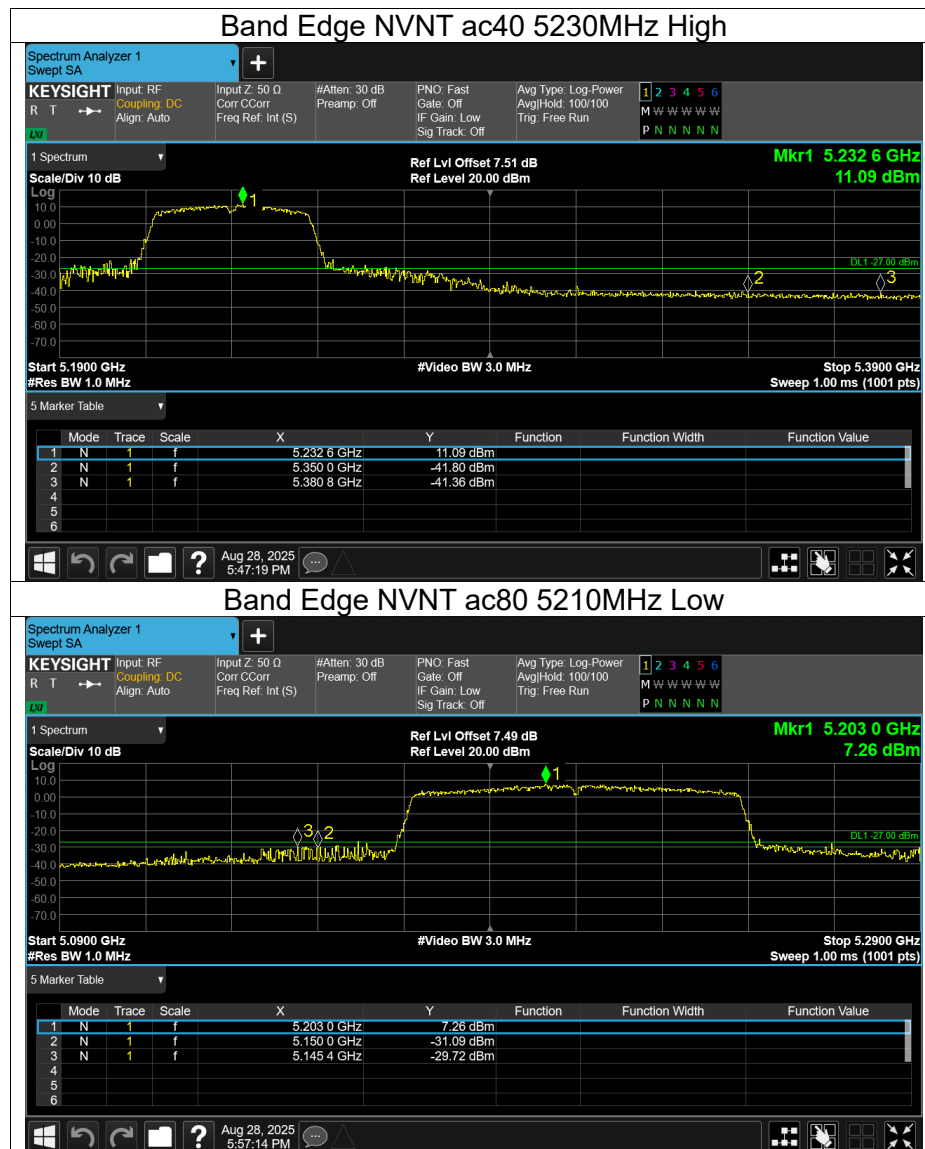

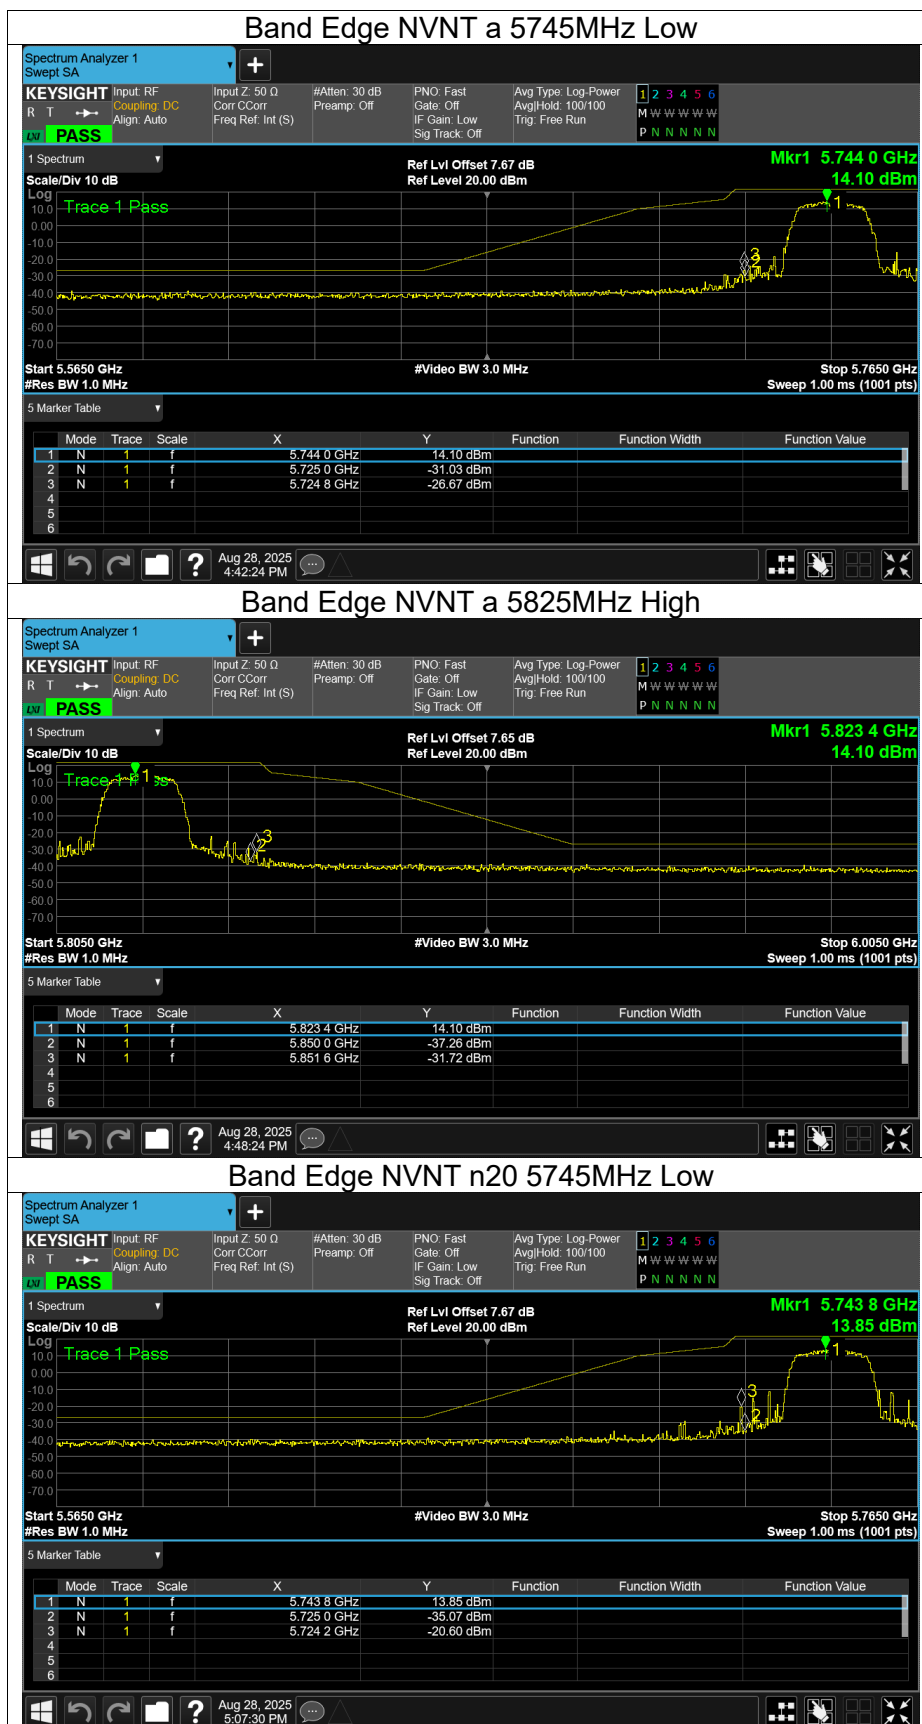

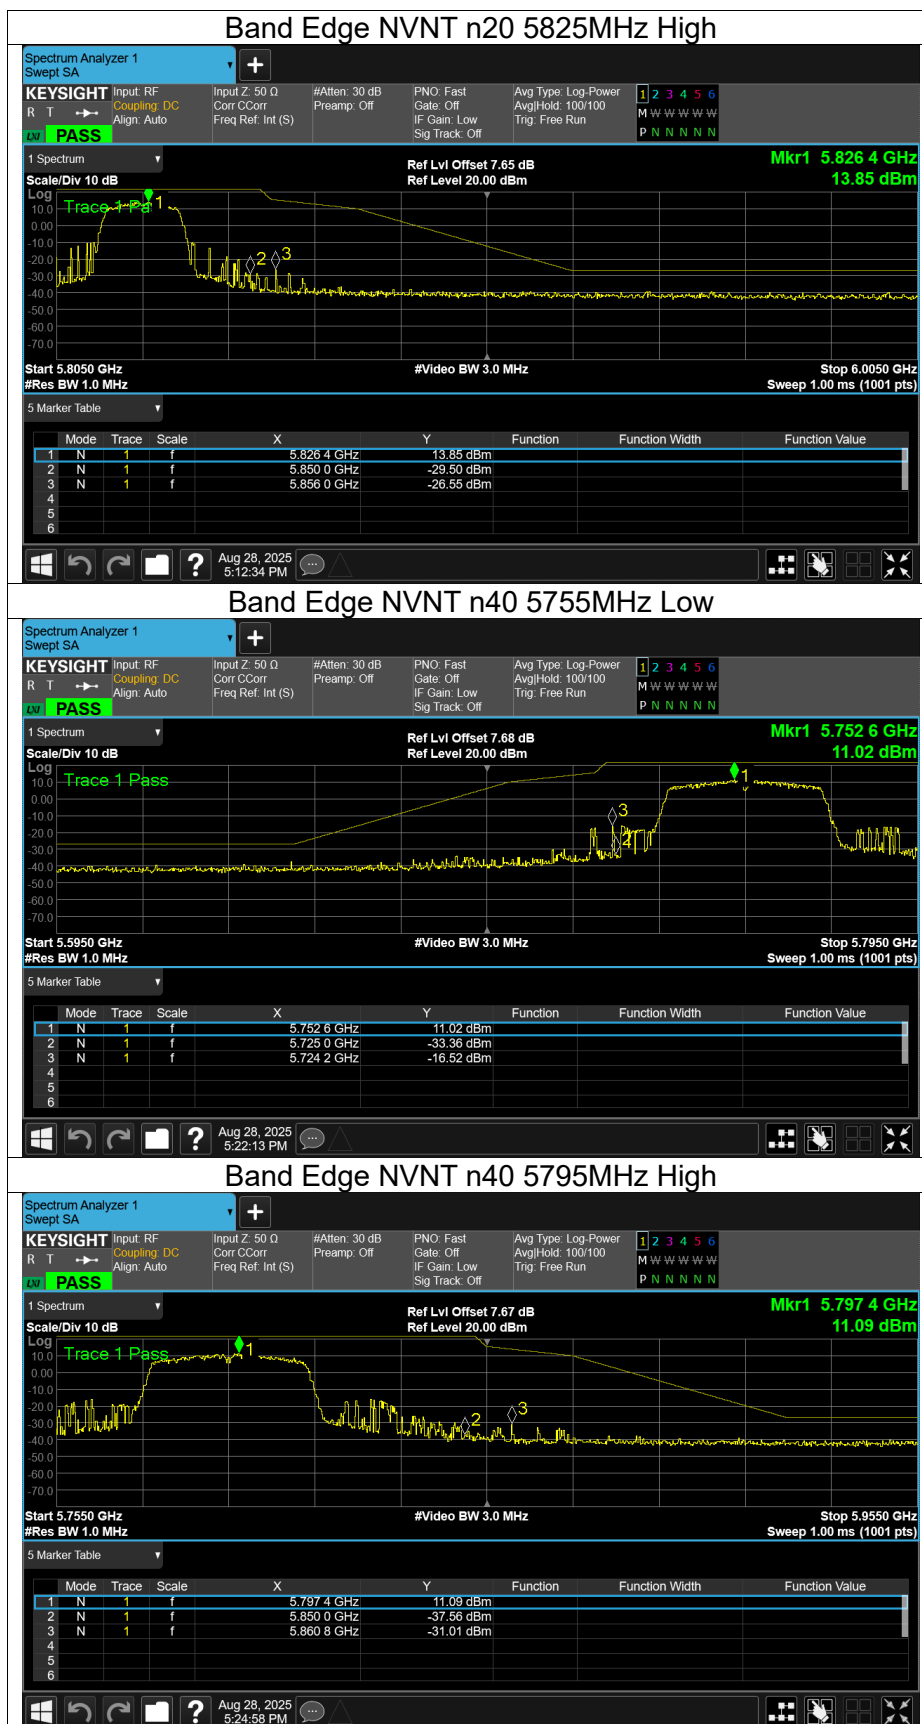





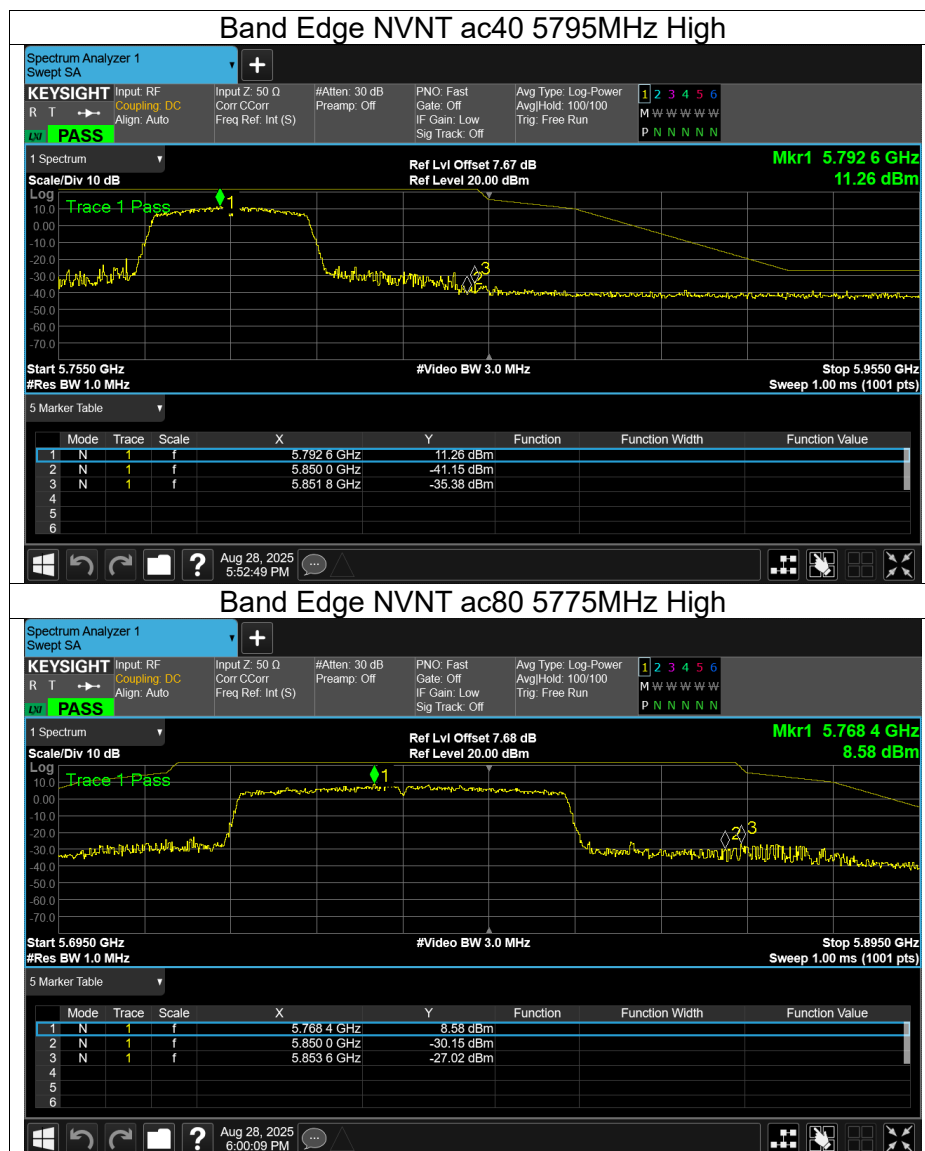










-6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	15.045	0.5	Pass
NVNT	a	5785	15.137	0.5	Pass
NVNT	a	5825	13.727	0.5	Pass
NVNT	n20	5745	15.052	0.5	Pass
NVNT	n20	5785	14.411	0.5	Pass
NVNT	n20	5825	15.109	0.5	Pass
NVNT	n40	5755	33.755	0.5	Pass
NVNT	n40	5795	35.11	0.5	Pass
NVNT	ac20	5745	14.407	0.5	Pass
NVNT	ac20	5785	15.11	0.5	Pass
NVNT	ac20	5825	15.026	0.5	Pass
NVNT	ac40	5755	35.077	0.5	Pass
NVNT	ac40	5795	32.581	0.5	Pass
NVNT	ac80	5775	75.091	0.5	Pass



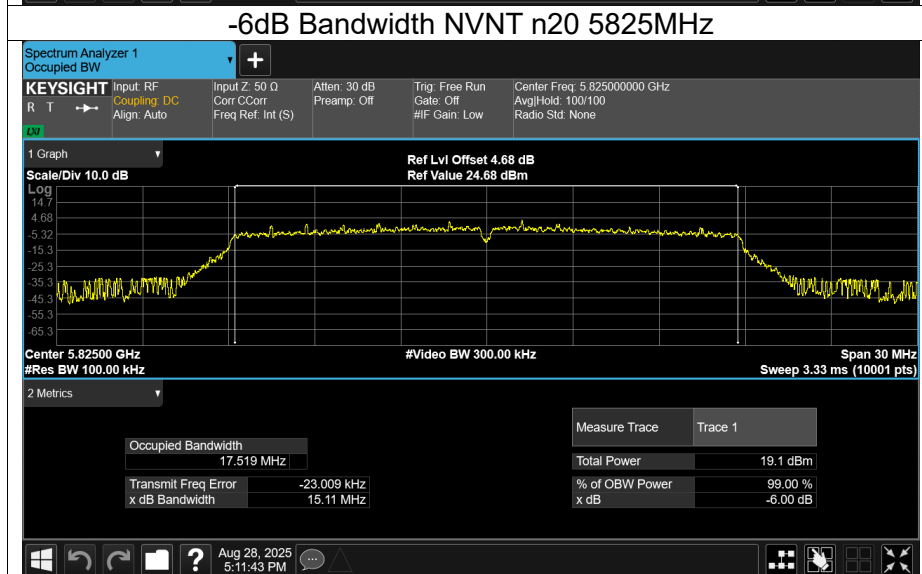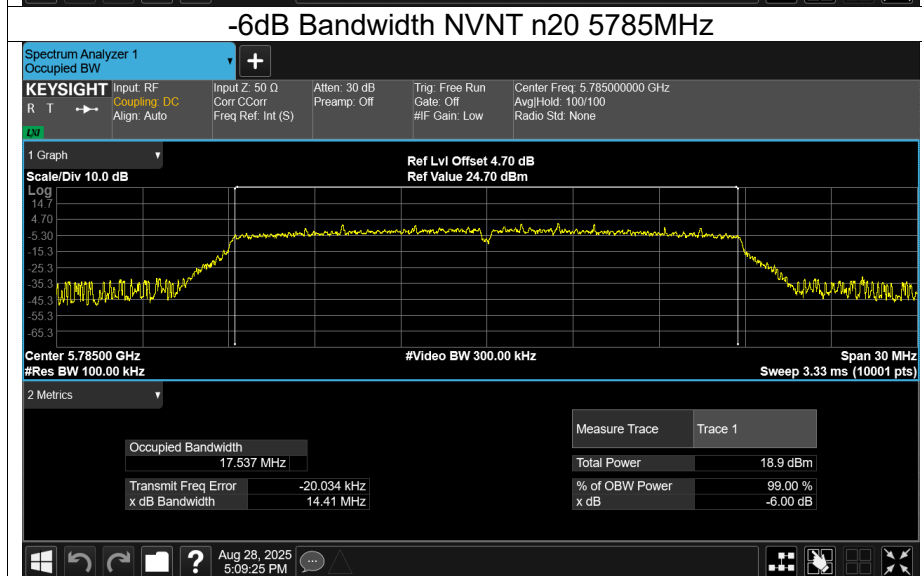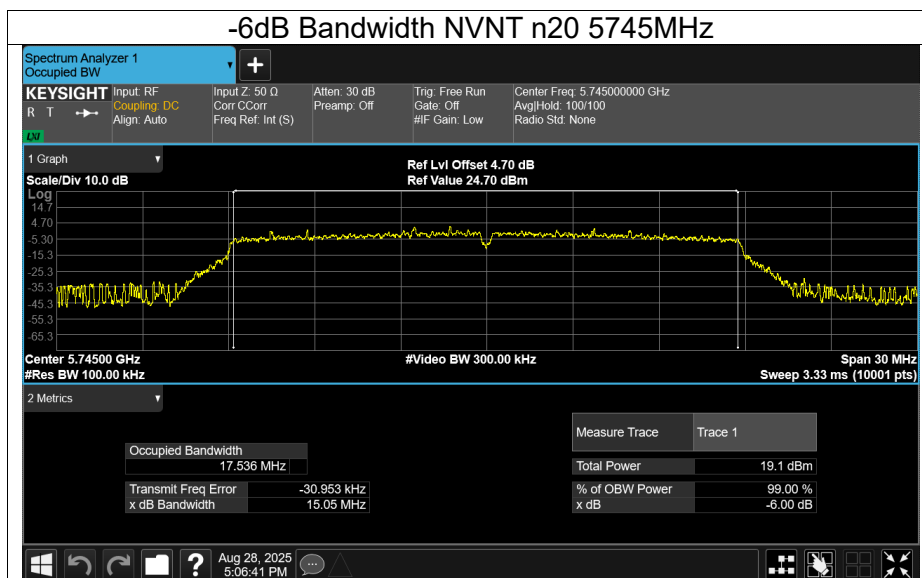

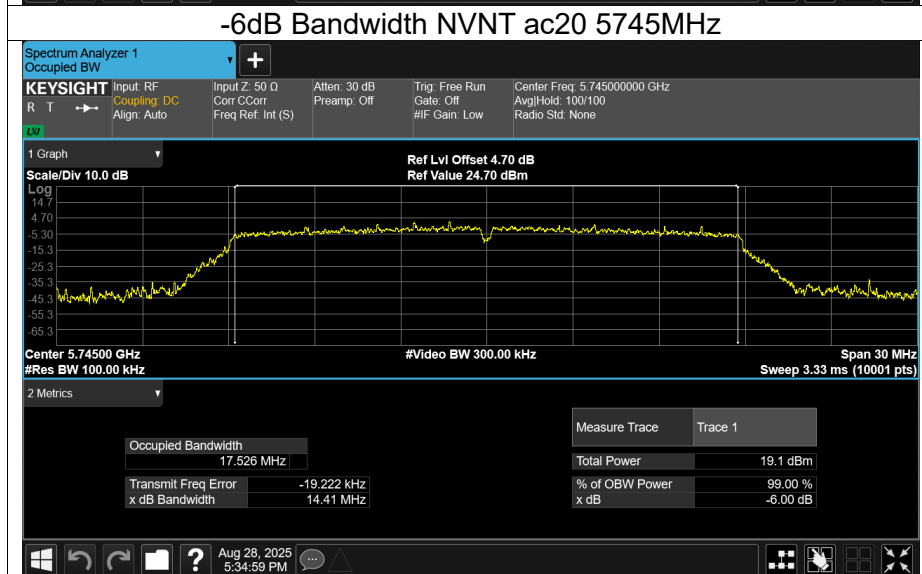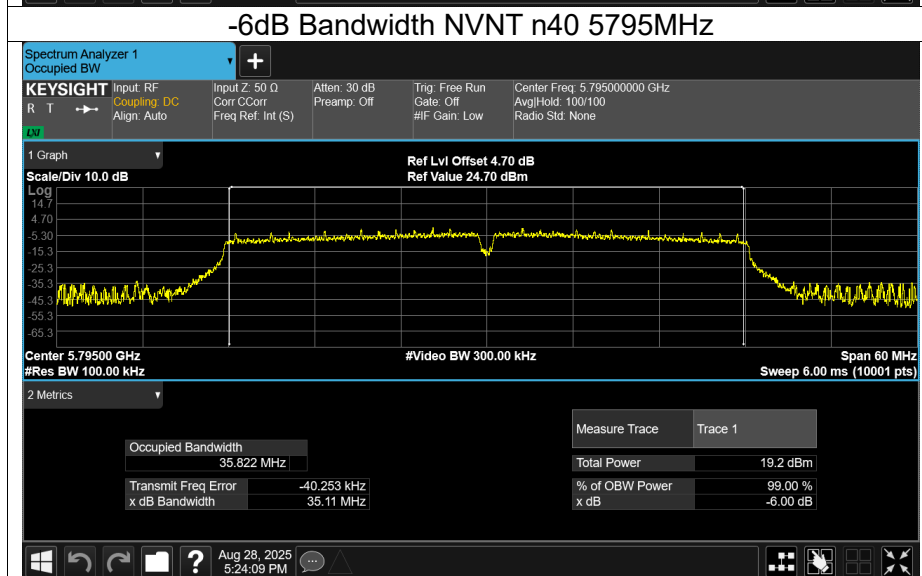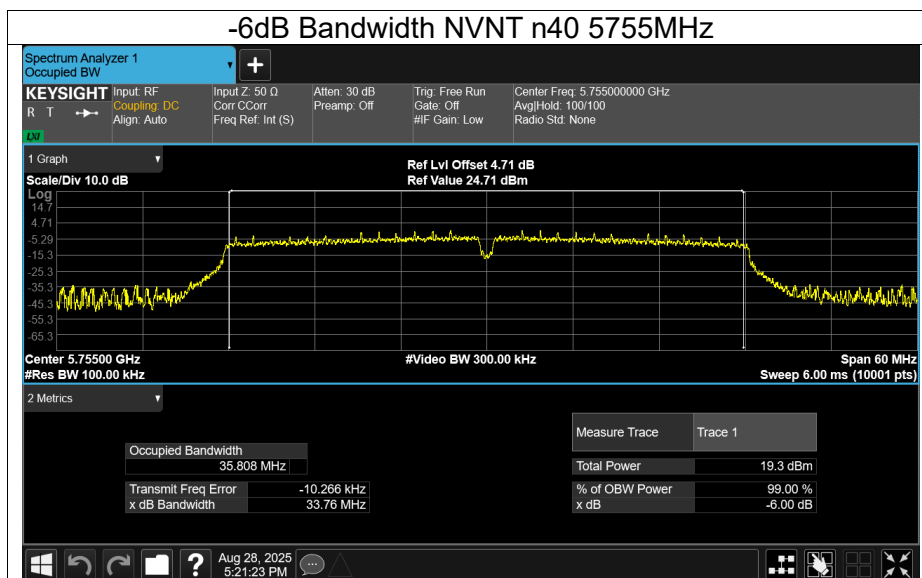

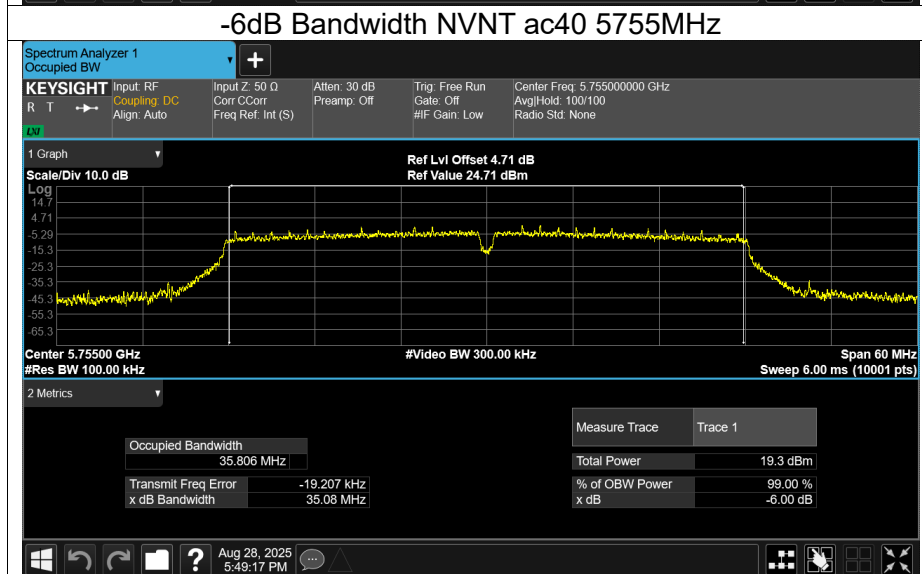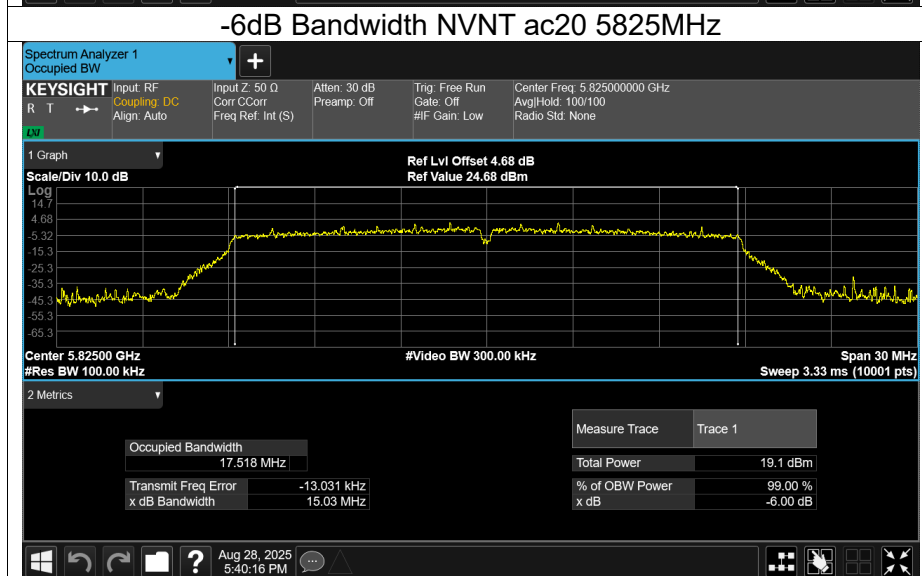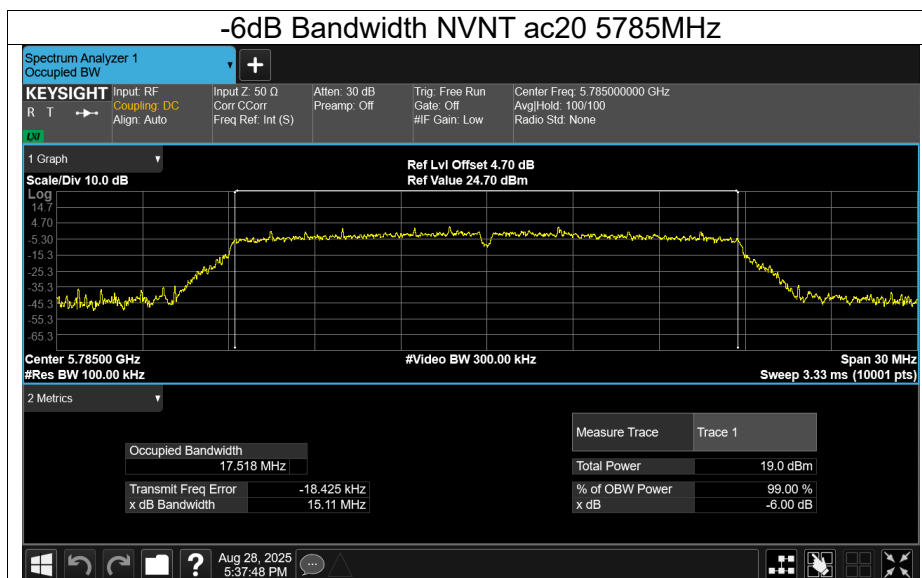

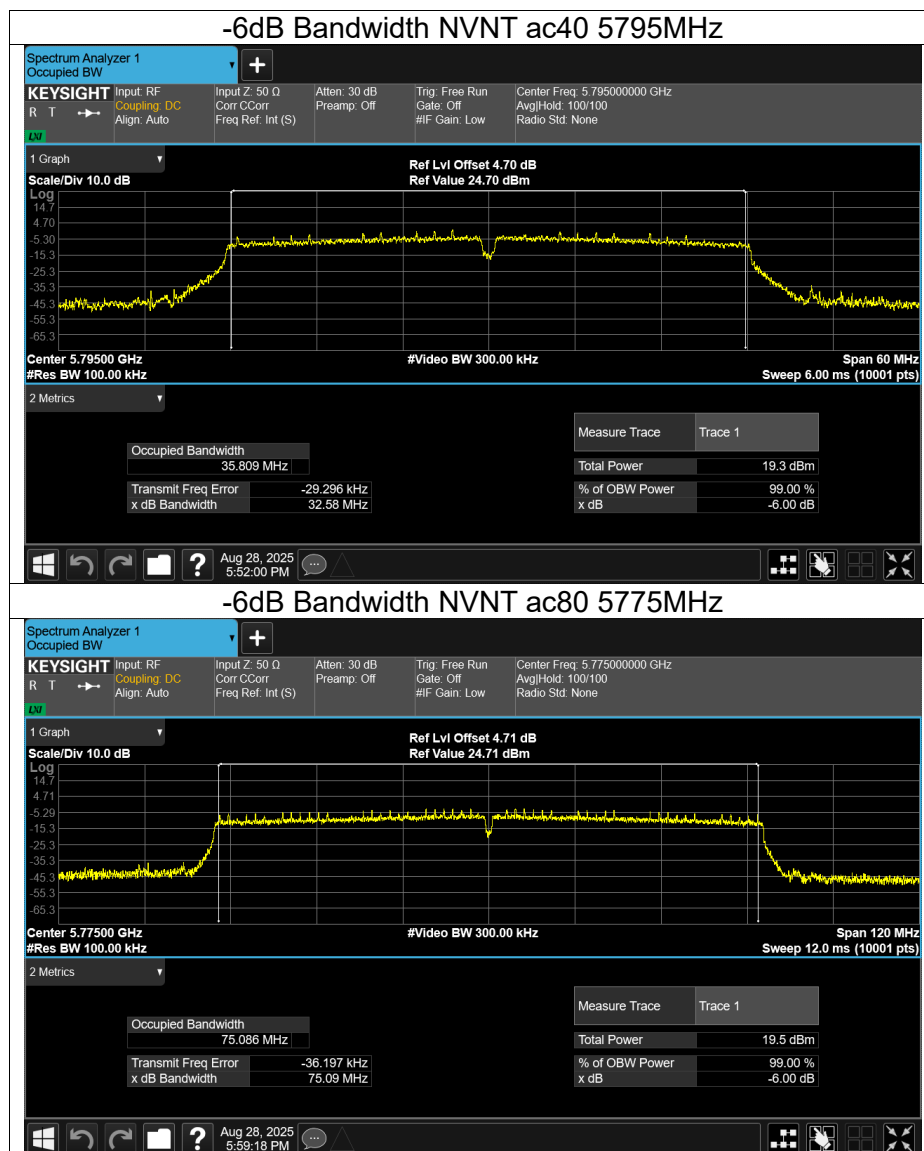



APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID & IC.

※※※※※END OF THE REPORT※※※※※