

Manufacture:PUWO (Guangzhou) Technology Co., Ltd.
Address:Room 1902, Guangqiao Times, No. 161, Guangshen
Avenue East, Xintang Town, Zengcheng District, Guangzhou
City, Guangdong Province, China.


Antenna Specification

Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	1.68 (Peak Gain XY-plane)	
Maximum Power (dBm)	1.68(XZ-plane)	
Minimum Power (dBm)	-3.83(XZ-plane)	
Avg. Power (dBm)	-0.48(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S .W. R	< 1.4	
Antenna Designation	PCB antenna	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

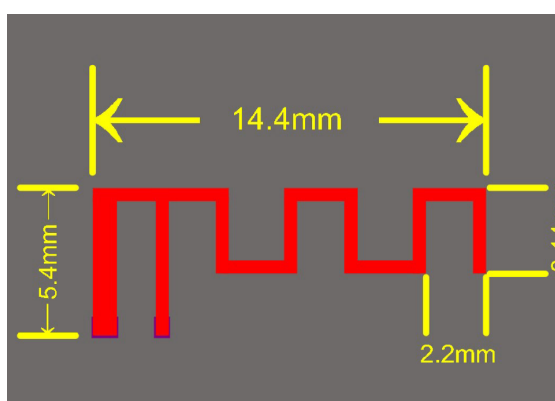

Antenna Gain


Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	60.2 %

Return Loss



The Environment of Antenna Radiation Pattern

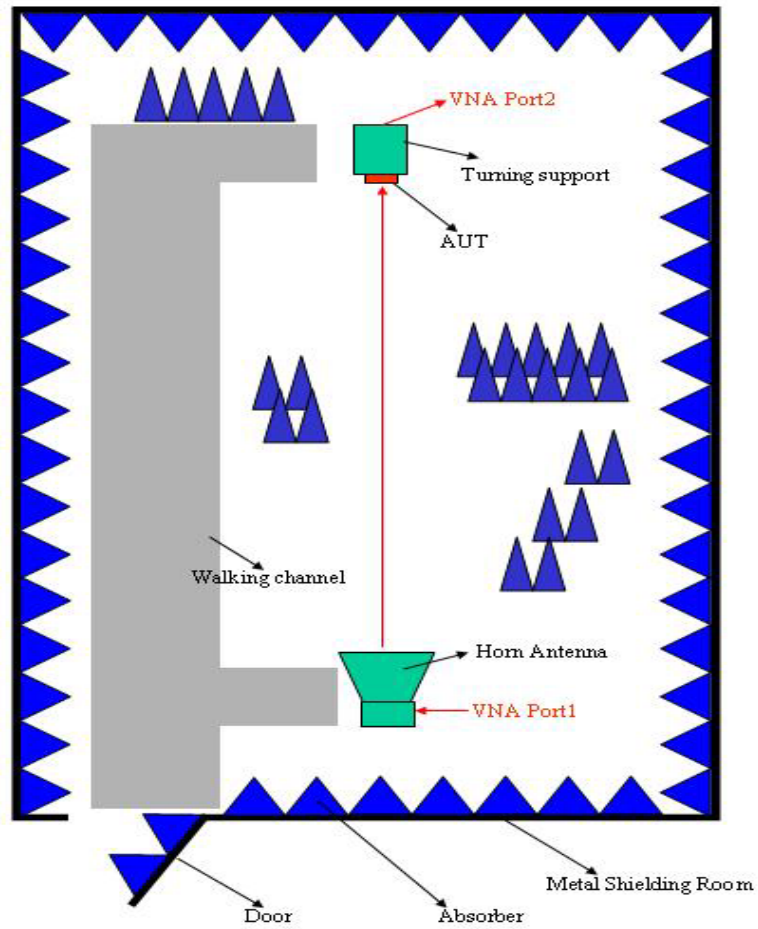

XY-plane

