



深圳信诺山通信技术有限公司

Shenzhen SignalSen Telecom Technology Co , .Ltd

WIFI 天线规格书

WiFi Antenna specification

我司料号 Our material No: W699-1B160B-D

Antenna type:FPCB Antenna

客户: Customer:		项目名 Project:
频段: WiFi/BT FB: WiFi/BT	日期: 2025/5/20 Data: 5/20/2025	版本: R:A Version: R:A

Address:

Room 211, Hengbo science and technology Industrial Park, Qingning road,
Longhua District, Shenzhen



contents

contents	2
1. PROJECT INFORMATION AND ELECTRICAL SPECIFICATION	3
1-1 Project picture	3
1-2 Frequency Band:	3
1-3 Impedance matching	3
2. VSWR	3
2-1 Measuring Method:	3
2-2 S11 parameter values	4
3. EFFICIENCY AND GAIN	4
3-1 Efficiency/Gain- WIFI/BT	5
4. THE PRODUCTION INDEX	9
5. STRUCTURAL DRAWINGS	10

1. Project information and Electrical Specification

Those specifications were specially defined for WIFI /BTmodel, and all characteristics were measured under the model's handset testing jig .

1-1Project picture



1-2 Frequency Band:

Frequency Band	MHz
WiFi/BT	2400-2500/5050-5850

1-3 Impedance matching


DUT 的 RF 线路上的所有匹配器件都保持不变 All matching devices on the RF circuit of DUT remain unchanged

2.VSWR

2-1 Measuring Method:


- 1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR,*
- 2. Keeping this jig away from metal at least 20cm.*

测试示意图如下 The test diagram is as follows:

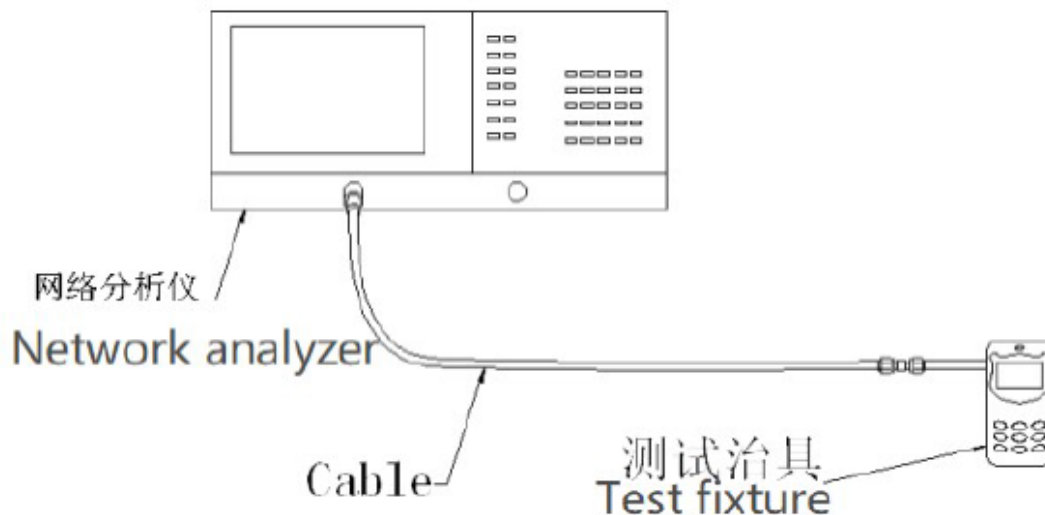

2-2 S11 parameter values

频率 Frequency (MHZ)	2400	2500	5050	5400	5850
驻波 Standing wave	1.37	1.39	1.72	1.31	1.80

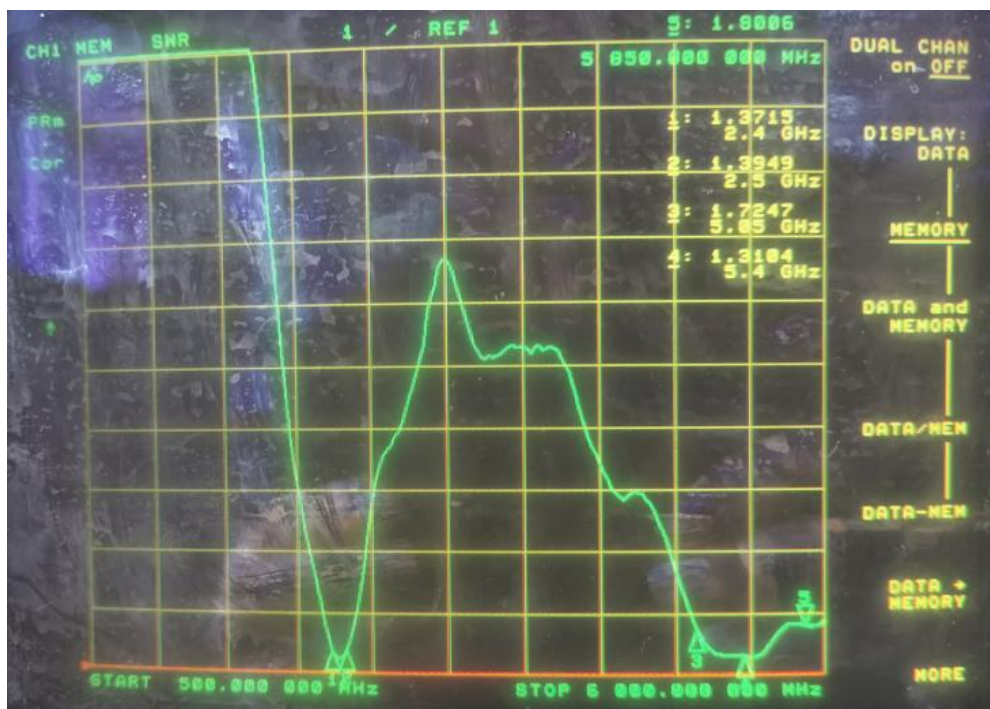

3. Efficiency and Gain

*measuring and test instruments:

微波暗室 Microwave anechoic chamber

Agilent 网络分析仪 Microwave anechoic chamber

Agilent 频谱分析仪 Spectrum analyzer


8960 综合测试仪 Network analyzer

标准天线 Standard antenna

*test method:

equipment 以 H 面放于转台中心位置固定，与喇叭天线中心位置在同一个水平线上。



Fix the H surface at the center position of the turntable, and ensure it is on the same horizontal line as the center position of the horn antenna.

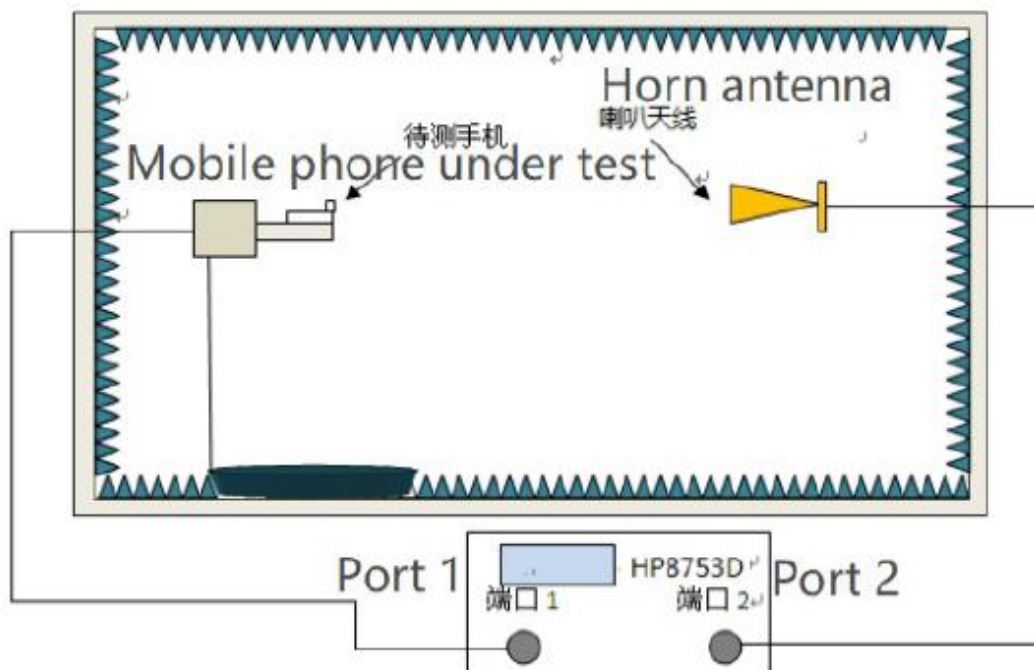


3-1 Efficiency/Gain- WIFI/BT

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	50.67	-2.95	1.73
2450	50.75	-2.95	1.69
2500	51.75	-2.86	1.9


2400.000MHz




2400.000MHz H

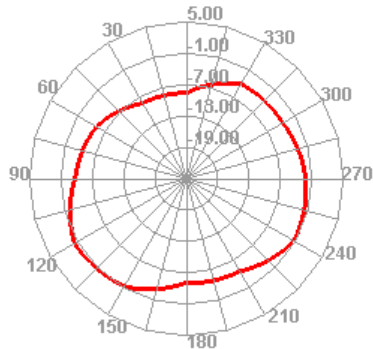



2400.000MHz E1

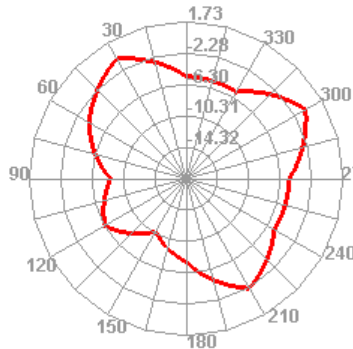


2400.000MHz E2

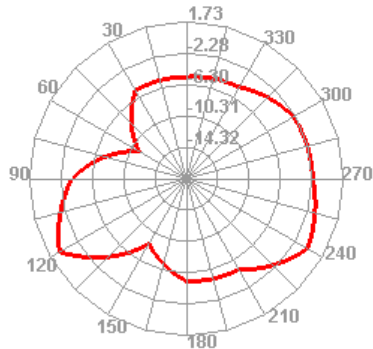


2450.000MHz




2450.000MHz H

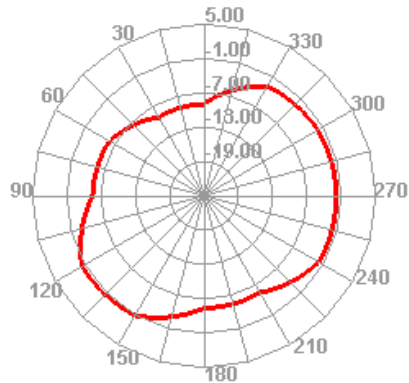



2450.000MHz E1

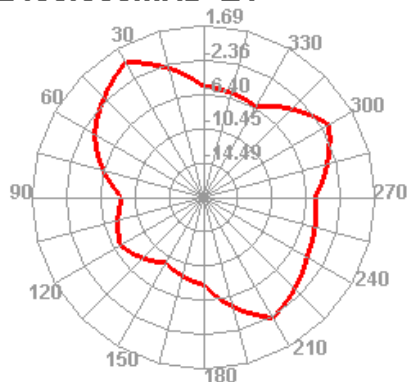


2450.000MHz E2

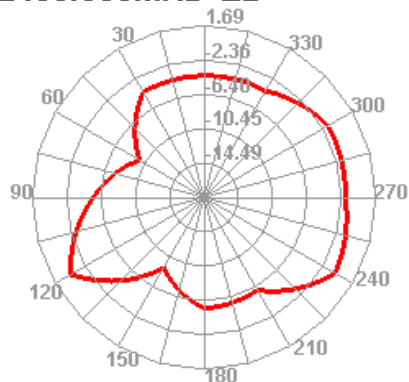


2500.000MHz




2500.000MHz H

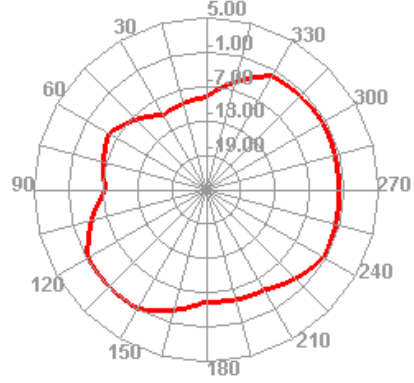

2500.000MHz E1

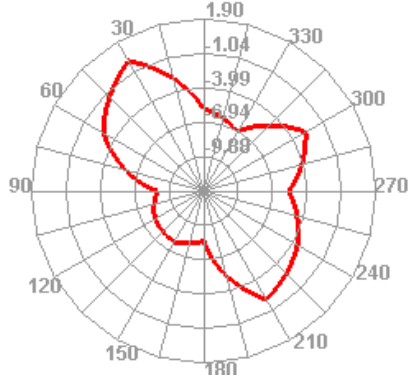

2500.000MHz E2

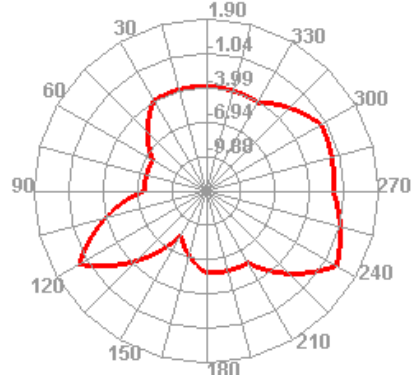



4. The production index

In the mass production of antenna, the standing-wave ratio is used as the test standard.

According to the differences of the project itself, the following standards are given:

频率 Frequency (MHZ)	量产标准 Mass production standard
WIFI (2400-2500)	VSWR (量产产品 Mass production products) <) <VSWR(设计样品 Design sample)+)+0.5

5. structural drawings

