



FCC Test Report

Test Report

On Behalf of

STARPONY (HK) LIMITED

For

Lighthouse Sound Machine & Night Light

Model No.: MEDO000LIW1817O16-A, MEDO000LIW1891W16-A

FCC ID: 2BRZQ-MEDO000LIW

Prepared For:

STARPONY (HK) LIMITED

SUITE 6503, 65/F, CENTRAL PLAZA, 18 HARBOUR ROAD, WAN CHAI, Hong Kong

Prepared By:

Shenzhen HUAK Testing Technology Co., Ltd.

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Aug. 19, 2025 ~ Aug. 28, 2025

Date of Report: Aug. 28, 2025

Report Number: HK2508194668-2E

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING



Applicant's Name : STARPONY (HK) LIMITED

Address : SUITE 6503, 65/F, CENTRAL PLAZA, 18 HARBOUR ROAD,
WAN CHAI, Hong Kong

Manufacturer's Name : STARPONY (HK) LIMITED

Address : SUITE 6503, 65/F, CENTRAL PLAZA, 18 HARBOUR ROAD,
WAN CHAI, Hong Kong

Product Description

Trade Mark : MeWaii

Product Name : Lighthouse Sound Machine & Night Light

Model and/or Type Reference : MEDO000LIW1817O16-A, MEDO000LIW1891W16-A

Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2020

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of Performance of Tests : Aug. 19, 2025 ~ Aug. 28, 2025

Date of Issue : Aug. 28, 2025

Test Result : Pass

Testing Engineer

len liao

Len Liao

Technical Manager

Sliver Wan

Sliver Wan

Authorized Signatory

Jason Zhou

Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Table of Contents

1. Test Result Summary	5
1.1 Test Procedures and Results.....	5
1.2 Information of the Test Laboratory	5
1.3 Measurement Uncertainty	6
2. EUT Description	7
2.1 General Description of EUT	7
2.2 Carrier Frequency of Channels.....	8
2.3 Operation of EUT during Testing.....	8
2.4 Description of Test Setup.....	9
3. General Information.....	10
3.1 Test Environment and Mode	10
3.2 Description of Support Units	13
4. Test Results and Measurement Data	14
4.1 AC Conducted Emission	14
4.2 Test Result.....	16
4.3 Maximum Conducted Output Power	18
4.4 Emission Bandwidth	21
4.5 Power Spectral Density	26
4.6 Conducted Band Edge and Spurious Emission Measurement.....	32
4.7 Radiated Spurious Emission Measurement.....	40
4.8 Antenna Requirement	61
5. Photographs of Test	62
6. Photos of the EUT.....	64



HUAK TESTING

HUAK TESTING



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

HUAK TESTING

HUAK TESTING

** Modified History **

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Aug. 28, 2025	Jason Zhou



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

1. Test Result Summary

1.1 Test Procedures and Results

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247(b)(4)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247(b)(3)	PASS
6dB Emission Bandwidth	§15.247(a)(2)	PASS
Power Spectral Density	§15.247(e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

Note:

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

1.2 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

HUAK TESTING



HUAK TESTING

2. EUT Description

2.1 General Description of EUT

Equipment:	Lighthouse Sound Machine & Night Light
Model Name:	MEDO000LIW1817O16-A
Series Model:	MEDO000LIW1891W16-A
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: MEDO000LIW1817O16-A.
FCC ID:	2BRZQ-MEDO000LIW
Antenna Type:	PCB Antenna
Antenna Gain:	1.68dBi
Operation Frequency:	802.11b/g/n20: 2412~2462MHz
Number of Channels:	802.11b/g/n20: 11CH
Modulation Type:	DSSS, OFDM
Power Source:	DC5V From Type-C or DC3.7V From Battery
Power Rating:	DC5V From Type-C or DC3.7V From Battery
<p>Note:</p> <ol style="list-style-type: none">1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.2. Antenna gain Refer to the antenna specifications.3. The cable loss data is obtained from the supplier.4. The test results in the report only apply to the tested sample.	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING

2.2 Carrier Frequency of Channels

Channel List For 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452	--	--

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3 Operation of EUT during Testing

Operating Mode

The mode is used: Transmitting mode for 802.11b/802.11g/802.11n (HT20)

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

3. General Information

3.1 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering Mode:	Keep the EUT in continuous transmitting by select channel and modulations
<p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.</p>	



3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	Lighthouse Sound Machine & Night Light	MeWaii	MEDO000LIW1817O16-A	N/A	EUT
2	USB Cable	N/A	N/A	Length: 1m	Peripheral
3	Adapter	N/A	MDY-10-EH	Input: AC100-240V, 50/60Hz, 0.7A Output: DC5V/3A, 9V/3A, 12V/2.25A, 20V/1.35A	Peripheral

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



HUAK TESTING

HUAK TESTING

HUAK TESTING

HUAK TESTING



4. Test Results and Measurement Data

4.1 AC Conducted Emission

Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10: 2020														
Frequency Range:	150 kHz to 30 MHz														
Receiver Setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Transmitting with modulation														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement. 														
Test Result:	PASS														

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Receiver	R&S	ESR	HKE-005	Feb. 19, 2025	Feb. 18, 2026
LISN	R&S	ENV216	HKE-002	Feb. 19, 2025	Feb. 18, 2026
LISN	R&S	ENV216	HKE-059	Feb. 19, 2025	Feb. 18, 2026
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Feb. 19, 2025	Feb. 18, 2026
EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	N/A	N/A
10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 19, 2025	Feb. 18, 2026


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Test Specification: Neutral

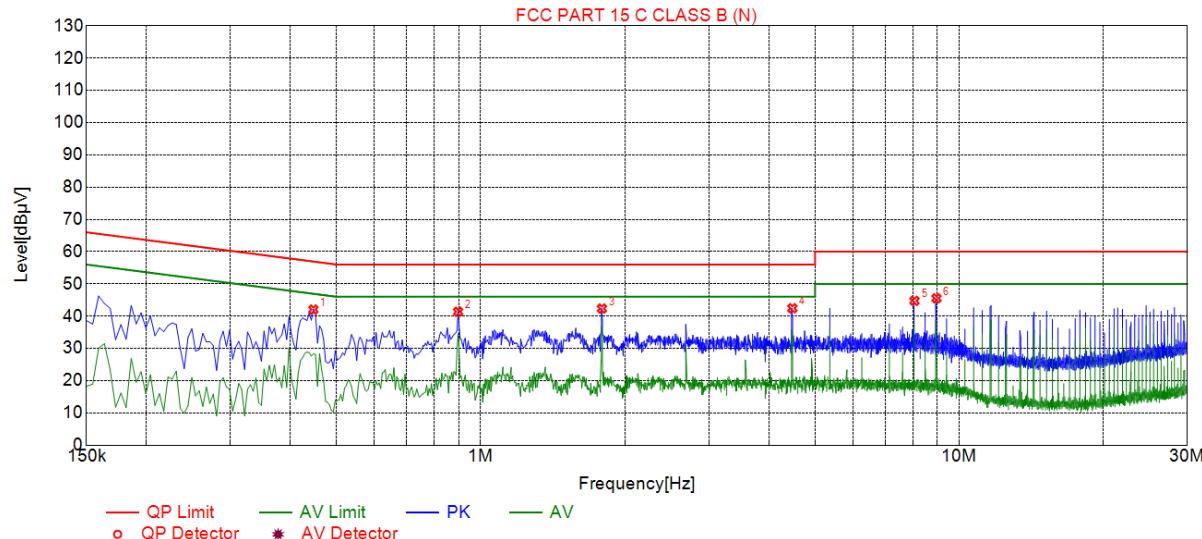

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Reading [dB μ V]	Detector	Type
1	0.4470	42.05	19.73	56.93	14.88	22.32	PK	N
2	0.8970	41.37	19.76	56.00	14.63	21.61	PK	N
3	1.7925	42.35	19.92	56.00	13.65	22.43	PK	N
4	4.4835	42.44	20.21	56.00	13.56	22.23	PK	N
5	8.0700	44.74	20.65	60.00	15.26	24.09	PK	N
6	8.9700	45.53	20.80	60.00	14.47	24.73	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



HUAK TESTING

Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
Power meter	Agilent	E4419B	HKE-085	Feb. 19, 2025	Feb. 18, 2026
Power Sensor	Agilent	E9300A	HKE-086	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**HUAK TESTING**

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

HUAK TESTING

HUAK TESTING

Test Data

Mode	Test Channel	Frequency	Maximum Peak Conducted Output Power	LIMIT
		(MHz)	(dBm)	dBm
802.11b	CH01	2412	7.55	30
802.11b	CH06	2437	7.46	30
802.11b	CH11	2462	7.41	30
802.11g	CH01	2412	7.45	30
802.11g	CH06	2437	7.17	30
802.11g	CH11	2462	7.87	30
802.11n(HT20)	CH01	2412	8.35	30
802.11n(HT20)	CH06	2437	8.14	30
802.11n(HT20)	CH11	2462	7.81	30

Note: The test results including the cable loss.



HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

HUAK TESTING

HUAK TESTING

HUAK TESTING



Lowest channel



Middle channel



Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



802.11g Modulation

Lowest channel



Middle channel



Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



802.11n (HT20) Modulation

Lowest channel



Middle channel



Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**


HUAK TESTING

HUAK TESTING

HUAK TESTING

4.5 Power Spectral Density

Test Specification

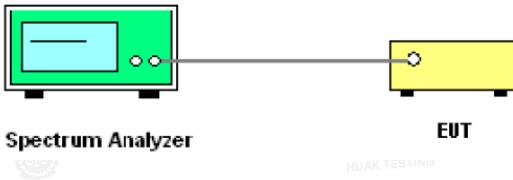Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication 558074 D01 15.247 Meas Guidance v05r02. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = Peak, Sweep time = auto couple. 6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 7. Measure and record the results in the test report.
Test Result:	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Test data

EUT Set Mode	Channel	Result (dBm/30KHz)	Result (dBm/3kHz)
802.11b	Lowest	-1.61	-11.61
	Middle	-1.71	-11.71
	Highest	-1.48	-11.48
802.11g	Lowest	-2.13	-12.13
	Middle	-3.24	-13.24
	Highest	-2.14	-12.14
802.11n(H20)	Lowest	-3.53	-13.53
	Middle	-3.89	-13.89
	Highest	-4.04	-14.04

Test plots as follows:

802.11b Modulation

Lowest channel



Middle channel



Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAK TESTING

HUAK TESTING

Test Specification

4.6 Conducted Band Edge and Spurious Emission Measurement

Test Requirement:

FCC Part15 C Section 15.247 (d)


Test Method:

KDB 558074 D01 15.247 Meas Guidance v05r02

Limit:

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

Test Setup:

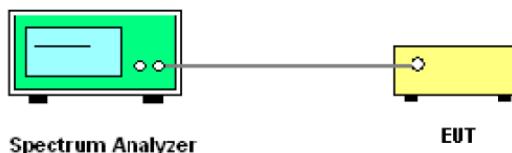

Test Mode:

Transmitting mode with modulation

Test Procedure:

1. The testing follows FCC KDB Publication 558074 D01 15.247 Meas Guidance v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Test Result:

PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


**Test Instruments**

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
High pass filter unit	Tonscend	JS0806-F	HKE-055	Feb. 19, 2025	Feb. 18, 2026
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




802.11b Modulation

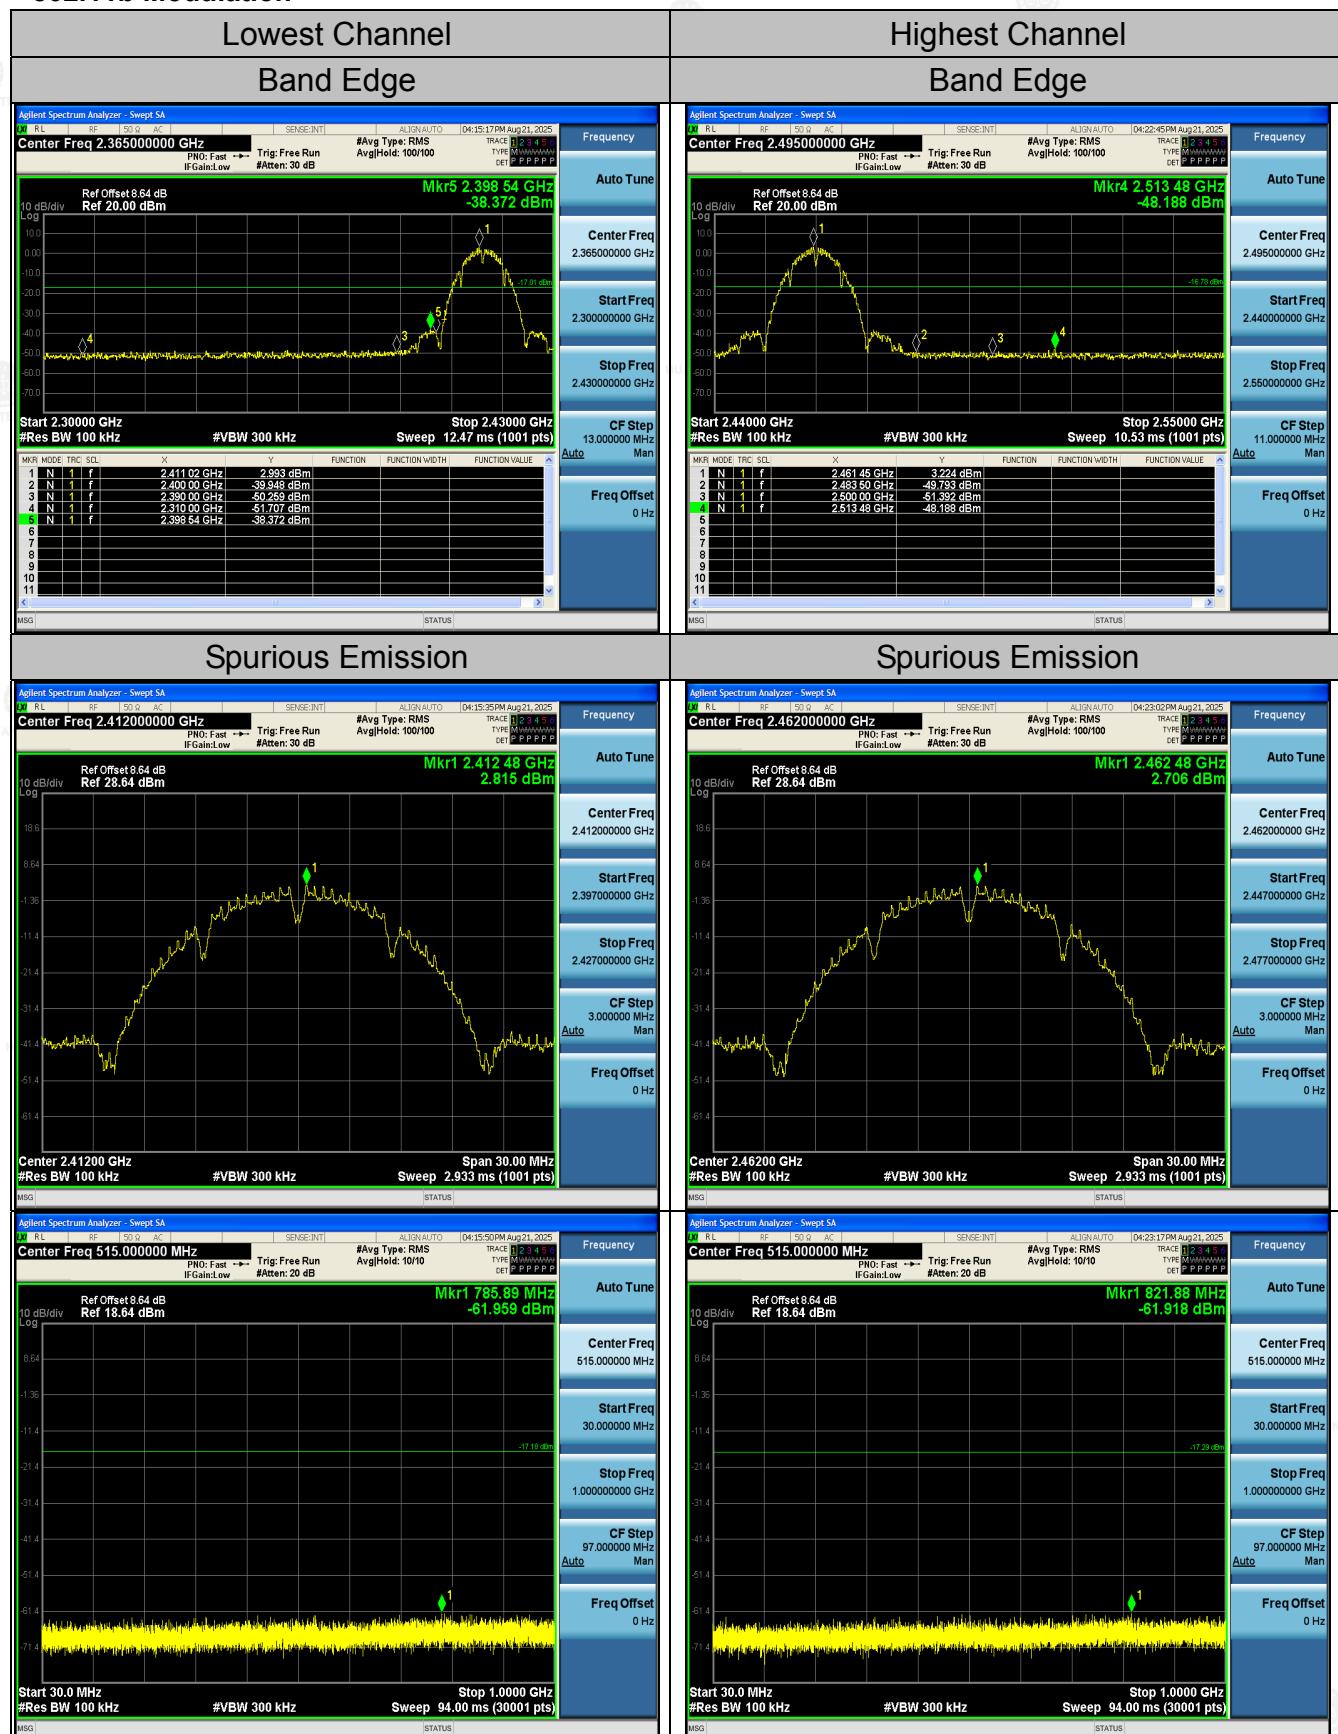

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

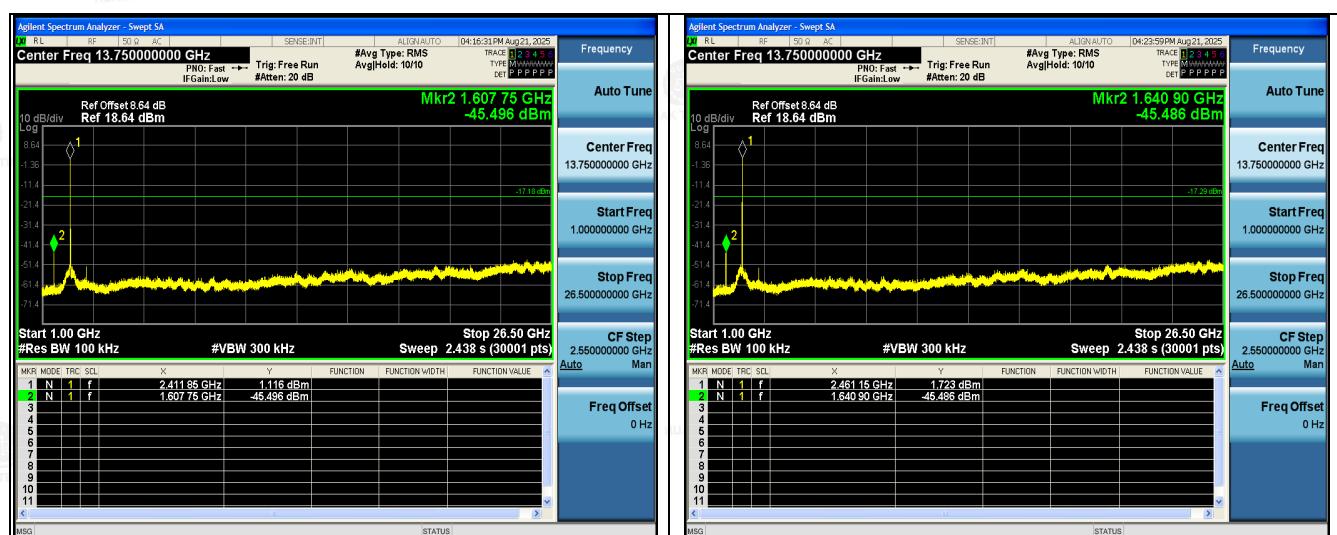

Middle Channel

Spurious Emission

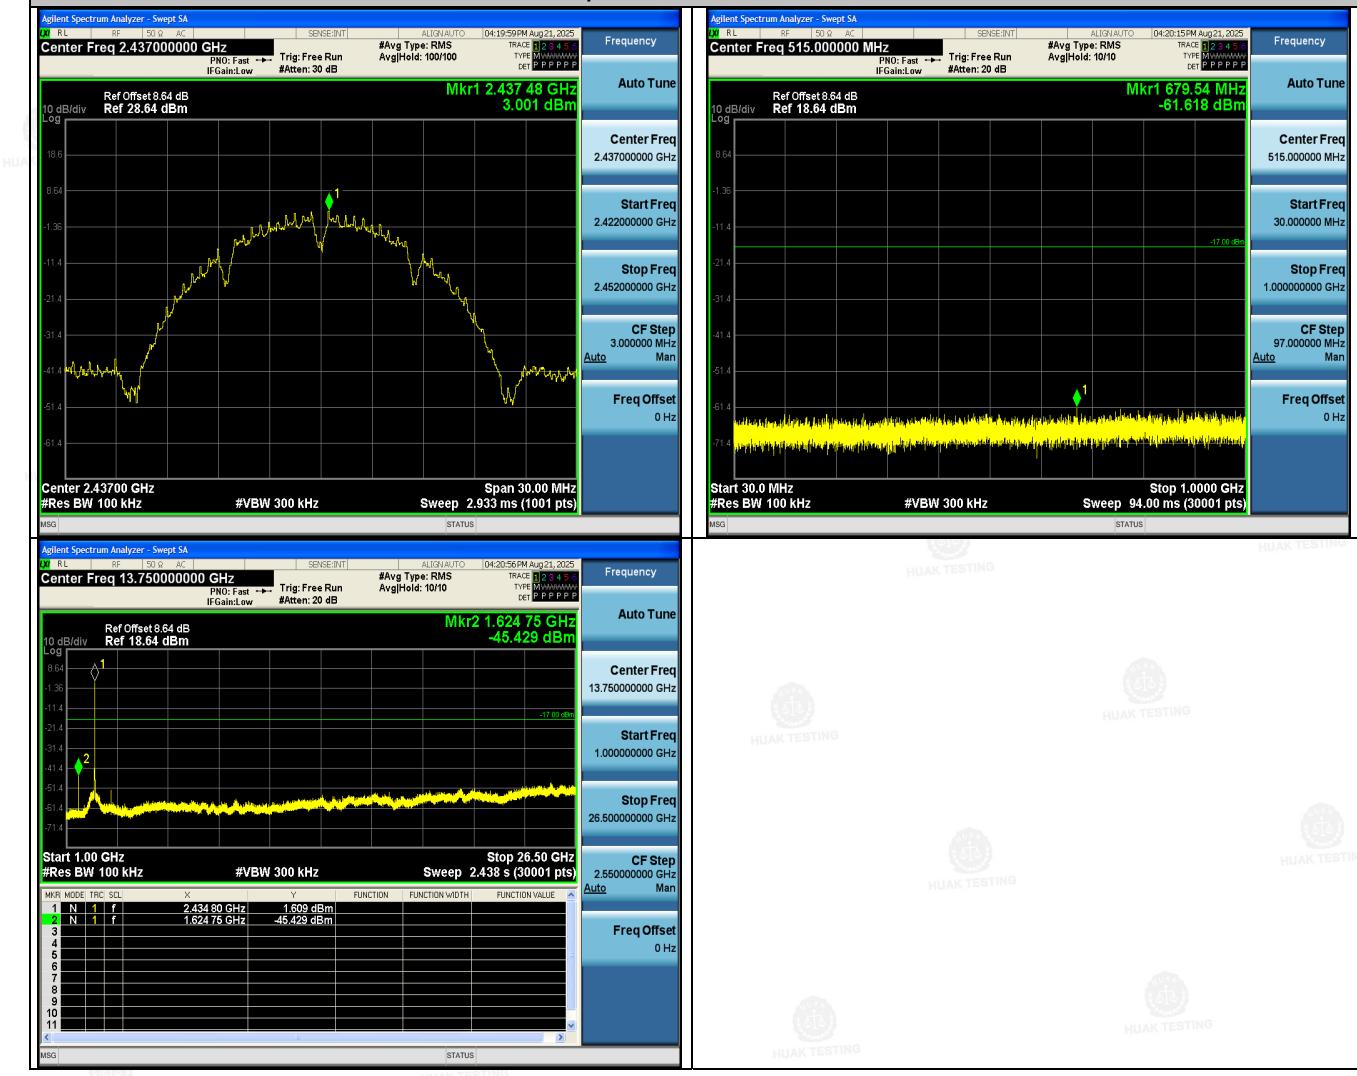


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com


Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



802.11g Modulation


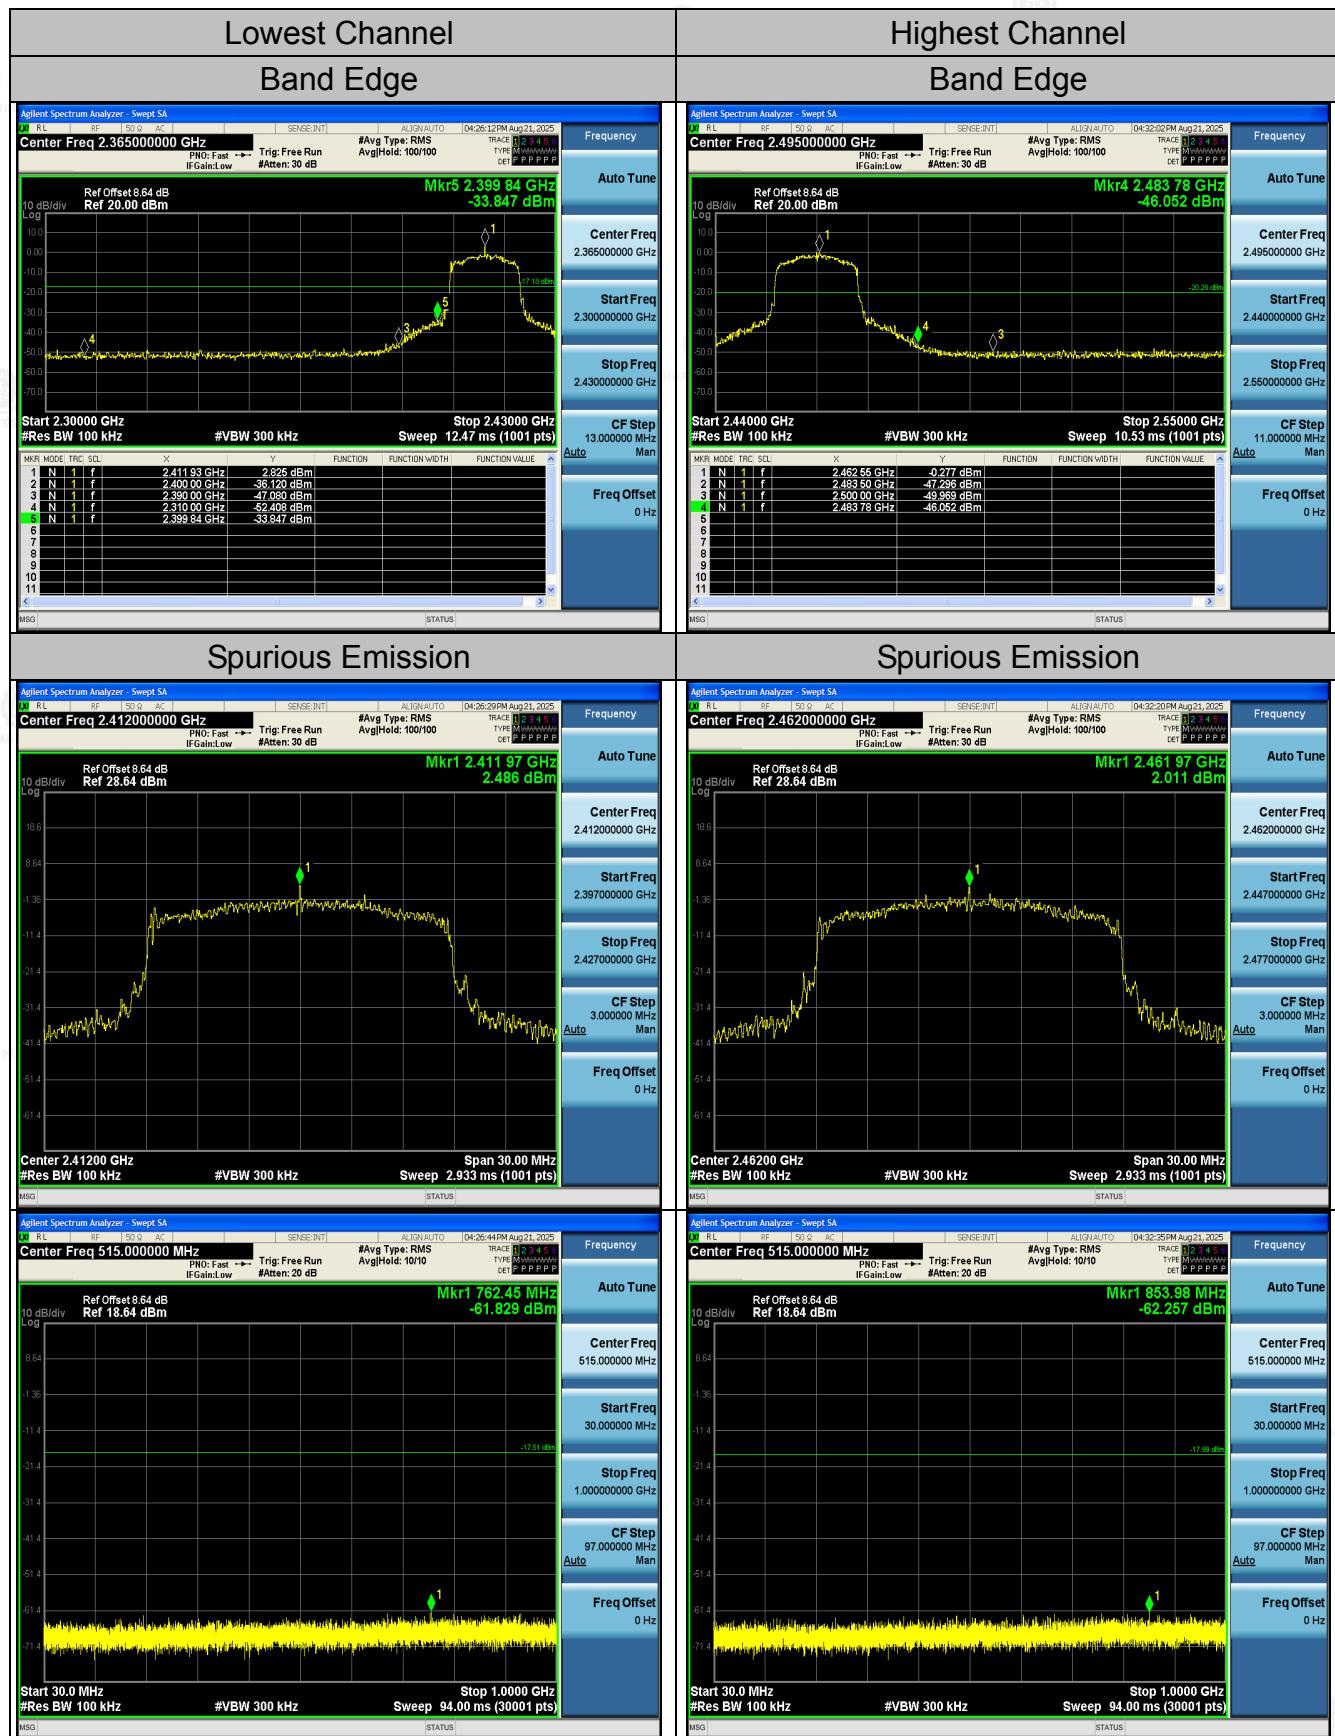


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

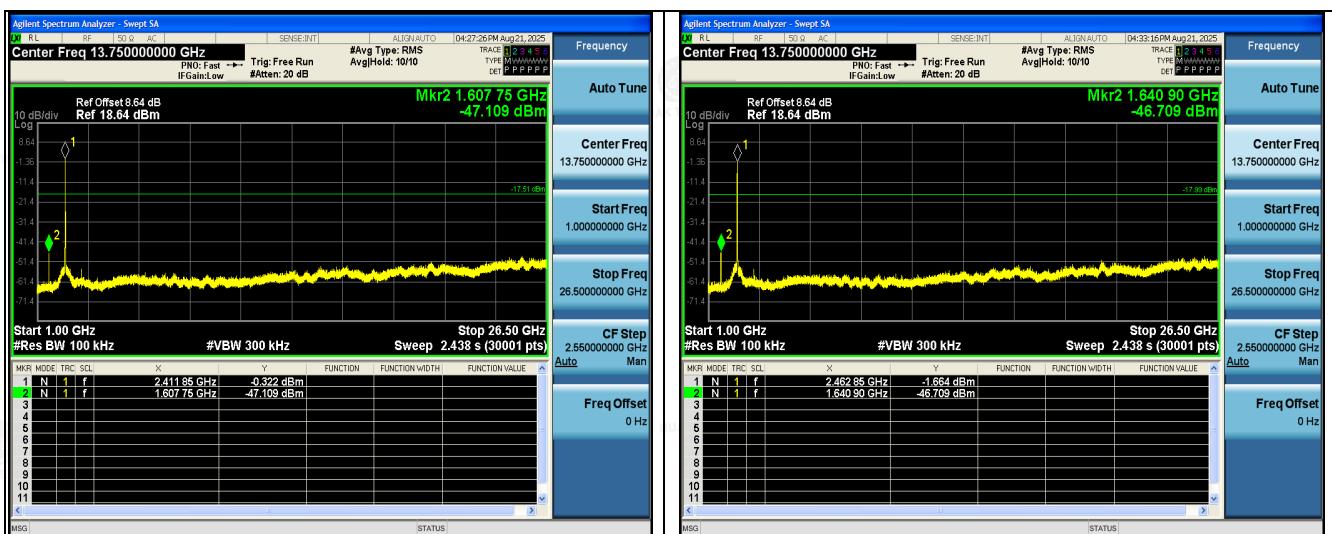

Middle Channel

Spurious Emission

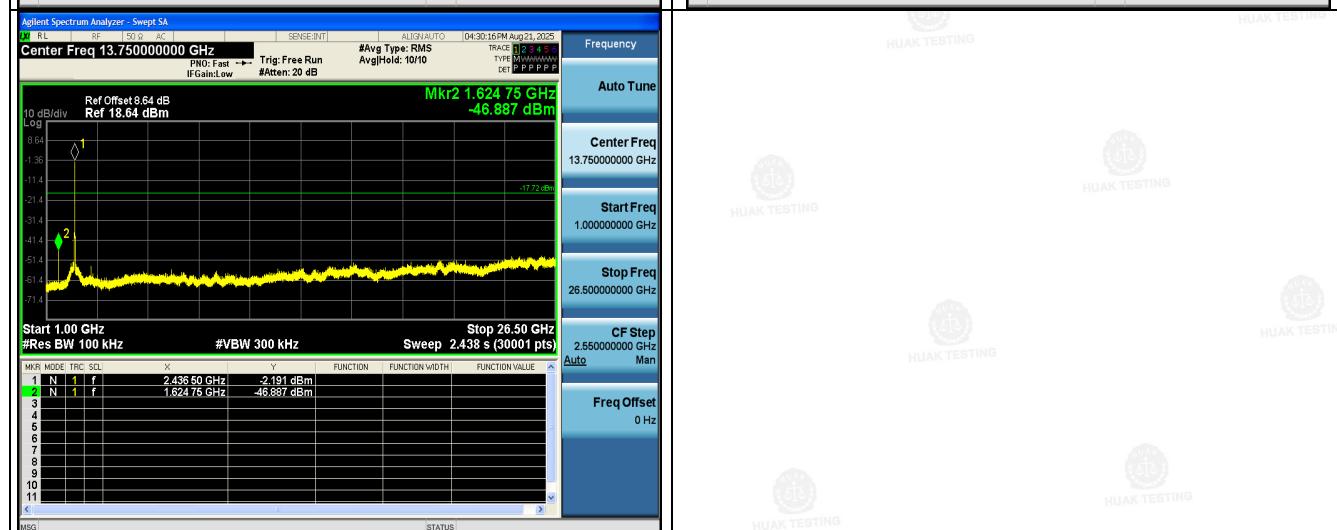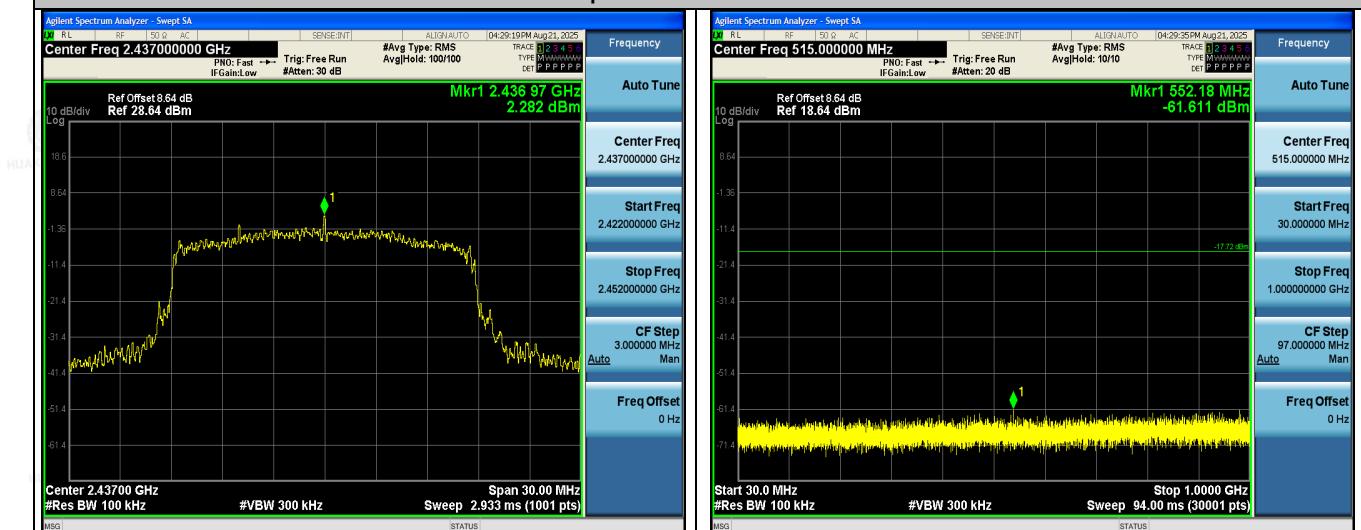

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com


Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



802.11n (HT20) Modulation




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

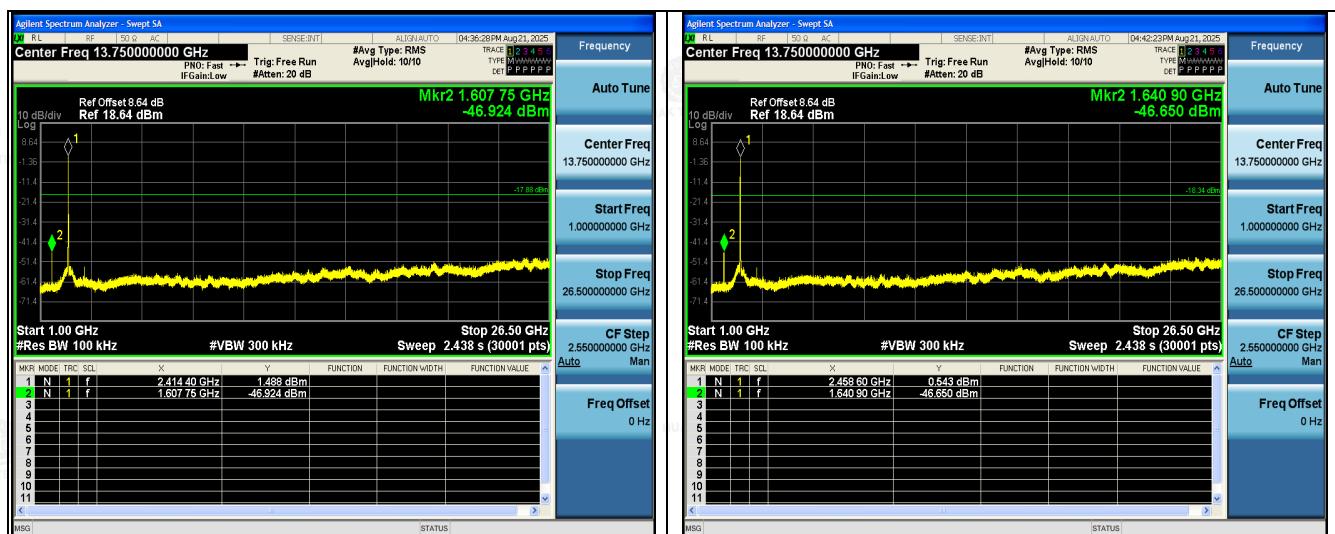

Middle Channel

Spurious Emission

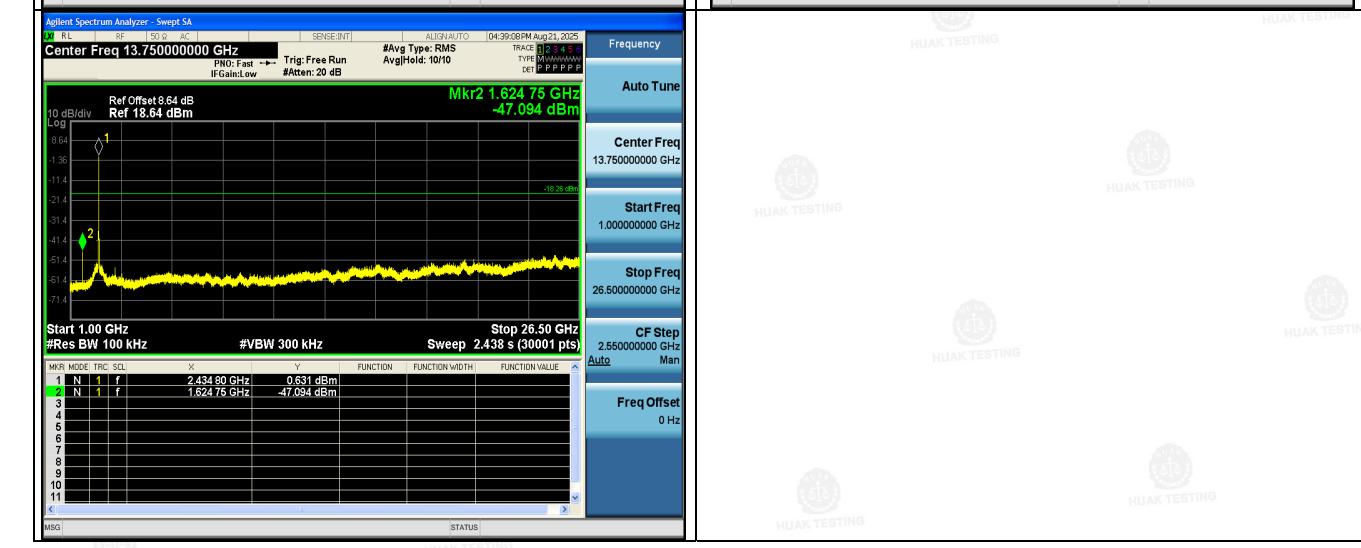

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4.7 Radiated Spurious Emission Measurement

Test Specification

Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10: 2020						
Frequency Range:	9 kHz to 25 GHz						
Measurement Distance:	3 m						
Antenna Polarization:	Horizontal & Vertical						
Operation Mode:	Transmitting mode with modulation						
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark		
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value		
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value		
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value		
Limit:	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
		Peak	1MHz	10Hz	Average Value		
	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)			
	0.009-0.490	2400/F(KHz)		300			
	0.490-1.705	24000/F(KHz)		30			
	1.705-30	30		30			
	30-88	100		3			
	88-216	150		3			
	216-960	200		3			
	Above 960	500		3			
	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	Detector		
	Above 1GHz	500		3	Average		
		5000		3	Peak		
Test Setup:	For radiated emissions below 30MHz						

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING



HUAK TESTING

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Test Procedure:	<p>The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none">(1) Span shall wide enough to fully capture the emission being measured;(2) Set RBW=120 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;(3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. <p>6. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test Results:	PASS



HUAK TESTING

Test Instruments

Radiated Emission Test Site (966)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	EMCI	EMC051845S	HKE-006	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 19, 2025	Feb. 18, 2026
Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 19, 2025	Feb. 18, 2026
6dB Attenuator	Pasternack	6db	HKE-184	Feb. 19, 2025	Feb. 18, 2026
EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 19, 2025	Feb. 18, 2026
Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	Feb. 20, 2026
Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	Feb. 20, 2026
Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	Feb. 20, 2026
EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Futian Street, Bao'an District, Shenzhen, Guangdong, China




HUAK TESTING
HUAK TESTING

Test Data

All the test modes completed for test. Only the worst result was reported as below:

Below 1GHz

Horizontal:

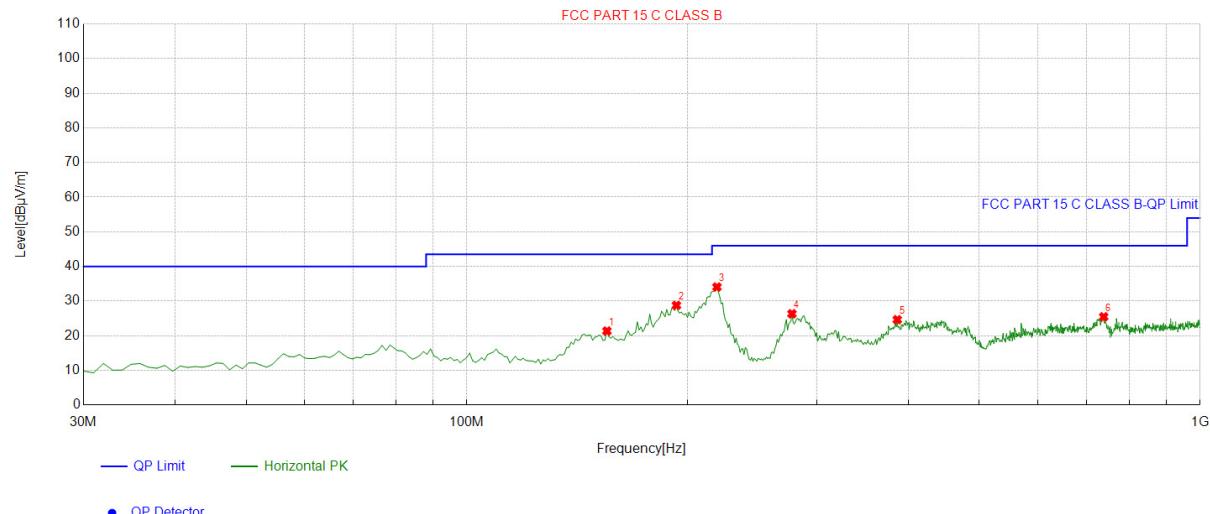

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	155.2553	-17.80	39.16	21.36	43.50	22.14	100	111	Horizontal
2	193.1231	-15.59	44.36	28.77	43.50	14.73	100	74	Horizontal
3	219.3393	-14.60	48.66	34.06	46.00	11.94	100	275	Horizontal
4	277.5976	-12.67	39.01	26.34	46.00	19.66	100	246	Horizontal
5	386.3463	-9.19	33.82	24.63	46.00	21.37	100	132	Horizontal
6	738.8088	-3.42	28.89	25.47	46.00	20.53	100	308	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Vertical:

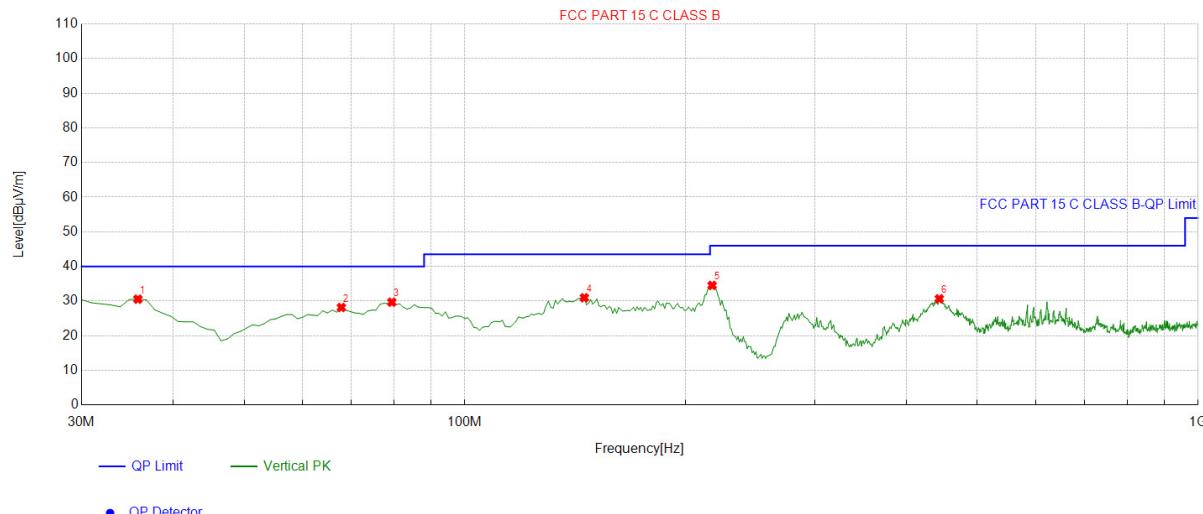

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.8258	-14.54	45.10	30.56	40.00	9.44	100	13	Vertical
2	67.8679	-16.02	44.18	28.16	40.00	11.84	100	293	Vertical
3	79.5195	-18.01	47.70	29.69	40.00	10.31	100	152	Vertical
4	145.5455	-18.27	49.24	30.97	43.50	12.53	100	103	Vertical
5	217.3974	-14.66	49.19	34.53	46.00	11.47	100	336	Vertical
6	443.6336	-8.65	39.31	30.66	46.00	15.34	100	279	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**HUAK TESTING**

HUAK TESTING

Radiated Emission Test

LOW CH1 (802.11b Mode)/2412

Above 1GHz

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	HUAK TESTING Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	54.71	-3.64	51.07	74	22.93	peak
4824	43.61	-3.64	39.97	54	14.03	AVG
7236	49.19	-0.95	48.24	74	25.76	peak
7236	39.85	-0.95	38.9	54	15.1	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	52.31	-3.64	48.67	74	25.33	peak
4824	43.68	-3.64	40.04	54	13.96	AVG
7236	48.53	-0.95	47.58	74	26.42	peak
7236	40.94	-0.95	39.99	54	14.01	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	50.51	-3.51	47	74	27	peak
4874	43.12	-3.51	39.61	54	14.39	AVG
7311	50.8	-0.82	49.98	74	24.02	peak
7311	40.84	-0.82	40.02	54	13.98	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-L level

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	52.62	-3.51	49.11	74	24.89	peak
4874	40.28	-3.51	36.77	54	17.23	AVG
7311	49.78	-0.82	48.96	74	25.04	peak
7311	38.69	-0.82	37.87	54	16.13	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-L level.



HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.98	-3.43	50.55	74	23.45	peak
4924	42.57	-3.43	39.14	54	14.86	AVG
7386	48.16	-0.75	47.41	74	26.59	peak
7386	41.55	-0.75	40.8	54	13.2	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	53.8	-3.43	50.37	74	23.63	peak
4924	43.34	-3.43	39.91	54	14.09	AVG
7386	49.25	-0.75	48.5	74	25.5	peak
7386	41.53	-0.75	40.78	54	13.22	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-L level

Remark:

REMARK:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) < 54dBuV/m(AV Limit), the Average Detected not need to completed.



HUAK TESTING

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	52.34	-3.64	48.7	74	25.3	peak
4824	41.49	-3.64	37.85	54	16.15	AVG
7236	49.78	-0.95	48.83	74	25.17	peak
7236	38.96	-0.95	38.01	54	15.99	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = I limit-I level

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	51.62	-3.64	47.98	74	26.02	peak
4824	42.17	-3.64	38.53	54	15.47	AVG
7236	48.73	-0.95	47.78	74	26.22	peak
7236	39.76	-0.95	38.81	54	15.19	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-1 level



Page 51 of 64

Report No.: HK2508194668-2E

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	52.87	-3.43	49.44	74	24.56	peak
4924	42.37	-3.43	38.94	54	15.06	AVG
7386	53.54	-0.75	52.79	74	21.21	peak
7386	41.69	-0.75	40.94	54	13.06	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-1 level

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	54.53	-3.43	51.1	74	22.9	peak
4924	40.93	-3.43	37.5	54	16.5	AVG
7386	52.95	-0.75	52.2	74	21.8	peak
7386	40.46	-0.75	39.71	54	14.29	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB_V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB_V/m(PK Value) < 54dB_V/m(AV Limit), the Average Detected not need to completed.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel : +86-0755-2302 9901 E-mail: info@huak.com Web : www.huak.com

Add : 1-2/F, Building B2, Junfeng Zhongcheng Zhibao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China. Tel.: +86-0755-2522 5501 E-mail: info@iiaak.com Web: www.iaak.com



HUAK TESTING

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	52.29	-3.64	48.65	74	25.35	peak
4824	44.42	-3.64	40.78	54	13.22	AVG
7236	49.29	-0.95	48.34	74	25.66	peak
7236	40.76	-0.95	39.81	54	14.19	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-L level

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	53.8	-3.64	50.16	74	23.84	peak
4824	42.04	-3.64	38.4	54	15.6	AVG
7236	52.78	-0.95	51.83	74	22.17	peak
7236	39.18	-0.95	38.23	54	15.77	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit Level



HUAK TESTING

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	49.72	-3.51	46.21	74.00	27.79	peak
4874	41.63	-3.51	38.12	54.00	15.88	AVG
7311	53.30	-0.82	52.48	74.00	21.52	peak
7311	40.42	-0.82	39.60	54.00	14.40	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-level

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	51.84	-3.51	48.33	74.00	25.67	peak
4874	41.98	-3.51	38.47	54.00	15.53	AVG
7311	52.38	-0.82	51.56	74.00	22.44	peak
7311	40.68	-0.82	39.86	54.00	14.14	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.



Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.97	-3.43	50.54	74	23.46	peak
4924	43.38	-3.43	39.95	54	14.05	AVG
7386	50.29	-0.75	49.54	74	24.46	peak
7386	39.37	-0.75	38.62	54	15.38	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	53.54	-3.43	50.11	74	23.89	peak
4924	38.12	-3.43	34.69	54	19.31	AVG
7386	52.33	-0.75	51.58	74	22.42	peak
7386	38.33	-0.75	37.58	54	16.42	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.



Test Result of Radiated Spurious at Band edges

All modes have been tested. Only the worst result was reported as below:

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	52.69	-5.81	46.88	74	27.12	peak
2310.00	44.39	-5.81	38.58	54	15.42	AVG
2390.00	53.88	-5.84	48.04	74	25.96	peak
2390.00	43.61	-5.84	37.77	54	16.23	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-1 level.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2310.00	53.42	-5.81	47.61	74	26.39	peak
2310.00	40.45	-5.81	34.64	54	19.36	AVG
2390.00	55	-5.84	49.16	74	24.84	peak
2390.00	42.78	-5.84	36.94	54	17.06	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit_Level

**HUAK TESTING**

HUAK TESTING

HUAK TESTING

HUAK TESTING

Operation Mode: TX CH High (2462MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	55.31	-5.81	49.5	74	24.5	peak
2483.50	43.6	-5.81	37.79	54	16.21	AVG
2500.00	51.82	-6.06	45.76	74	28.24	peak
2500.00	40.05	-6.06	33.99	54	20.01	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	53.64	-5.81	47.83	74	26.17	peak
2483.50	41.24	-5.81	35.43	54	18.57	AVG
2500.00	51.36	-6.06	45.3	74	28.7	peak
2500.00	41.16	-6.06	35.1	54	18.9	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

**HUAK TESTING**

HUAK TESTING

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits 74	Margin (dB)	Detector Type
2310.00	54.75	-5.81	48.94	74	25.06	peak
2310.00	43.35	-5.81	37.54	54	16.46	AVG
2390.00	52.77	-5.84	46.93	74	27.07	peak
2390.00	40.61	-5.84	34.77	54	19.23	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits 74	Margin (dB)	Detector Type
2310.00	54.27	-5.81	48.46	74	25.54	peak
2310.00	41.46	-5.81	35.65	54	18.35	AVG
2390.00	51.77	-5.84	45.93	74	28.07	peak
2390.00	40.81	-5.84	34.97	54	19.03	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**HUAK TESTING**

HUAK TESTING

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	51.75	-5.65	46.1	74	27.9	peak
2483.50	45.58	-5.65	39.93	54	14.07	AVG
2500.00	53.1	-5.65	47.45	74	26.55	peak
2500.00	42.34	-5.65	36.69	54	17.31	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	52.13	-5.65	46.48	74	27.52	peak
2483.50	42.29	-5.65	36.64	54	17.36	AVG
2500.00	53.89	-5.65	48.24	74	25.76	peak
2500.00	41.7	-5.65	36.05	54	17.95	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING
HUAK TESTING

Shenzhen HUAK Testing Technology Co., Ltd.

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Phone: +86-0755-2302 9901

E-mail: info@huak.com

Web: www.huak.com

HSR-001

HSR-002

HSR-003

HSR-004

HSR-005

HSR-006

HSR-007

HSR-008

HSR-009

HSR-010

HSR-011

HSR-012

HSR-013

HSR-015

HSR-016

HSR-017

HSR-018

HSR-019

HSR-020

HSR-021

HSR-022

HSR-023

HSR-024

HSR-025

HSR-027

HSR-028

HSR-029

HSR-030

HSR-031

HSR-032

HSR-033

HSR-034

HSR-035

HSR-036

HSR-037

HSR-038

HSR-039

HSR-040

HSR-041

HSR-042

HSR-043

HSR-044

HSR-045

HSR-046

HSR-047

HSR-048

HSR-049

HSR-050

HSR-051

HSR-052

HSR-053

HSR-054

HSR-055

HSR-056

HSR-057

HSR-058

HSR-059

HSR-060

HSR-061

HSR-062

HSR-063

HSR-064

HSR-065

HSR-066

HSR-067

HSR-068

HSR-069

HSR-070

HSR-071

HSR-072

HSR-073

HSR-074

HSR-075

HSR-076

HSR-077

HSR-078

HSR-079

HSR-080

HSR-081

HSR-082

HSR-083

HSR-084

HSR-085

HSR-086

HSR-087

HSR-088

HSR-089

HSR-090

HSR-091

HSR-092

HSR-093

HSR-094

HSR-095

HSR-096

HSR-097

HSR-098

HSR-099

HSR-0100

HSR-0101

HSR-0102

HSR-0103

HSR-0104

HSR-0105

HSR-0106

HSR-0107

HSR-0108

HSR-0109

HSR-0110

HSR-0111

HSR-0112

HSR-0113

HSR-0114

HSR-0115

HSR-0116

HSR-0117

HSR-0118

HSR-0119

HSR-0120

HSR-0121

HSR-0122

HSR-0123

HSR-0124

HSR-0125

HSR-0126

HSR-0127

HSR-0128

HSR-0129

HSR-0130

HSR-0131

HSR-0132

HSR-0133

HSR-0134

HSR-0135

HSR-0136

HSR-0137

HSR-0138

HSR-0139

HSR-0140

HSR-0141

HSR-0142

HSR-0143

HSR-0144

HSR-0145

HSR-0146

HSR-0147

HSR-0148

HSR-0149

HSR-0150

HSR-0151

HSR-0152

HSR-0153

HSR-0154

HSR-0155

HSR-0156

HSR-0157

HSR-0158

HSR-0159

HSR-0160

HSR-0161

HSR-0162

HSR-0163

HSR-0164

HSR-0165

HSR-0166

HSR-0167

HSR-0168

HSR-0169

HSR-0170

HSR-0171

HSR-0172

HSR-0173

HSR-0174

HSR-0175

HSR-0176

HSR-0177

HSR-0178

HSR-0179

HSR-0180

HSR-0181

HSR-0182

HSR-0183

HSR-0184

HSR-0185

HSR-0186

HSR-0187

HSR-0188

HSR-0189

HSR-0190

HSR-0191

HSR-0192

HSR-0193

HSR-0194

HSR-0195

HSR-0196

HSR-0197

HSR-0198

HSR-0199

HSR-0200

HSR-0201

HSR-0202

HSR-0203

HSR-0204

HSR-0205

HSR-0206

HSR-0207

HSR-0208

HSR-0209

HSR-0210

HSR-0211

HSR-0212

HSR-0213

HSR-0214

HSR-0215

HSR-0216

HSR-0217

HSR-0218

HSR-0219

HSR-0220

HSR-0221

HSR-0222

HSR-0223

HSR-0224

HSR-0225

HSR-0226

HSR-0227

HSR-0228

HSR-0229

HSR-0220

HSR-0221

HSR-0222

HSR-0223

HSR-0224

HSR-0225

HSR-0226

HSR-0227

HSR-0228

HSR-0229

HSR-0220

HSR-0221

HSR-0222

HSR-0223

HSR-0224

HSR-0225

HSR-0226

HSR-0227

HSR-0228

HSR-0229

HSR-0220

HSR-0221

HSR-0222

HSR-0223

HSR-0224

HSR-0225

HSR-0226

HSR-0227

HSR-0228

HSR-0229

HSR-0220

HSR-0221

HSR-0222

HSR-0223

HSR-0224

HSR-0225

HSR-0226

HSR-0227

</

**HUAK TESTING**

HUAK TESTING

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.12	-5.65	48.47	74	25.53	peak
2483.50	40.38	-5.65	34.73	54	19.27	AVG
2500.00	52.48	-5.65	46.83	74	27.17	peak
2500.00	41.11	-5.65	35.46	54	18.54	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	51.57	-5.65	45.92	74	28.08	peak
2483.50	43.52	-5.65	37.87	54	16.13	AVG
2500.00	52.18	-5.65	46.53	74	27.47	peak
2500.00	40.16	-5.65	34.51	54	19.49	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit-Level.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING

4.8 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is an PCB Antenna, which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 1.68dBi.

WIFI ANTENNA

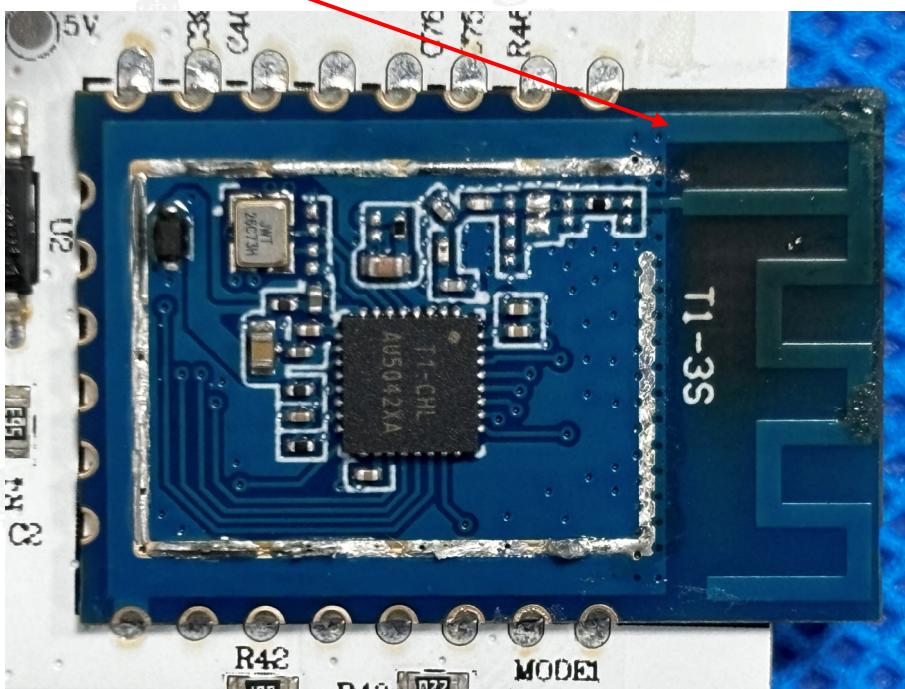

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



HUAK TESTING

HUAK TESTING




HUAK TESTING



HUAK TESTING



AC Conducted Emission

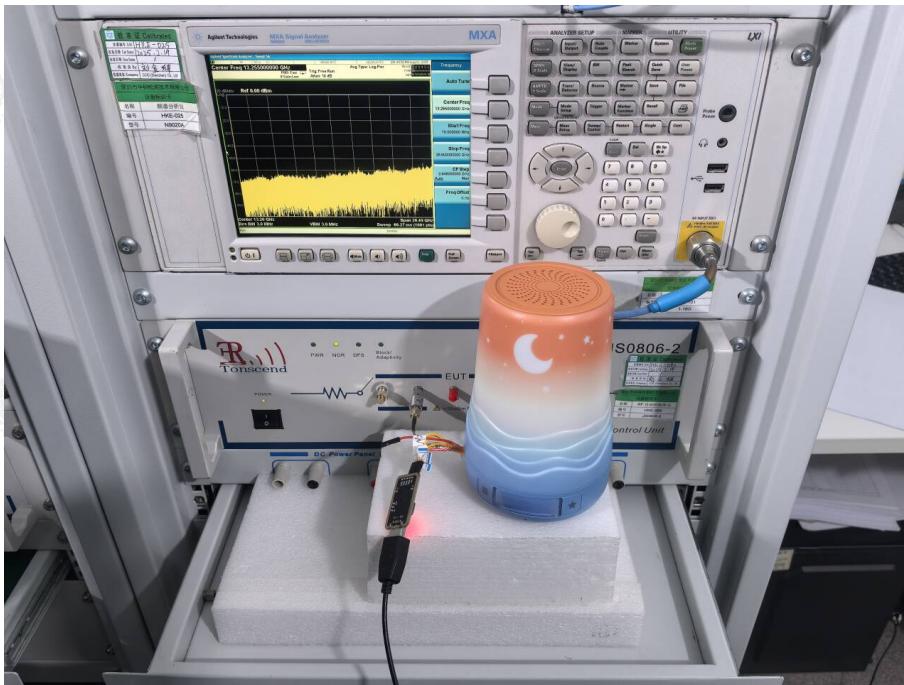

RF Conducted Emission

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAK Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAK Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----