

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

FAN REMOTE CONTROLLER

**MODEL No.: TX002,TX002-R,TX002-E,TX002-ER,
TX003,TX003-R,TX003-E, TX003-ER**

FCC ID: A25-TX003E

REPORT NO: FTS11GR-055E

ISSUE DATE: Nov. 25, 2011

Prepared for

**DawnSun Electronic Technology.Co.,Ltd.ZhongShan
NO.8 NANYI STREET ,XINGGONG RD SHAXI TOWN
ZHONGSHAN,GUANGDONG 528471 CHINA**

Prepared by

**Future Test Services (Zhongshan)Co., Ltd.
2/F,NO.33 Xiangfeng South Road, Xiaolan Town, Zhongshan City,
Guangdong Province, China.
Tel : +86-760-22582758
Fax: +86-760-22582768**

VERIFICATION OF COMPLIANCE

Applicant:	DawnSun Electronic Technology.Co.,Ltd.ZhongShan NO.8 NANYI STREET ,XINGGONG RD SHAXI TOWN ZHONGSHAN, GUANGDONG 528471 CHINA
Manufacturer	DawnSun Electronic Technology.Co.,Ltd.ZhongShan NO.8 NANYI STREET ,XINGGONG RD SHAXI TOWN ZHONGSHAN, GUANGDONG 528471 CHINA
Product Description:	FAN REMOTE CONTROLLER
Integral PCB antenna	0dBi
Pulse train modulation	OOK
Model Number:	Basic Model: TX003-E Additional Model: TX002,TX002-R,TX002-E,TX002-ER,TX003, TX003-R, TX003-ER
Serial Number:	N/A
File Number:	FTS11GR-055E
Date of Test:	Nov.16, 2011 to Nov.25 2011

We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.231, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

The test results of this report relate only to the tested sample identified in this report.

Approved By



Henry Wang / Manager
Future Test Services (Zhongshan)Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION.....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 SPECIAL ACCESSORIES	5
1.5 EQUIPMENT MODIFICATIONS	5
1.6 TEST FACILITY	6
2. SYSTEM TEST CONFIGURATION.....	7
2.1 EUT CONFIGURATION	7
2.2 EUT EXERCISE	7
2.3 TEST PROCEDURE	7
2.4 LIMITATION	8
2.5 CONFIGURATION OF TESTED SYSTEM	9
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES	10
5. CONDUCTED EMISSIONS TEST (NOT APPLICABLE IN THIS REPORT).....	11
5.1 MEASUREMENT PROCEDURE:.....	11
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
5.3 MEASUREMENT EQUIPMENT USED:	11
5.4 MEASUREMENT RESULT:.....	11
5.5 CONDUCTED MEASUREMENT PHOTOS:.....	11
6. RADIATED EMISSION TEST	12
6.1 MEASUREMENT PROCEDURE.....	12
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
6.3 MEASUREMENT EQUIPMENT USED:	14
6.4 MEASUREMENT RESULT.....	15
7. DEACTIVATION TESTING	17
7.1 REQUIREMENT.....	17
7.2 TEST SET-UP	17
7.3 MEASUREMENT EQUIPMENT USED:	17
7.4 TEST PROCEDURE.....	17
7.5 TEST DATA	17
8. OCCUPIED BANDWIDTH.....	19
8.1 MEASUREMENT PROCEDURE.....	19
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
8.3 MEASUREMENT EQUIPMENT USED:	19
8.4 MEASUREMENT RESULTS:.....	19

9. MAXIMUM MODULATION PERCENTAGE (M%)	21
9.1 LIMIT §15.35 (C).....	21
9.2 TEST PROCEDURE	21
9.3 CALCULATION	21
9.4 RESULTS	21
9.5 MAXIMUM MODULATION PERCENTAGE	21

1. GENERAL INFORMATION

1.1 Product Description

The Elgin molded plastic, Inc Model: TX003-E (referred to as the EUT in this report) The EUT is an short range, lower power, FAN REMOTE CONTROLLER designed as an Input Device.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 315 MHz, one channel.
- B). Power Supply: DC12V AA Battery*1

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: A25-TX003E filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description
EMC Lab. : Accredited by CNAS, 2007.07.27
The certificate is valid until 2012.07.26
The Laboratory has been assessed and proved to be in compliance
with CNAS/CL01:2006
The Certificate Registration Number is L3150

Accredited by TUV Product Service Group 2011.07.05
The certificate is valid until 2012.07.05
The Laboratory has been assessed according to the requirements
ISO/IEC 17025: 2005

Accredited by FCC, Aug. 18, 2011
The Certificate Number is 247565

Accredited by Industry Canada, January 13, 2011
The Certificate Registration Number. is 46405-9444

Name of Firm : DONGGUAN EMTEK CO., LTD
Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Conducted Emission (Not applicable in this report)

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

(2) Radiated Emission

- a. The field strength of any emission within this band (section 15.231) shall not exceed 10000 micro volts/meter at 3 meters. (80dB μ V at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- b. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 and section 15.231(Intentional Radiators general limit). as below.

Frequency (MHz)	Field strength μ V/m	Distance (m)	Field strength at 3m dB μ V/m
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in dB μ V/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205
4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of ξ 15.205, then the general radiated emission limits in ξ 15.209 apply.

Fundamental Frequency(MHZ)	Field Strength of Fundamental
	uV/m
	dBuV/m
315	6042
Harmonics	604.2
	75.62
	55.62

Remark: (1) Emission level in dBuV/m=20 log (uV/m)
(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
(3)The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



3. Summary Of Test Results

FCC Rules	Description Of Test	Result
§ 15.207	Conducted Emission	N/A
§ 15.231 (b)	Radiated Emission	Compliant
§ 15.231 (c)	Bandwidth Test	Compliant
§ 15.231 (a)(2)	Deactivation Testing	Compliant

4. Description of test modes

The EUT (FAN REMOTE CONTROLLER) has been tested under normal operating condition. The EUT stay in continuous transmitting mode. The Frequency 315MHz are chosen for testing.

5. Conducted Emissions Test (Not applicable in this report)

5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

5.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2011	05/29/2012
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2011	05/29/2012
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2011	05/29/2012
50ΩCoaxial Switch	Anritsu	MP59B	M20531	05/29/2011	05/29/2012

5.4 Measurement Result:

N/A

5.5 Conducted Measurement Photos:

N/A


6. Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. The emission limits shown in the above table are based on measurements employing a CIPSR quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

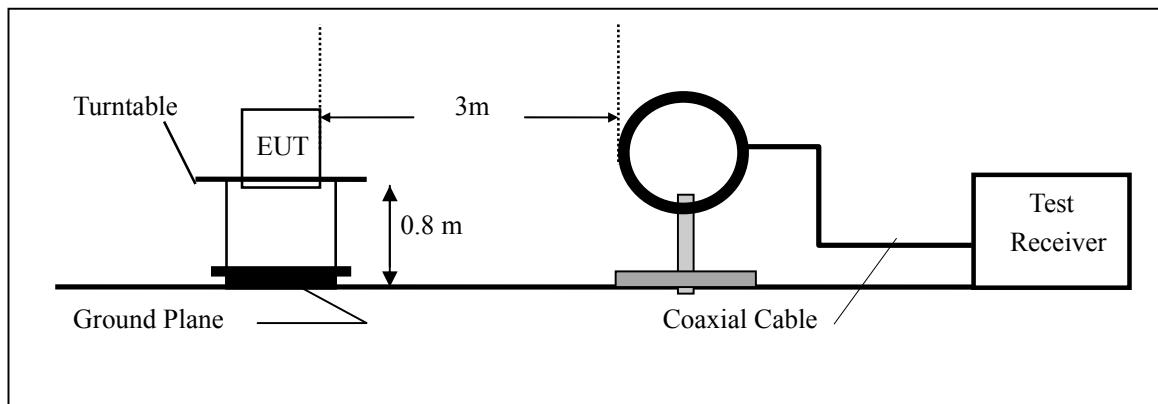

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

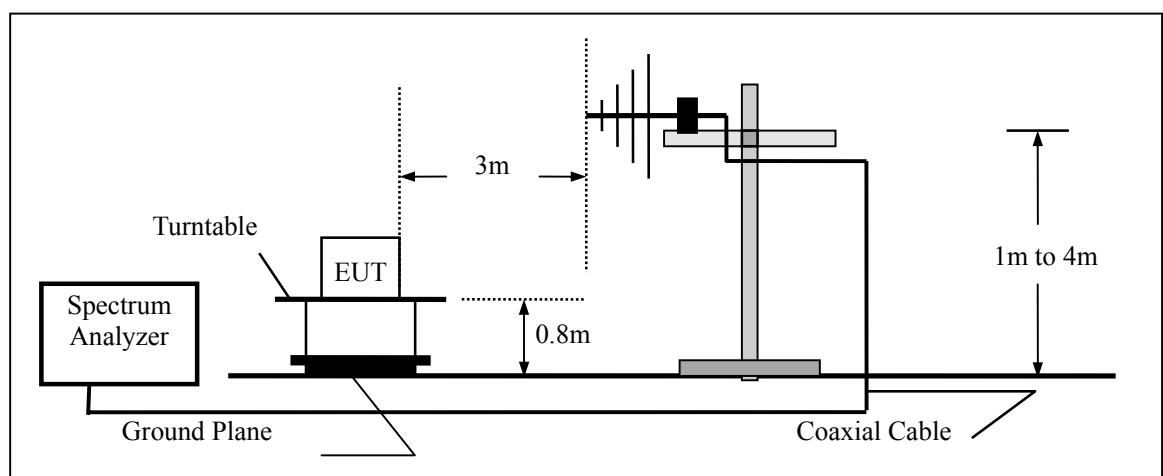

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

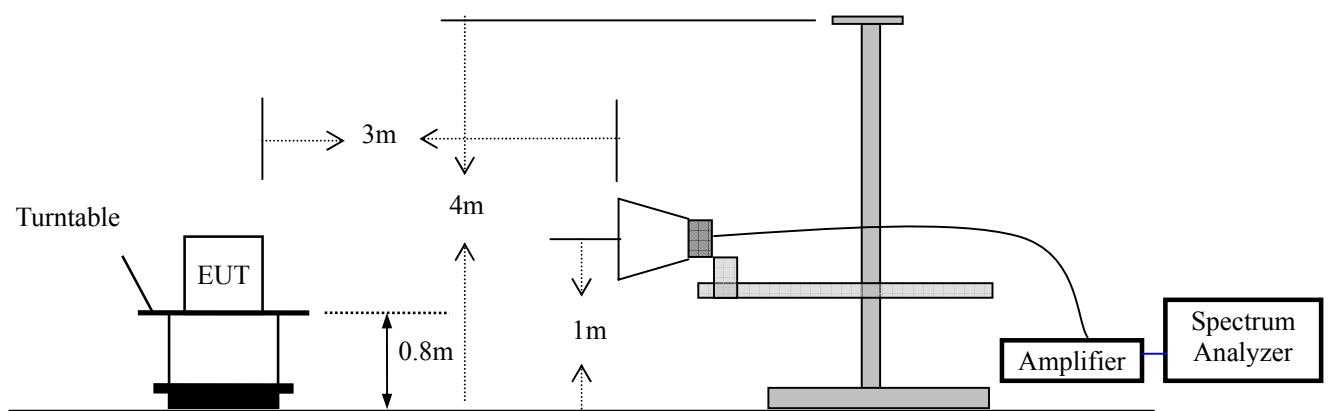

6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2011	05/29/2012
Spectrum Analyzer	HP	E4407B	839840481	05/29/2011	05/29/2012
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2011	05/29/2012
Pre-Amplifier	HP	8447D	2944A07999	05/29/2011	05/29/2012
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2011	05/29/2012
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2011	05/29/2012
Horn Antenna	Electro-Metrics	EM-6961	103314	05/29/2011	05/29/2012
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/29/2011	05/29/2012

6.4 Measurement Result

A. Fundamental Radiated Emission Data

Operation Mode: Transmitting Mode Test Date : Nov.24, 2011
 Test Item: Fundamental Radiated Emission Data Temperature : 22 °C
 Fundamental Frequency: 315MHz Humidity : 56 %
 Test Result: PASS Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
315.00	V	68.25	55.62	-7.37	Peak
630.00	V	48.32	55.62	-7.30	Peak
945.00	V	46.32	55.62	-9.30	Peak
1260.00	V	32.23	55.62	-23.39	Peak
1575.00	V	30.22	55.62	-25.40	Peak
1890.00	V	28.12	55.62	-27.50	Peak
2205.00	V	26.32	55.62	-29.30	Peak
2520.00	V	25.34	55.62	-30.28	Peak
2835.00	V	24.11	55.62	-31.51	Peak
3150.00	V	25.32	55.62	-30.30	Peak
315.00	H	67.15	75.62	-8.47	Peak
630.00	H	45.21	55.62	-10.41	Peak
945.00	H	42.14	55.62	-13.48	Peak
1260.00	H	32.21	55.62	-23.41	Peak
1575.00	H	30.02	55.62	-25.60	Peak
1890.00	H	28.02	55.62	-27.60	Peak
2205.00	H	26.12	55.62	-29.50	Peak
2520.00	H	25.04	55.62	-30.58	Peak
2835.00	H	24.01	55.62	-31.61	Peak
3150.00	H	25.02	55.62	-30.60	Peak

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.231.

Note: (1) All Readings are Peak Value.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) The average measurement was not performed when the peak measured data under the limit of average detection.

B. General Radiated Emission Data

Operation Mode: Transmitting Mode Test Date : Nov.24, 2011
 Test Item: General Radiated Emission Data Temperature : 22 °C
 Fundamental Frequency: 315 MHz Humidity : 56%
 Test Result: PASS Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
176.175	V	30.61	43.50	-12.89	Peak
264.300	V	32.26	46.00	-13.74	Peak
352.400	V	31.93	46.00	-14.07	Peak
440.400	V	30.49	46.00	-15.51	Peak
528.500	V	30.93	46.00	-15.07	Peak
176.200	H	31.29	43.50	-12.21	Peak
264.300	H	31.41	46.00	-14.59	Peak
352.400	H	32.51	46.00	-13.49	Peak
440.400	H	31.98	46.00	-14.02	Peak
528.500	H	30.96	46.00	-15.04	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.209.

7. DEACTIVATION TESTING

7.1 Requirement

Per 15.231(a) (2), A transmitter activated automatically shall cease transmission within 5 seconds after activation.

7.2 Test SET-UP

Same as 6.2 Radiated Emission Measurements.

7.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2011	05/29/2012
Pre-Amplifier	HP	8447D	2944A07999	05/29/2011	05/29/2012
Broadband Antenna	Sunol Sciences	JB1	A040904-2	05/29/2011	05/29/2012

7.4 Test Procedure

1. The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2009. The specification used was the FCC 15.231(a) limits.
2. Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

7.5 Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56%
ATM Pressure:	1032mbar

Test Mode: Transmitting

Transmitting time	Limit (Second)	Result
512.5ms	5	PASS

Refer to the attached Duty Cycle plot

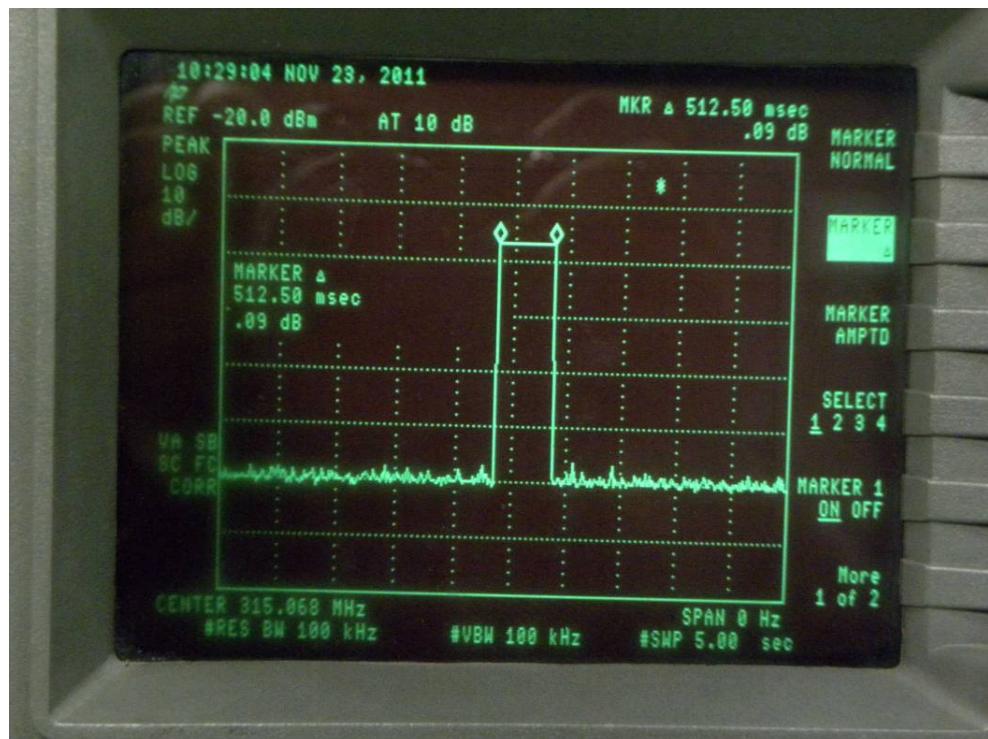

8. Occupied Bandwidth

8.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Center Frequency = fundamental frequency, RBW=10KHz, VBW= 30KHz
4. Set SPA Max hold. Mark peak.

8.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Measurement.

8.3 Measurement Equipment Used:


Same as 6.2 Radiated Emission Measurement.

8.4 Measurement Results:

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209.

Refer to attached data chart.

20dB Bandwidth	Limit (Fundamental*0.25%)	Result
100KHz	315MHz*0.25%=787.5KHz	PASS

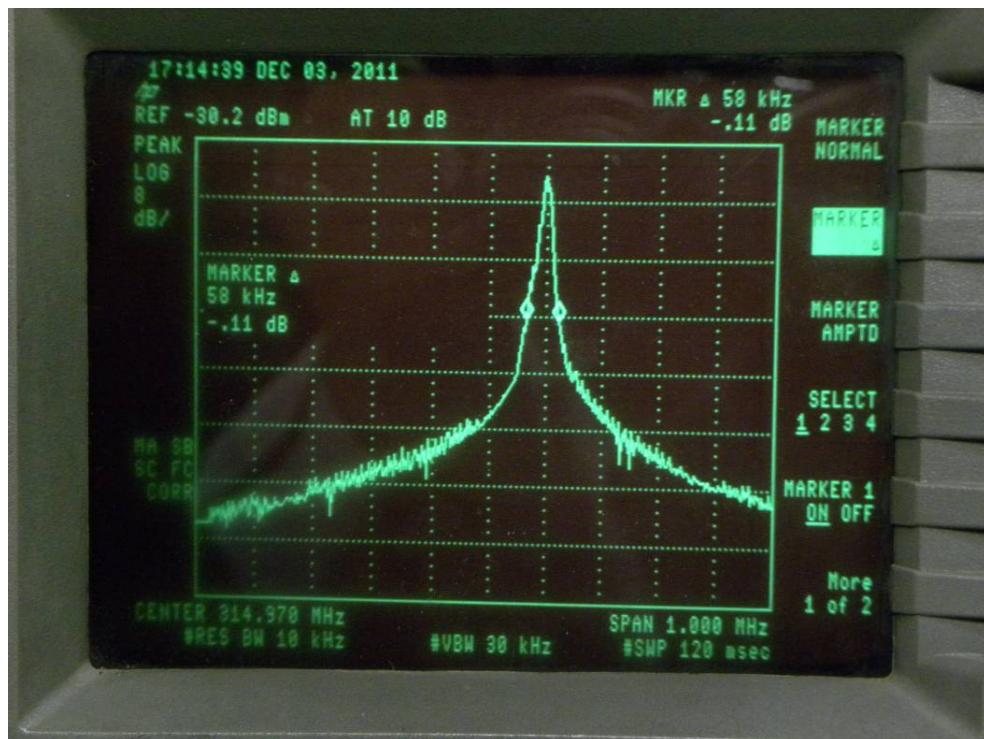Band Width Test Data

9. MAXIMUM MODULATION PERCENTAGE (M%)

9.1 LIMIT § 15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative(provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 seconds interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

9.2 TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 KHz and the VBW is set to 100 KHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

9.3 CALCULATION

Average Reading = Peak Reading(dBuV/m)+20log (Duty Cycle), Where Duty Cycle is (# of pulses *pulse width)/100 or T

9.4 RESULTS

No non-compliance noted:

9.5 MAXIMUM MODULATION PERCENTAGE

One Period (ms)	Pulse Width (ms)		# of Pulses		Duty Cycle	% Duty Cycle
32.25	Short	Long	Short	Long	0.55	55%
	0.375	0.875	8	17		

