Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Right Head Cheek Low CH128

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.88 mho/m; ε_r = 41.628; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Right Head Cheek Low CH128/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.892 mW/g

GSM850/Right Head Cheek Low CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.077 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.049 W/kg

SAR(1 g) = 0.721 mW/g; SAR(10 g) = 0.514 mW/g

Maximum value of SAR (measured) = 0.862 mW/g

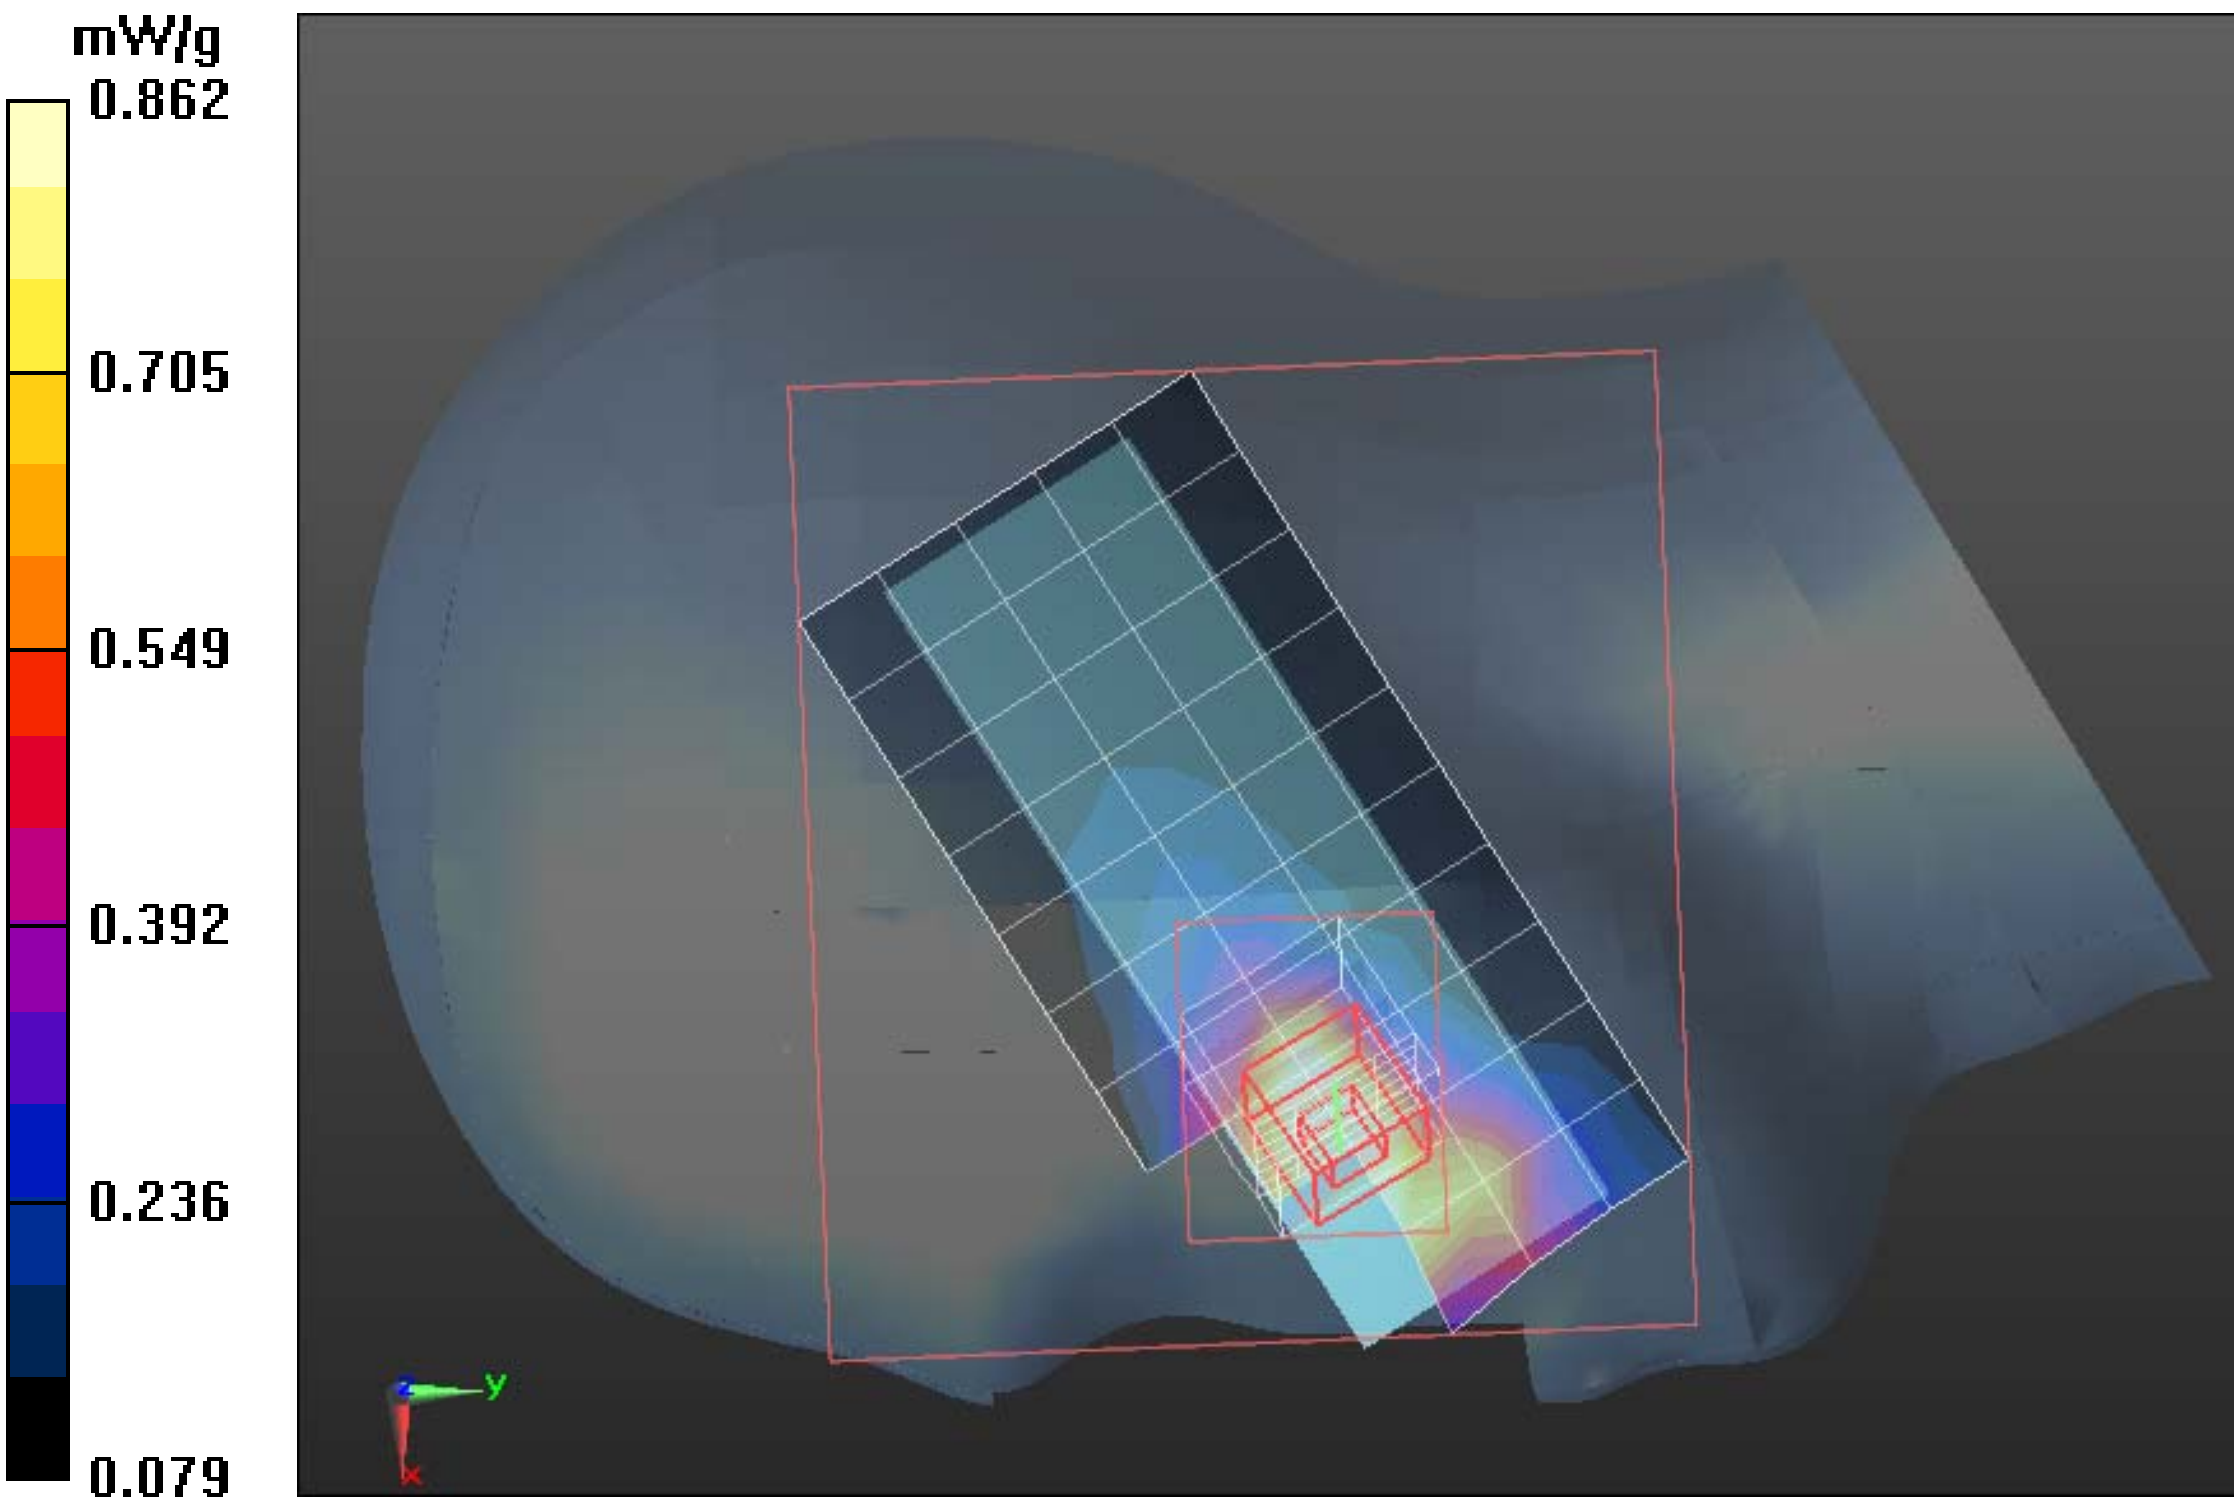

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Right Head Cheek Middle CH190

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.89 mho/m; ε_r = 41.478; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Right Head Cheek Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.858 mW/g

GSM850/Right Head Cheek Middle CH190/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.352 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.014 W/kg

SAR(1 g) = 0.701 mW/g; SAR(10 g) = 0.404 mW/g

Maximum value of SAR (measured) = 0.839 mW/g

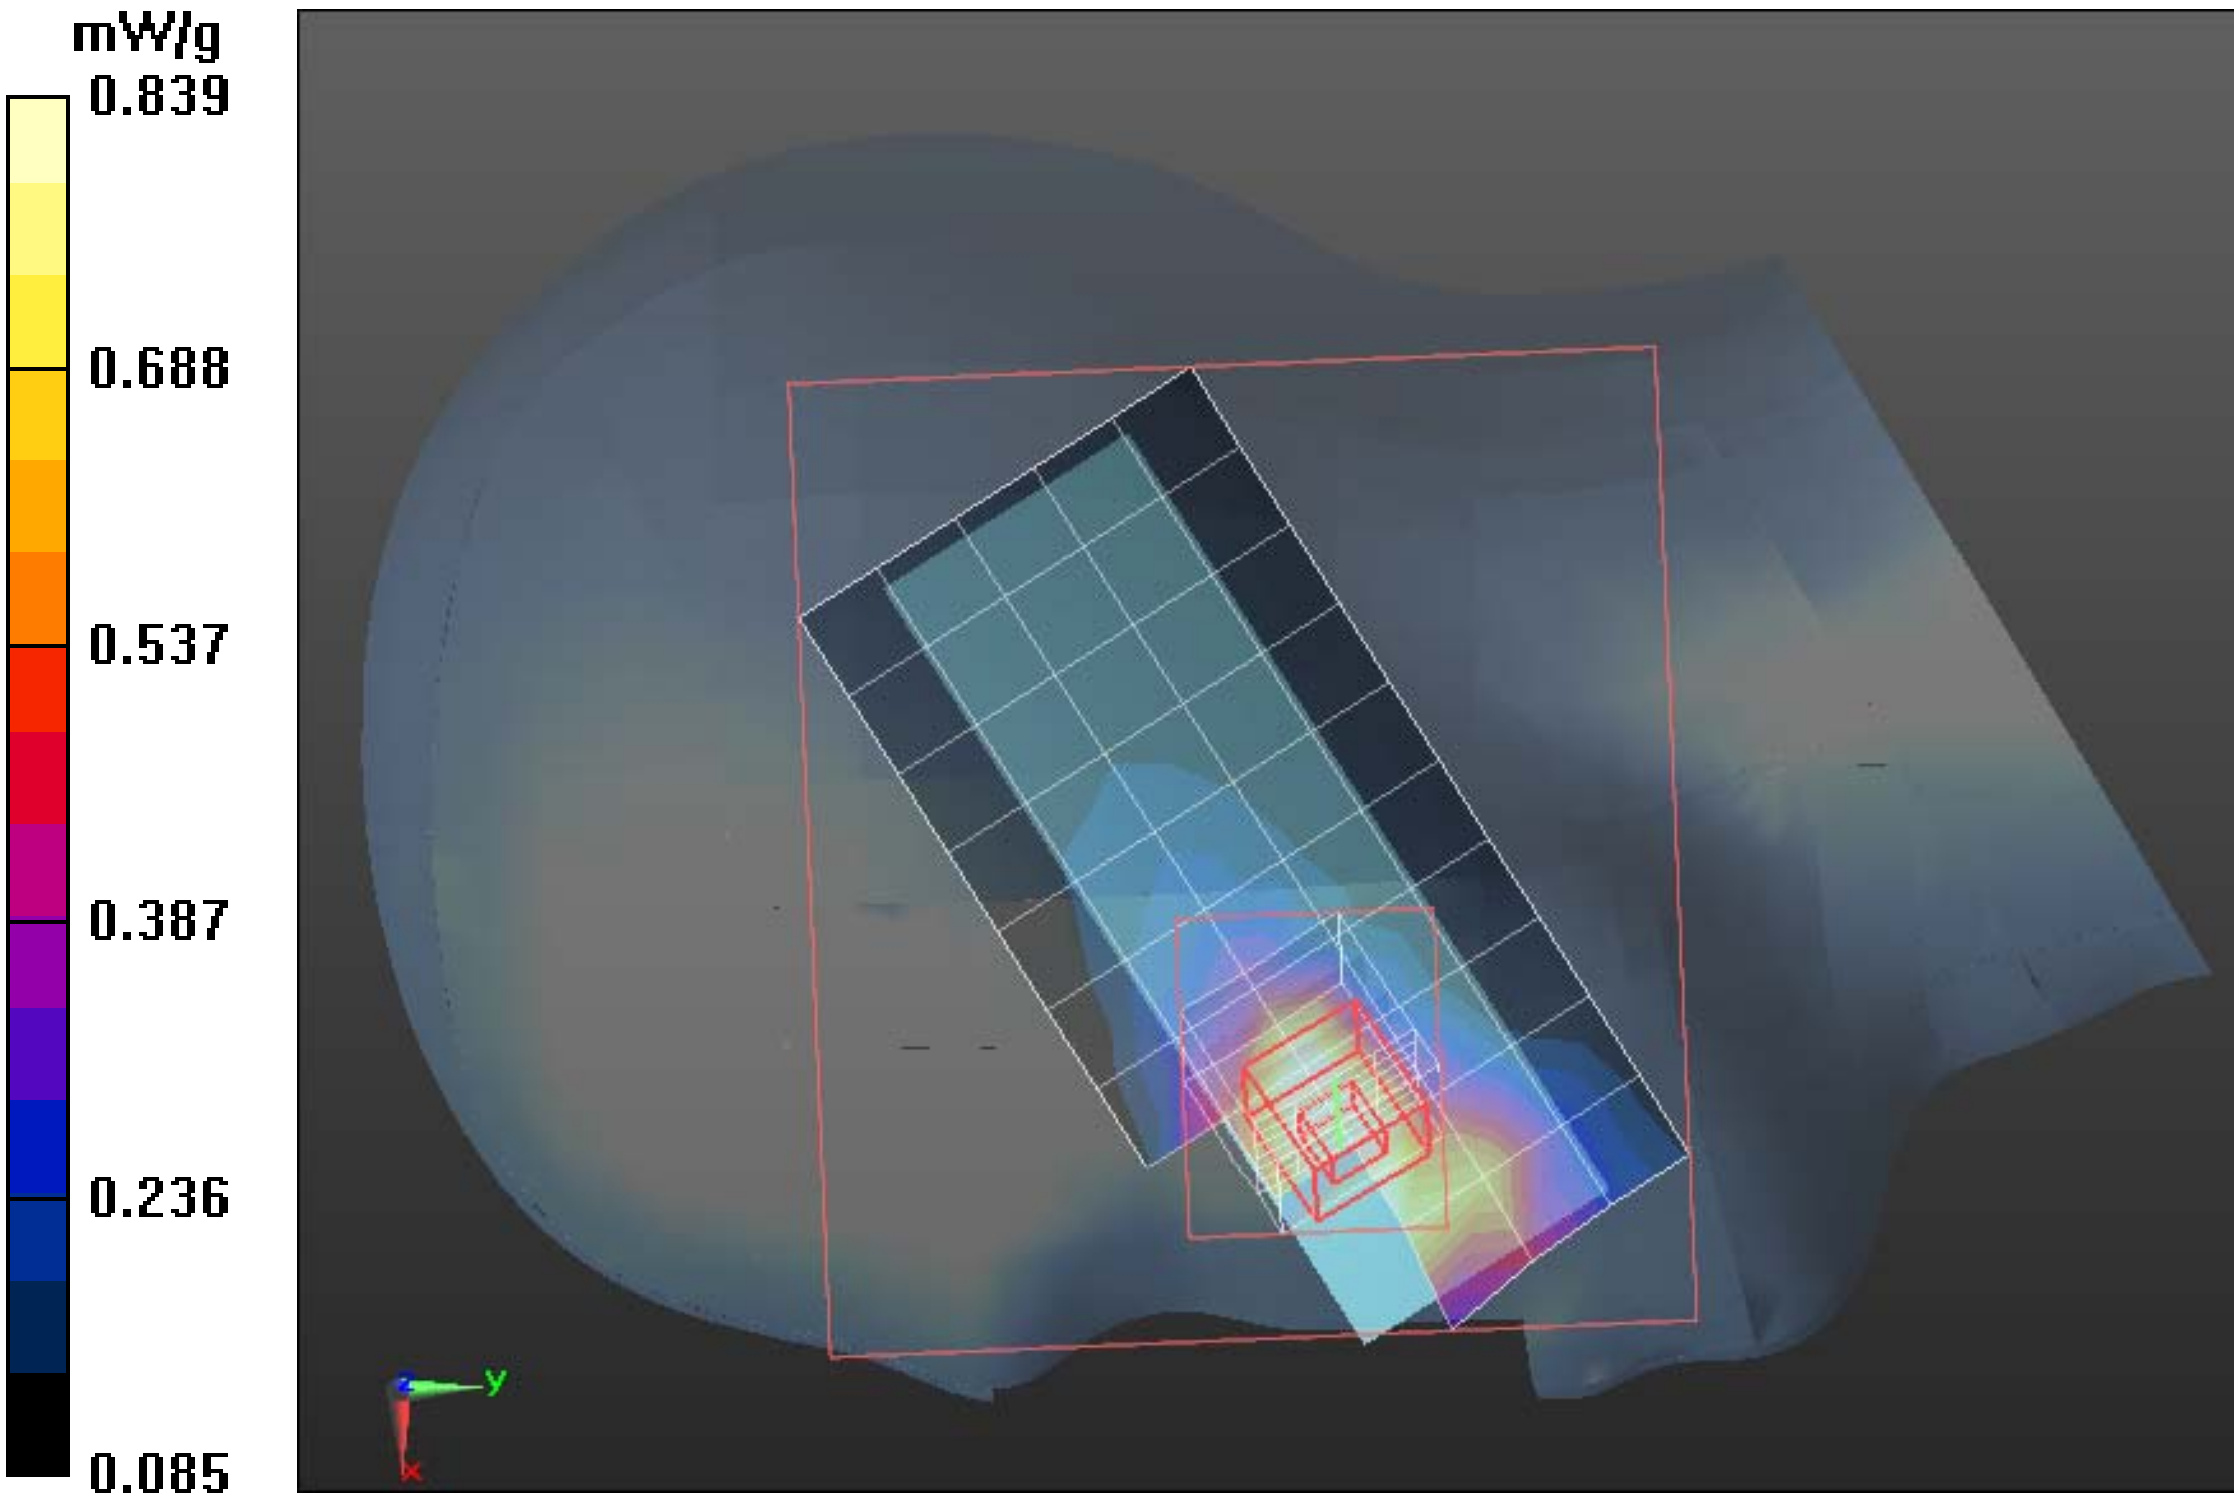

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Right Head Cheek High CH251

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.899 mho/m; ε_r = 41.327; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Right Head Cheek High CH251/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.789 mW/g

GSM850/Right Head Cheek High CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.672 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 0.768 mW/g

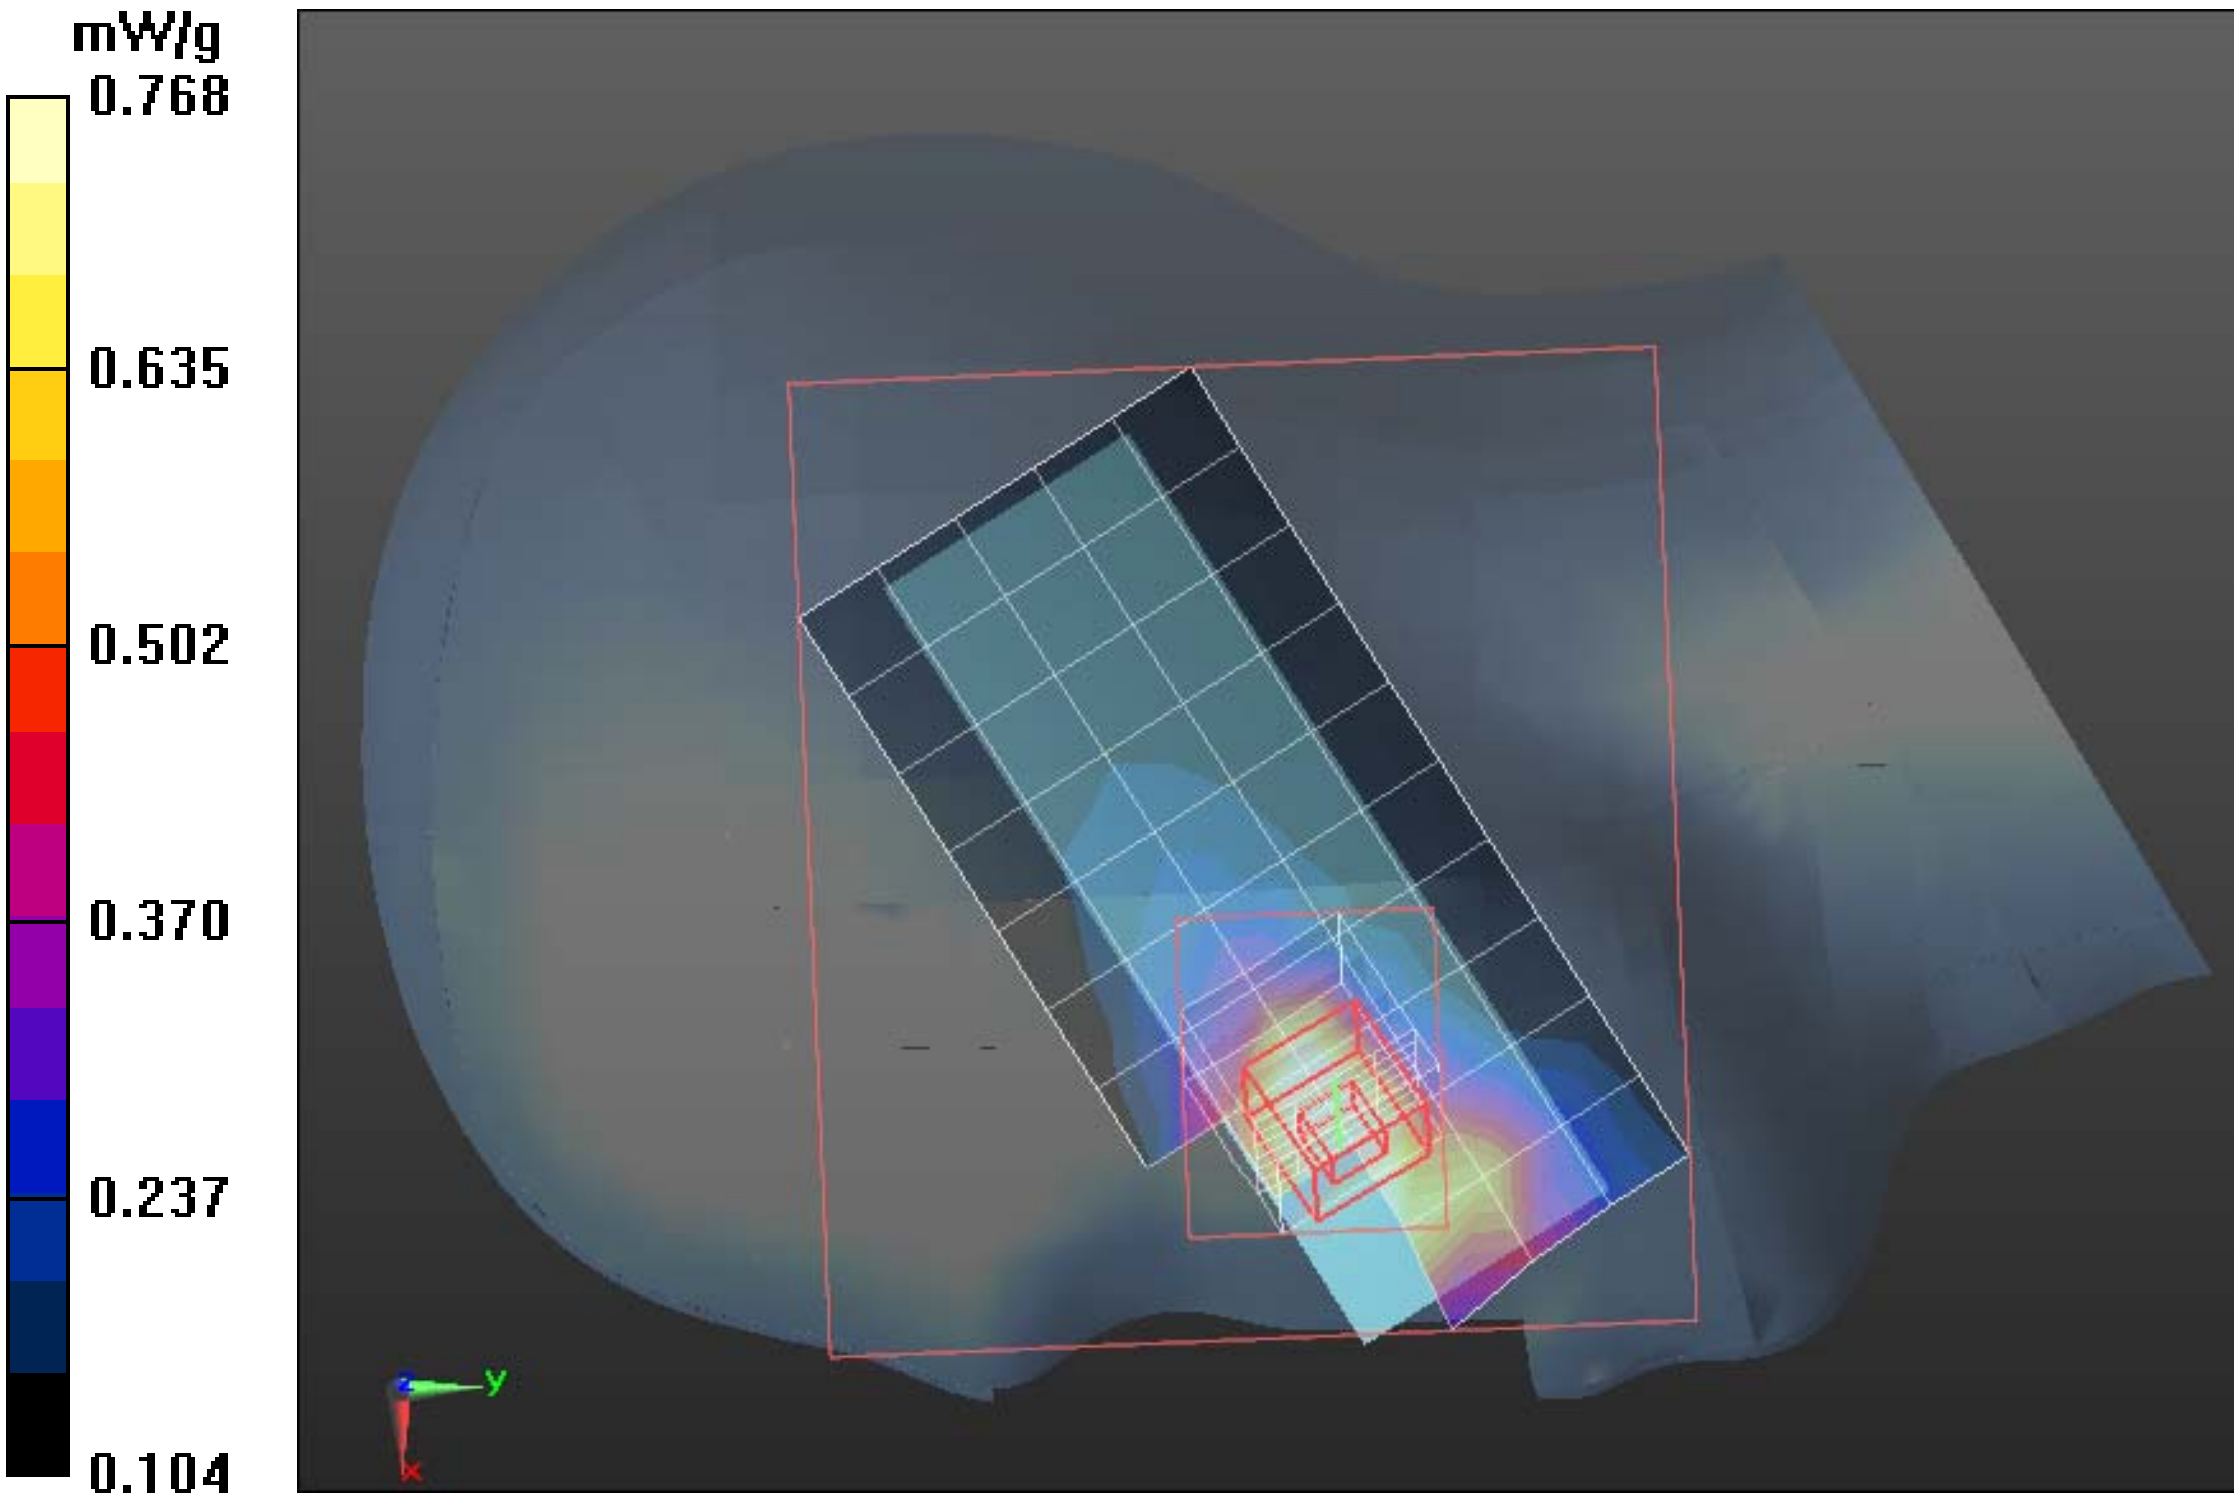

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Right Head Tilted Low CH128

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 824.2 MHz; $\sigma = 0.88$ mho/m; $\varepsilon_r = 41.628$; $\rho = 1000$ kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Right Head Tilted Low CH128/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.670 mW/g

GSM850/Right Head Tilted Low CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.154 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.629 mW/g

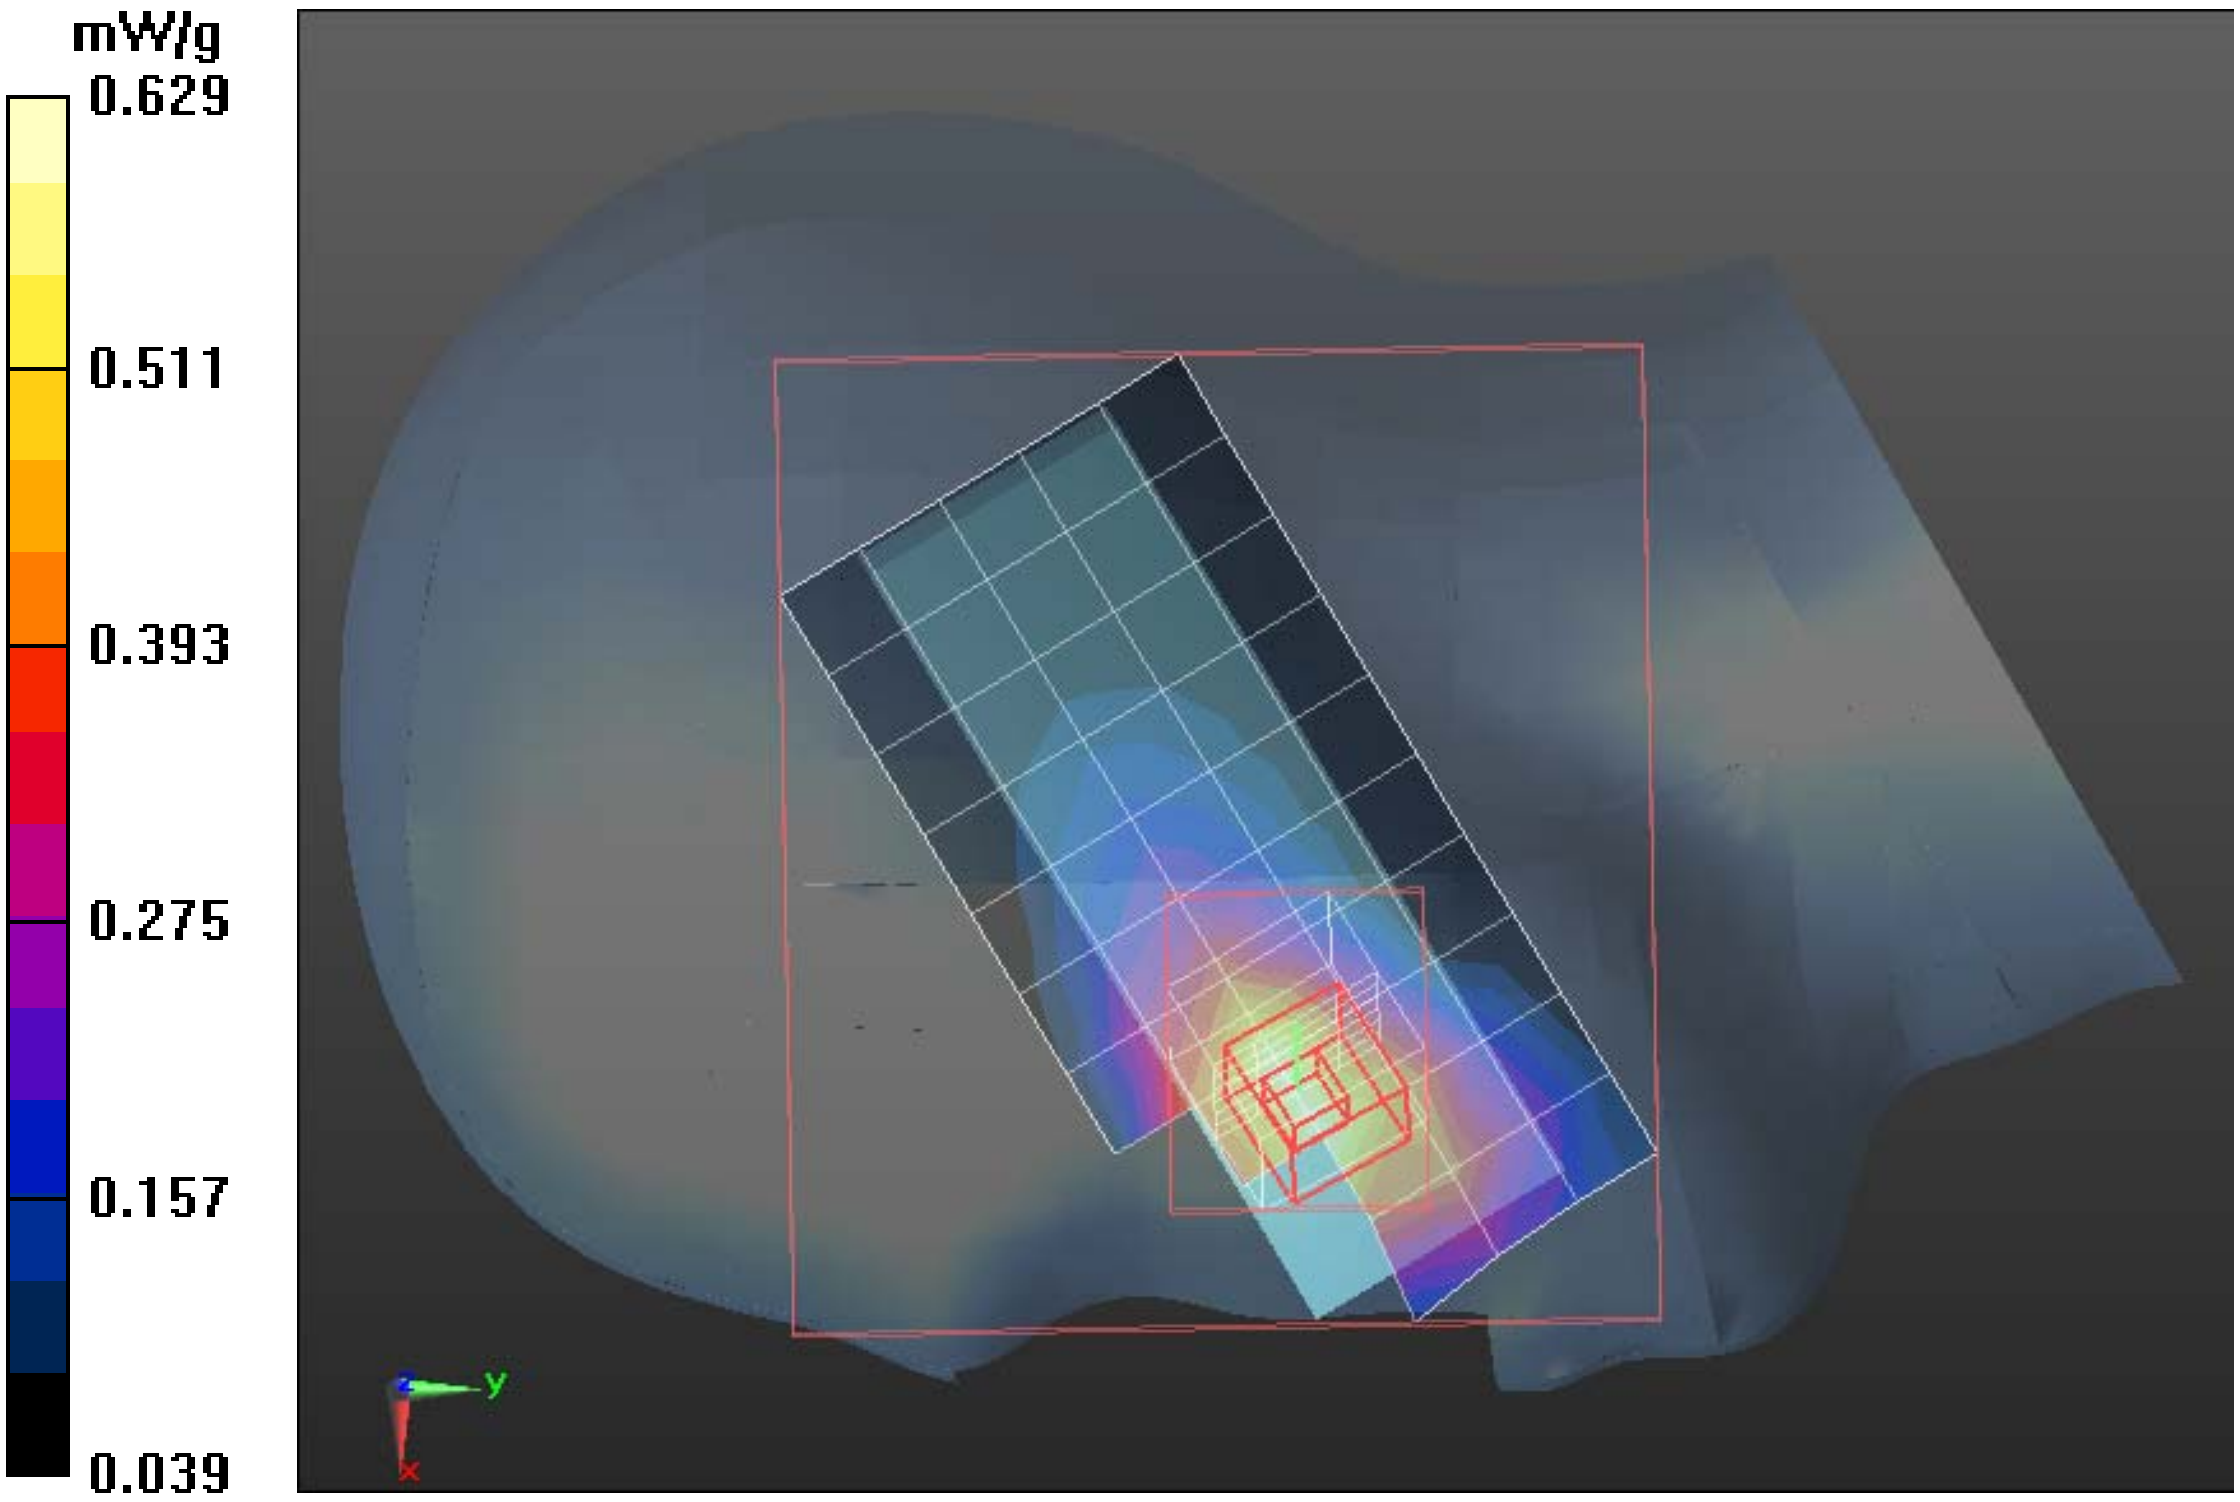

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Right Head Tilted Middle CH190

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.89 mho/m; ε_r = 41.478; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Right Head Tilted Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.546 mW/g

GSM850/Right Head Tilted Middle CH190/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.290 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

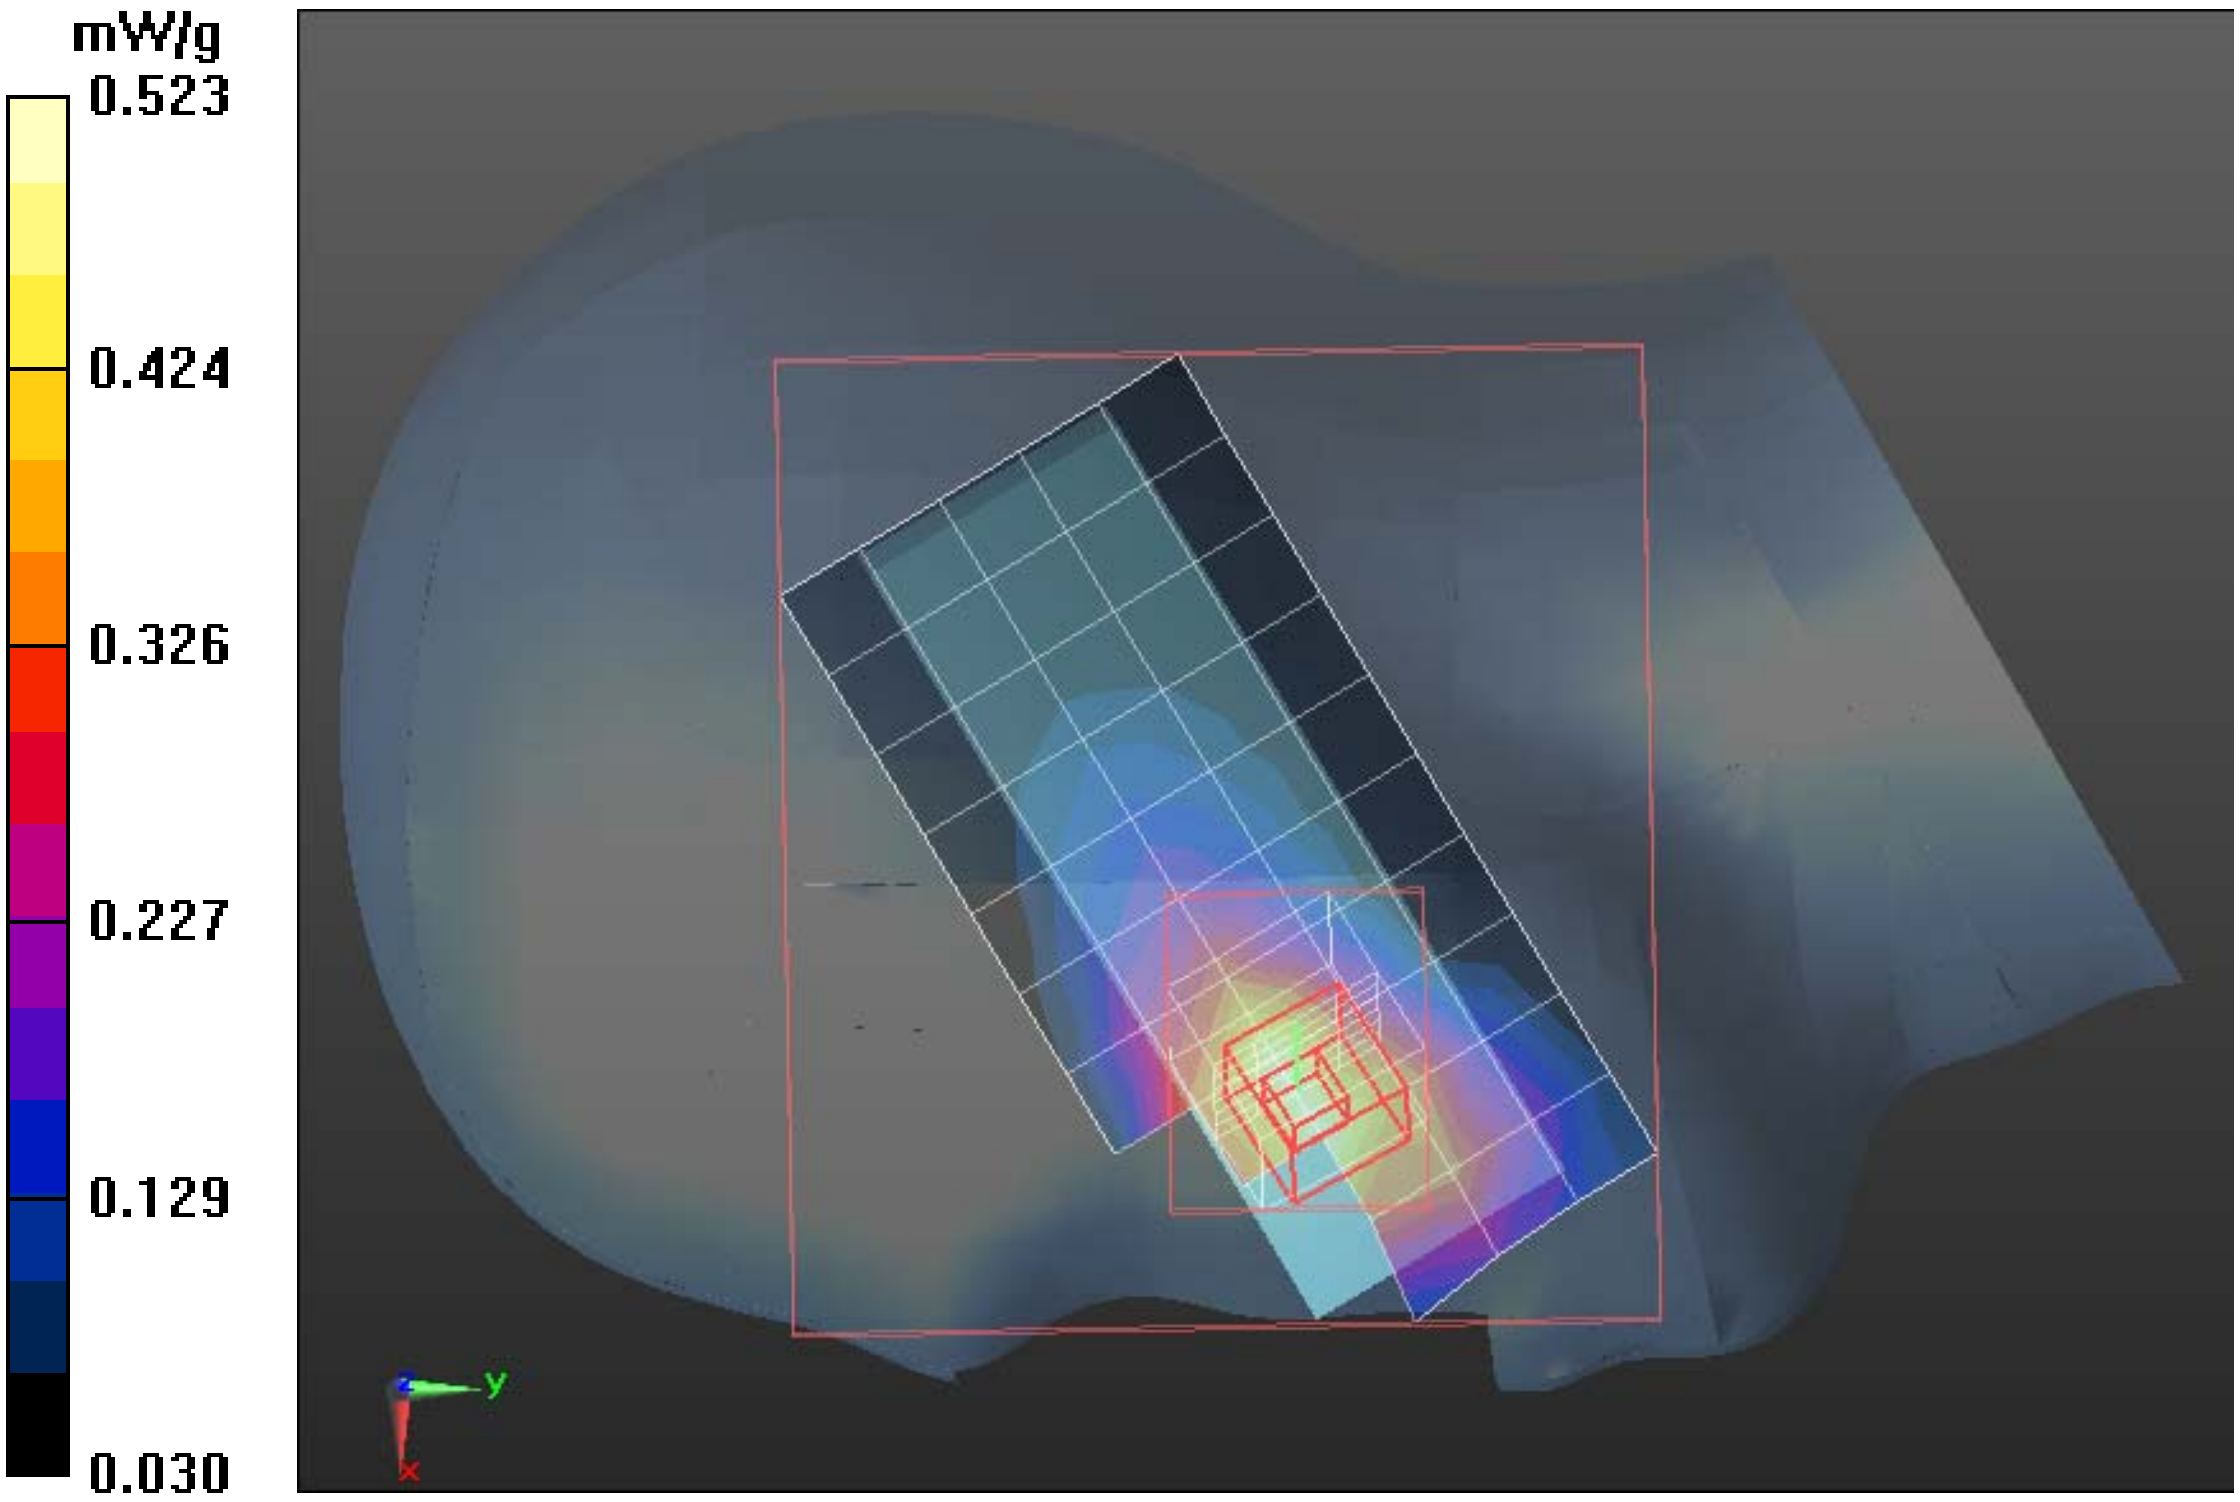

Compliance Certification Services Inc.

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Right Head Tilted High CH251

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.899 mho/m; ε_r = 41.327; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Right Head Tilted High CH251/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.472 mW/g

GSM850/Right Head Tilted High CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.658 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.505 mW/g

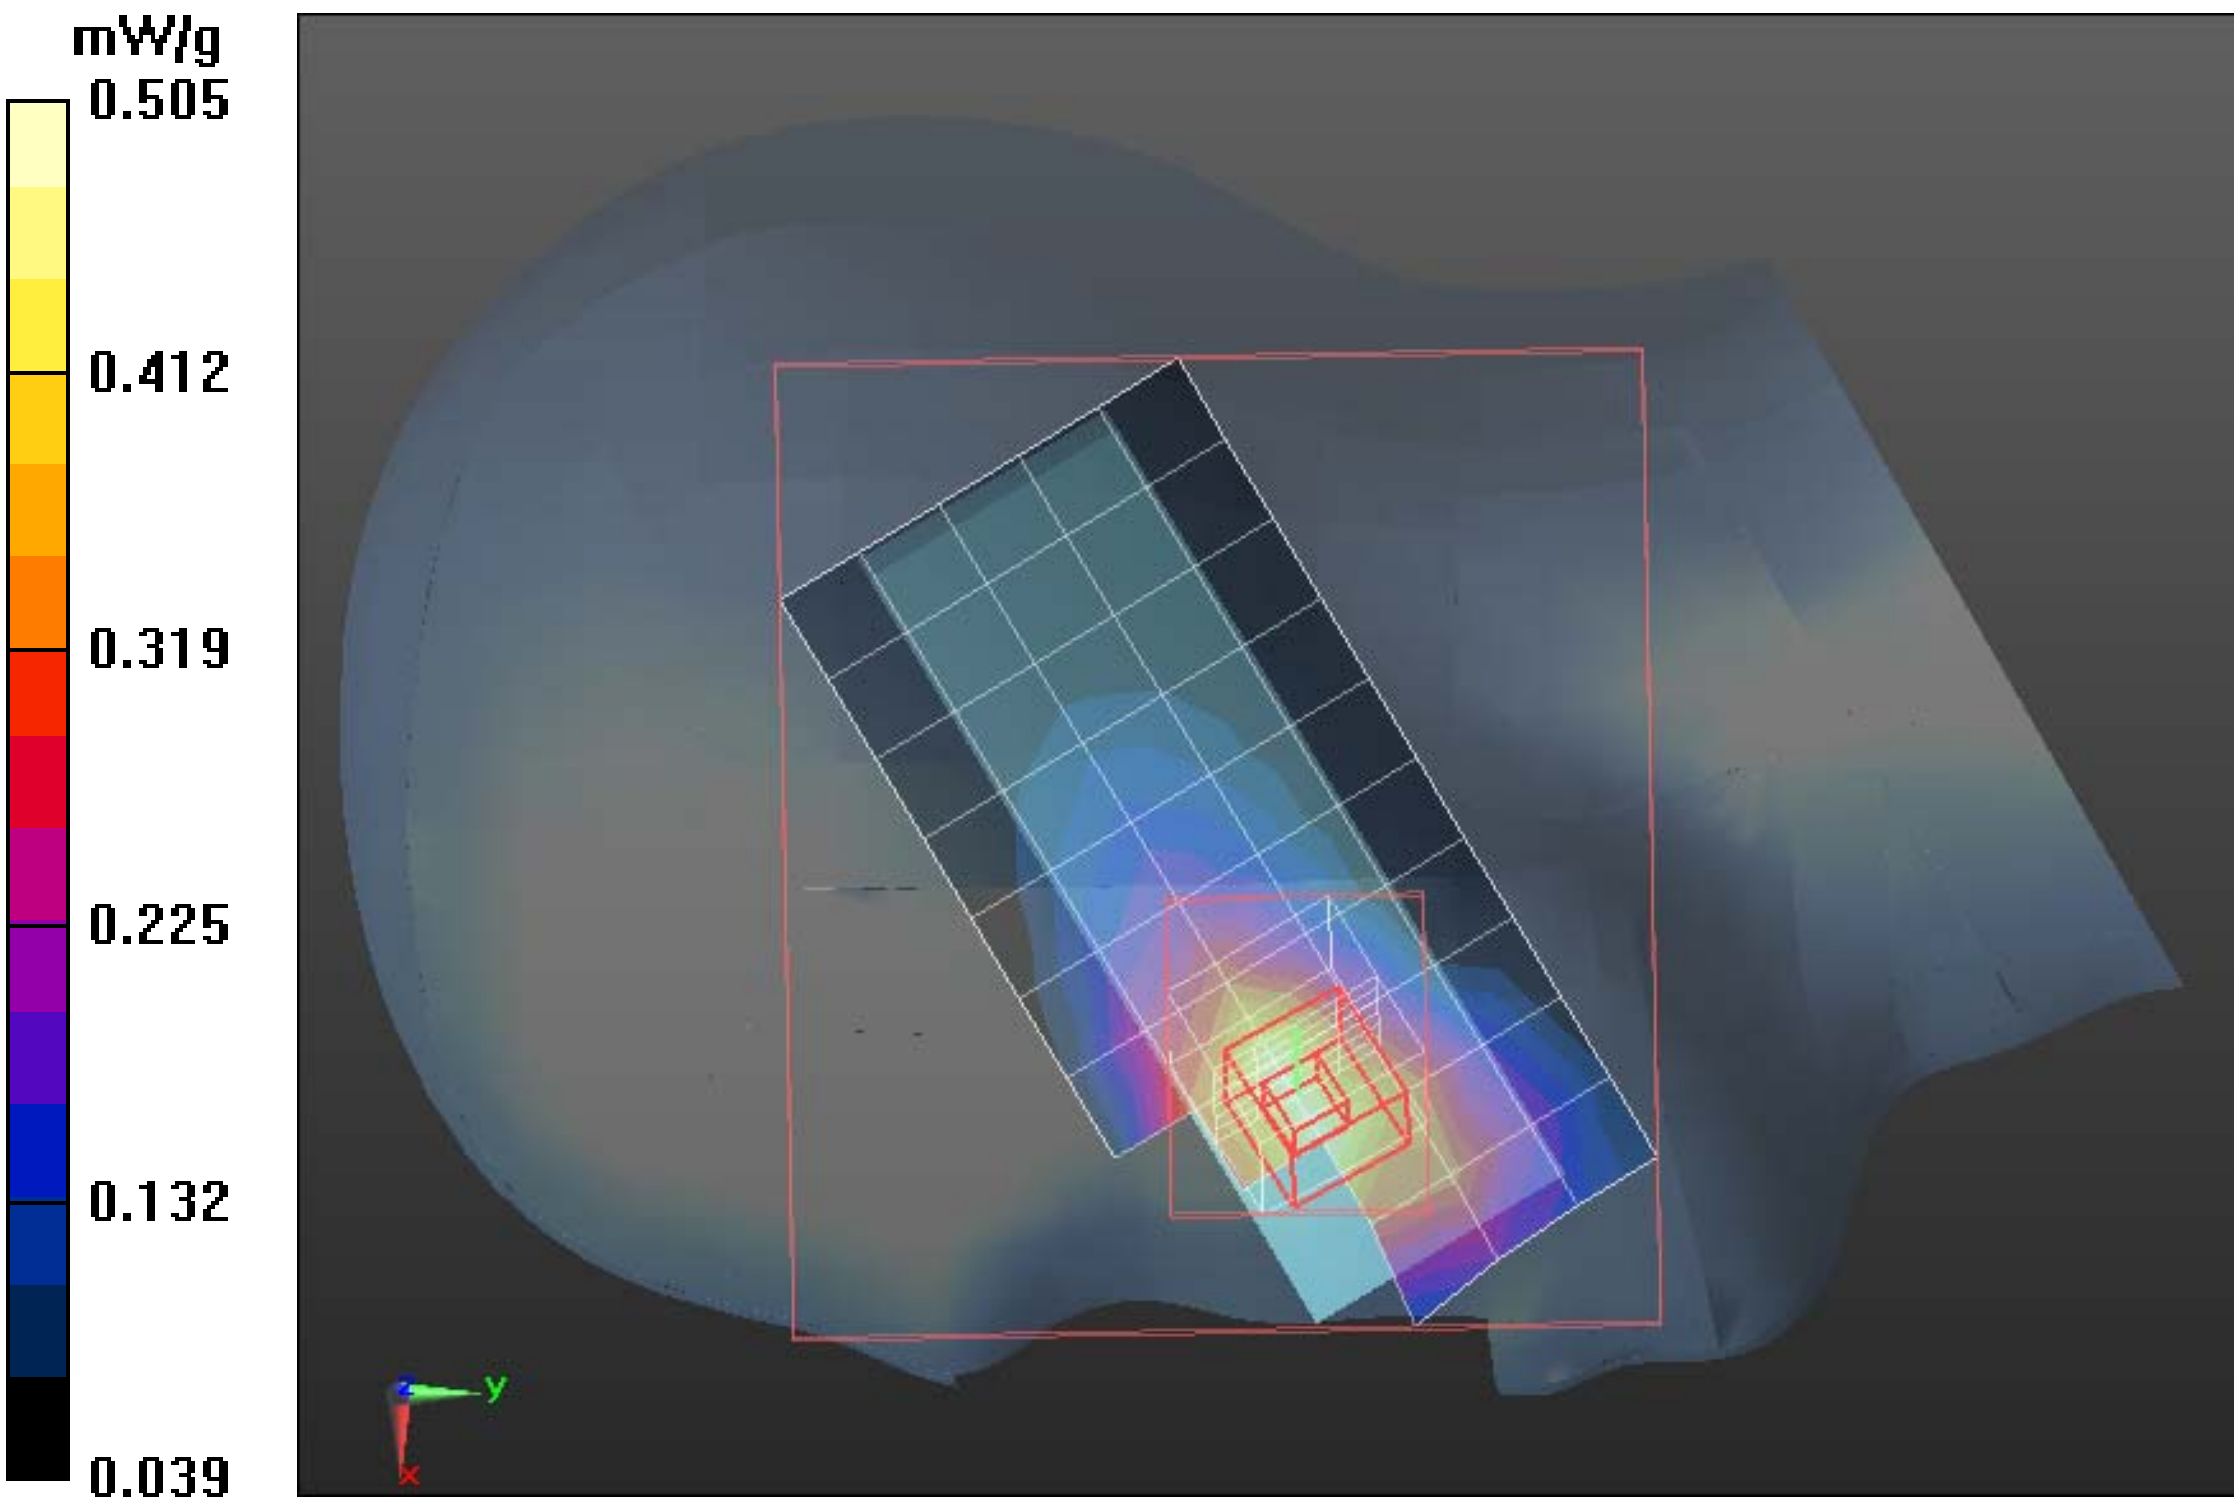

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Left Head Cheek Low CH128

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.88 mho/m; ε_r = 41.628; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Left Head Cheek Low CH128/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.592 mW/g

GSM850/Left Head Cheek Low CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.294 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.649 mW/g

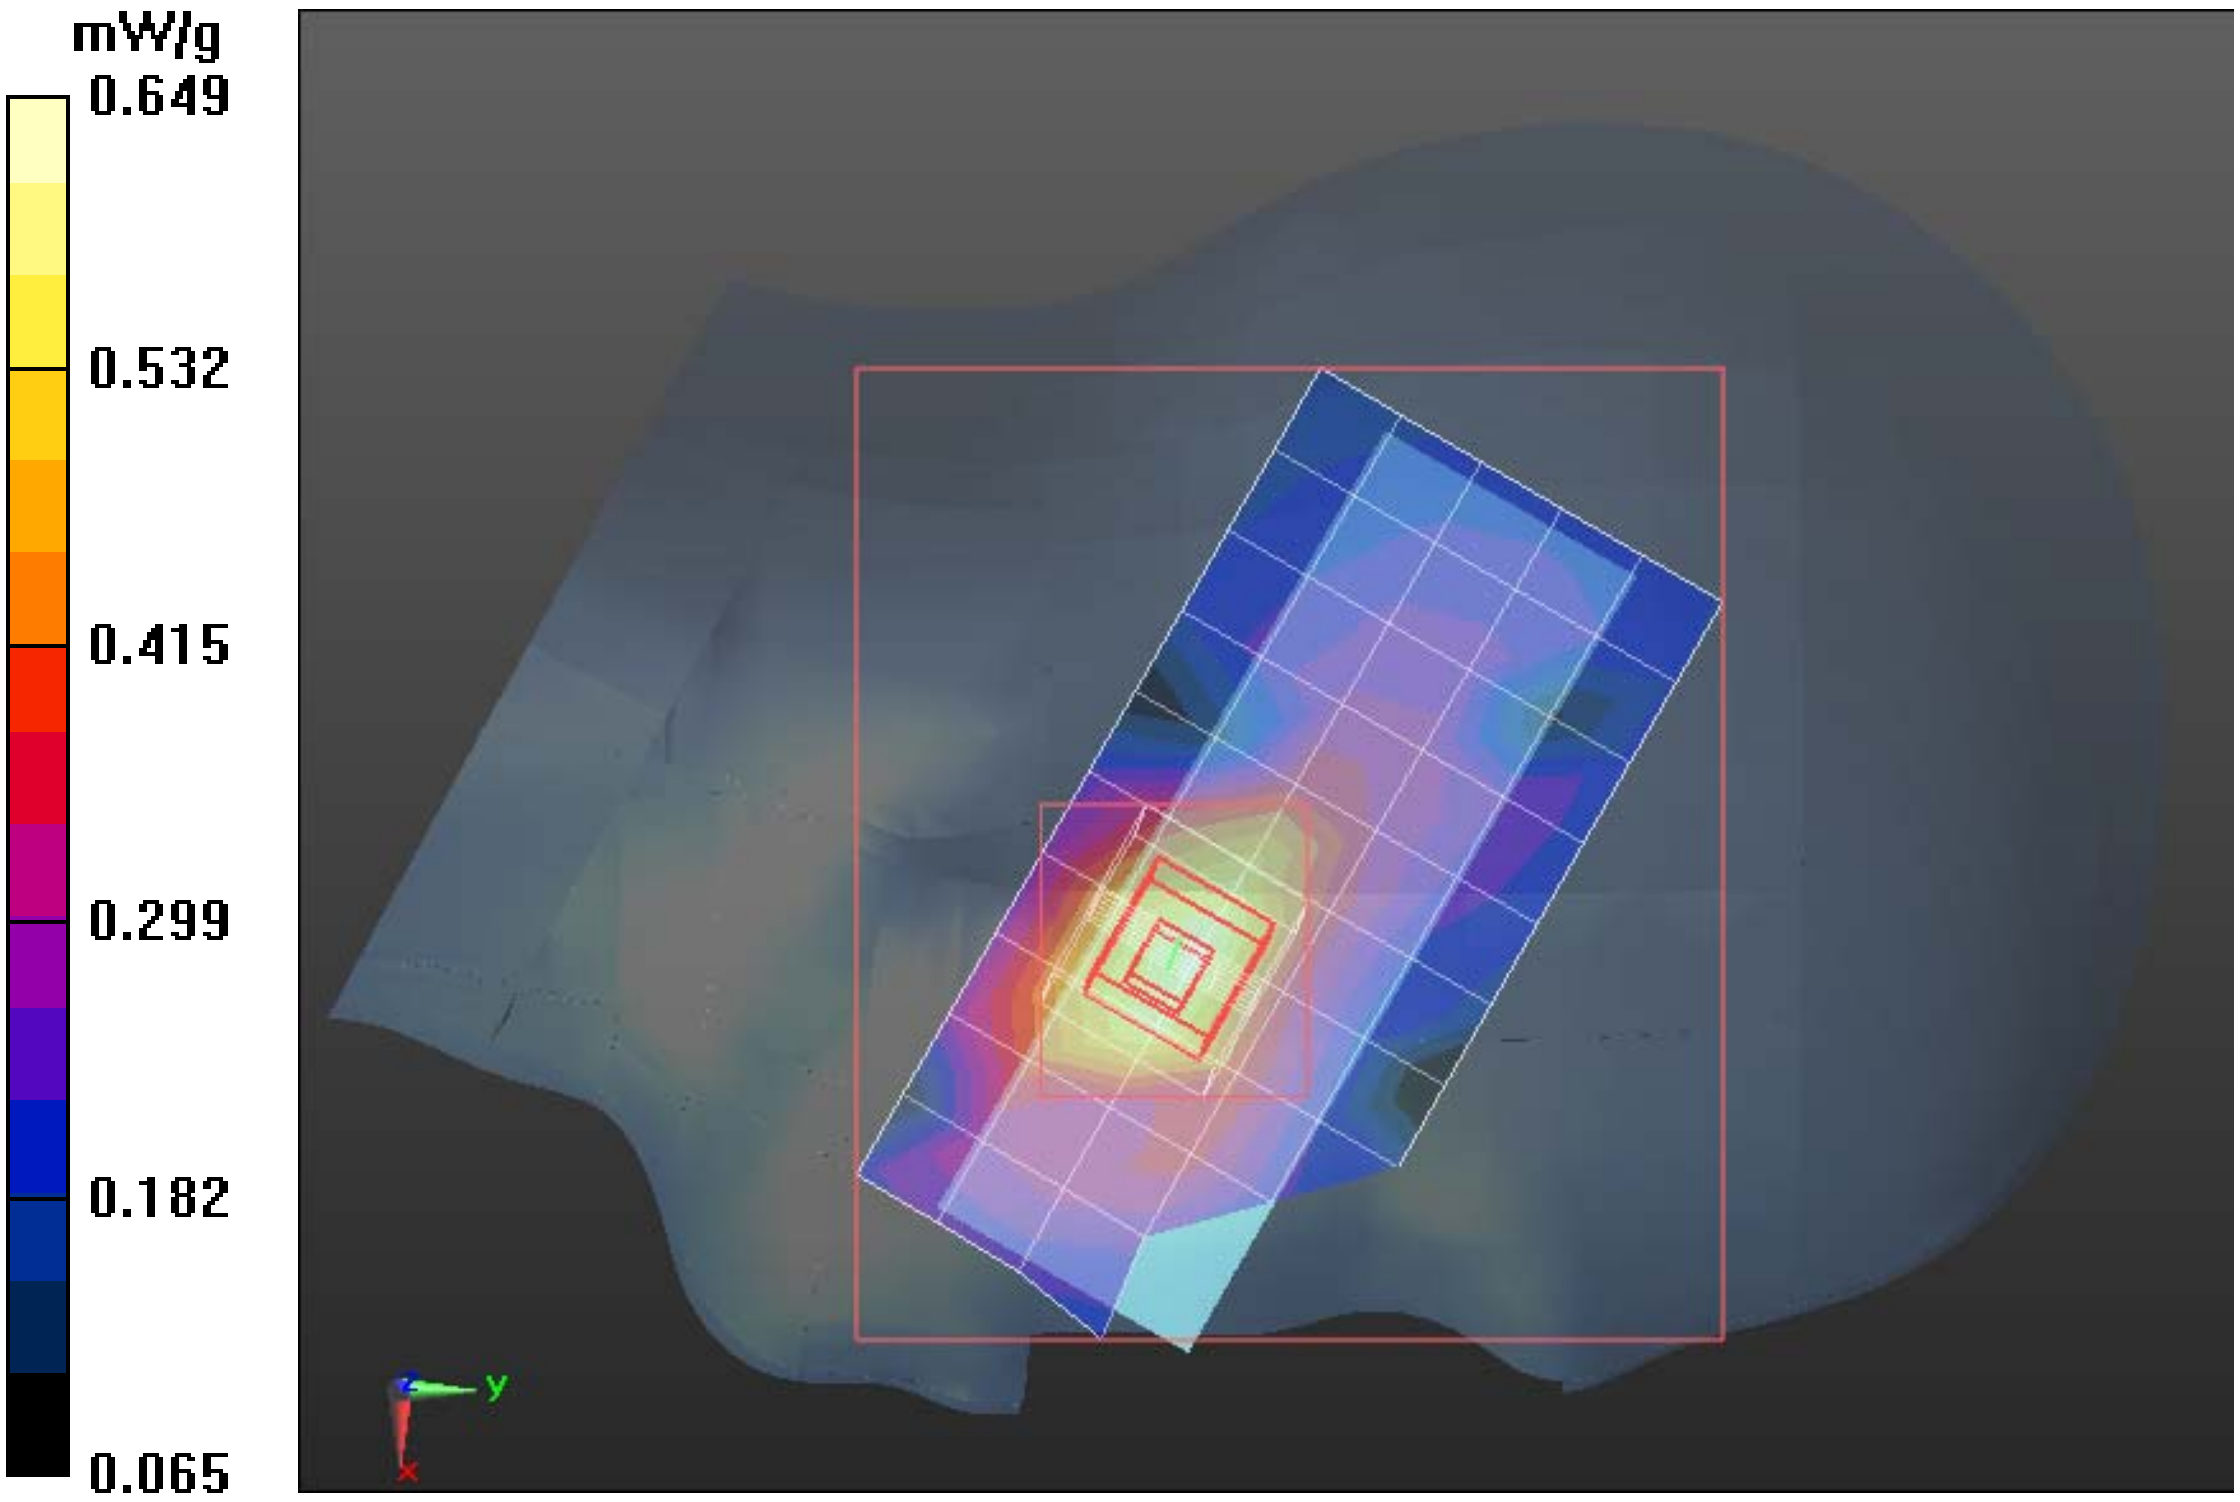

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Left Head Cheek Middle CH190

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.89 mho/m; ε_r = 41.478; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Left Head Cheek Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.897 mW/g

GSM850/Left Head Cheek Middle CH190/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.131 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.990 W/kg

SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

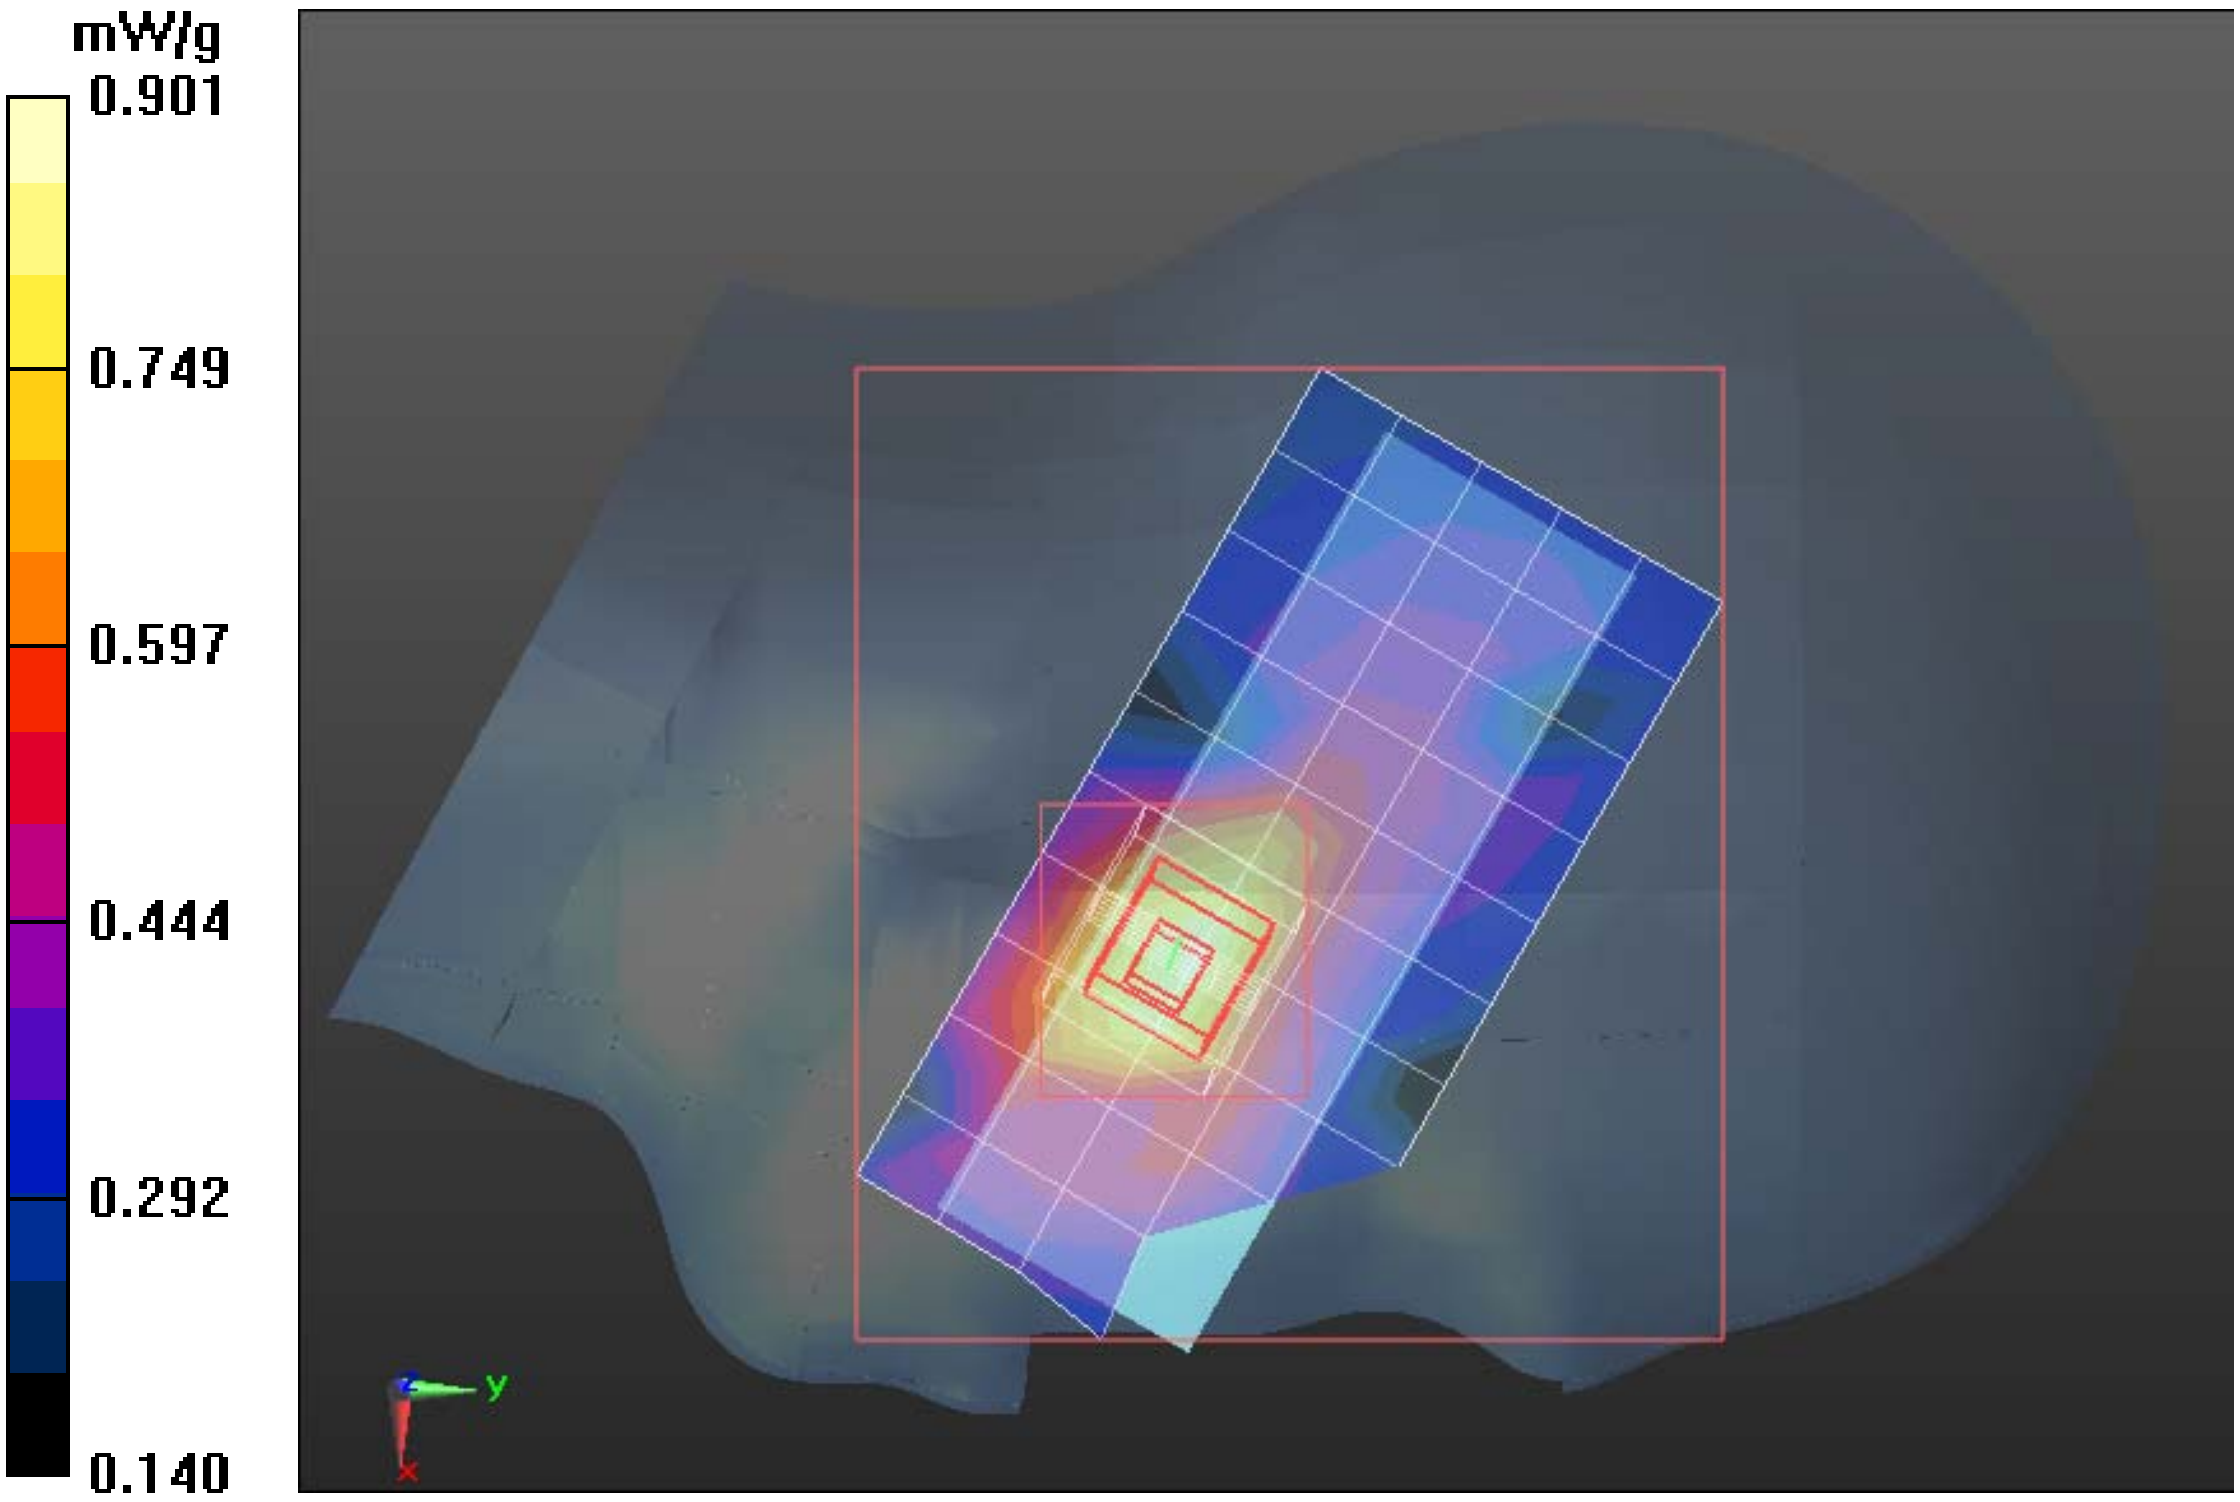

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Left Head Cheek High CH251

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz;Communication System PAR: 9.191 dB

Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.899 mho/m; ε_r = 41.327; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Left Head Cheek High CH251/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.818 mW/g

GSM850/Left Head Cheek High CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.915 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.472 mW/g

Maximum value of SAR (measured) = 0.831 mW/g

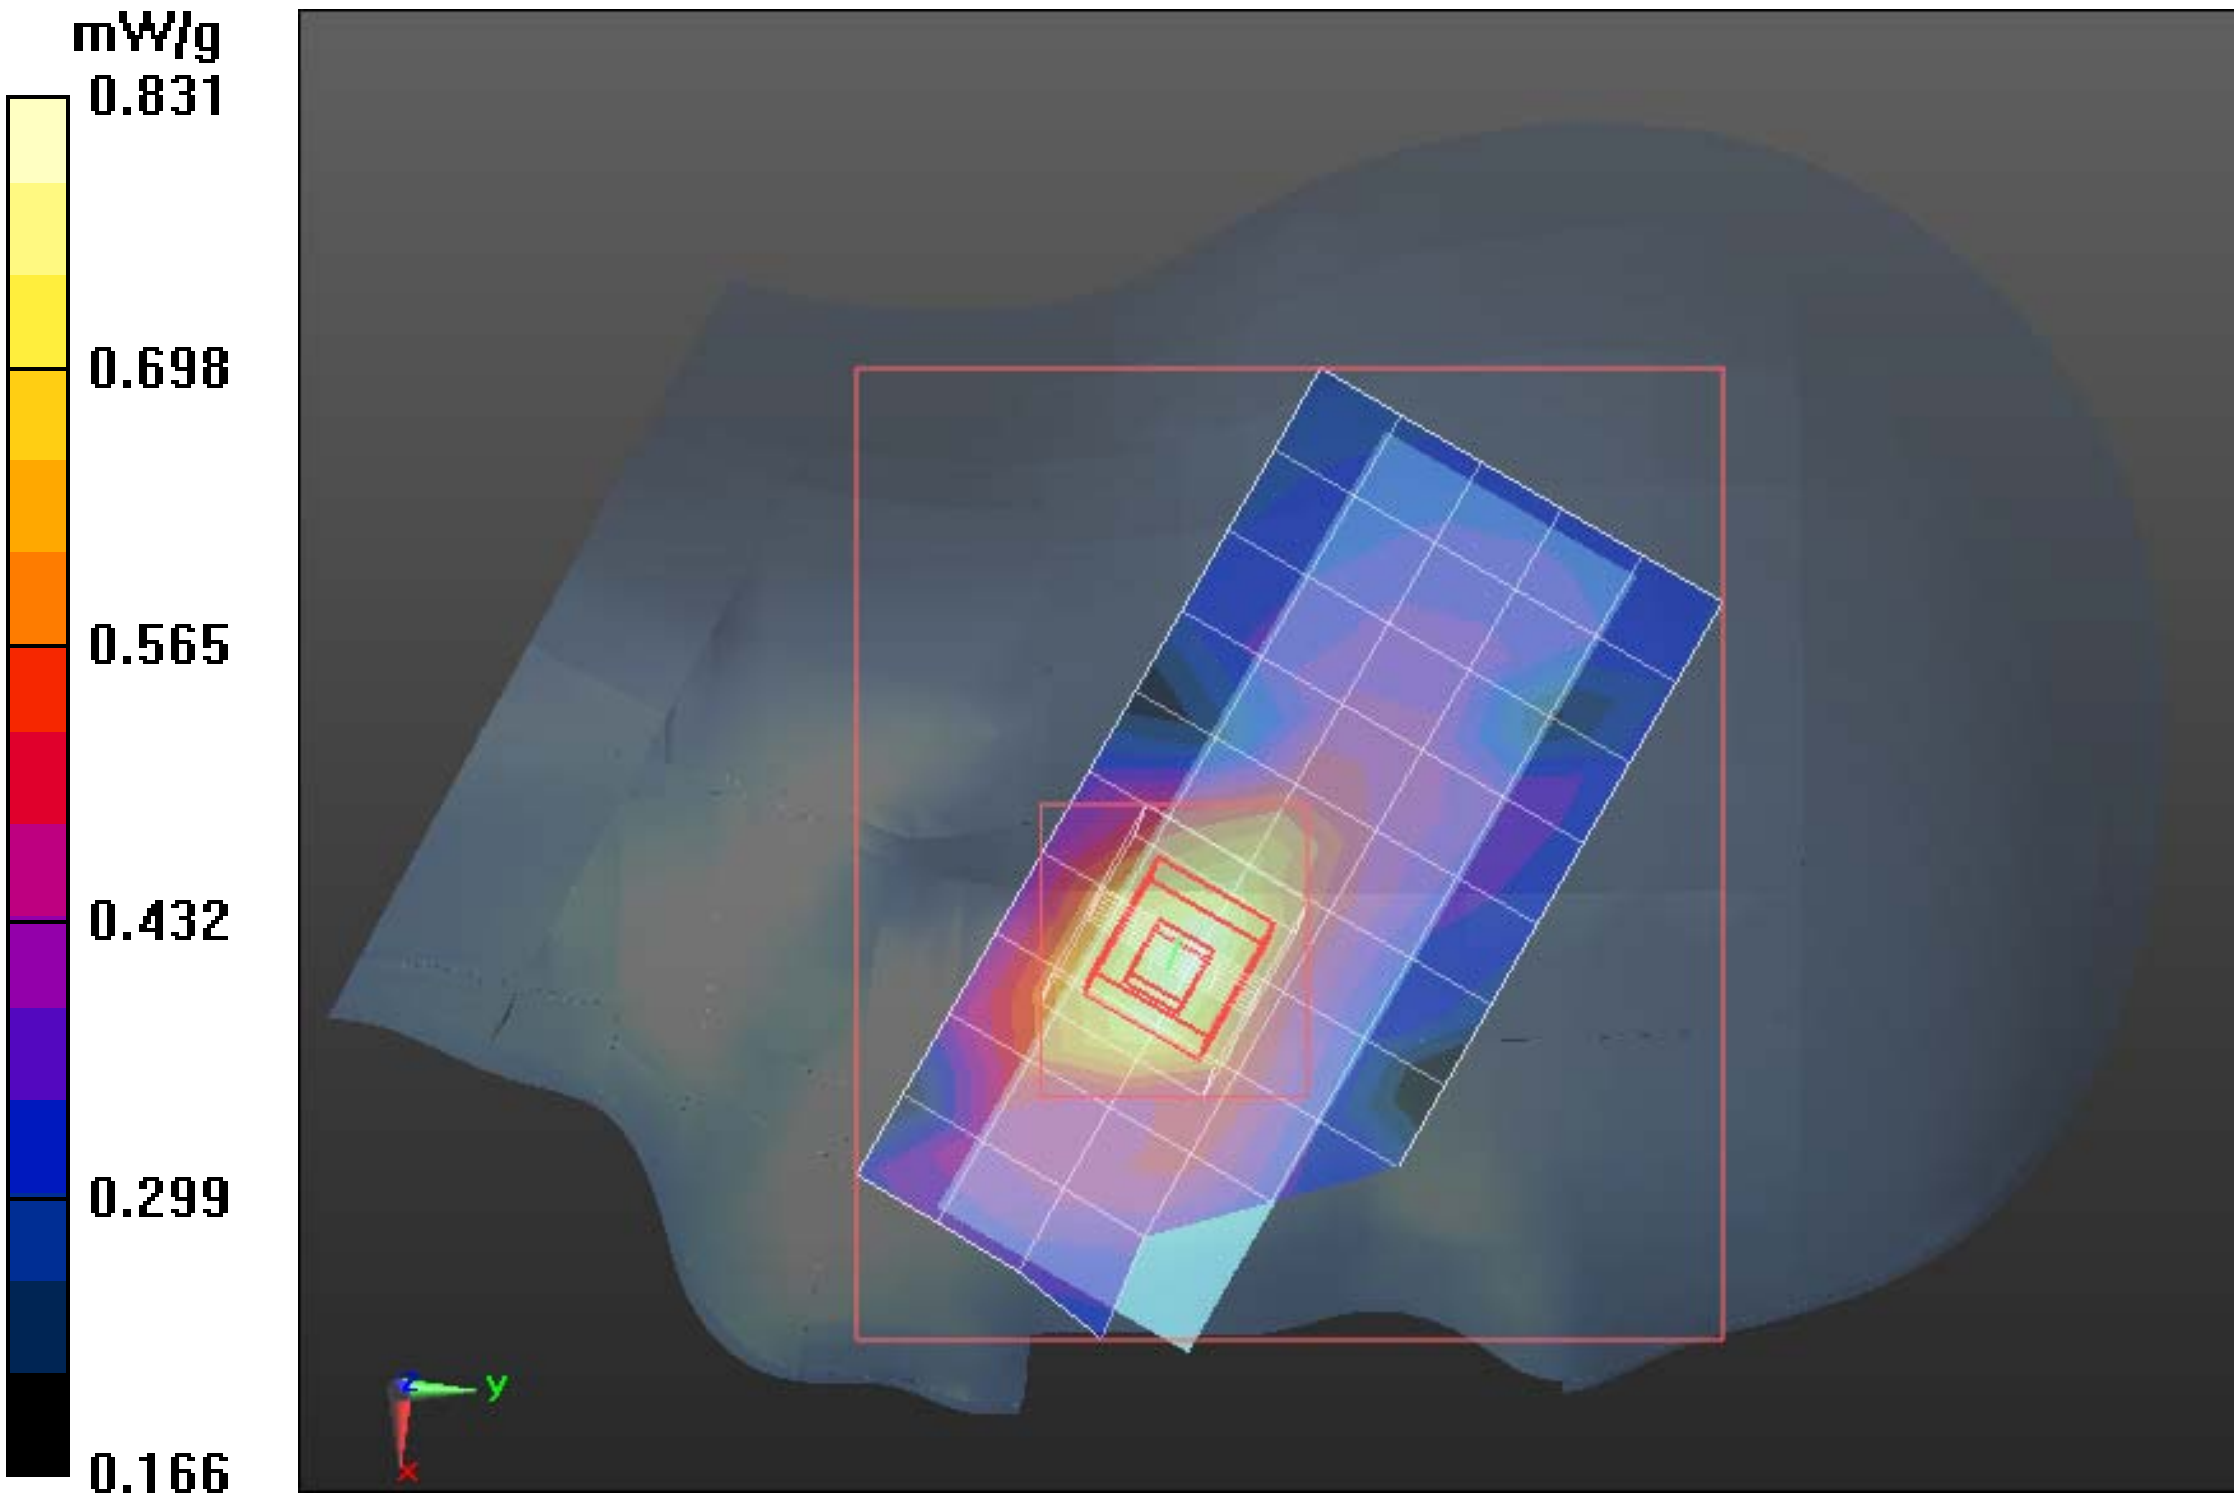

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Left Head Tilted Low CH128

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz;Communication System PAR: 9.03 dB
Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.88 mho/m; ε_r = 41.628; ρ = 1000 kg/m^3
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Left Head Tilted Low CH128/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.606 mW/g

GSM850/Left Head Tilted Low CH128/Zoom Scan (7x7x9)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.535 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.725 W/kg
SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.334 mW/g
Maximum value of SAR (measured) = 0.653 mW/g

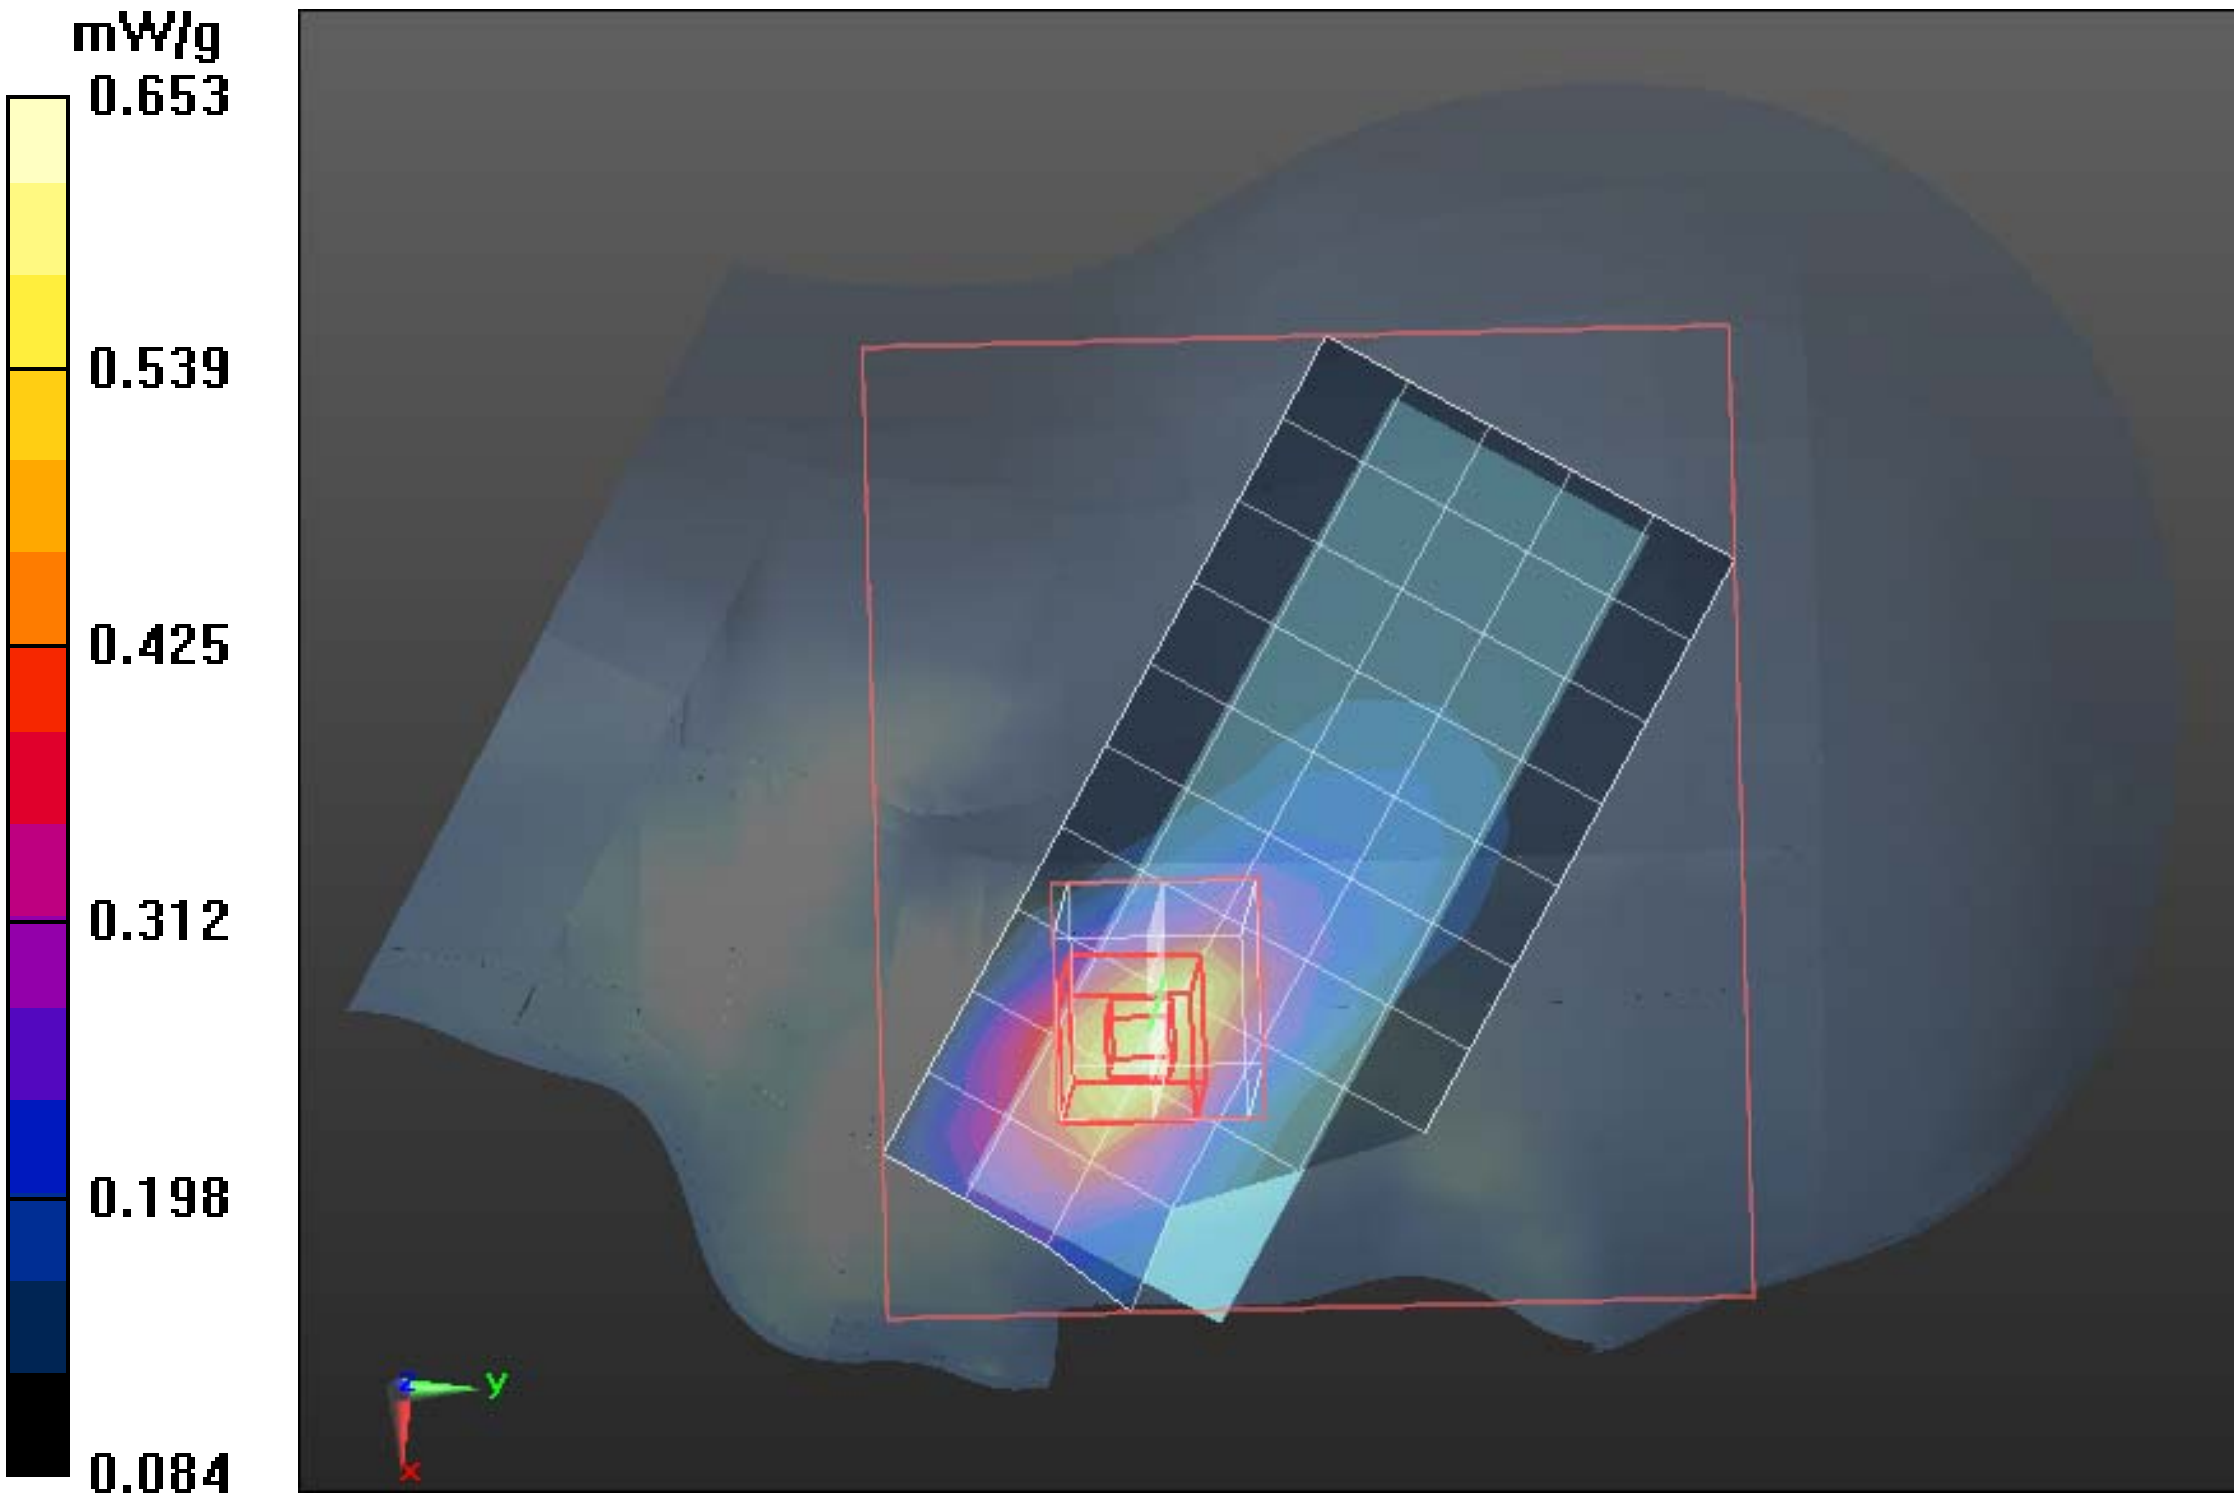

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Left Head Tilted Middle CH190

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 836.6 MHz; σ = 0.89 mho/m; ε_r = 41.478; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Left Head Tilted Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.522 mW/g

GSM850/Left Head Tilted Middle CH190/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.082 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.558 mW/g

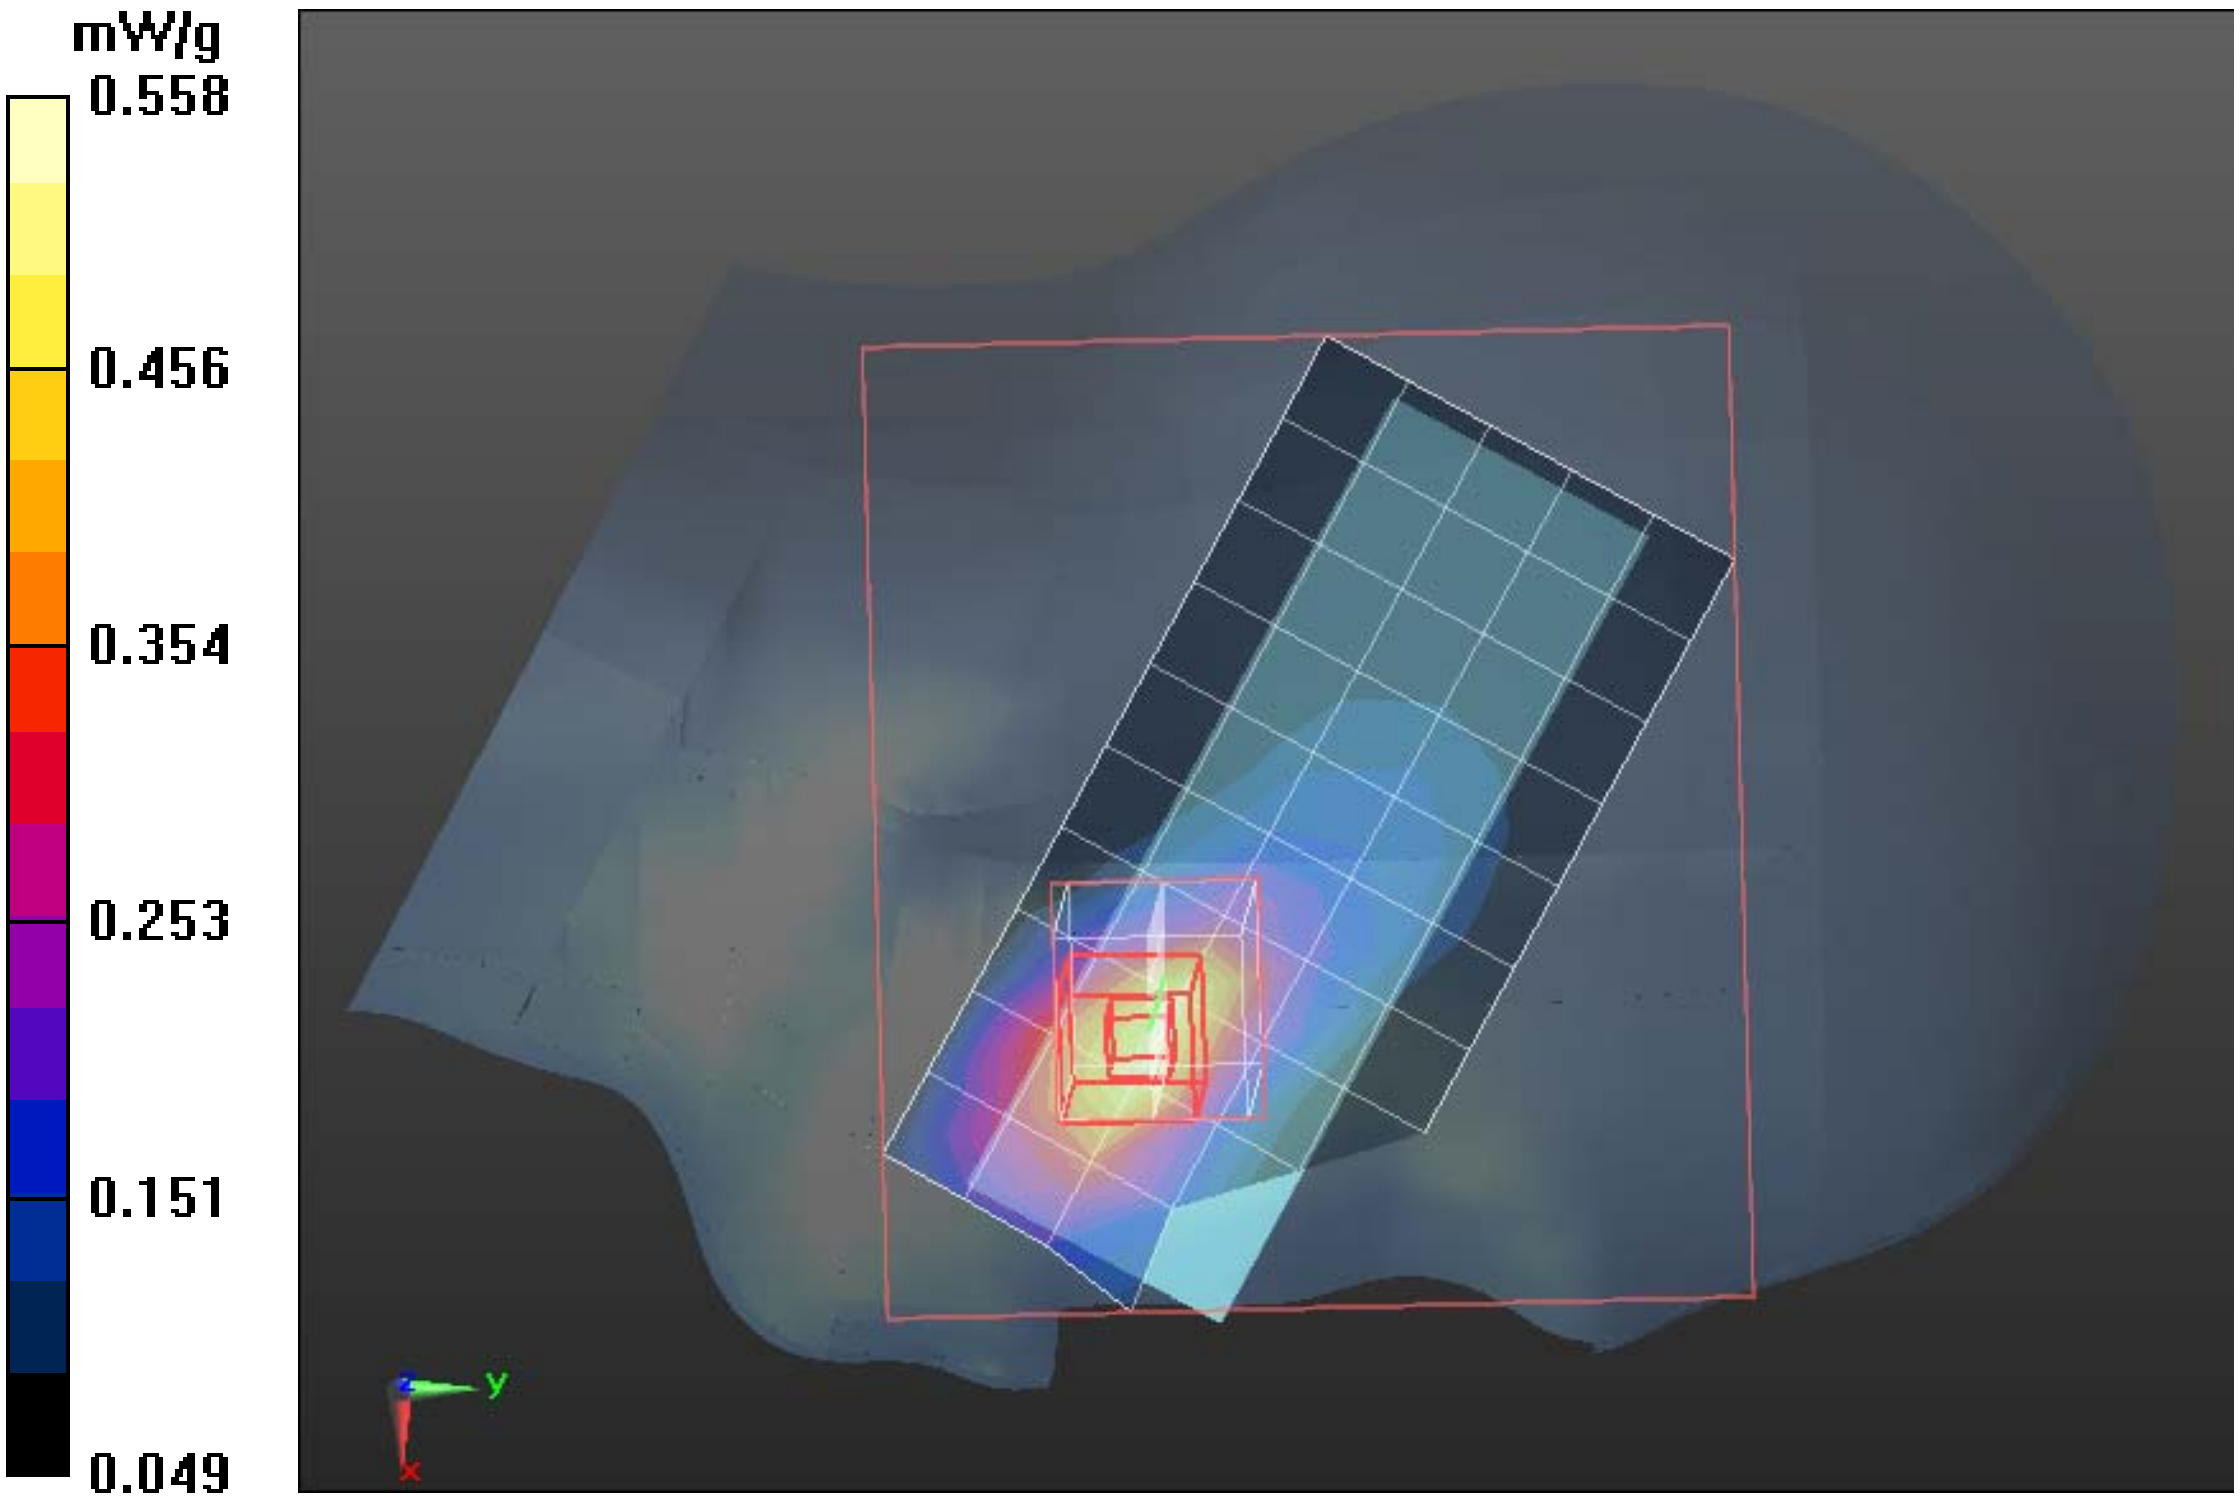

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Left Head Tilted High CH251

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 848.8 MHz; σ = 0.899 mho/m; ε_r = 41.327; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM850/Left Head Tilted High CH251/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.510 mW/g

GSM850/Left Head Tilted High CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.432 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.366 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

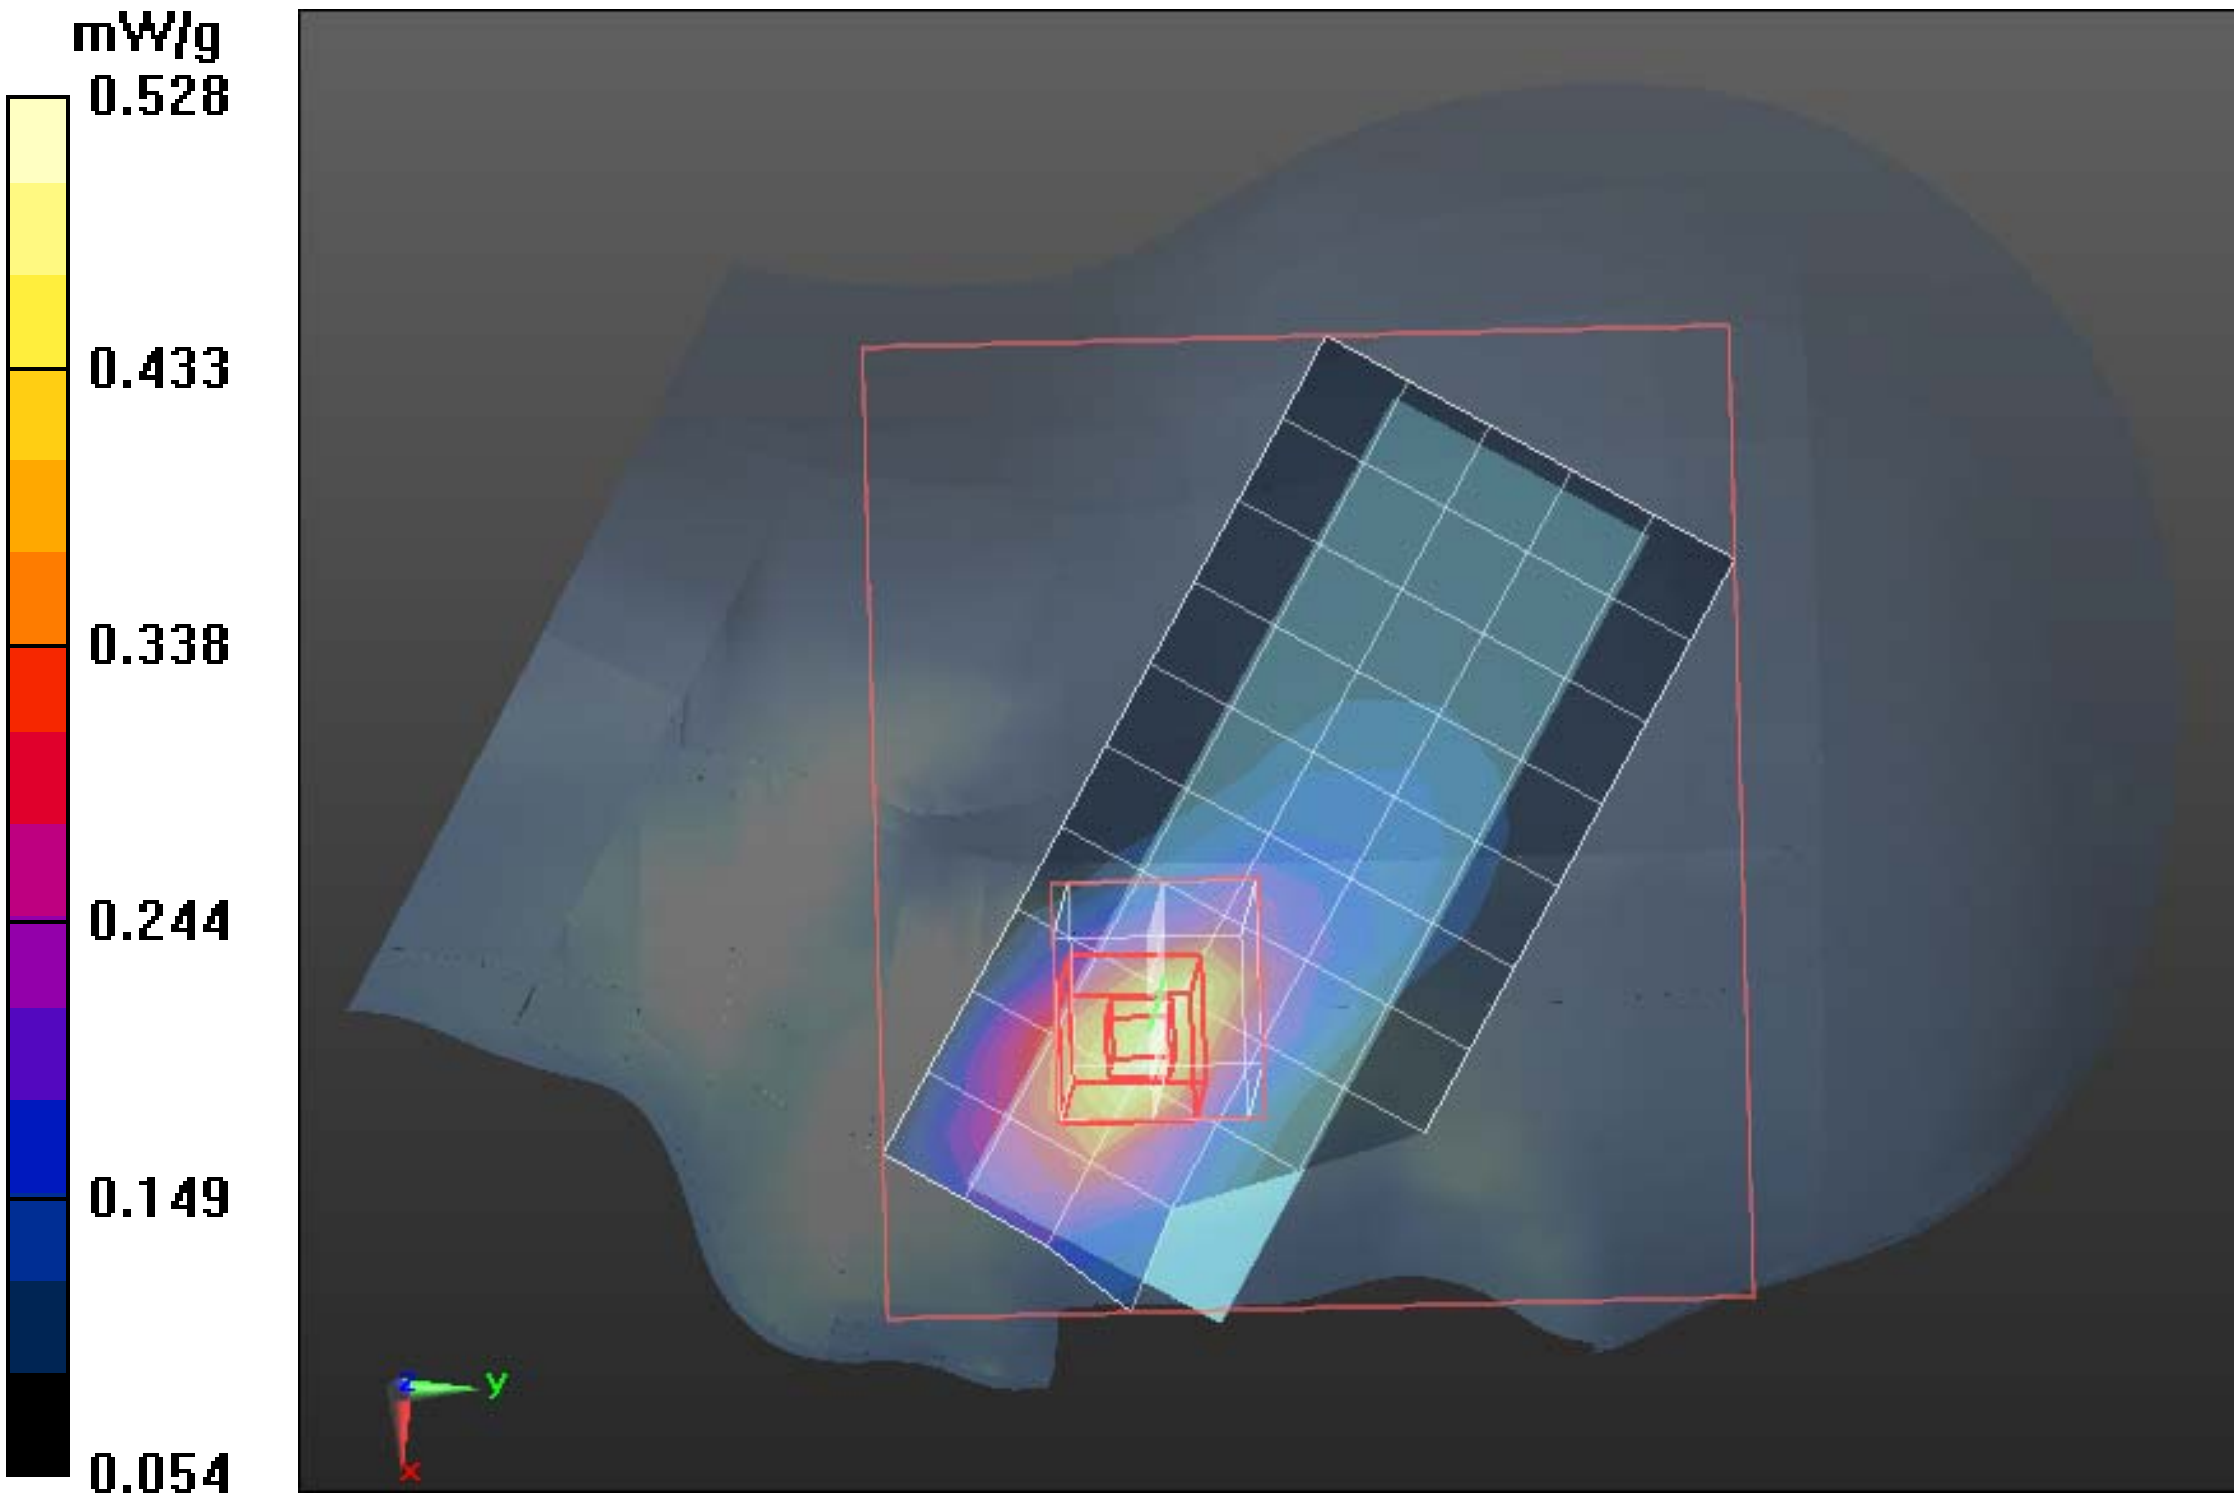

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Body Up Low CH128

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.95mho/m; ε_r = 55.015; ρ = 1000 kg/m^3

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM 850/GSM850 Body Up Low CH128/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.427 mW/g

GSM 850/GSM850 Body Up Low CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.143 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

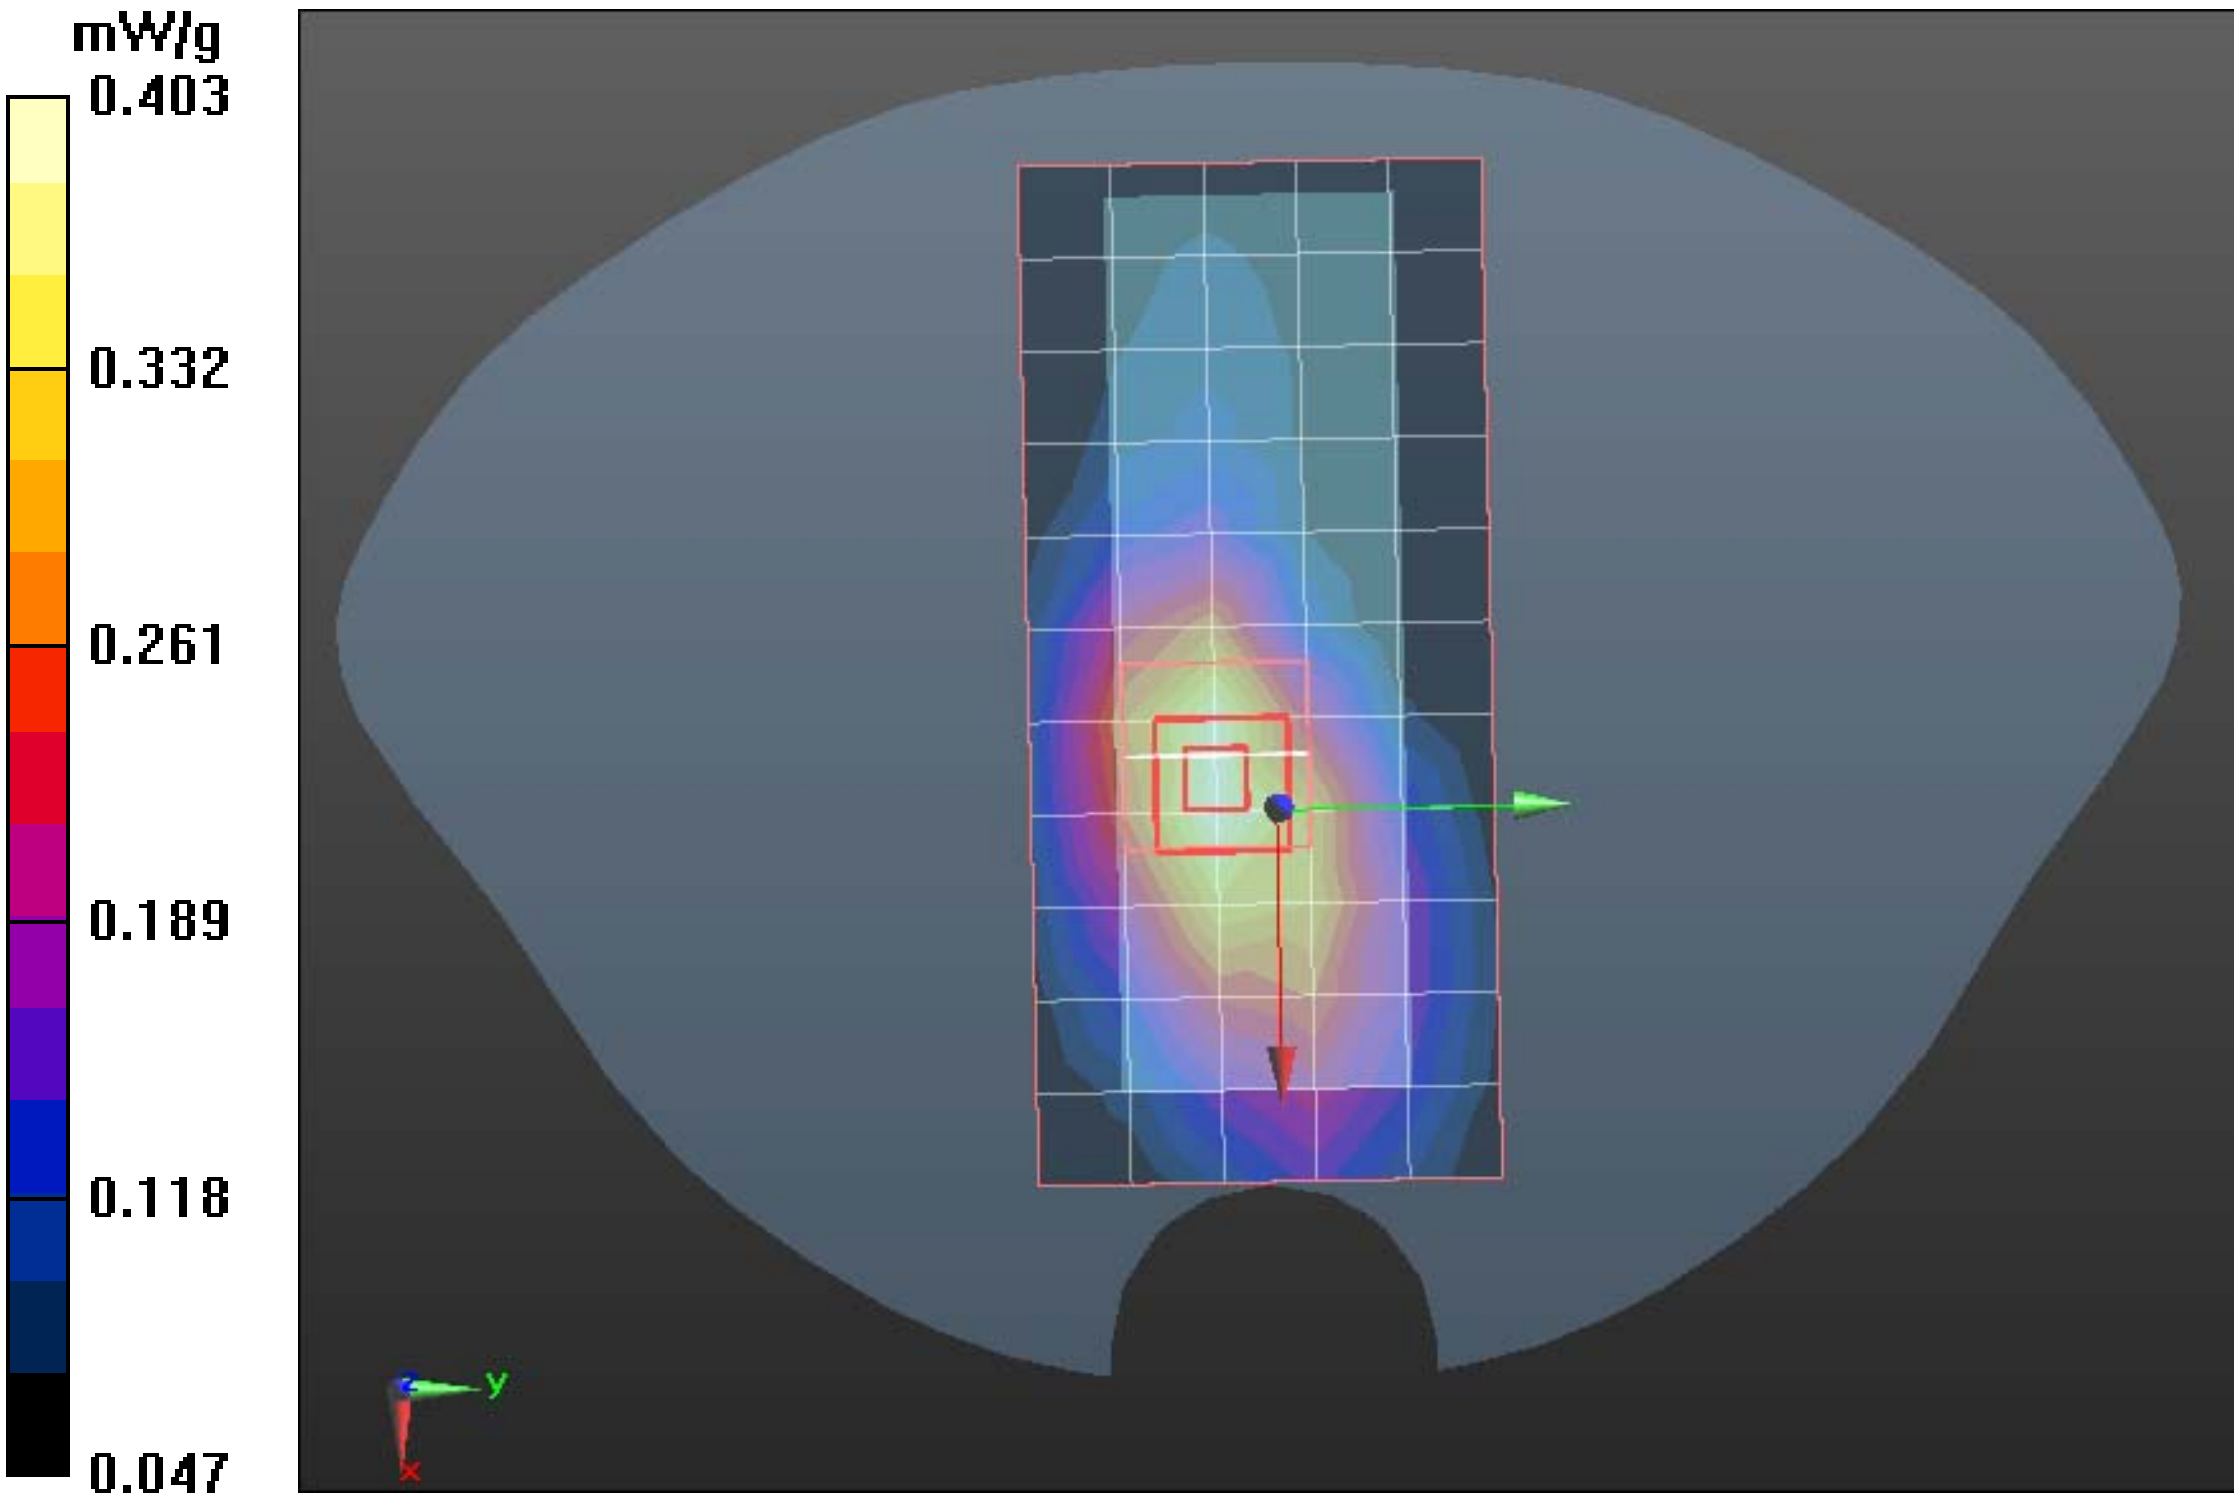

Compliance Certification Services Inc.

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

GSM 850-Body Down Low CH128

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used (interpolated): f = 824.2 MHz; σ = 0.96mho/m; ε_r = 55.204; ρ = 1000 kg/m^3

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GSM 850/GSM850 Body Down Low CH128/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.998 mW/g

GSM 850/GSM850 Body Down Low CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.902 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.208 W/kg

SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.493 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

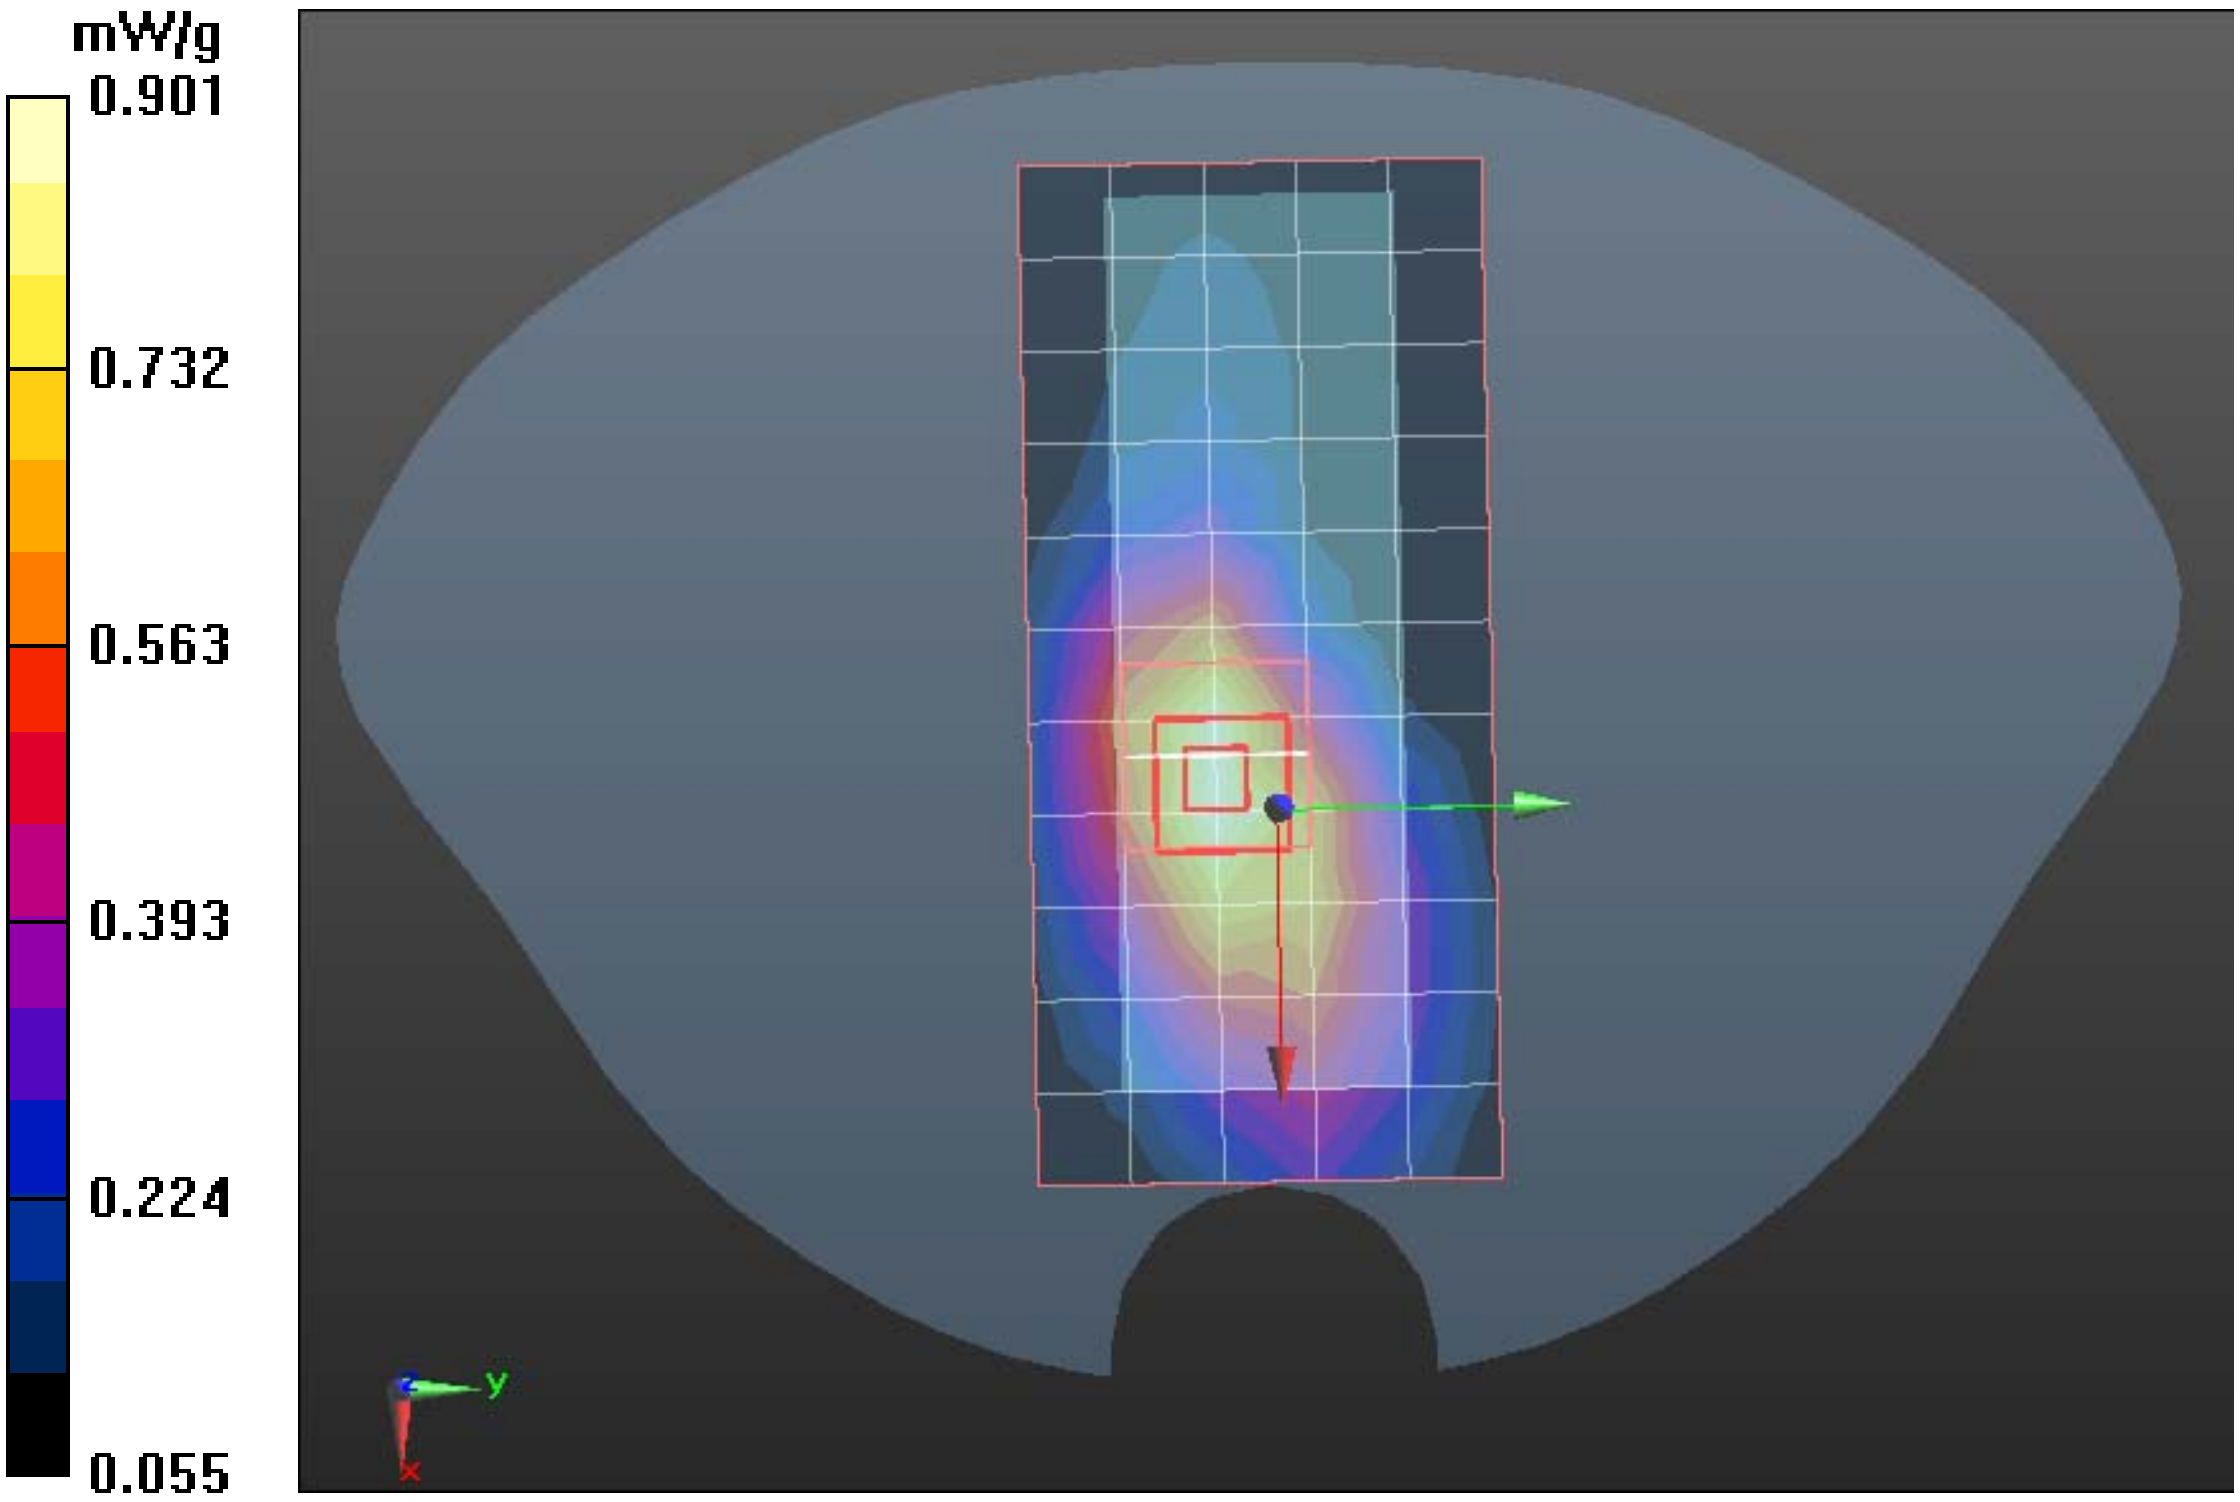

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS-1900-Right Head Cheek Low CH512

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1850.2 MHz; σ = 1.42 mho/m; ε_r = 39.87; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Cheek Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.723 mW/g

PCS1900/Right Head Cheek Low CH512/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.833 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.285 W/kg

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.935 mW/g

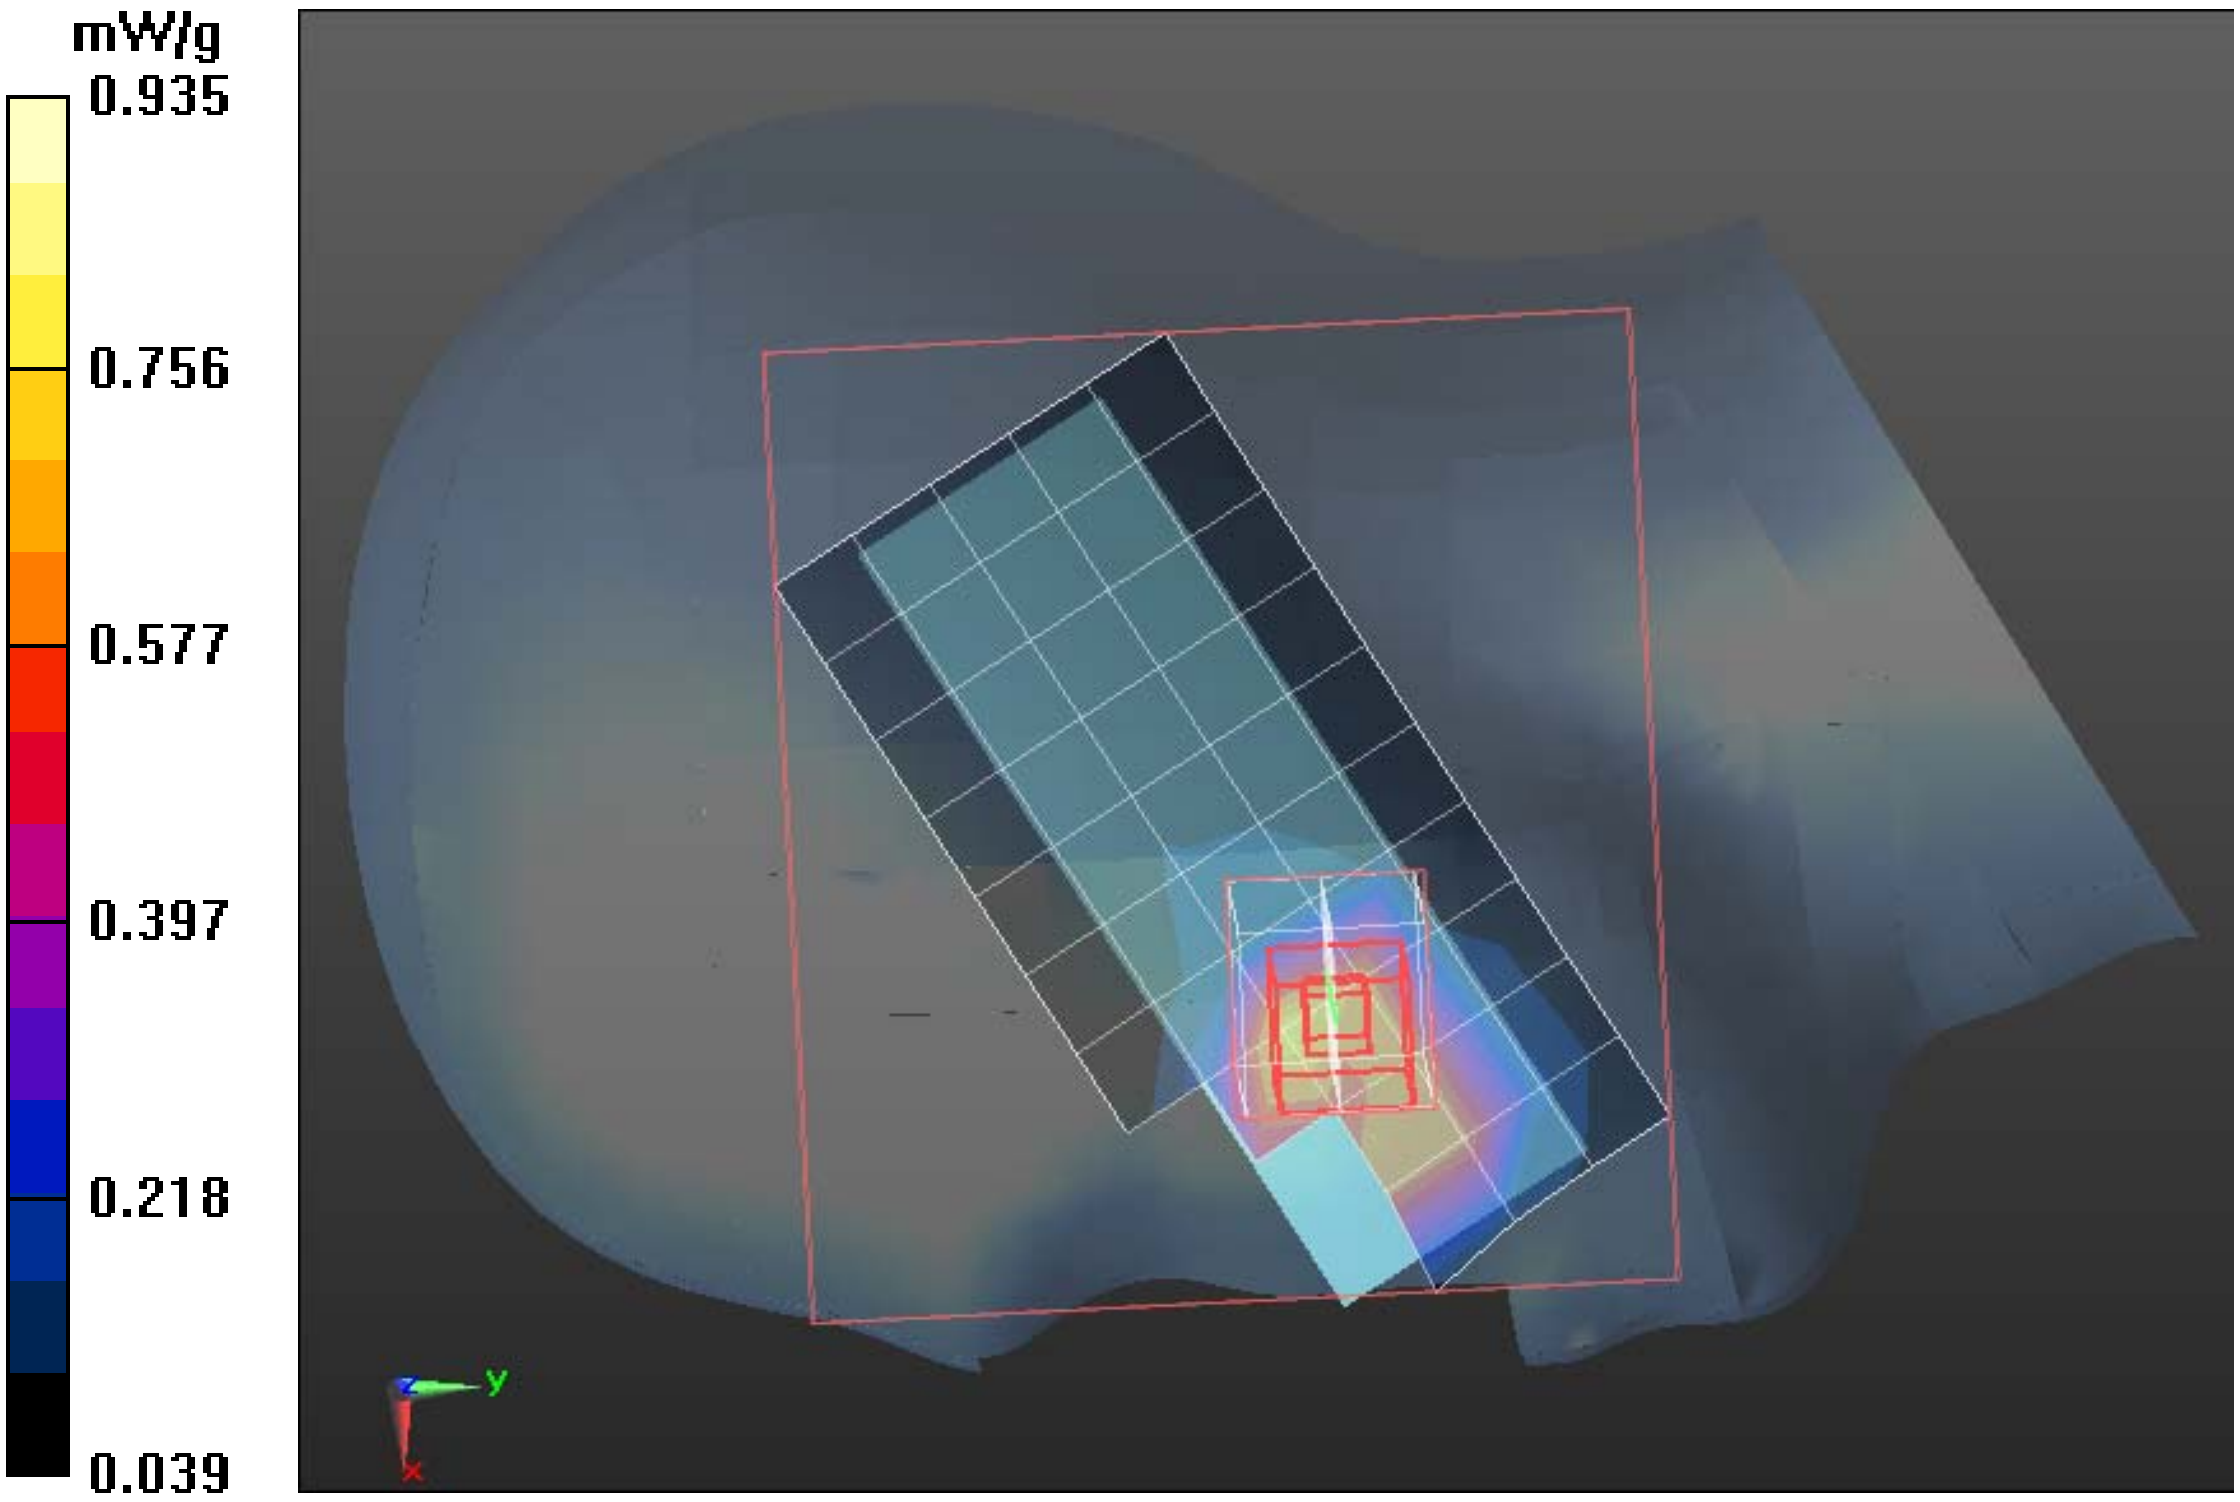

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS-1900-Right Head Cheek Middle CH661

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; ε_r = 39.74; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Cheek Middle CH661/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.727 mW/g

PCS1900/Right Head Cheek Middle CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.306 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.085 W/kg

SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.813 mW/g

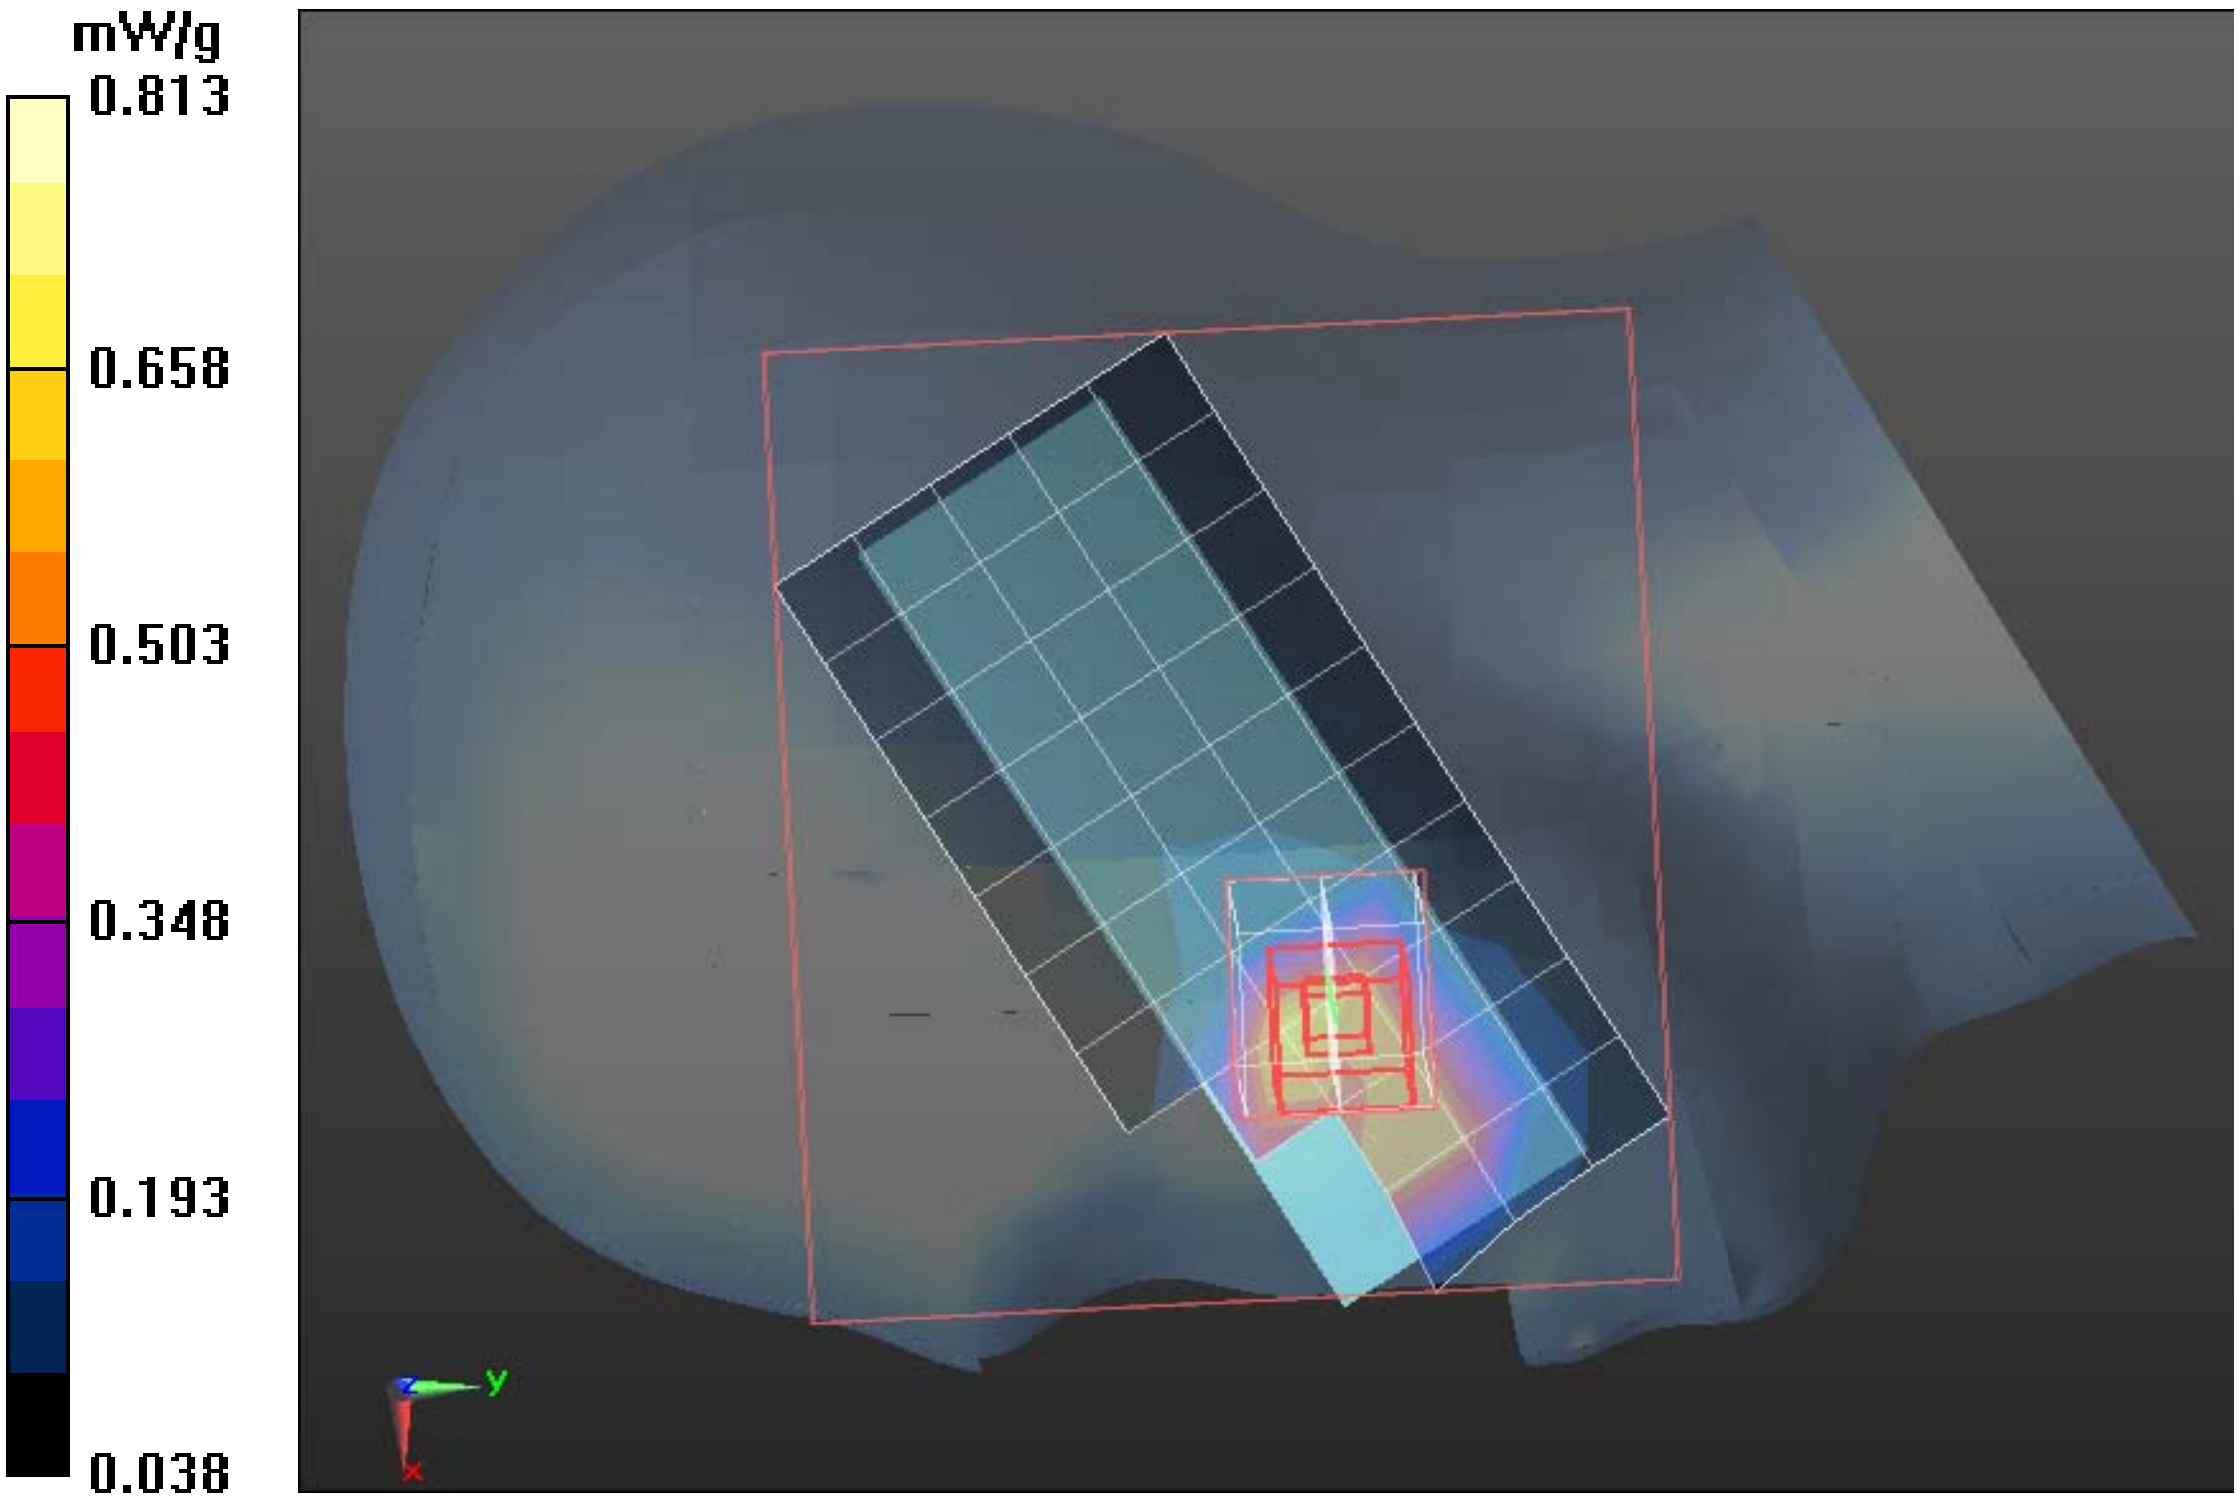

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS-1900-Right Head Cheek High CH810

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1910MHz; σ = 1.47 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Cheek High CH810/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.769 mW/g

PCS1900/Right Head Cheek High CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.426 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.154 W/kg

SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.857 mW/g

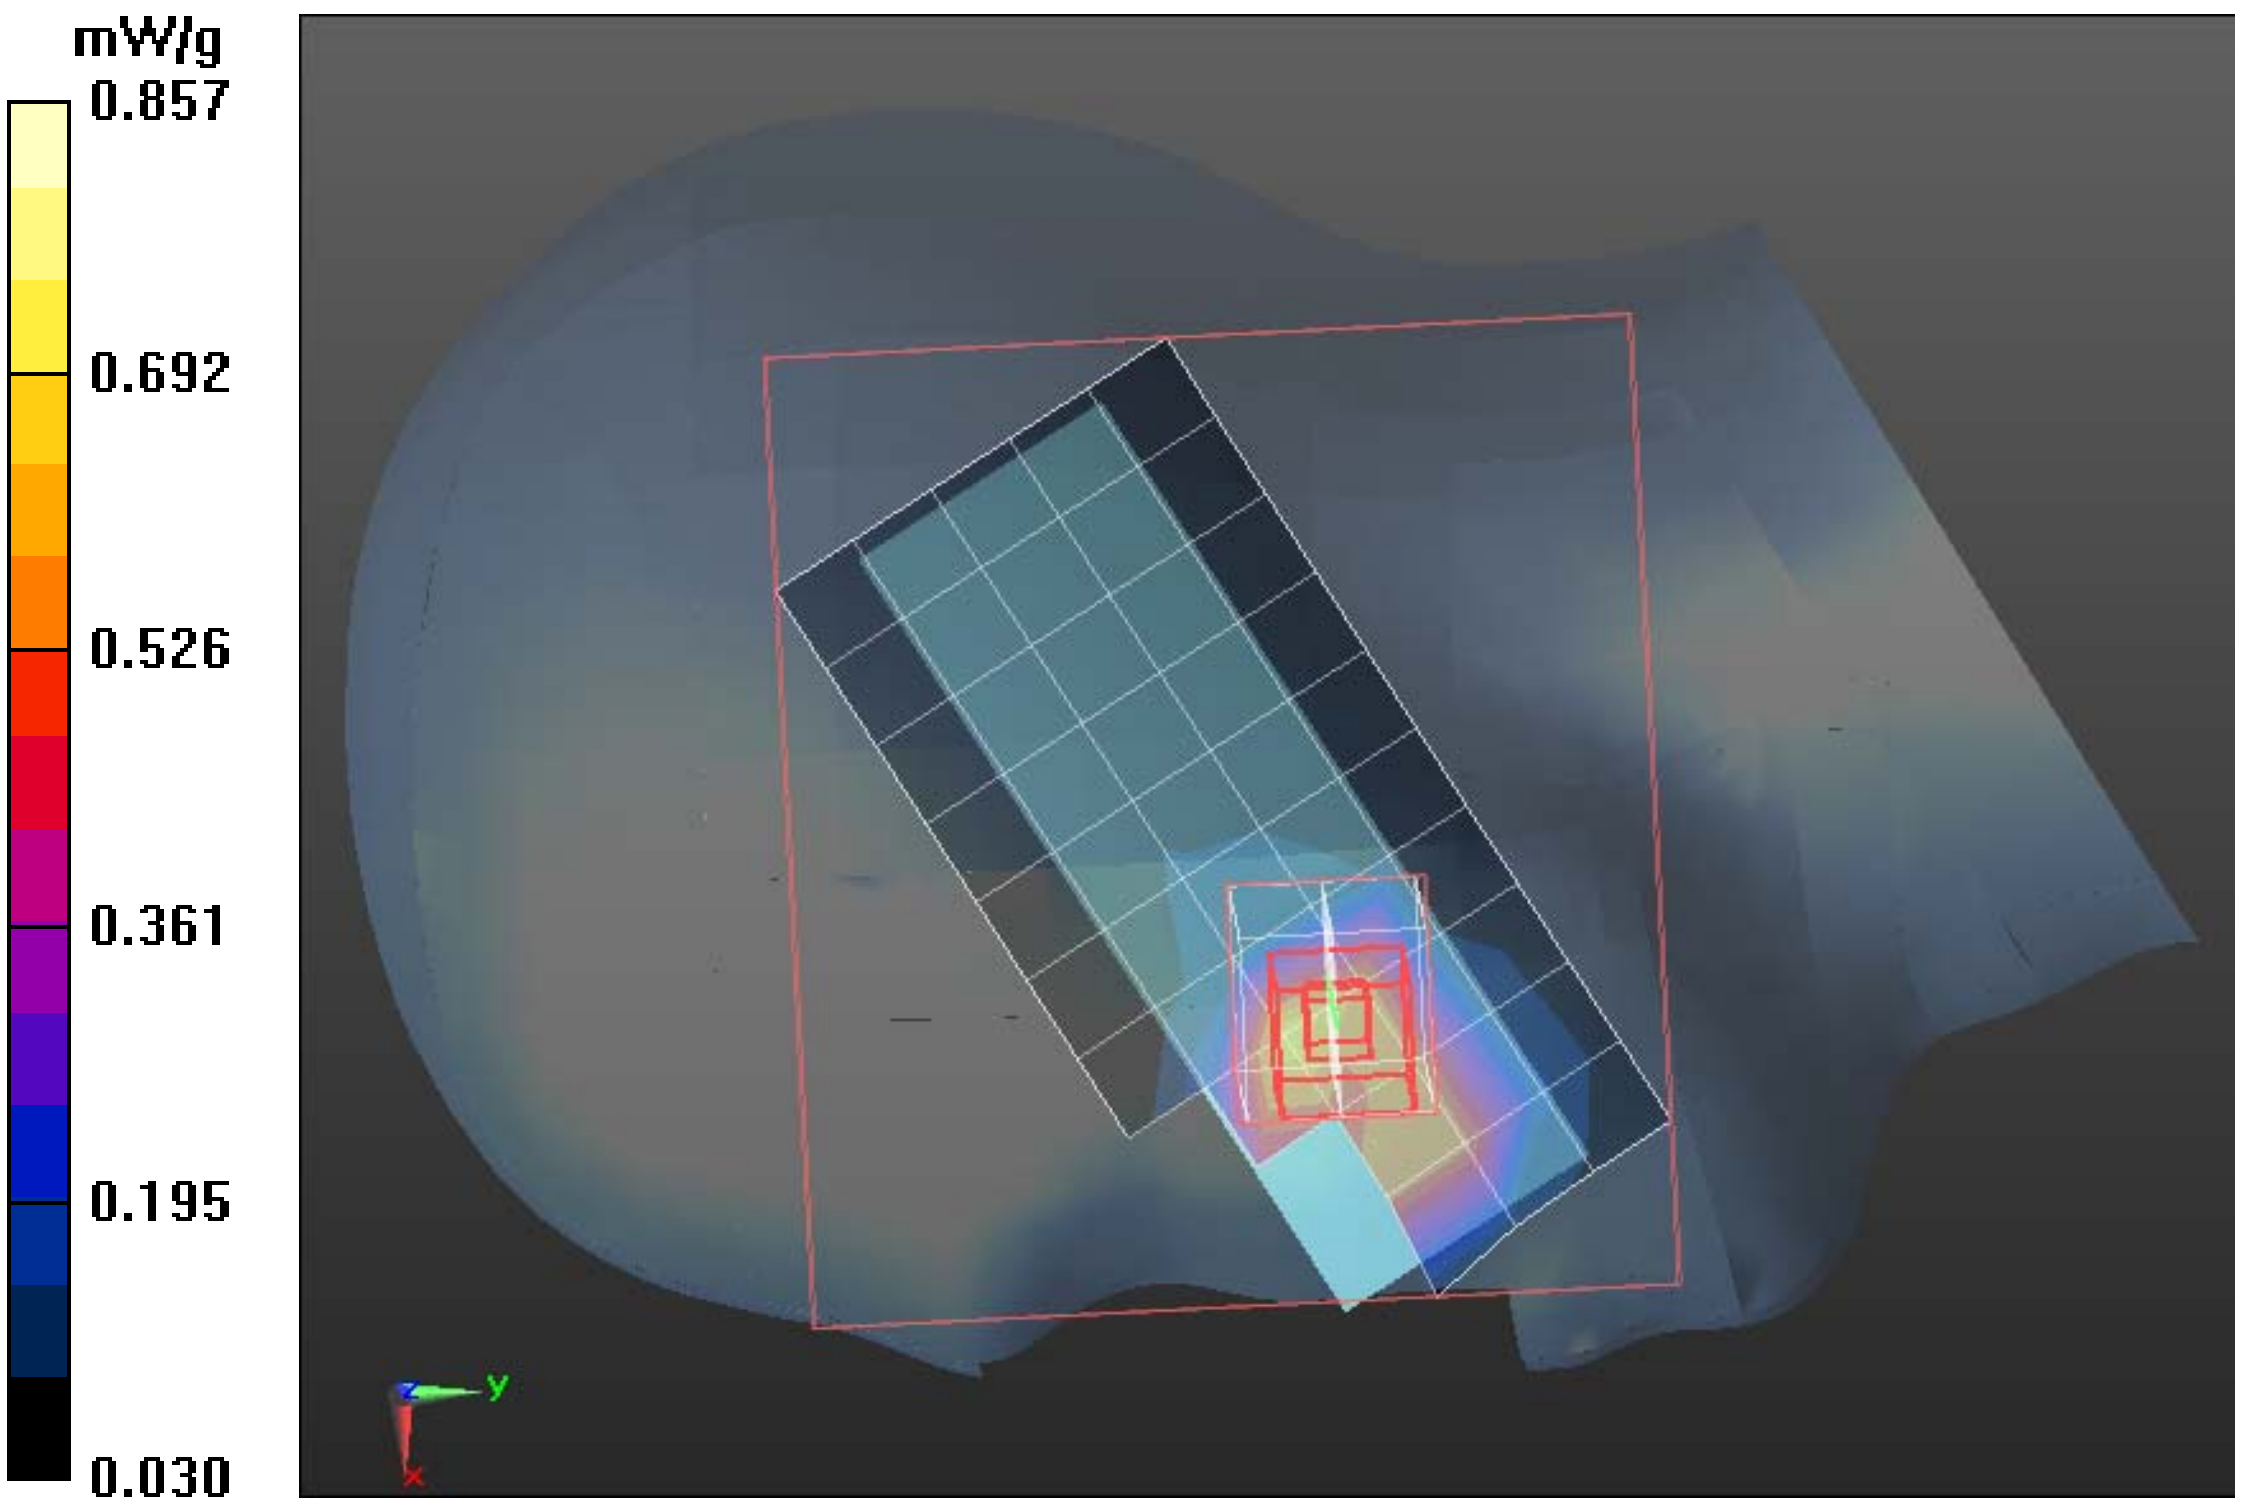

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS-1900-Right Head Tilted Low CH512

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1850.2 MHz; σ = 1.42 mho/m; ε_r = 39.87; ρ = 1000 kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Tilted Low CH512/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.816 mW/g

PCS1900/Right Head Tilted Low CH512/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.993 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.226 W/kg

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.864 mW/g

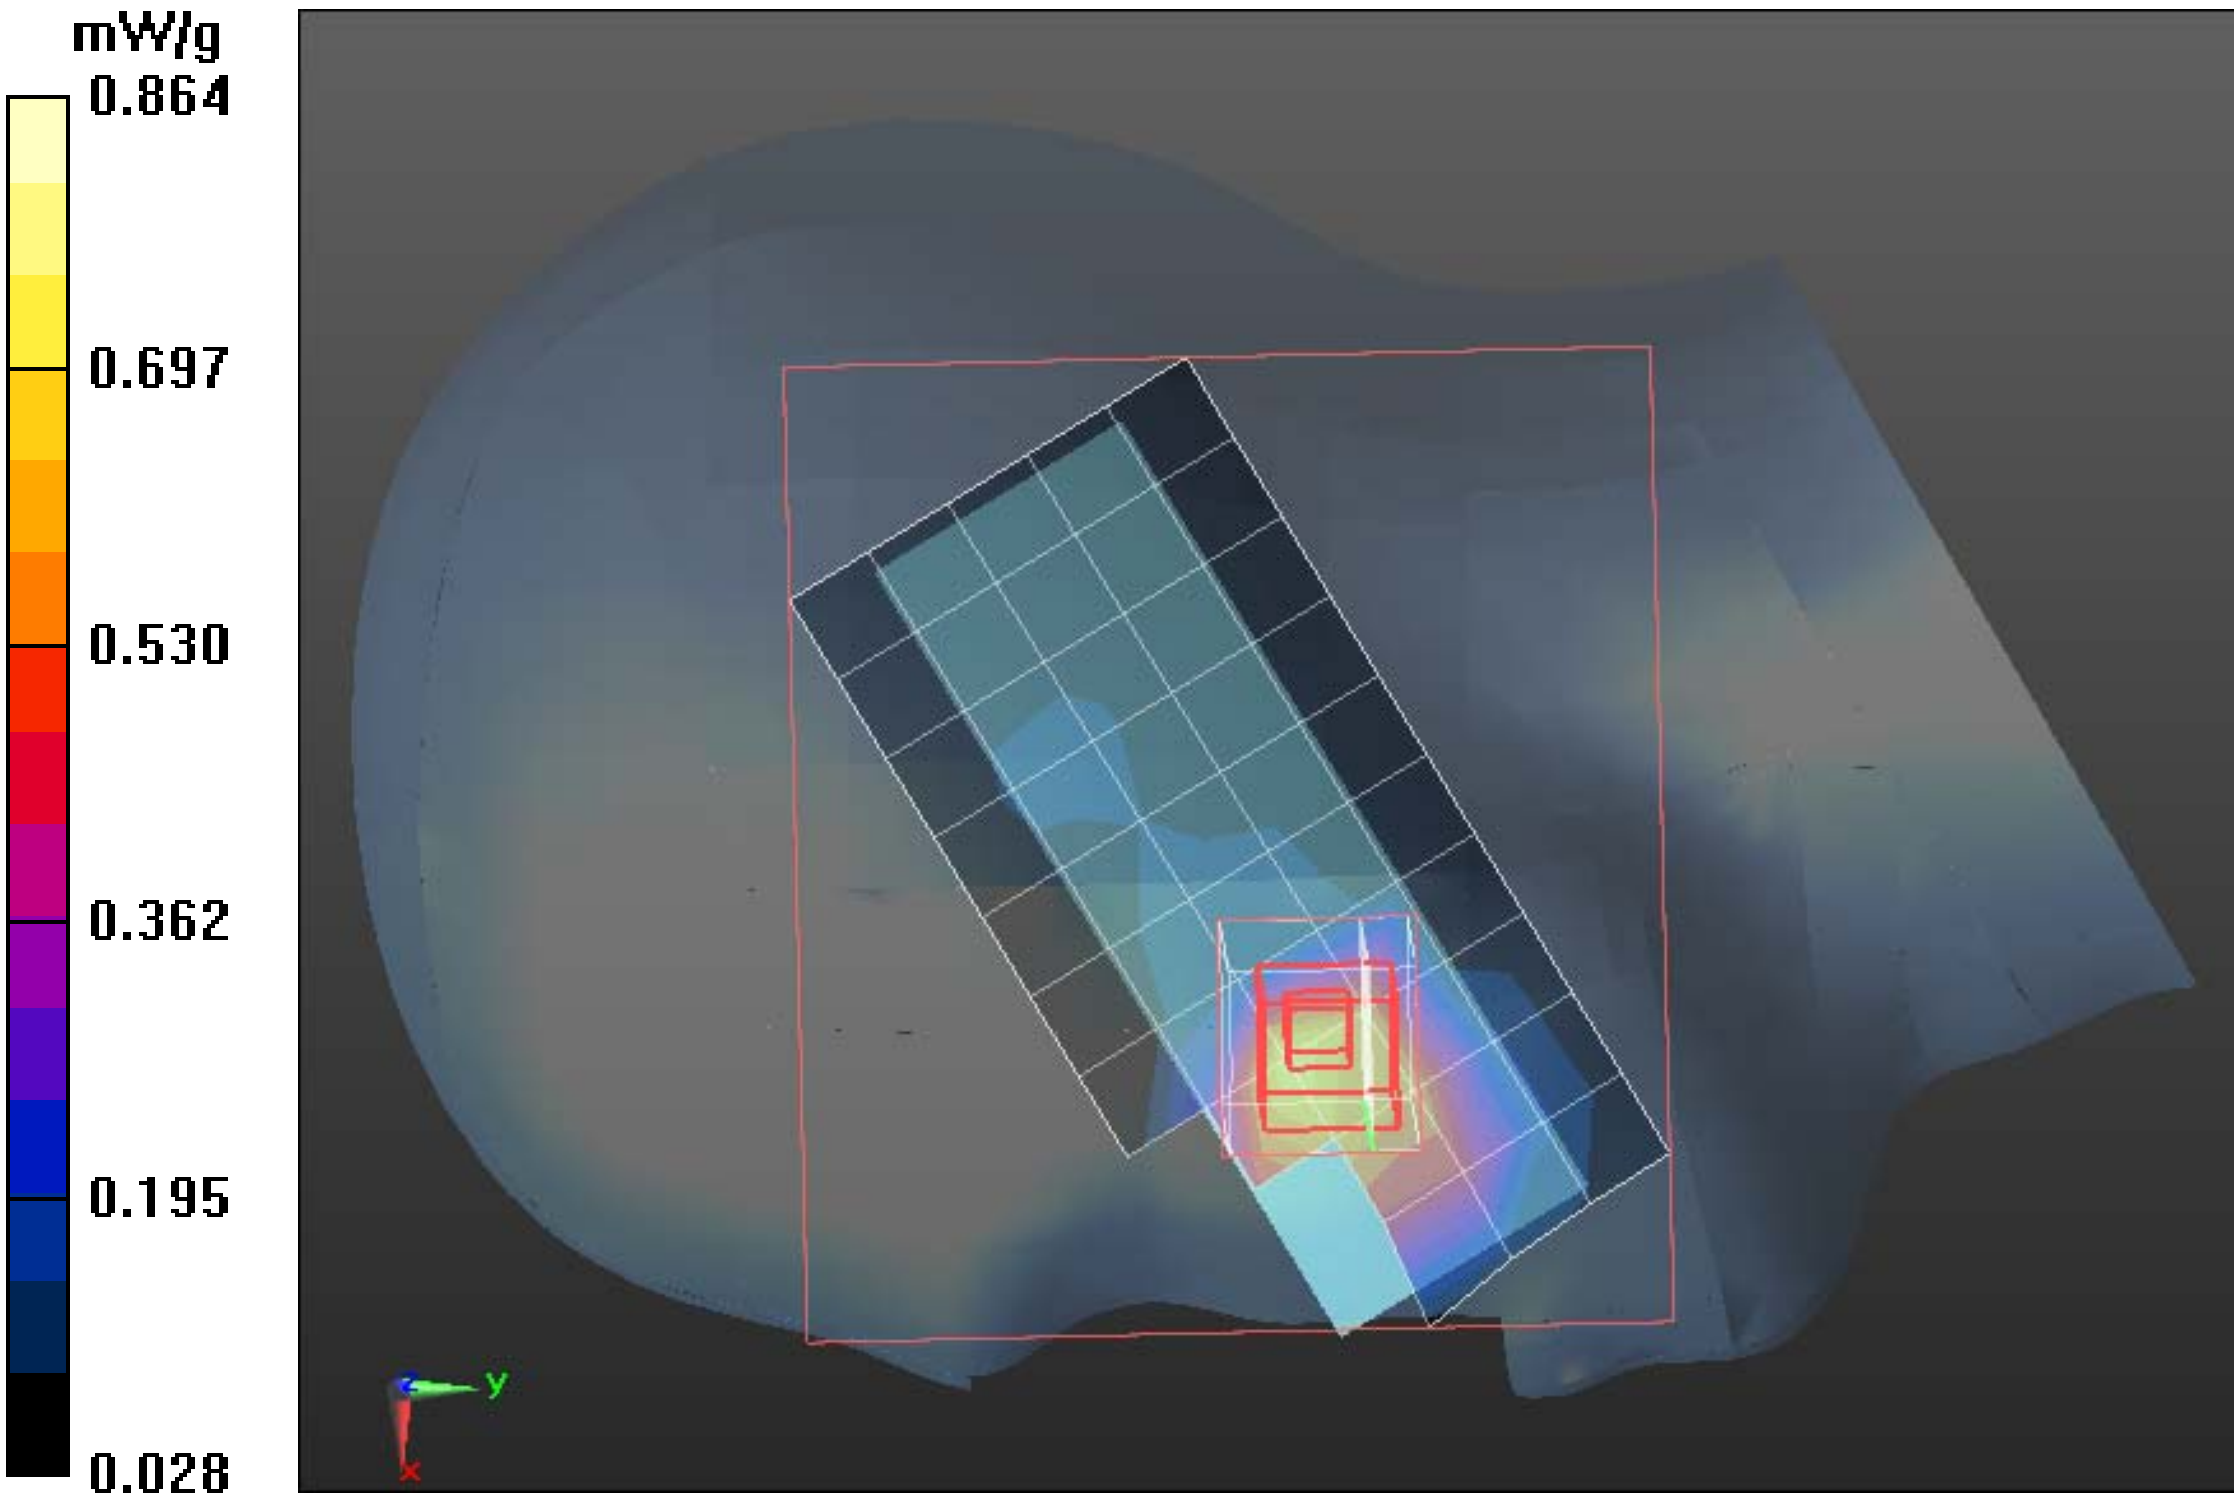

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS-1900-Right Head Tilted Middle CH661

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz;Communication System PAR: 9.03 dB
Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; ε_r = 39.74; ρ = 1000 kg/m^3
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Tilted Middle CH661/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.698 mW/g

PCS1900/Right Head Tilted Middle CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.840 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.124 W/kg
SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.214 mW/g
Maximum value of SAR (measured) = 0.797 mW/g

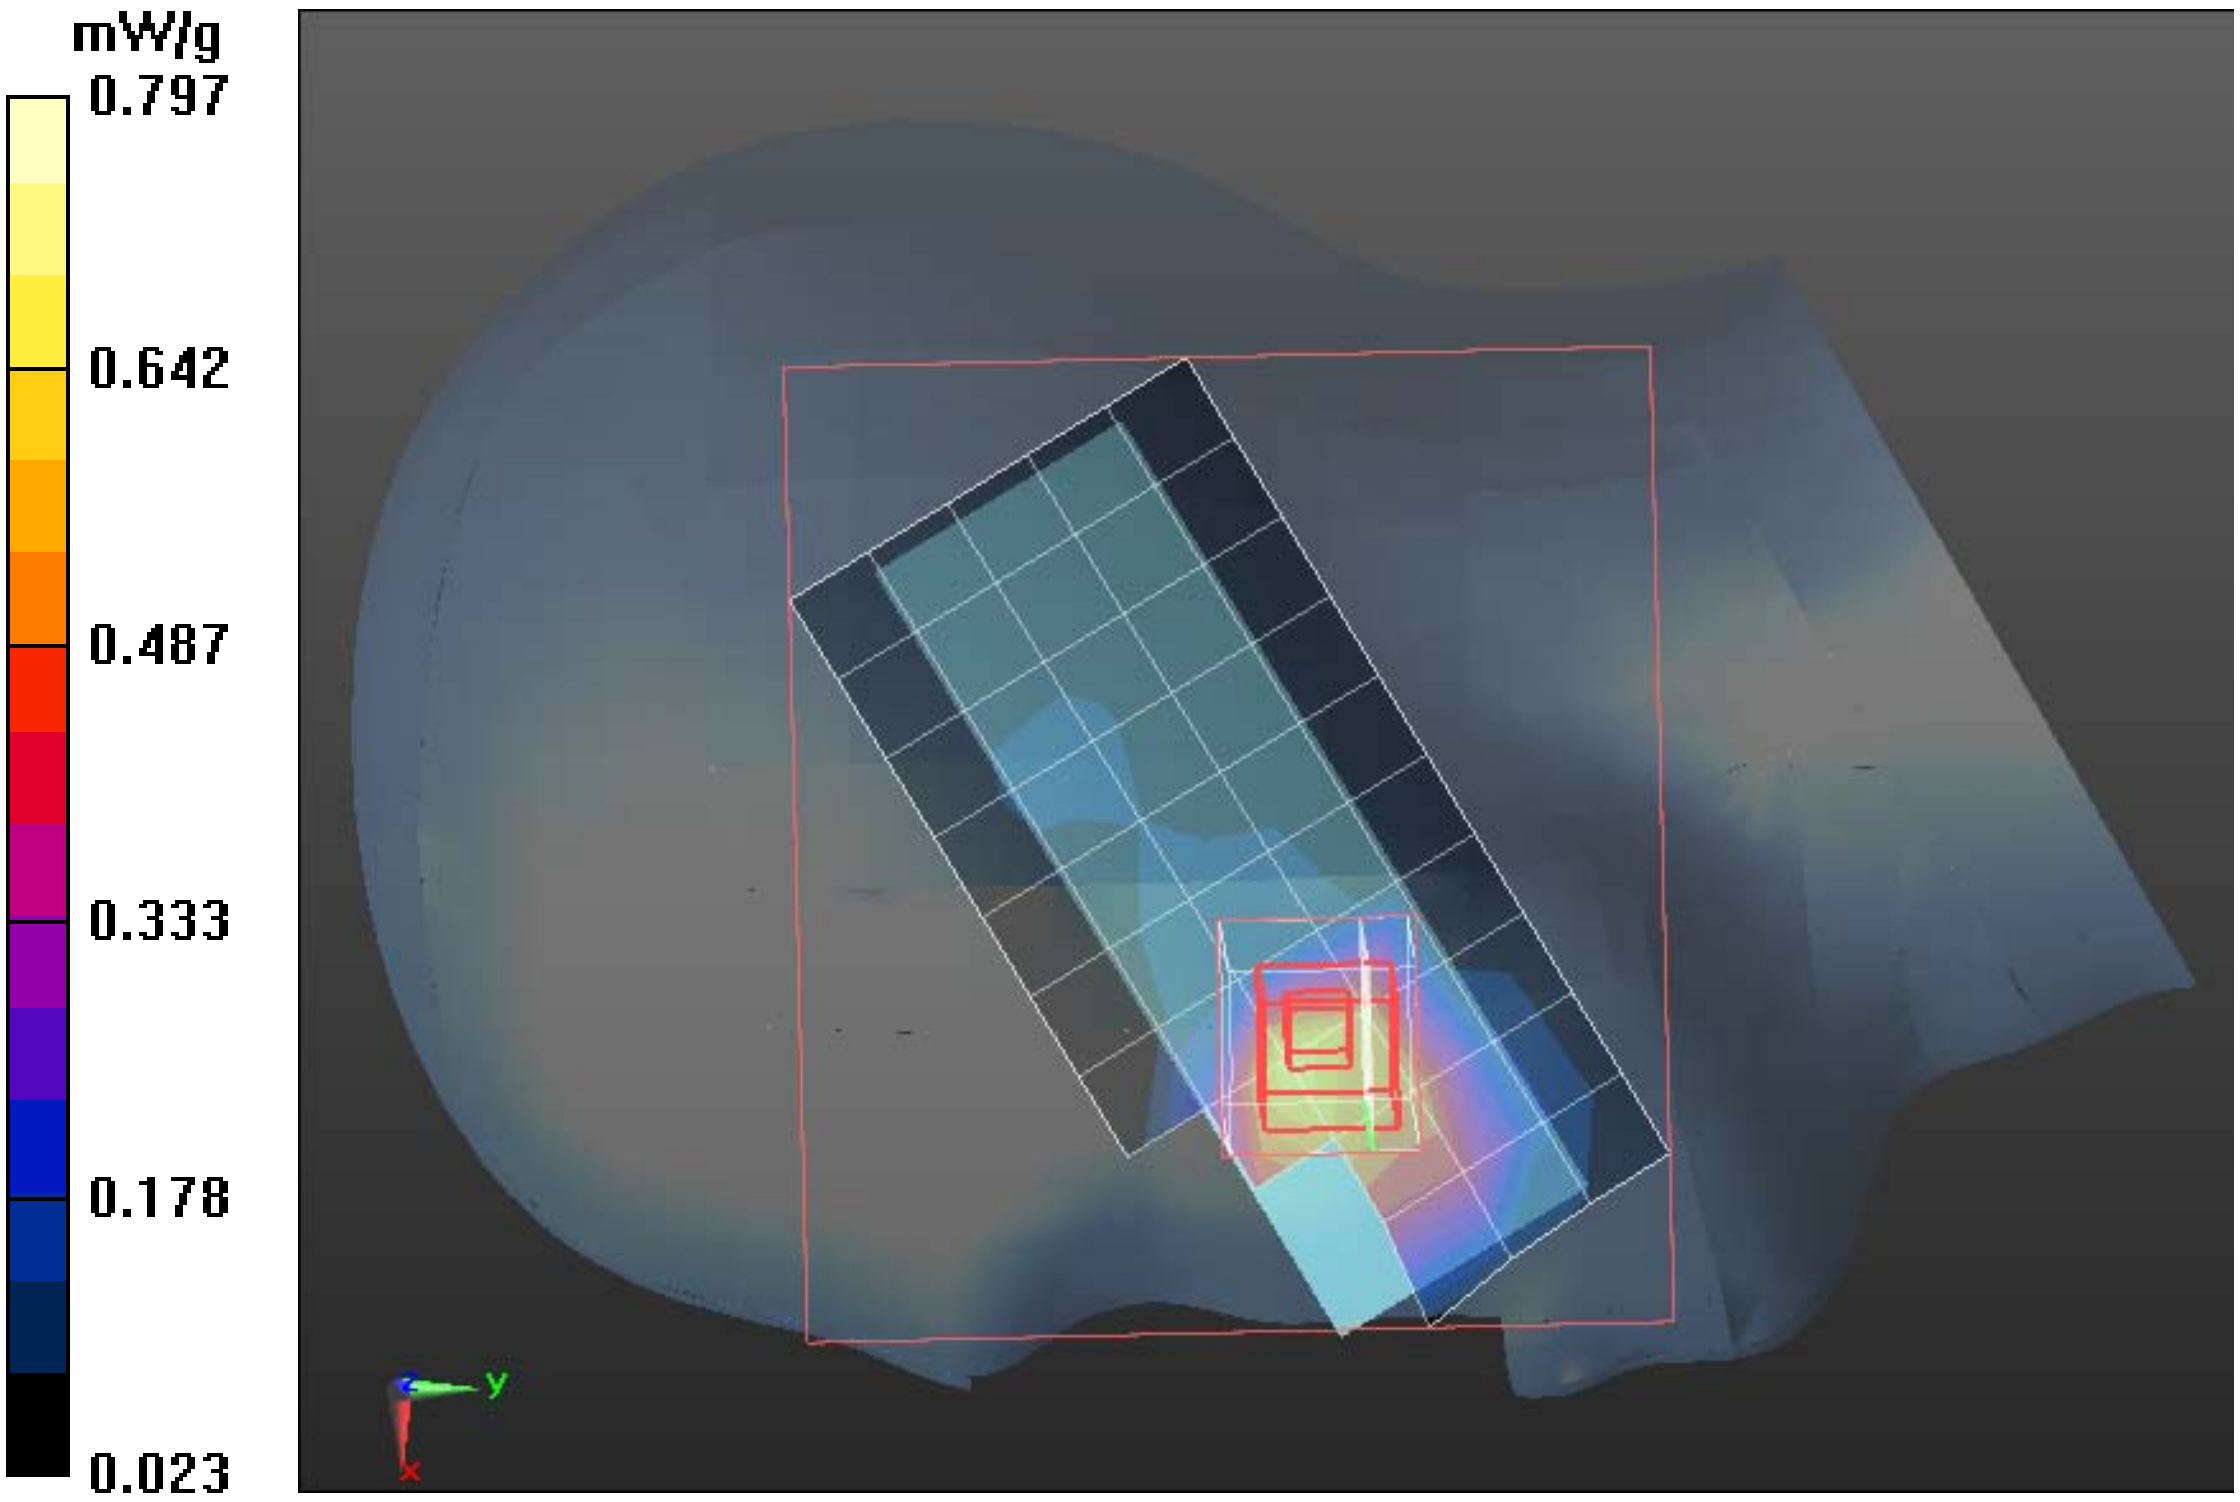

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS-1900-Right Head Tilted High CH810

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1910MHz; $\sigma = 1.47$ mho/m; $\varepsilon_r = 39.6$; $\rho = 1000$ kg/m^3

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Tilted High CH810/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.703 mW/g

PCS1900/Right Head Tilted High CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.947 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.126 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

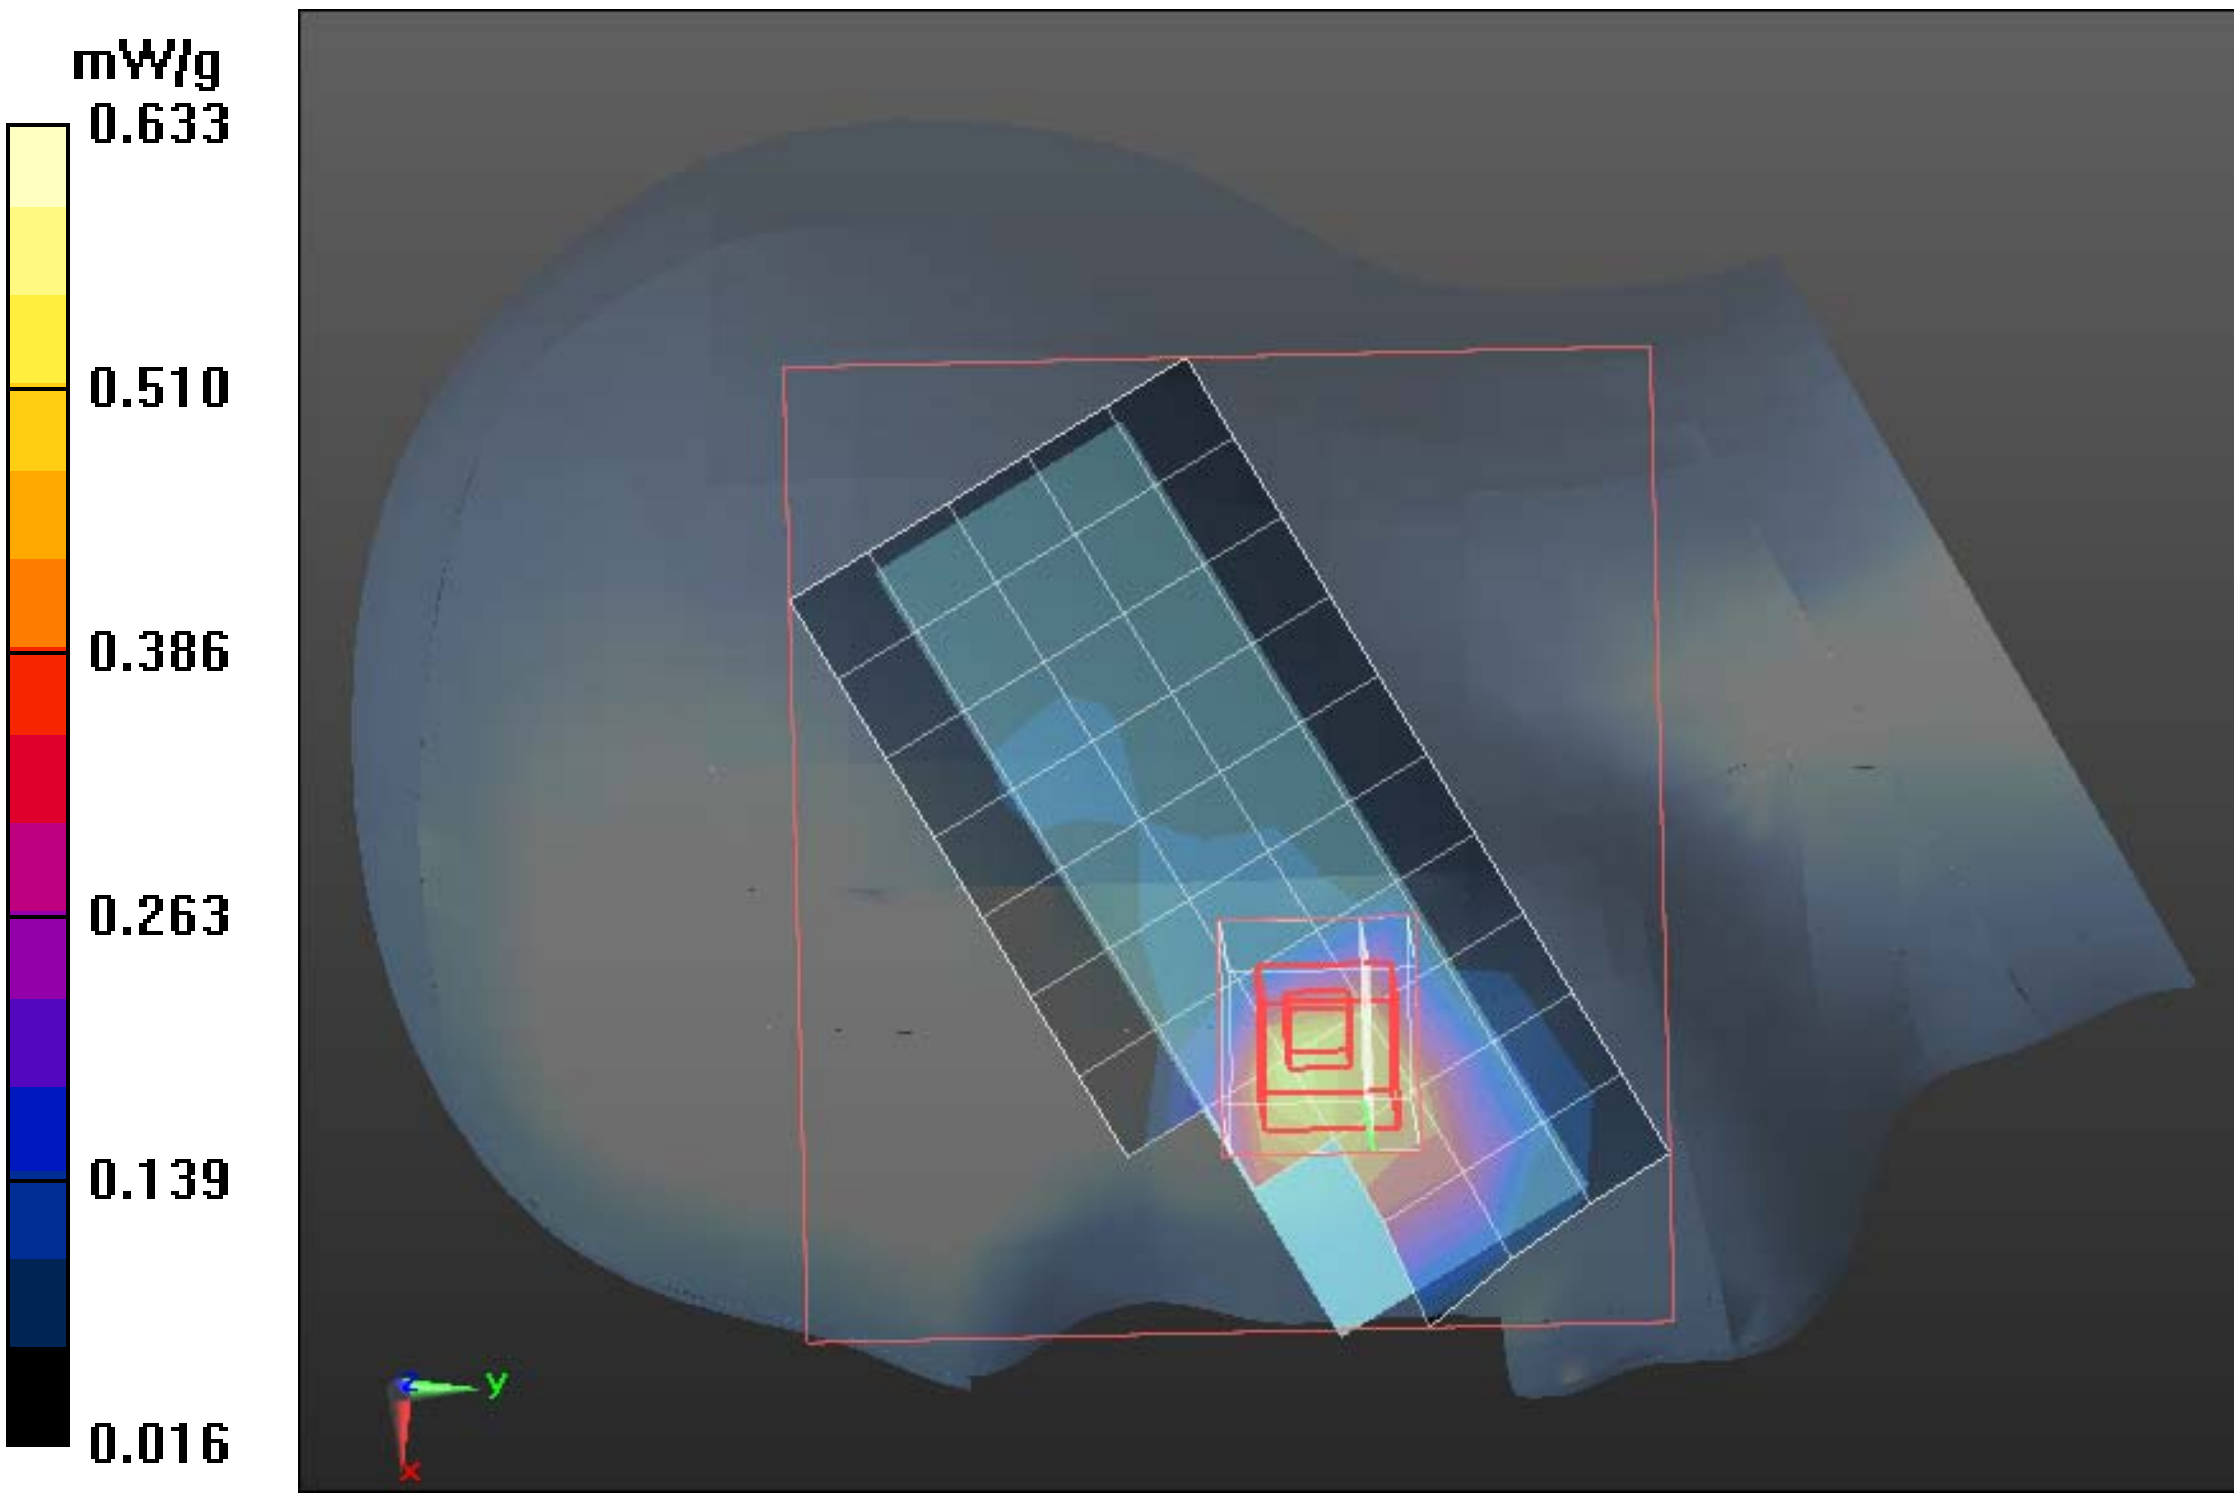

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS 1900-Left Head Cheek Low CH512

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1850.2 MHz; σ = 1.42 mho/m; ε_r = 39.87; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Cheek Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.617 mW/g

PCS1900/Left Head Cheek Low CH512/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.427 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.859 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 0.628 mW/g

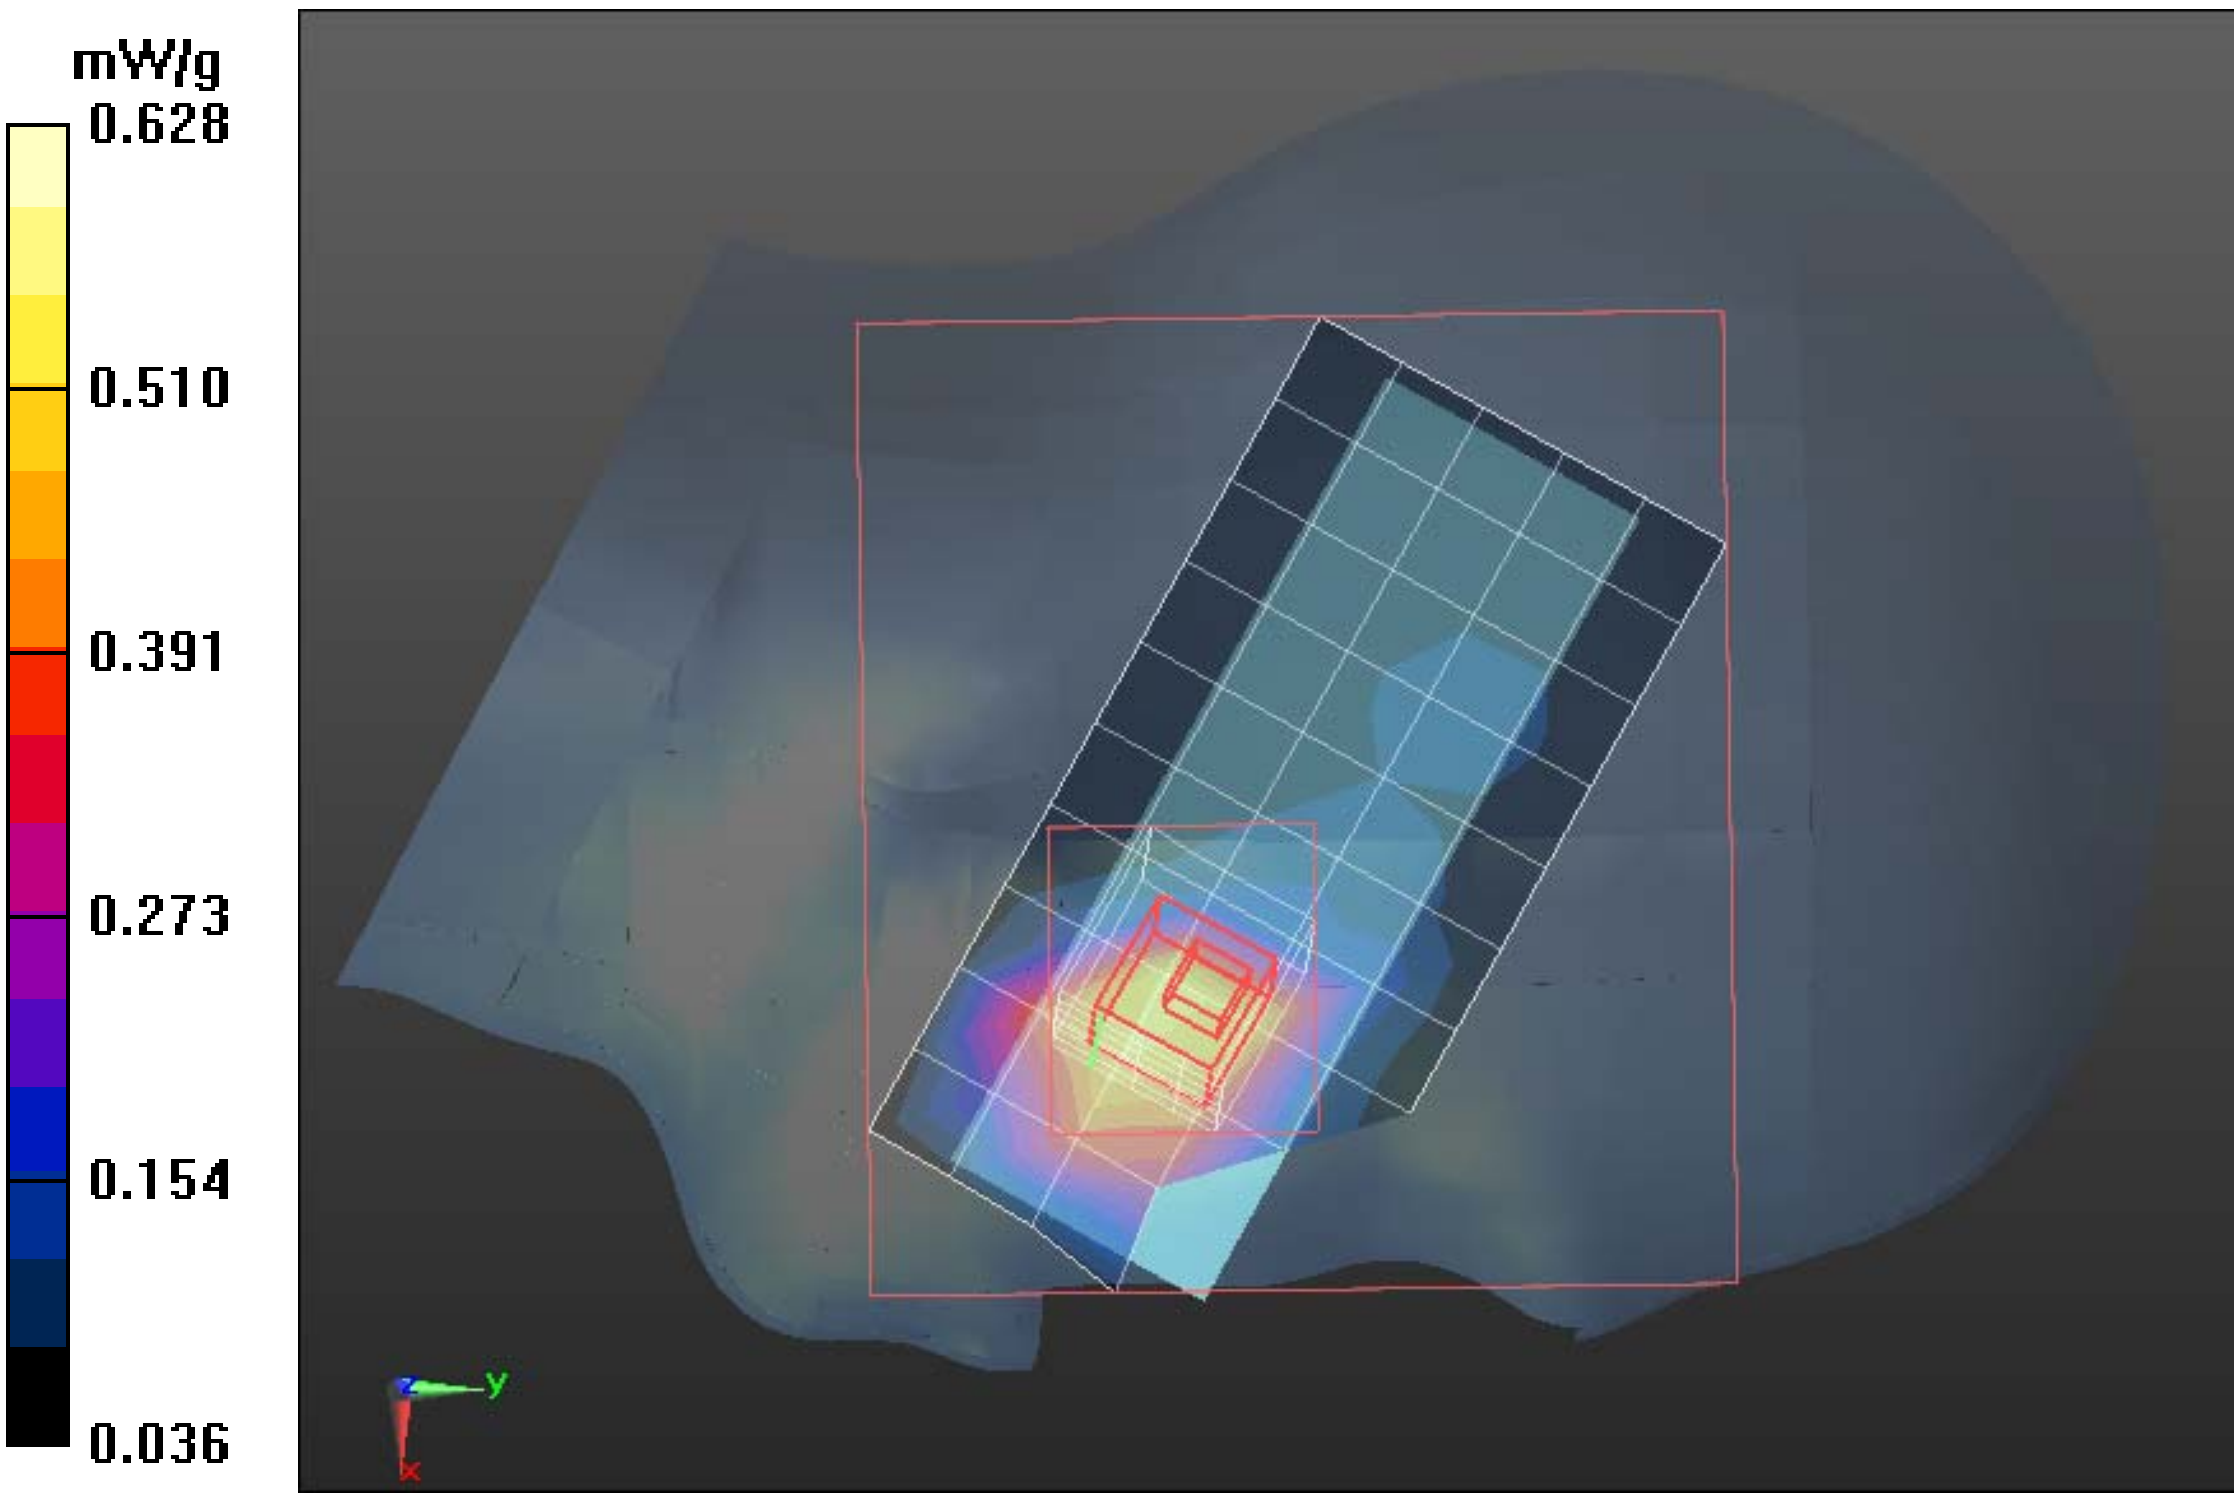

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS 1900-Left Head Cheek Middle CH661

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz;Communication System PAR: 9.03 dB
Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; ε_r = 39.74; ρ = 1000 kg/m^3
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Cheek Middle CH661/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.513 mW/g

PCS1900/Left Head Cheek Middle CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 16.020 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.661 W/kg
SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.133 mW/g
Maximum value of SAR (measured) = 0.504 mW/g

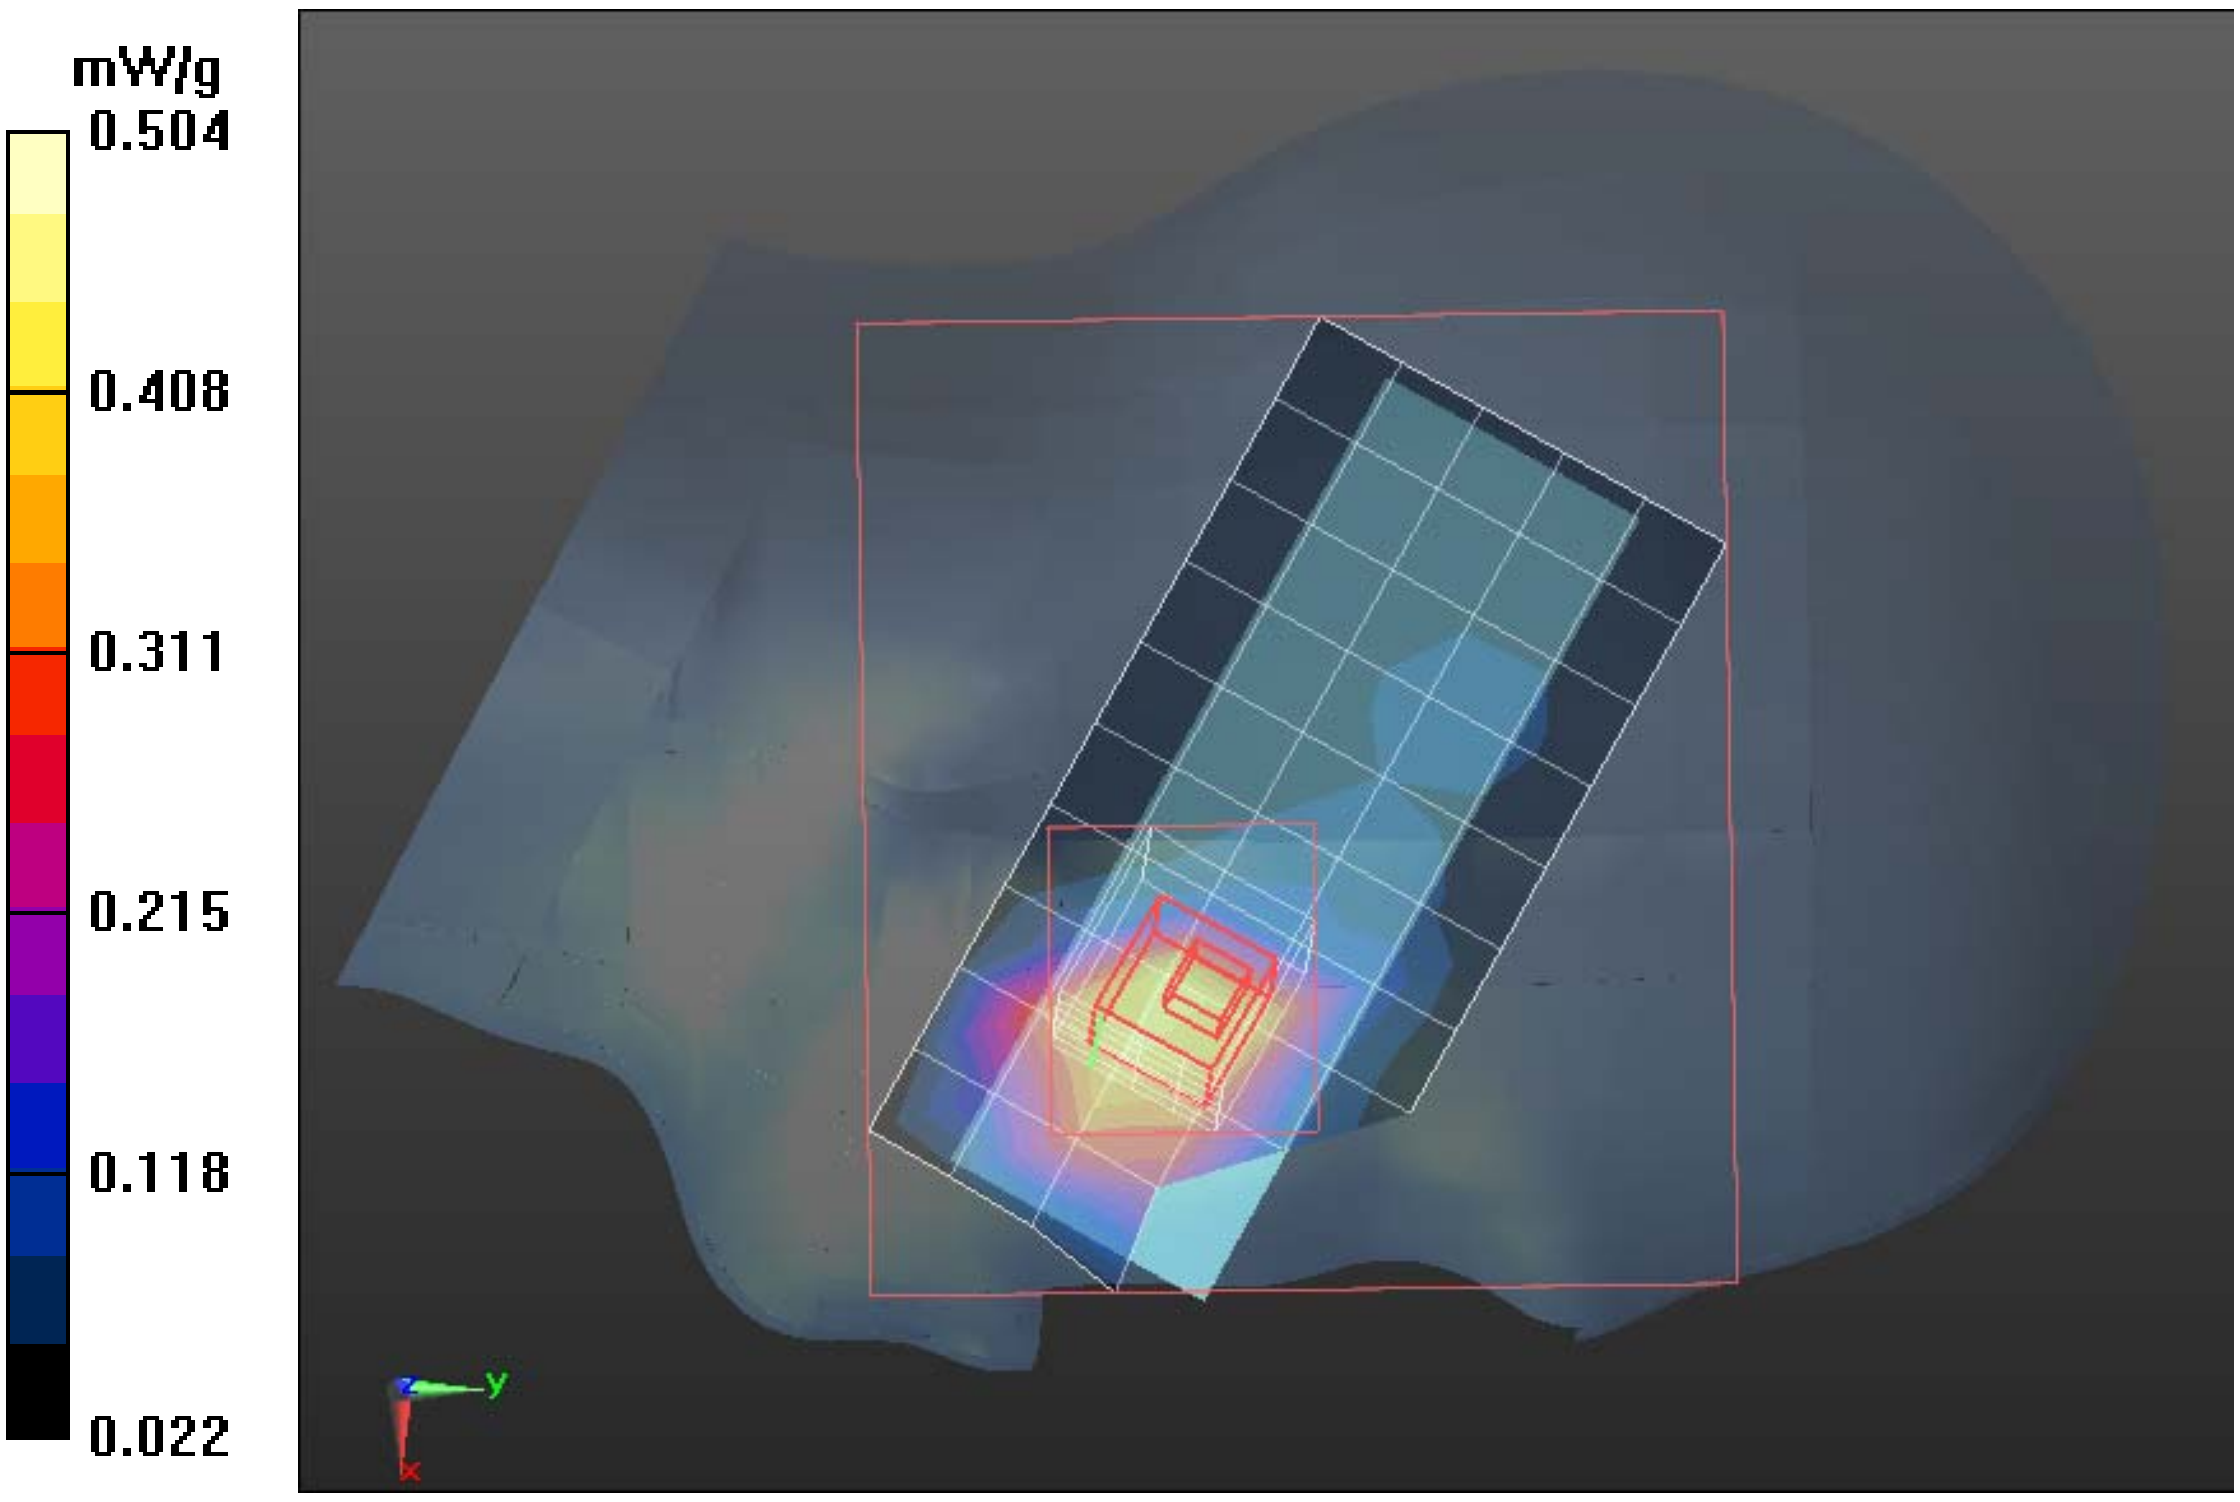

Compliance Certification Services Inc.

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS 1900-Left Head Cheek High CH810

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1910MHz; σ = 1.47 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Cheek High CH810/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.533 mW/g

PCS1900/Left Head Cheek High CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.367 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.577 mW/g

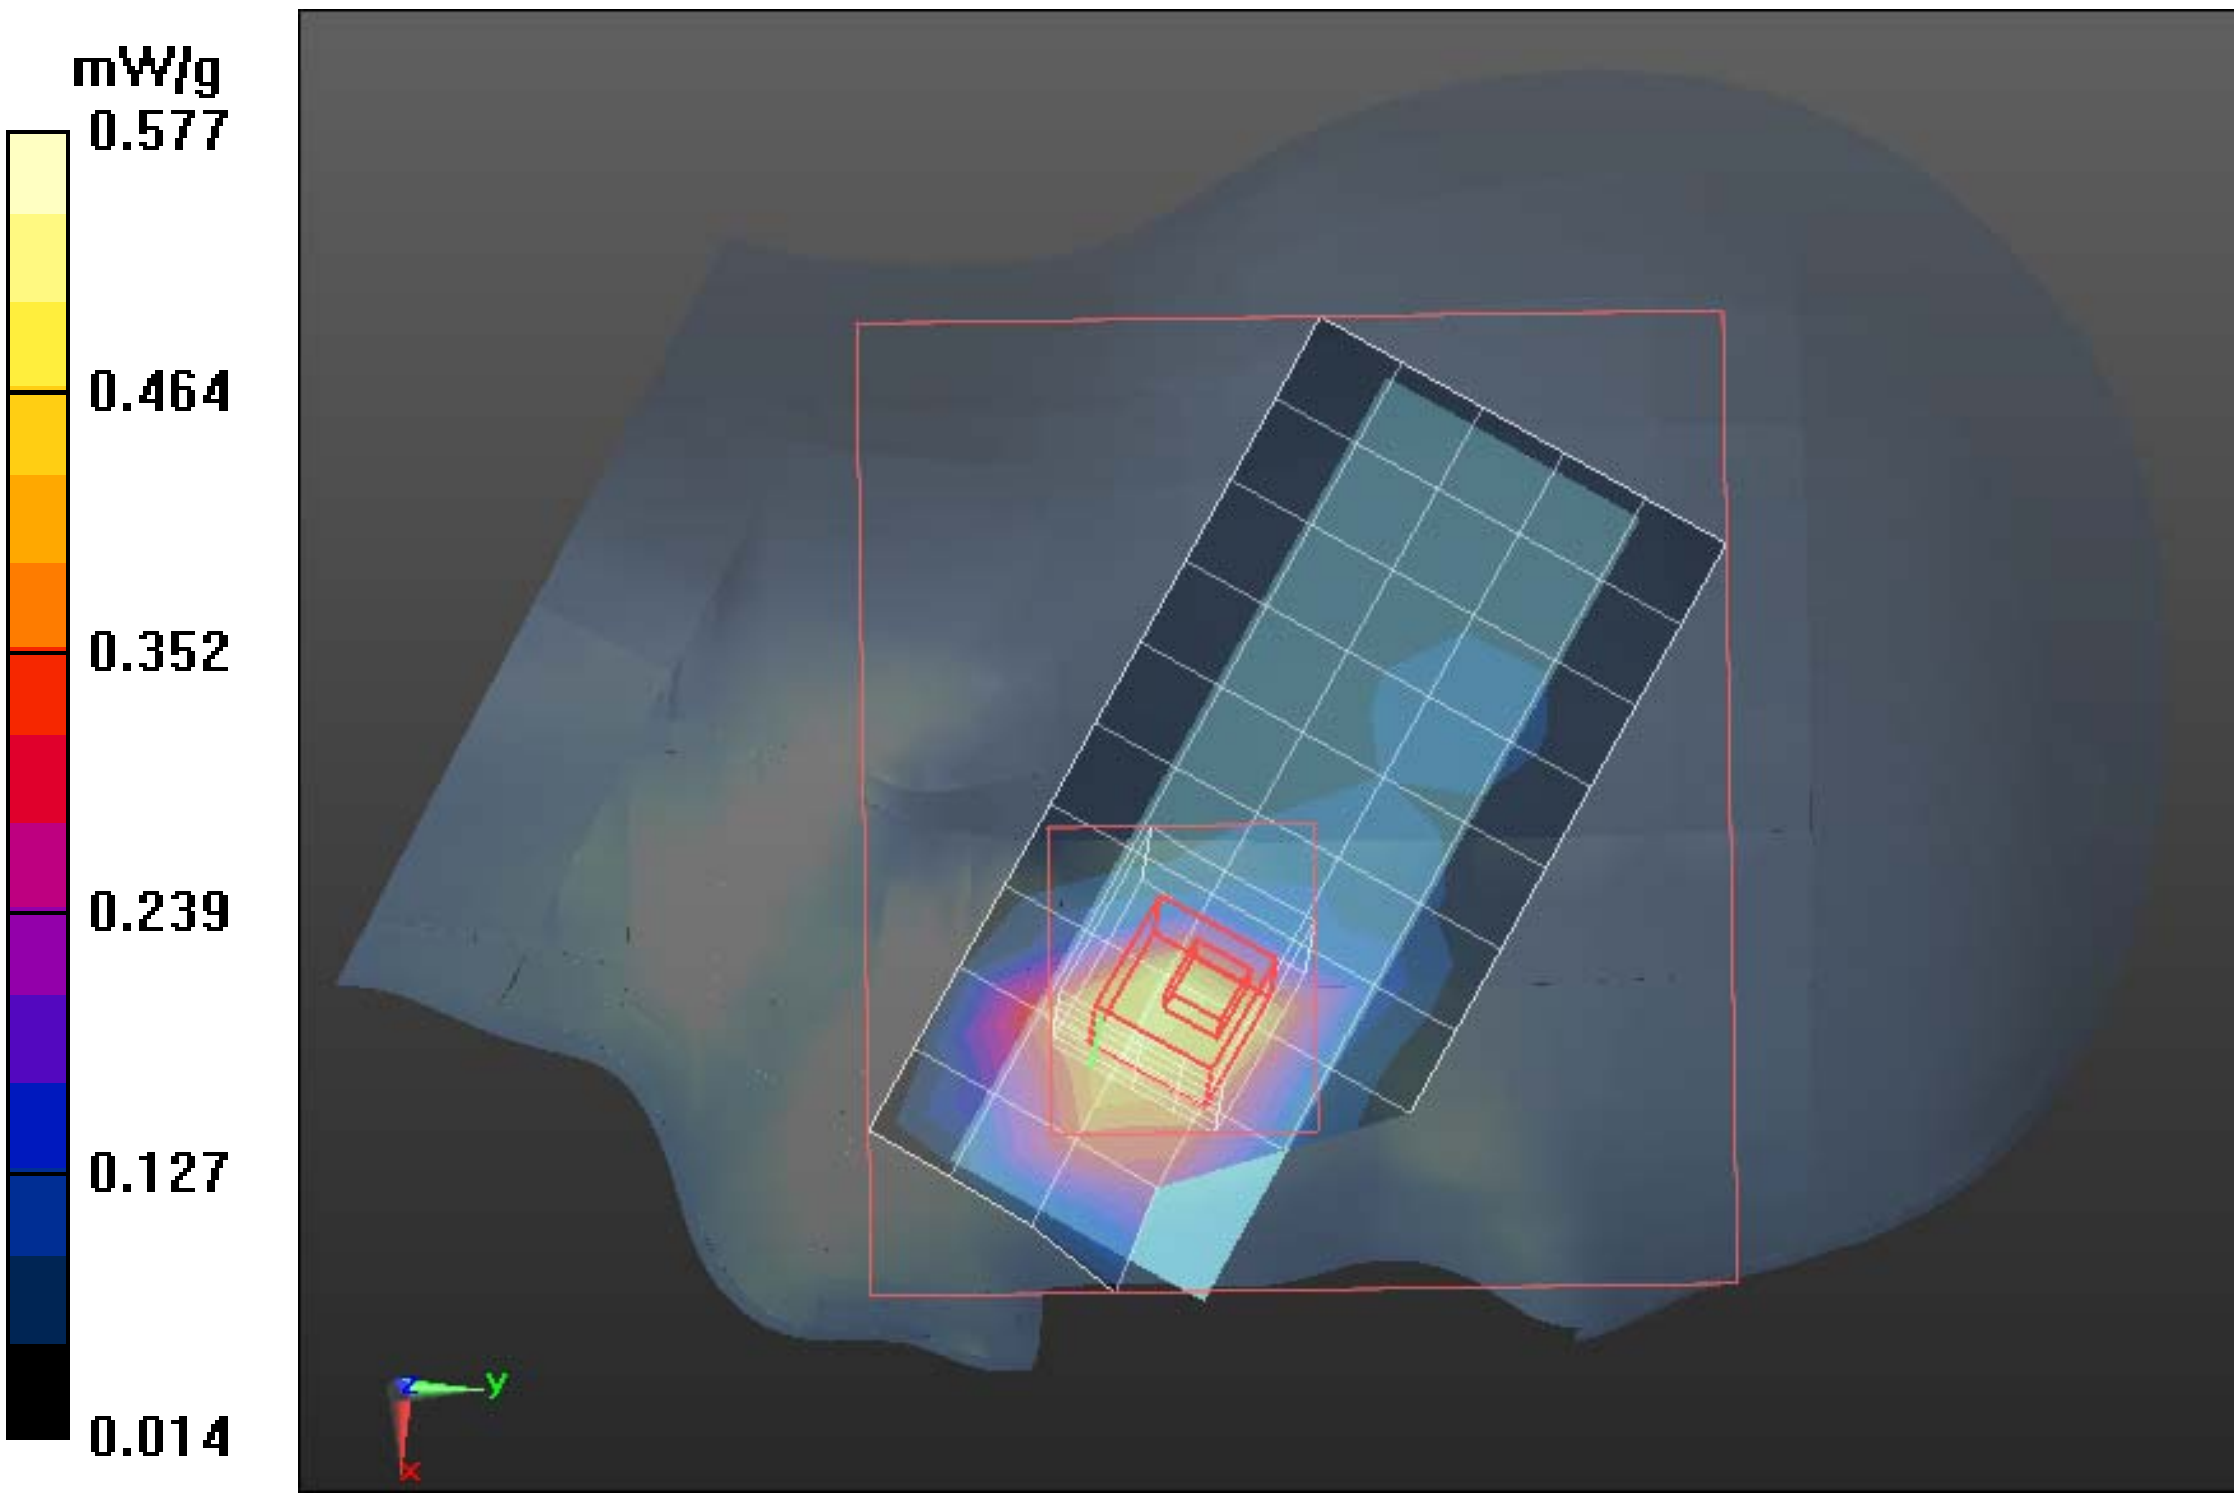

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS 1900-Left Head Tilted Low CH512

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1850.2 MHz; σ = 1.42 mho/m; ε_r = 39.87; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Tilted Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.604 mW/g

PCS1900/Left Head Tilted Low CH512/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.502 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.674 mW/g

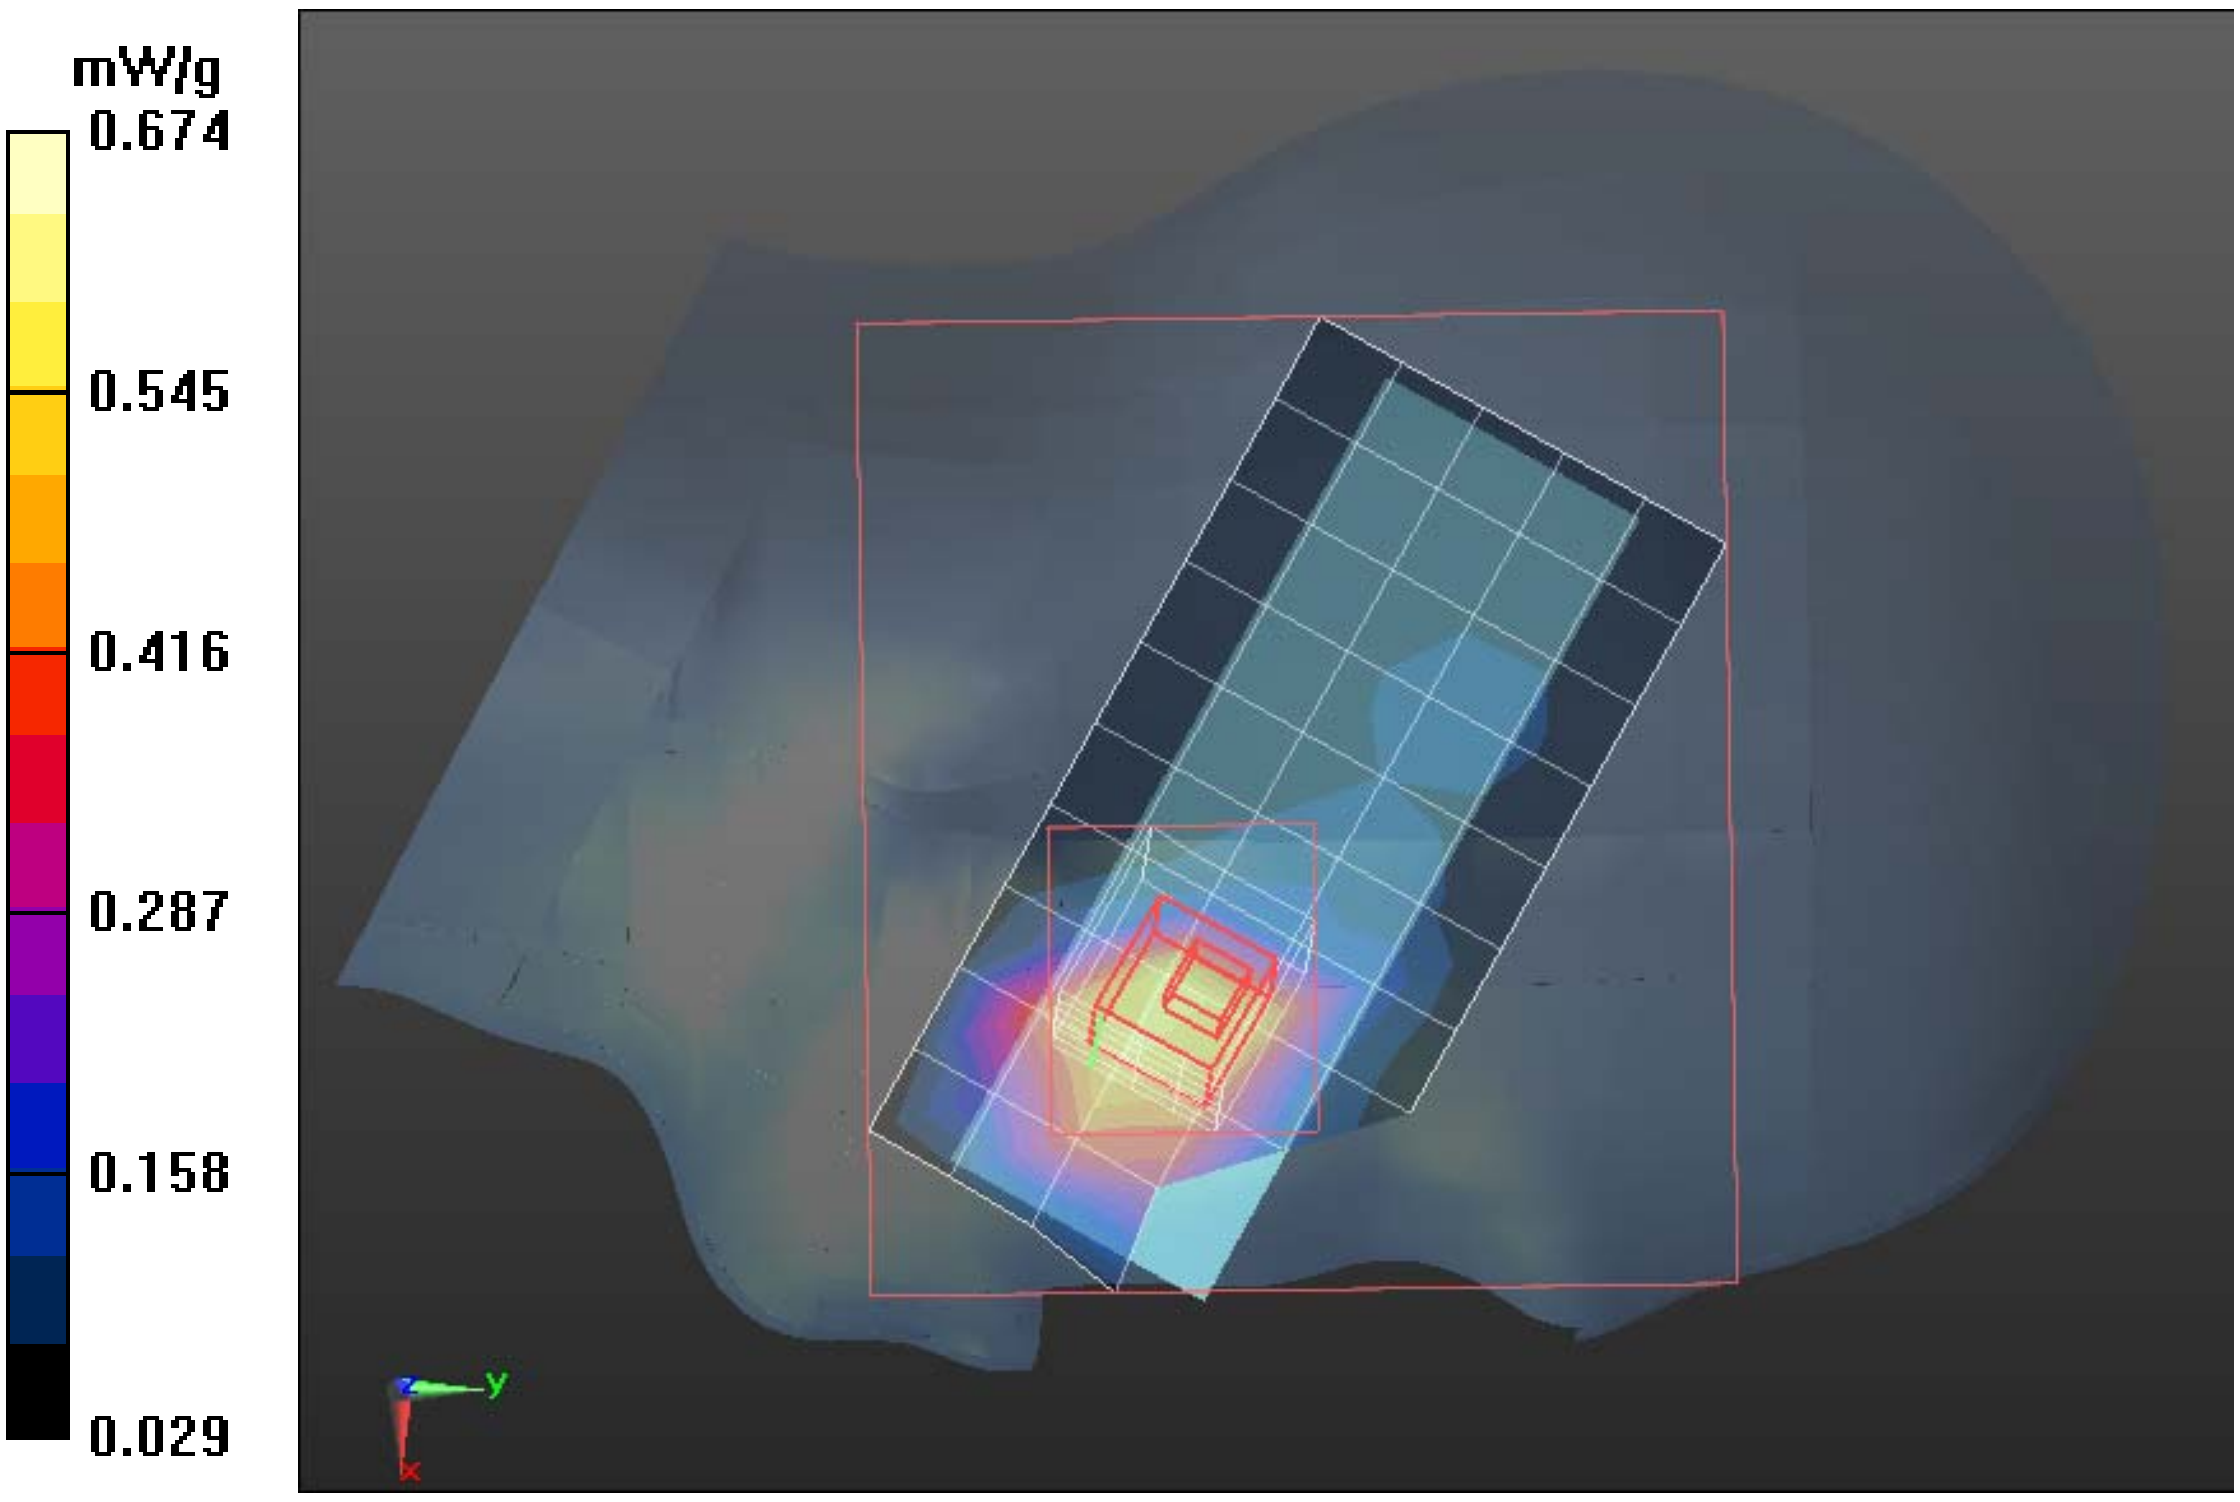

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS 1900-Left Head Tilted Middle CH661

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1880 MHz; σ = 1.45 mho/m; ε_r = 39.74; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Tilted Middle CH661/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.575 mW/g

PCS1900/Left Head Tilted Middle CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.771 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.868 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 0.637 mW/g

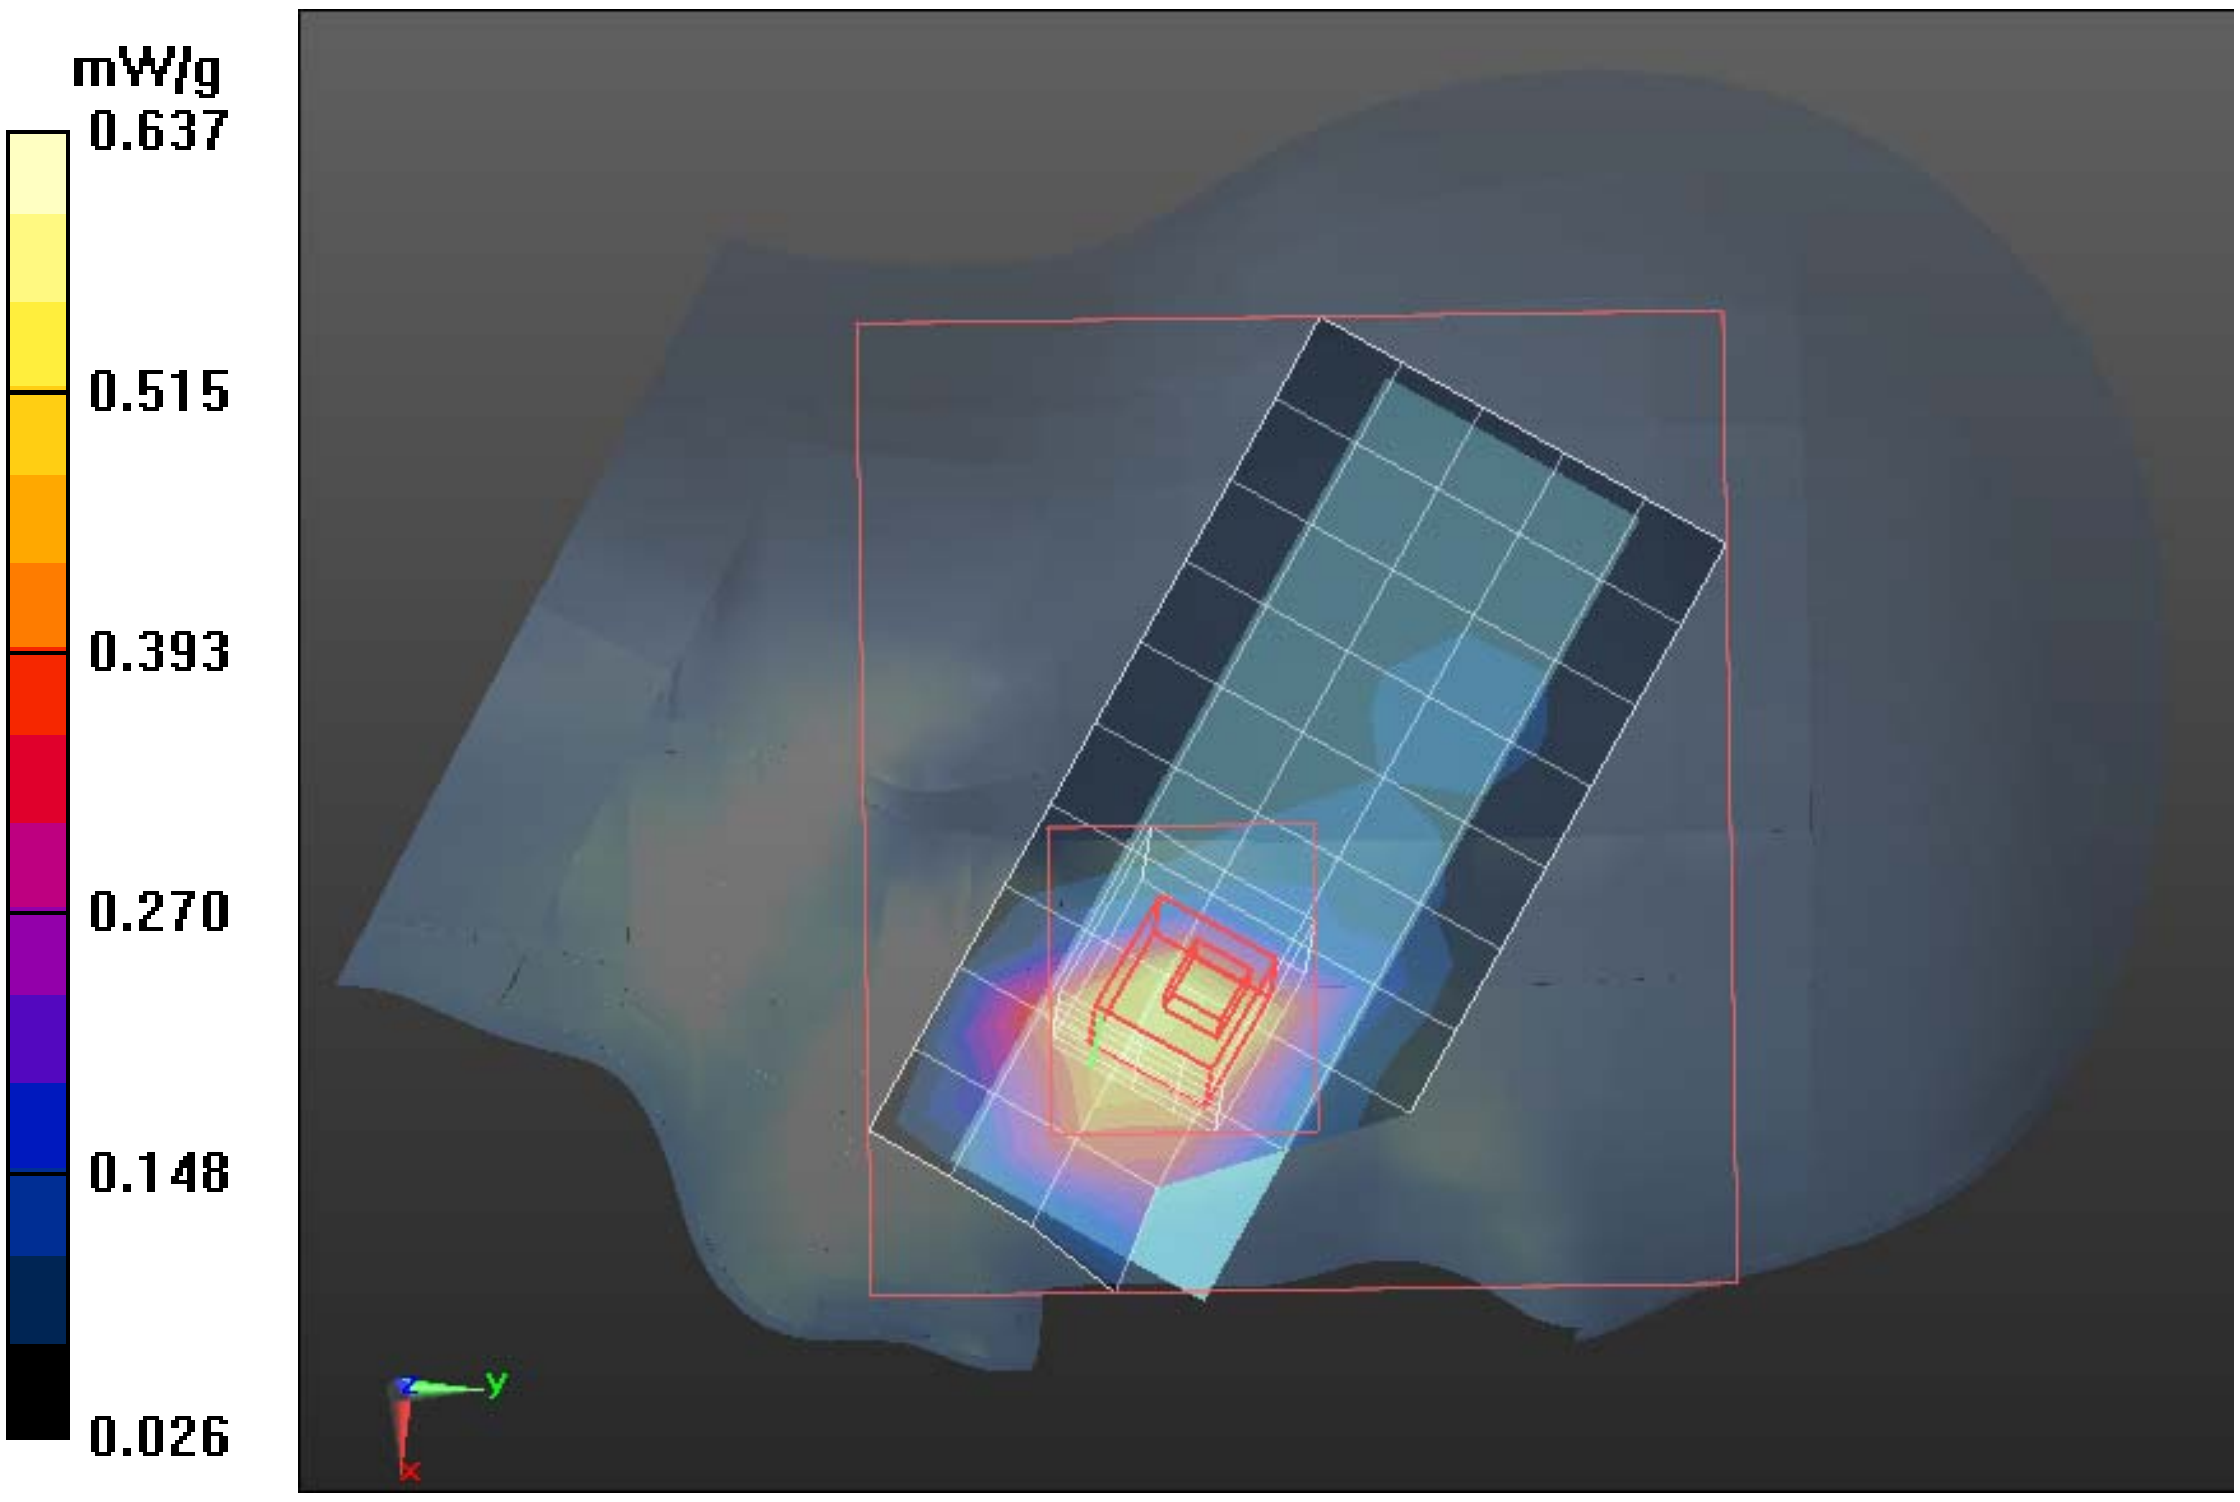

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS 1900-Left Head Tilted High CH810

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1910MHz; σ = 1.47 mho/m; ε_r = 39.6; ρ = 1000 kg/m^3

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Tilted High CH810/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.454 mW/g

PCS1900/Left Head Tilted High CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.272 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

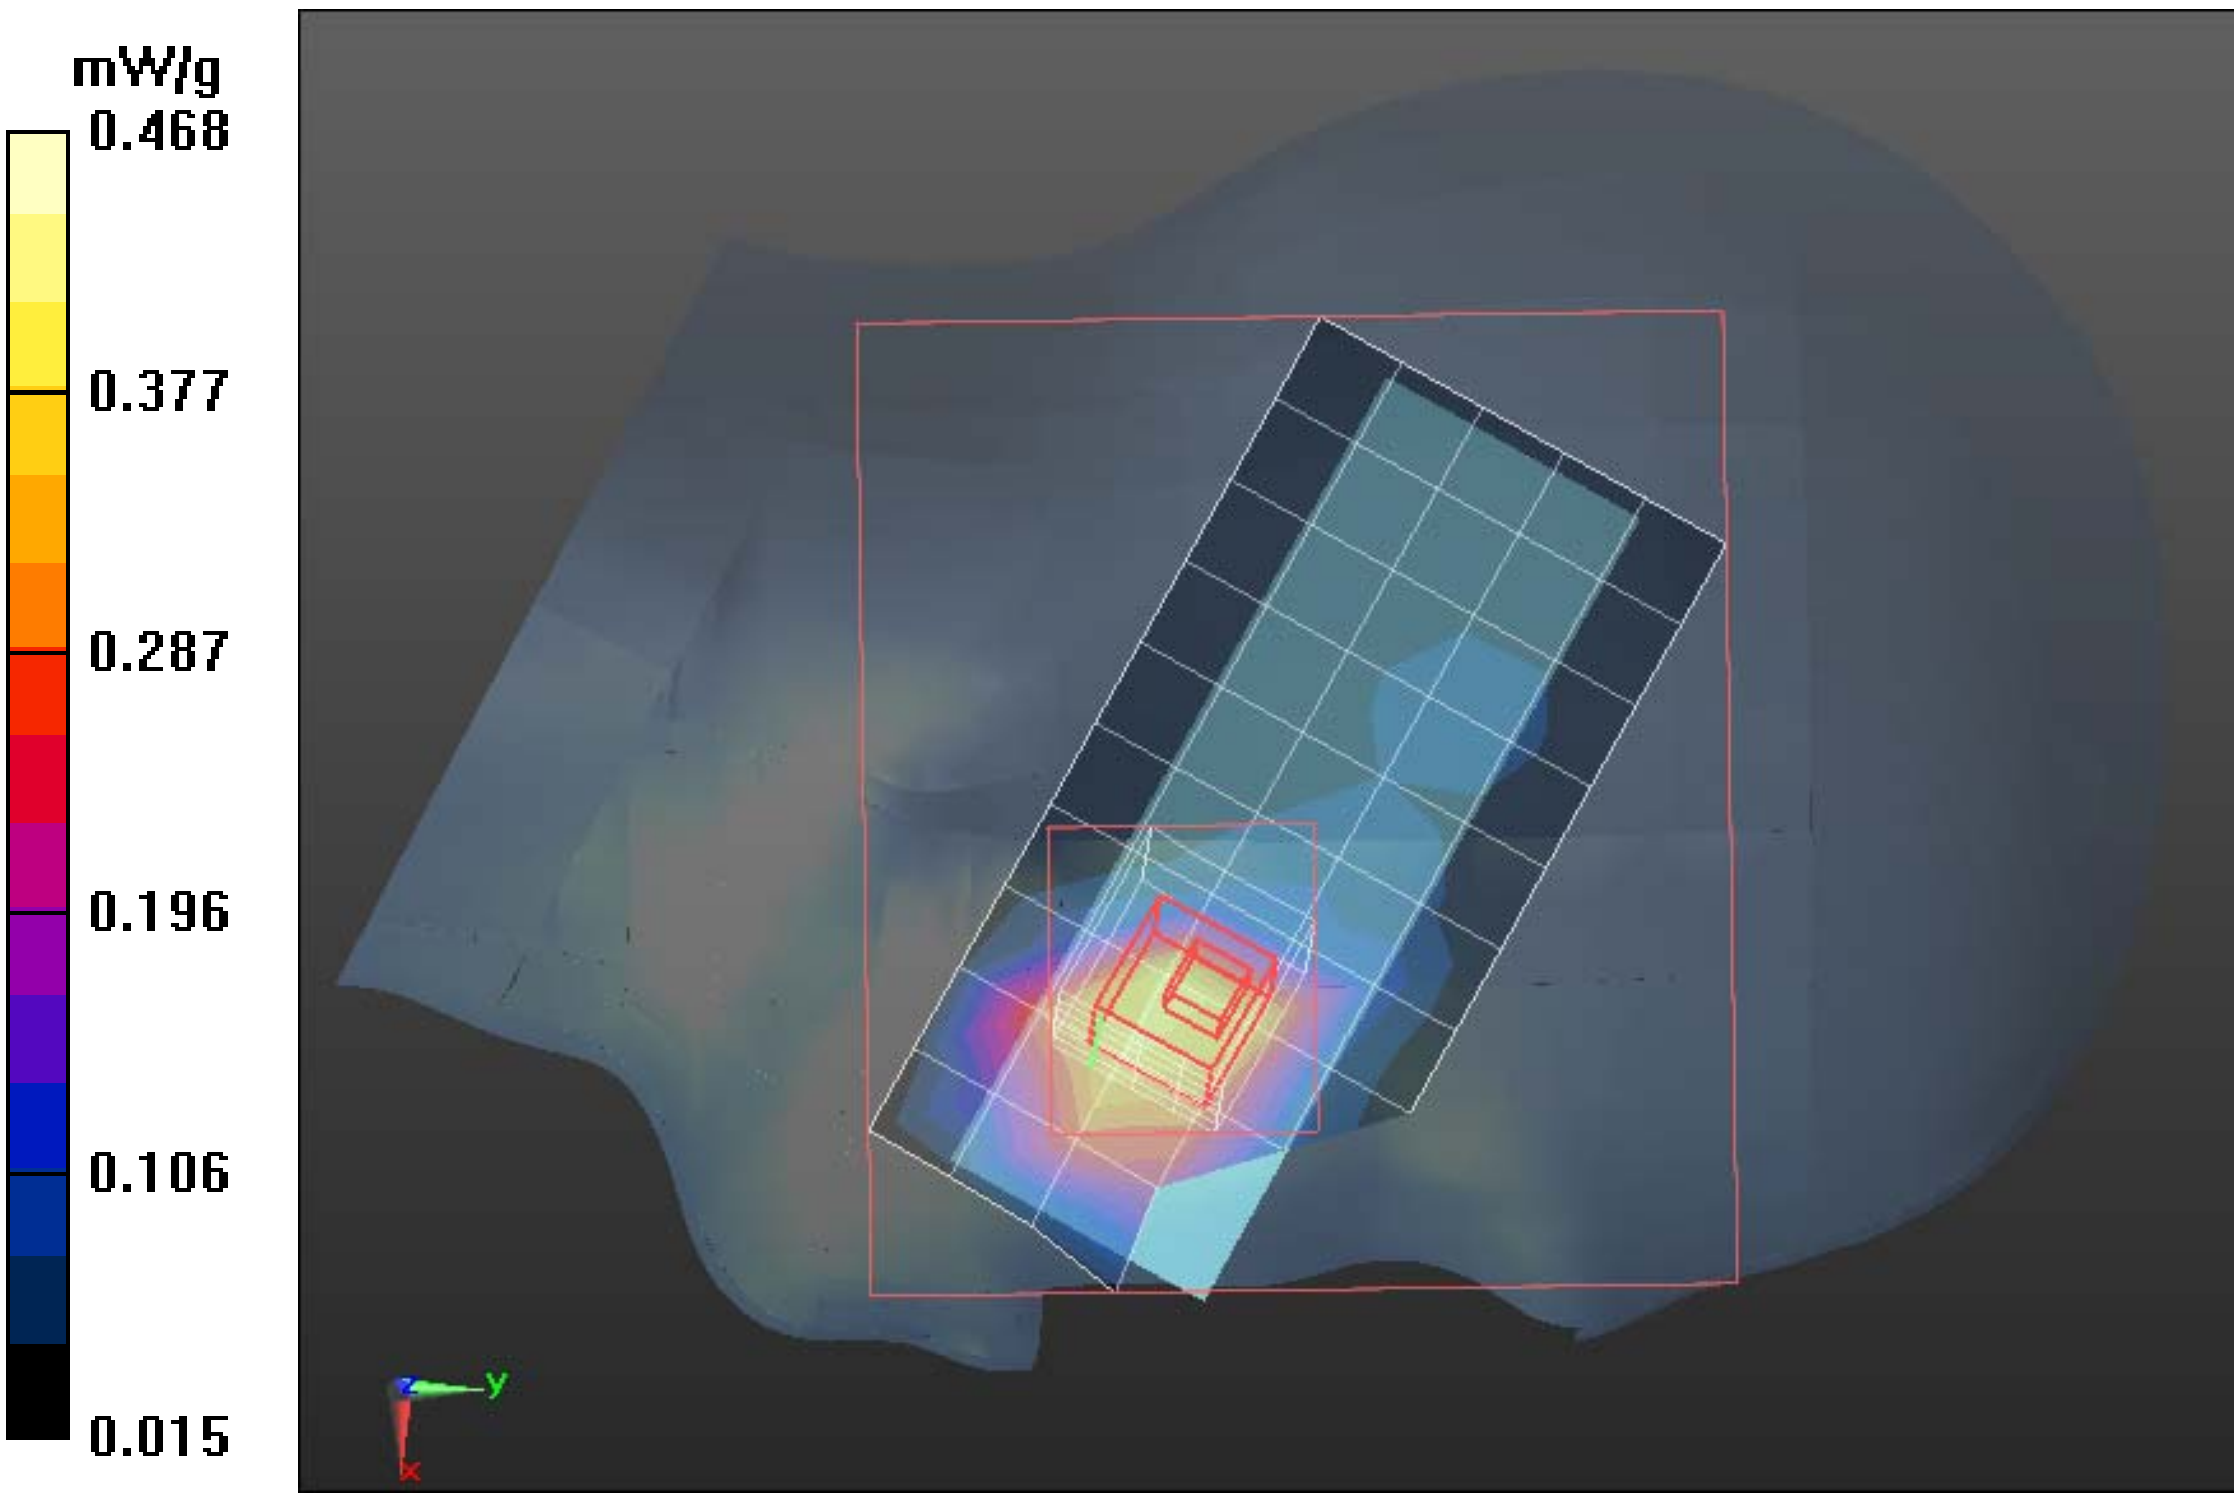

Compliance Certification Services Inc.

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS1900-Body Up Low CH512

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz;Communication System PAR: 9.03 dB

Medium parameters used: f = 1850.2 MHz; σ = 1.53 mho/m; ε_r = 51.24; ρ = 1000 kg/m^3

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/ PCS1900 Body Up Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.380 mW/g

PCS1900/ PCS1900 Body Up Low CH512/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.177 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

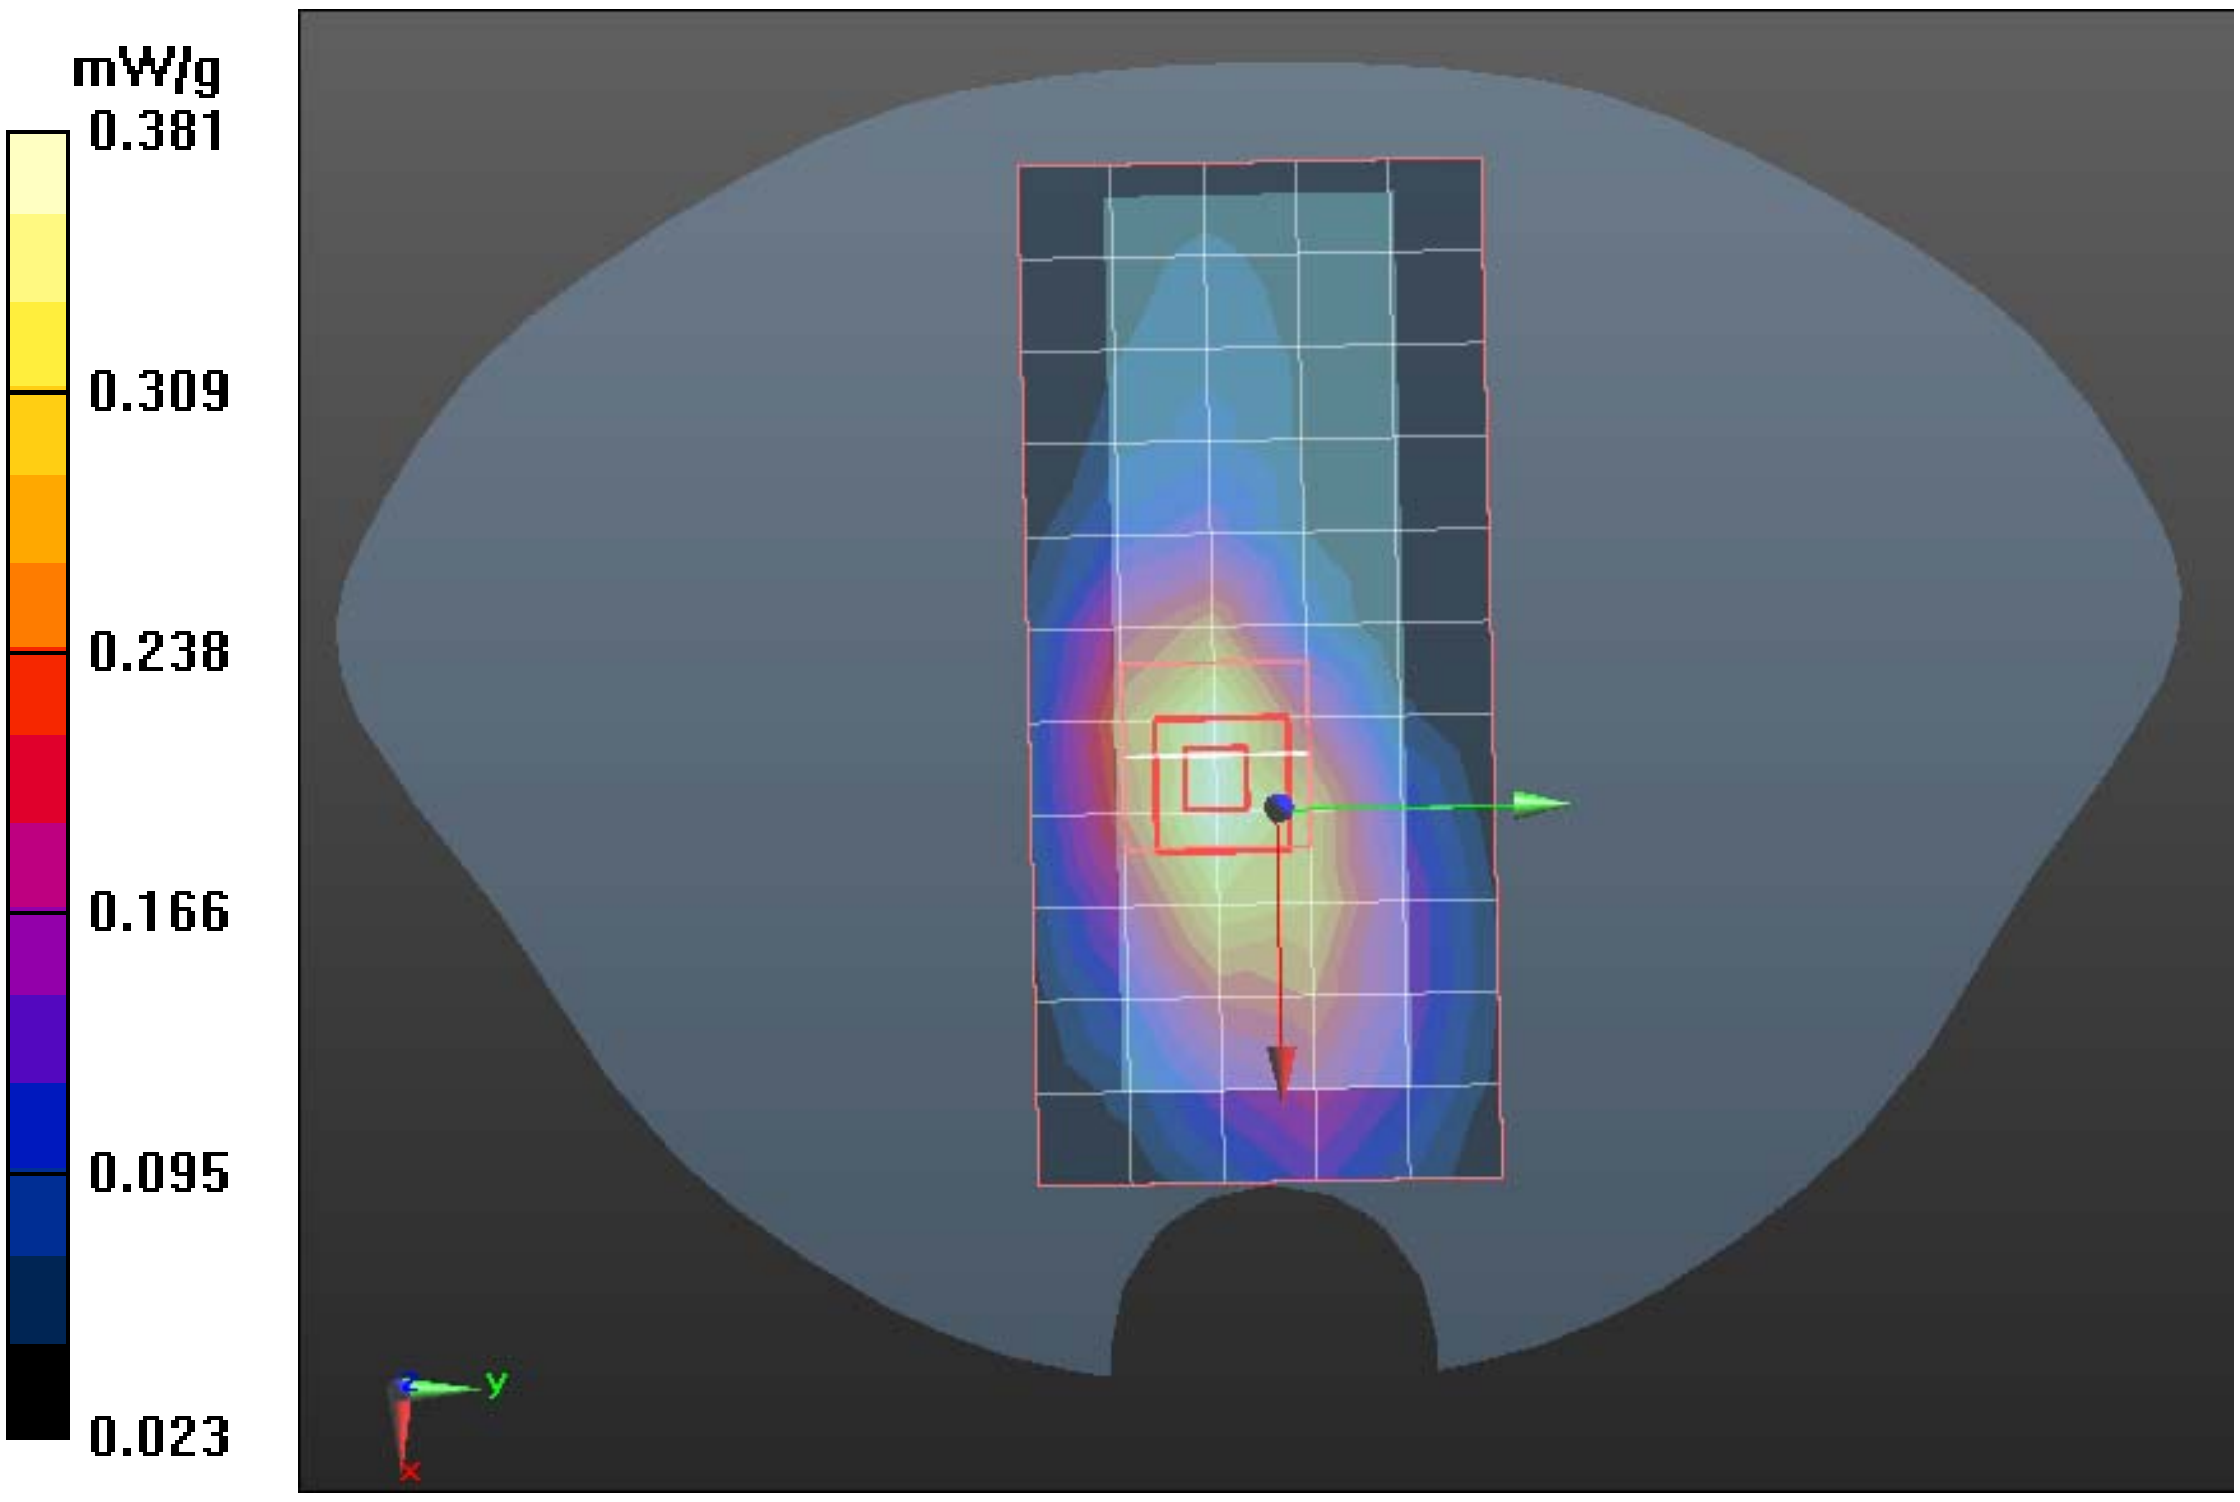

Test Laboratory: Compliance Certification Services Inc. November 23, 2011

PCS1900-Body Down Low CH512

DUT: GSM Mobile Phone; Type: T322; Serial: 358688000000158

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz;Communication System PAR: 9.03 dB Medium parameters used: f = 1850.2 MHz; σ = 1.53 mho/m; ε_r = 51.24; ρ = 1000 kg/m^3 Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/ PCS1900 Body Down Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.753 mW/g

PCS1900/ PCS1900 Body Down Low CH512/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.972 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.127 W/kg

SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.847 mW/g