



Part 22

TEST REPORT

Product Name	GSM 850/1900 dual band mobile
Model Name	PB100
FCC ID	A2F-PB100
Client	Pengbo Telcom (H.K) Limited.

TA Technology (Shanghai) Co., Ltd.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 2 of 33

GENERAL SUMMARY

Product Name	GSM 850/1900 dual band mobile	Model Name	PB100
FCC ID	A2F-PB100		
Report No.	RZA1111-1844RF01R1		
Client	Pengbo Telcom (H.K) Limited.		
Manufacturer	MINGYI		
Reference Standard(s)	<p>FCC CFR47 Part 2 (2010-12) Frequency Allocations And Radio Treaty Matters; General Rules And Regulations</p> <p>FCC CFR 47 Part 22H (2010-12) Public Mobile Services(850MHz)</p> <p>ANSI/TIA-603-C(2004) Land mobile FM or PM Communications Equipment Measurements and Performance Standards.</p>		
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 2 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <p style="text-align: center;">(Stamp)</p> <p style="text-align: center;">Date of issue: November 24th, 2011</p> 		
Comment	The test result only responds to the measured sample.		

Approved by 杨伟中

Director

Revised by 徐凯

RF Manager

Performed by 王

RF Engineer

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 3 of 33

TABLE OF CONTENT

1. General Information	4
1.1. Notes of the test report	4
1.2. Testing laboratory	4
1.3. Applicant Information	5
1.4. Manufacturer Information.....	5
1.5. Information of EUT.....	6
1.6. Test Date	7
2. Test Information	8
2.1. Summary of test results	8
2.2. RF Power Output	9
2.3. Effective Radiated Power.....	11
2.4. Occupied Bandwidth.....	14
2.5. Band Edge Compliance	17
2.6. Frequency Stability	20
2.7. Spurious Emissions at Antenna Terminals	22
2.8. Radiates Spurious Emission	26
3. Main Test Instruments	31
ANNEX A: EUT Appearance and Test Setup.....	32
A.1 EUT Appearance	32
A.2 Test Setup.....	33

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 4 of 33

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electrical report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 5 of 33

1.3. Applicant Information

Company: Pengbo Telcom (H.K) Limited.
Address: Room#F,10th Floor,Meyer Industrial Building 2 Chong Yip St. Kwun Tong, Kowloon Hongkong
City: Hongkong
Postal Code: /
Country: P.R. China
Contact: YaBo.Zhang
Telephone: 86-13825210005
Fax: 0755-25267272

1.4. Manufacturer Information

Company: MINGYI
Address: Room 1703~1706, International Chamber of Commerce Building-B, No.138 Fuhua Road 1, Futian District
City: Shenzhen
Postal Code: /
Country: P.R. China
Telephone: +86 13510010762
Fax: +86 755 33356212

TA Technology (Shanghai) Co., Ltd.
Test Report

1.5. Information of EUT

General information

Name of EUT:	GSM 850/1900 dual band mobile		
IMEI :	353848042542733		
Hardware Version:	X100_P1		
Software Version:	X100V1.2.1B01-Q802-ES-SILICON7-US		
Antenna Type:	Internal Antenna		
Device Operating Configurations:			
Operating Mode(s):	GSM 850:(tested)		
Test Modulation:	(GSM)GMSK		
Maximum E.R.P.	GSM 850: 26.54 dBm		
Power Supply:	Battery or Charger		
Rated Power Supply Voltage:	3.8V		
Extreme Voltage:	Minimum: 3.5V Maximum: 4.2V		
Extreme Temperature:	Lowest: -10°C Highest: +50°C		
Test Channel: (Low - Middle - High)	128 - 190 - 251 (GSM 850) (tested)		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824.2 ~ 848.8	869.2 ~ 893.8

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 7 of 33

Auxiliary Equipment Details

AE1: Battery

Model: BL-4C
Manufacture: SHENZHEN KingerPower Technology CO.,Ltd
S/N: /

Equipment Under Test (EUT) is GSM 850/1900 dual band mobile with internal antenna. The EUT is tested GSM 850 band in this report.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test is performed from November 3, 2011 to November 6, 2011.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 8 of 33

2. Test Information

2.1. Summary of test results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	22.917	PASS
5	Frequency Stability	2.1055 / 22.355	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
7	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS

PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 9 of 33

2.2. RF Power Output


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

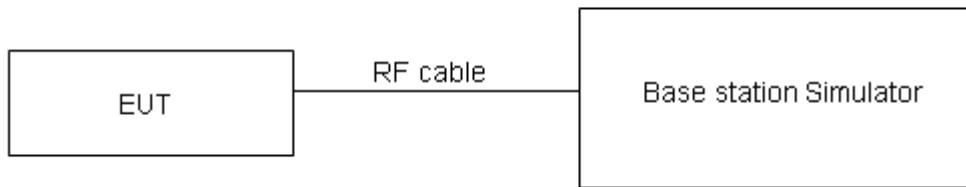

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 10 of 33

Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
GSM	Results	824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
		31.60	31.50	31.41

2.3. Effective Radiated Power

Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

The measurement procedures in TIA- 603C are used.

Step 1:

The measurement is carried out in the semi-anechoic chamber. EUT was placed on a 0.8 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used while RBW and VBW are both set to 3MHz. During the measurement, the highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna moved up and down over a range from 1 to 4 meters in both horizontally and vertically polarized orientations. The test setup refers to figure below.

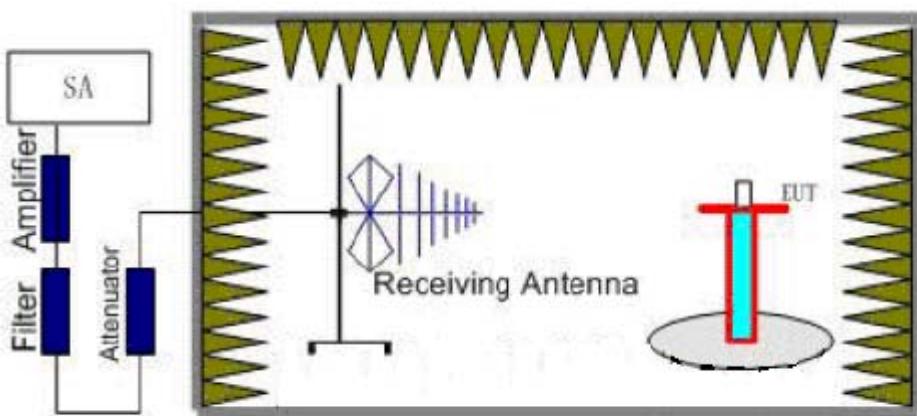


Step 2:

A dipole antenna shall be substituted in place of the EUT. The antenna will be driven by a signal generator with a adjustable S.G. applied through a 30dB amplifier and a Tx cable. Then the Analyzer reading which is equal to LVL is recorded while the antenna was moving up and down. The E.R.P. /E.I.R.P. of the EUT can be calculated through the level of the signal generator, Tx cable loss and the gain of the substitution antenna. The test setup refers to figure below.

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1111-1844RF01R1

Page 12 of 33

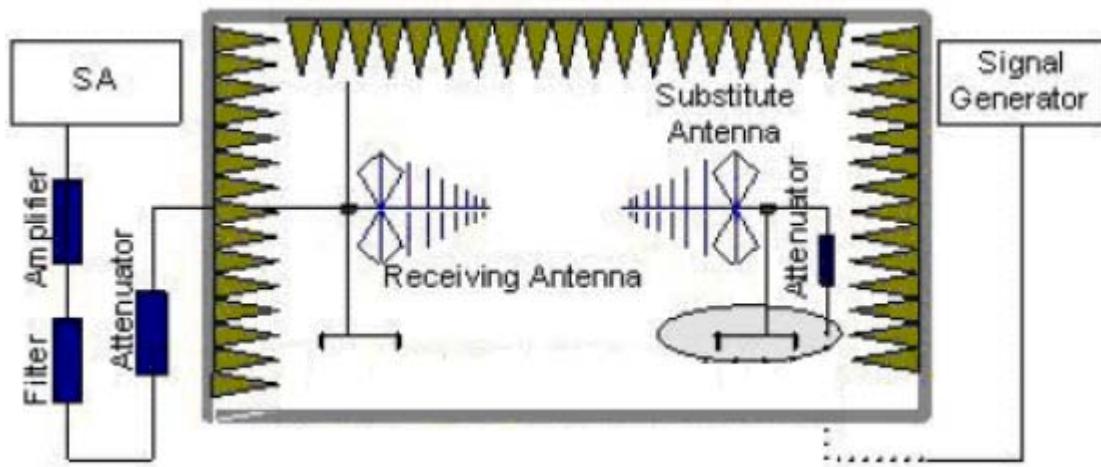

E.R.P = S.G + 30. - Tx Cable loss + Substitution antenna gain - 2.15.

$$\text{EIRP} = \text{E.R.P} + 2.15$$

Limits

Rule Part 22.913(a) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	≤ 7 W (38.45 dBm)
-------	------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19$ dB

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 13 of 33

Test Results: Pass

	Channel	Polarization	LVL (dBm)	SG+30 (dBm)	Gain (dBi)	Cable Loss (dBm)	E.R.P. (dBm)
GSM 850	128	Vertical	-19.84	42.5	1.06	15.17	26.24
	190	Vertical	-18.48	42.71	1.24	15.2	26.54
	251	Vertical	-19.79	40.78	1.38	15.24	24.93

Note: 1. E.R.P = S.G+30. - Tx Cable loss + Substitution antenna gain – 2.15.

2. EIRP= E.R.P+2.15

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 14 of 33

2.4. Occupied Bandwidth


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz, VBW is set to 10kHz for GSM 850. 99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

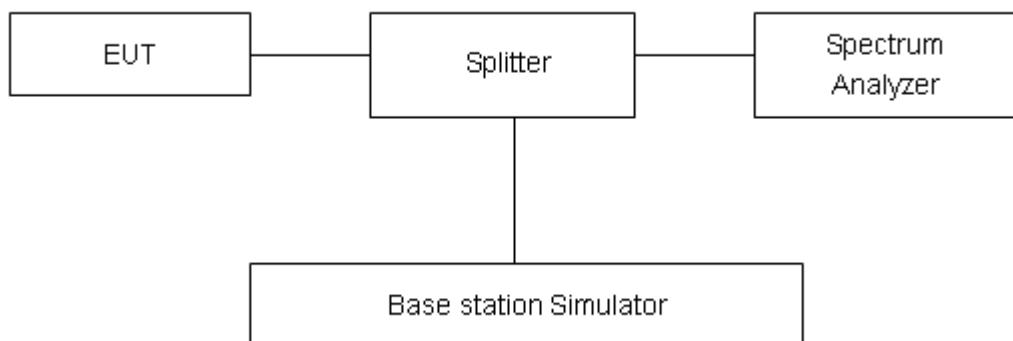

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

TA Technology (Shanghai) Co., Ltd.


Test Report

Report No.: RZA1111-1844RF01R1

Page 15 of 33

Test Result

	Channel	Frequency (MHz)	99% Power Bandwidth (kHz)	-26dBc Bandwidth(kHz)
GSM 850	128	824.2	244.5873	312.973
	190	836.6	243.8607	307.741
	251	848.8	243.4519	304.292

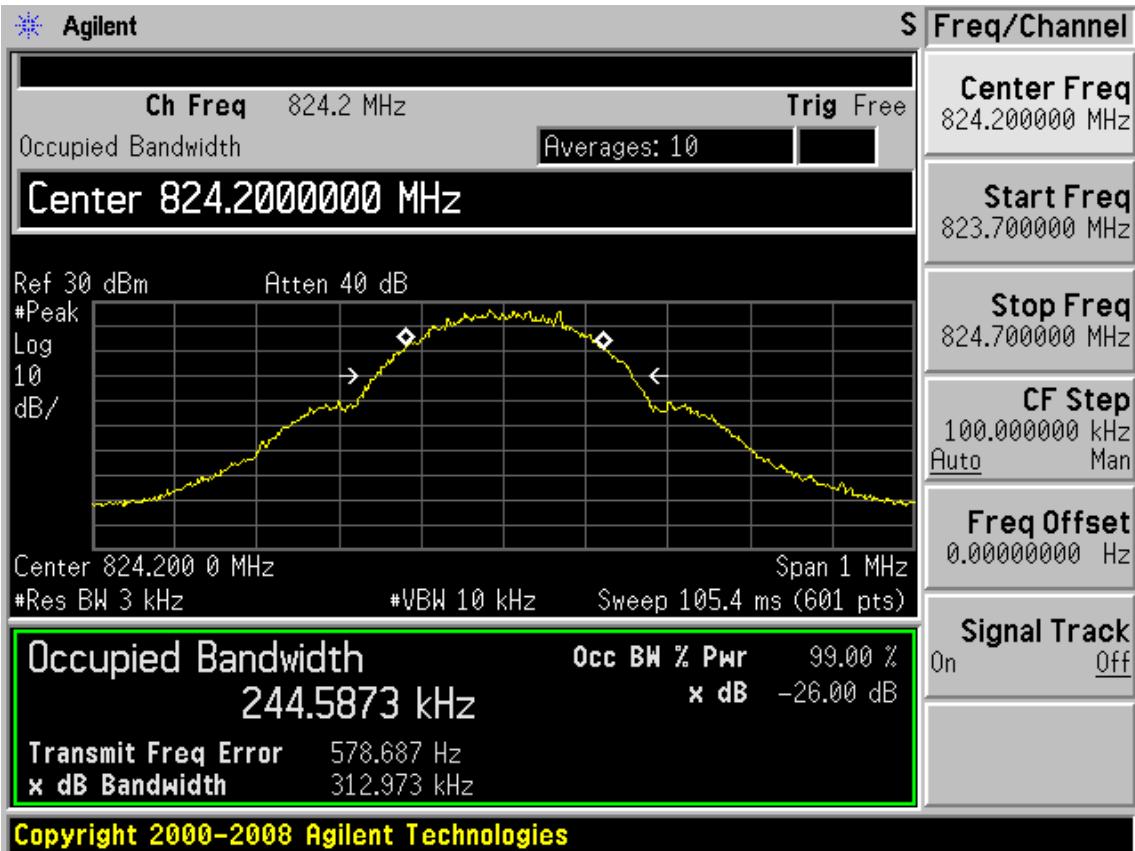


GSM 850 CH128 Occupied Bandwidth

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 16 of 33

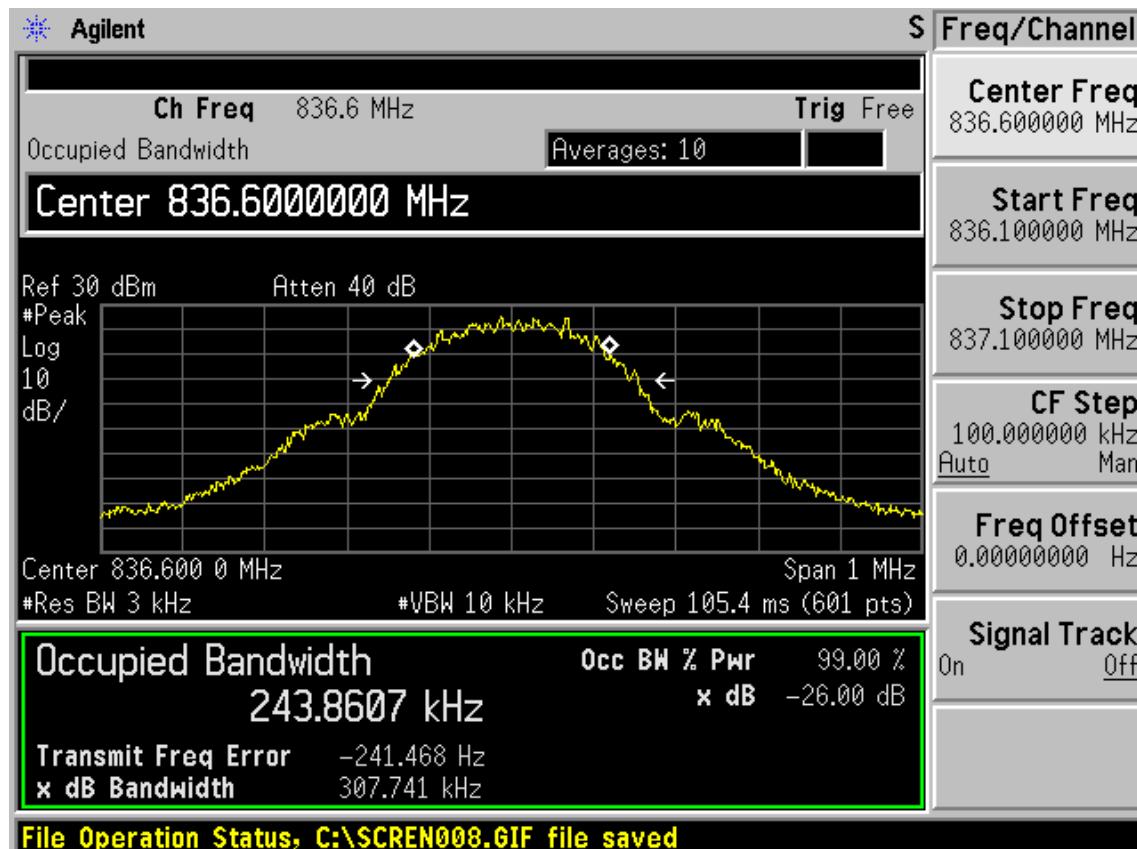

GSM 850 CH190 Occupied Bandwidth



GSM 850 CH251 Occupied Bandwidth

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1111-1844RF01R1

Page 17 of 33

2.5. Band Edge Compliance


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 3kHz, VBW is set to 10kHz for GSM 850. Spectrum analyzer plots are included on the following pages.

Test Setup

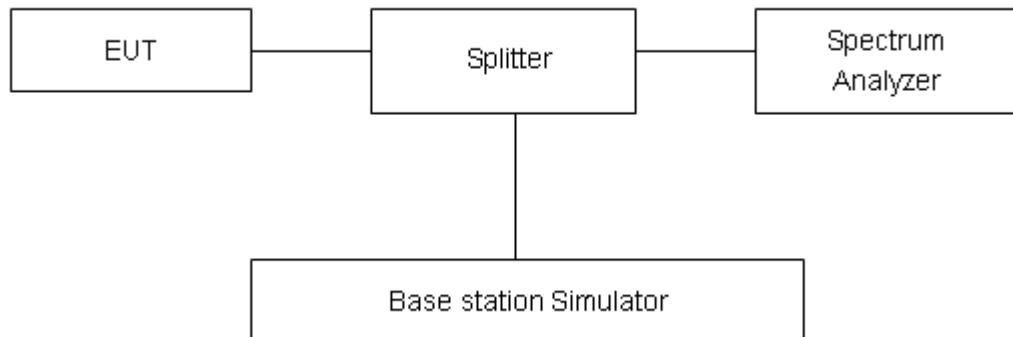

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.


TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 18 of 33

Test Result:

	Carrier frequency (MHz)	Reference value (dBm)	Limit	Conclusion
GSM 850	824.0	-18.07	-13	PASS
	849.0	-22.73	-13	PASS

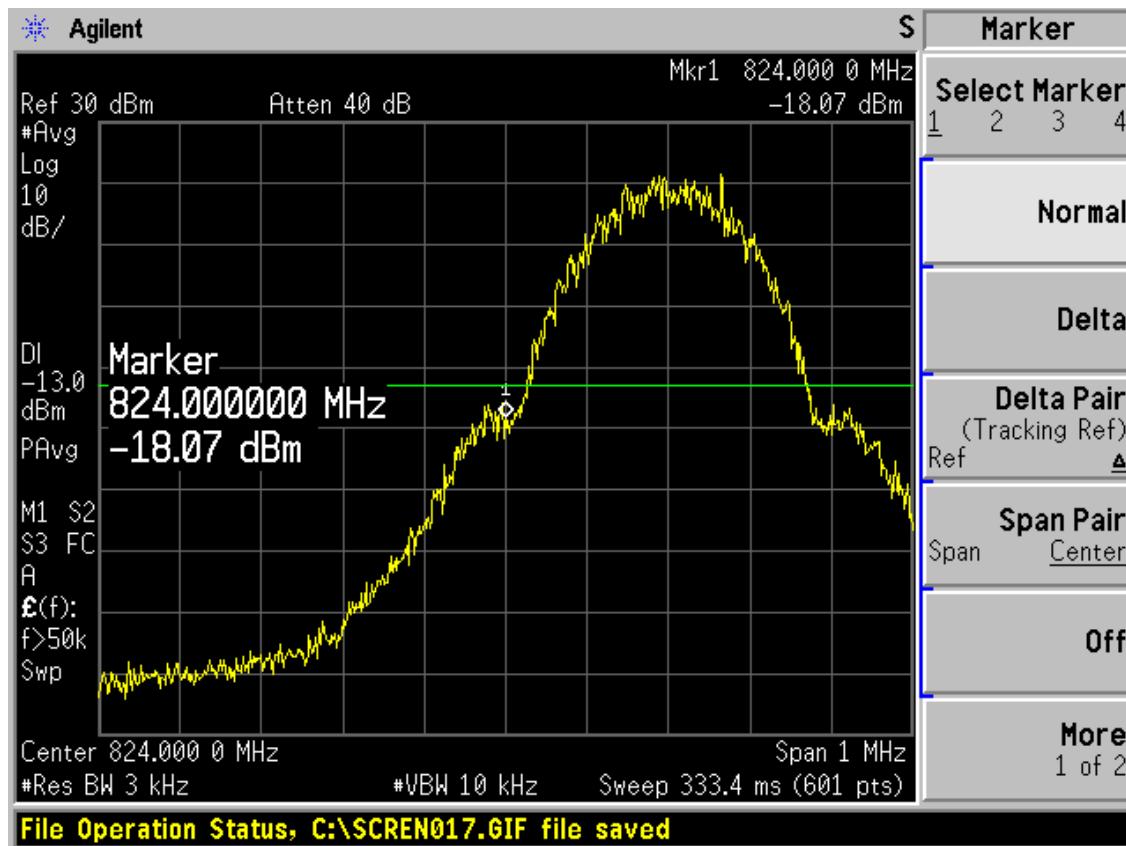


GSM 850 128 Channel

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 19 of 33

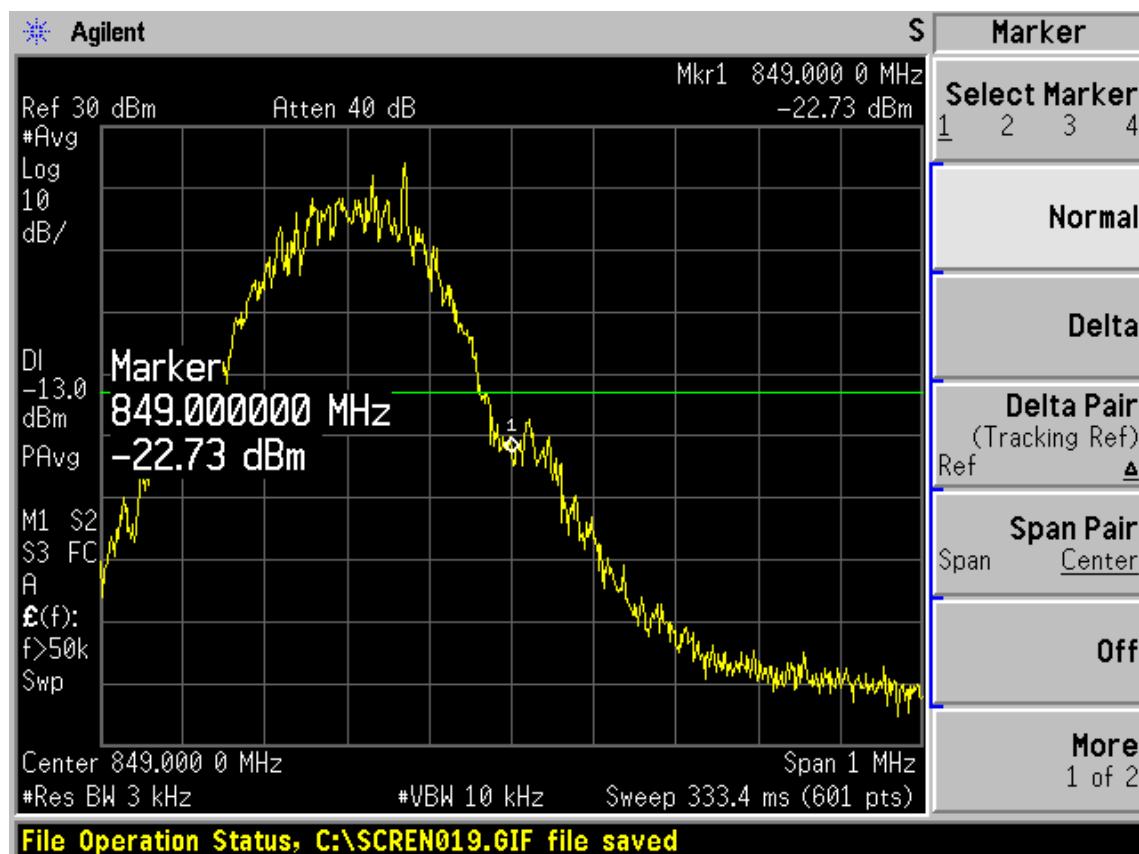

GSM 850 251 Channel

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 20 of 33

2.6. Frequency Stability

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.5 V and 4.2 V, with a nominal voltage of 3.8V.

Test setup

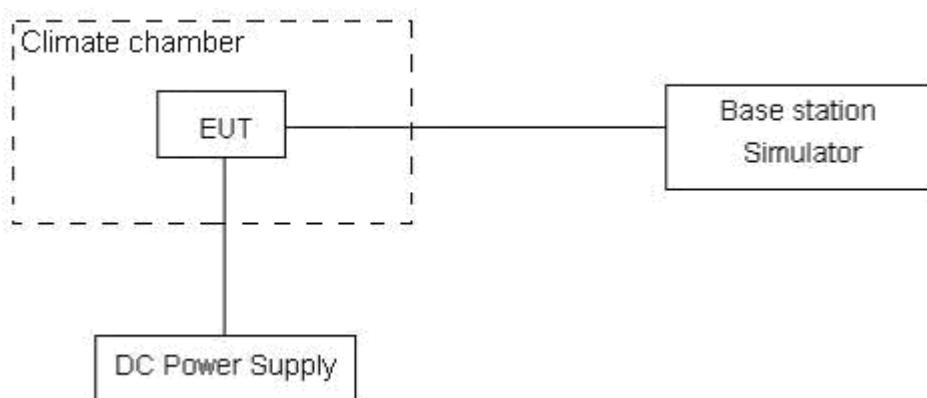

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 21 of 33

Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency from the base station.

Limits	≤ 2.5 ppm
--------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U = 0.01\text{ppm}$.

Test Result

Temperature (°C)	Test Results (ppm) / 3.8 V Power supply
	Channel 190
-30	0.01694
-20	0.01425
-10	0.01315
0	0.00864
10	0.00956
20	0.01093
30	0.01246
40	0.01865
50	0.02015

Voltage (V)	Test Results(ppm) / 20°C
	Channel 190
3.5	0.01452
3.8	0.01093
4.2	0.01579

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No.: RZA1111-1844RF01R1

Page 22 of 33

2.7. Spurious Emissions at Antenna Terminals


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. For GSM 850, RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

Test setup

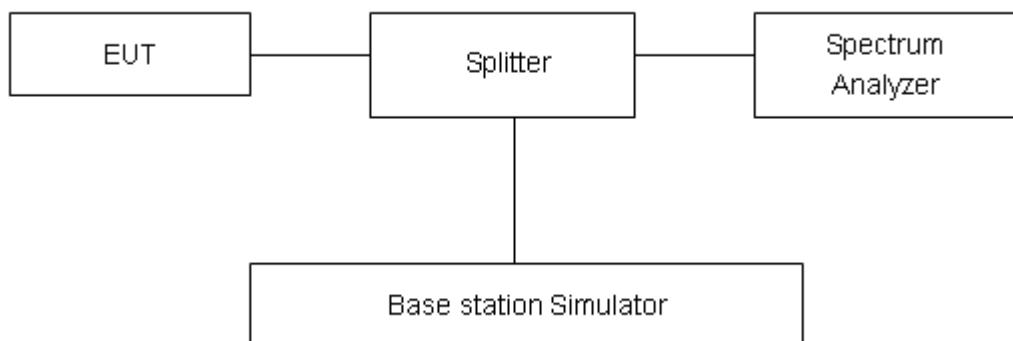

Limits

Rule Part 22.917(a) specifies that "The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P) \text{ dB}$."

Limit	-13 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75 % confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-12.75GHz	1.407 dB


TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1111-1844RF01R1

Page 23 of 33

Test Result

GSM 850 CH128

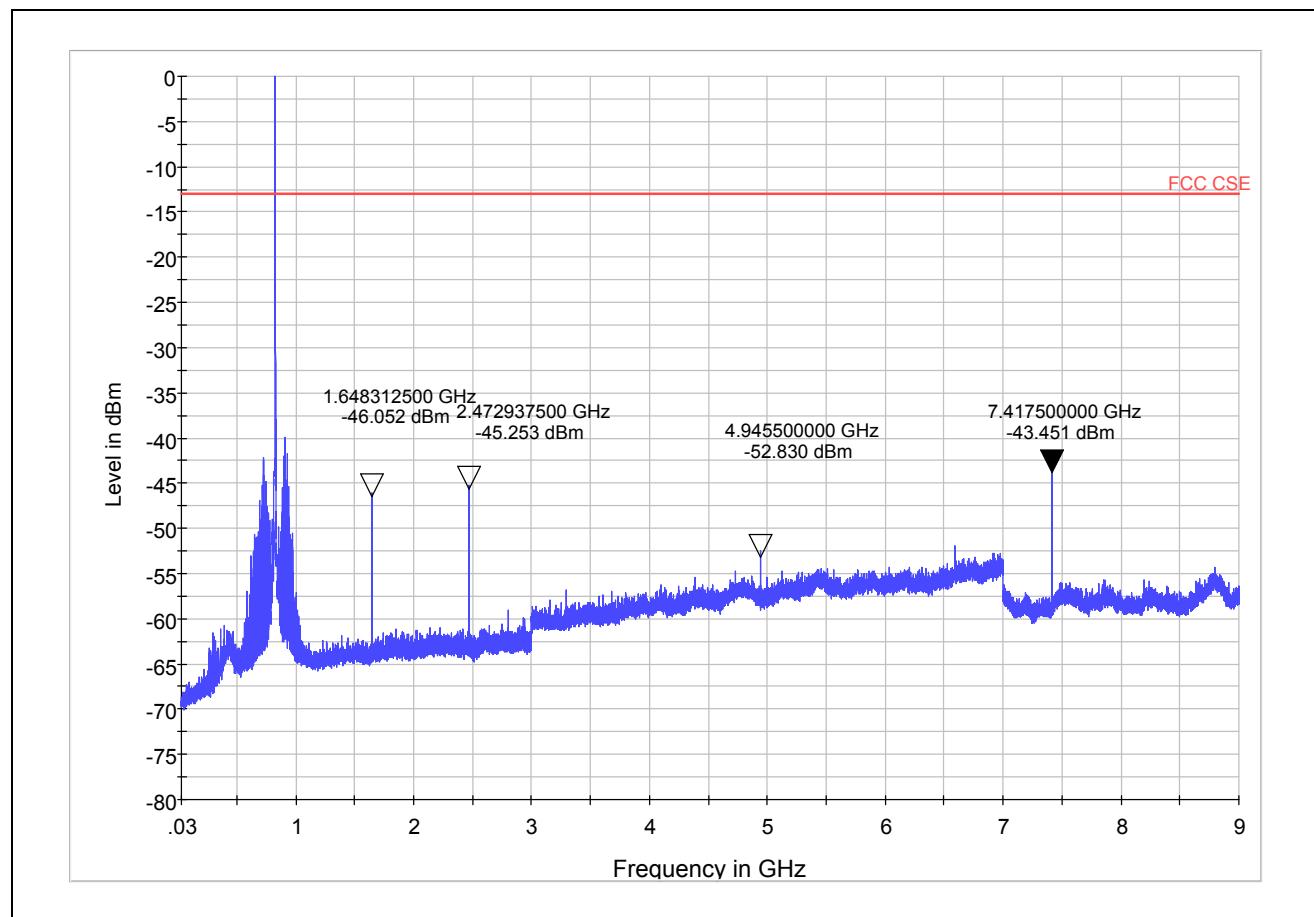

Note: The signal beyond the limit is carrier

GSM 850 128 Channel 30MHz~9GHz

Harmonic	TX ch.128 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	1648.3125	-46.052	-13	33.052
3	2472.9375	-45.253	-13	32.253
4	3296.8	Nf	-13	/
5	4121	Nf	-13	/
6	4945.5	-52.83	-13	39.83
7	5769.4	Nf	-13	/
8	6593.6	Nf	-13	/
9	7417.5	-43.451	-13	30.451
10	8242	Nf	-13	/

Nf: noise floor


Note: The other Spurious RF conducted emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 24 of 33

GSM 850 CH190

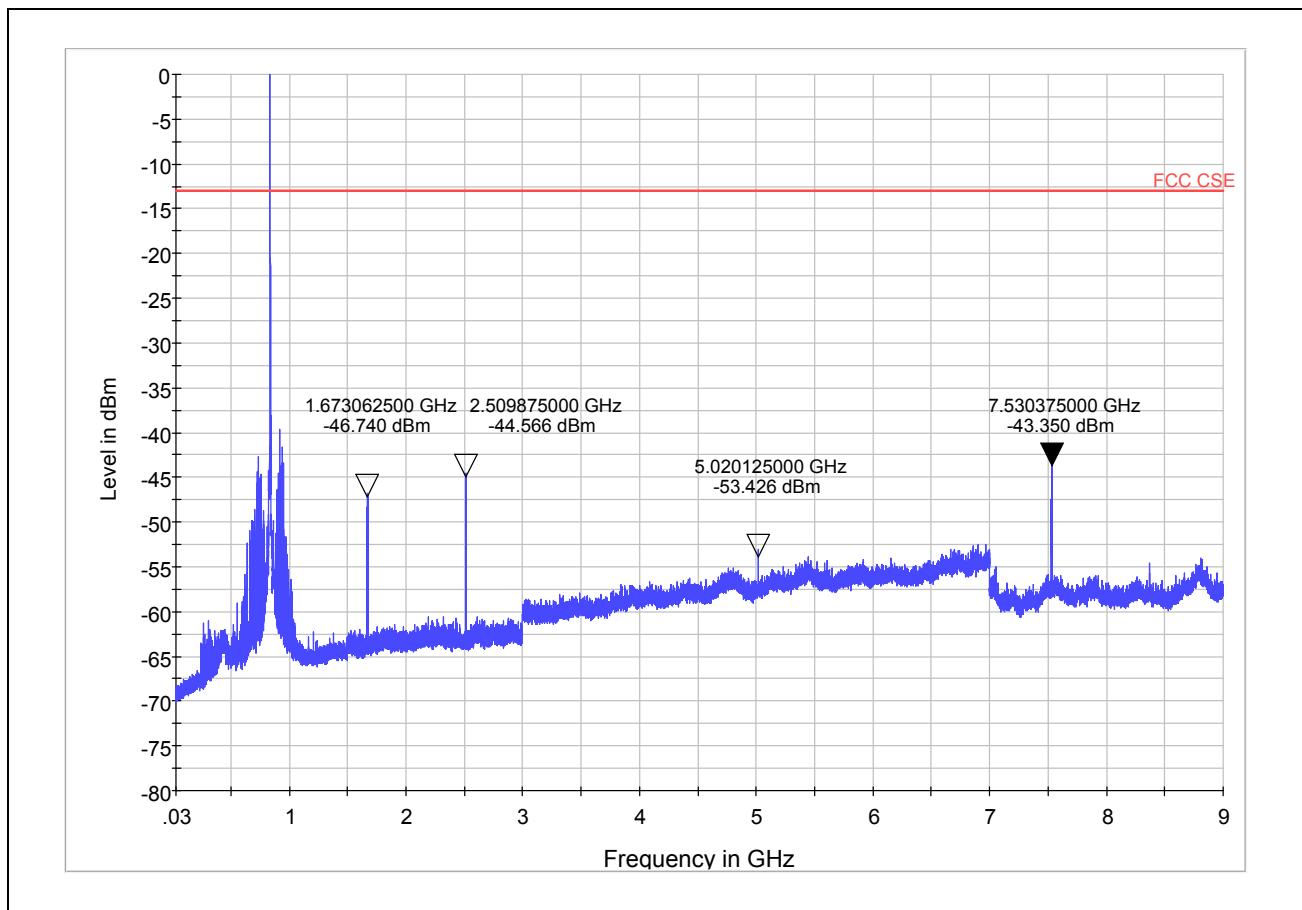

Note: The signal beyond the limit is carrier

GSM 850 190 Channel 30MHz~9GHz

Harmonic	TX ch.190 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	1673.0625	-46.740	-13	33.740
3	2509.875	-44.566	-13	31.566
4	3346.4	Nf	-13	/
5	4183	Nf	-13	/
6	5020.125	-53.426	-13	40.426
7	5856.2	Nf	-13	/
8	6692.8	Nf	-13	/
9	7530.375	-43.350	-13	30.350
10	8366	Nf	-13	/

Nf: noise floor


Note: The other Spurious RF conducted emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 25 of 33

GSM 850 CH251

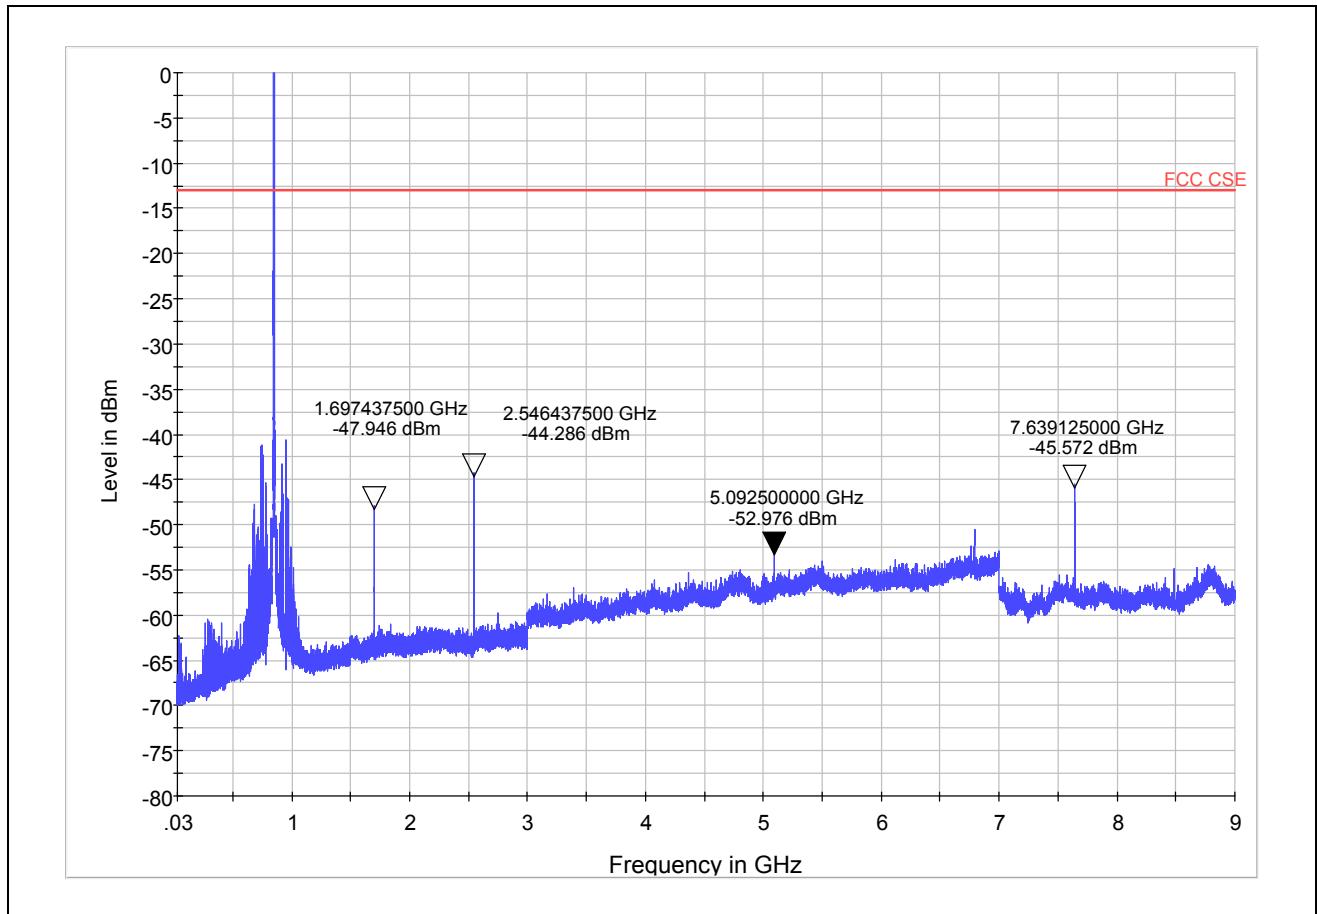

Note: The signal beyond the limit is carrier
 GSM 850 251 Channel 30MHz~9GHz

Harmonic	TX ch.251 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	1697.4375	-47.946	-13	34.946
3	2546.4375	-44.286	-13	31.286
4	3395.2	Nf	-13	/
5	4244	Nf	-13	/
6	5092.5	-52.976	-13	39.976
7	5941.6	Nf	-13	/
8	6790.4	Nf	-13	/
9	7639.125	-45.572	-13	32.572
10	8488	Nf	-13	/
Nf: noise floor				

Note: The other Spurious RF conducted emissions level is no more than noise floor.

2.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The measurements procedures in TIA -603C are used.


the spectrum is investigated from 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The emissions less than 20 dB below the permissible value are reported.

The procedure of Radiates Spurious Emission is as follows:

Step 1:

The measurement is carried out in the semi-anechoic chamber. EUT was placed on a 0.8 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used while RBW and VBW are both set to 3MHz. During the measurement, the highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna moved up and down over a range from 1 to 4 meters in both horizontally and vertically polarized orientations. The test setup refers to figure below.

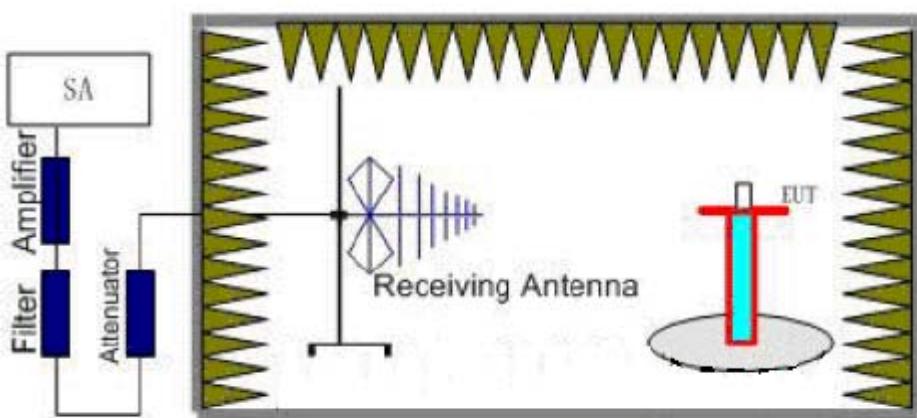


Step 2:

A dipole antenna shall be substituted in place of the EUT. The antenna will be driven by a signal generator with a adjustable S.G. applied through a Tx cable. Adjust the level of the signal generator output until the value of the receiver reach the previously recorded analyzer power level (LVL). Then The E.R.P. /E.I.R.P. of the EUT can be calculated through the level of the signal generator, Tx cable loss and the gain of the substitution antenna. The test setup refers to figure below.

TA Technology (Shanghai) Co., Ltd. Test Report

Report No.: RZA1111-1844RF01R1

Page 27 of 33

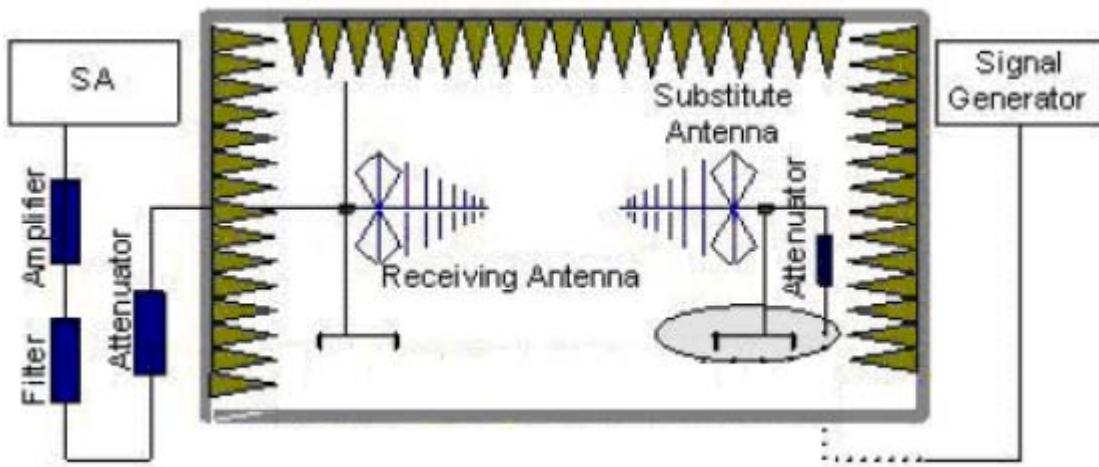

E.R.P (peak power) = S.G. - Tx Cable loss + Substitution antenna gain - 2.15.

EIRP = E.R.P + 2.15

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the antenna is vertical.

Limits

Rule Part 22.917(a) specifies that "The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB."

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 28 of 33

Test Result

GSM 850 CH128

Harmonic	TX ch.128 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1648.5	/	/	/	Nf	-13	/	/
3	2472.6	/	/	/	Nf	-13	/	/
4	3296.8	/	/	/	Nf	-13	/	/
5	4233.4	/	/	/	Nf	-13	/	/
6	4945.5	/	/	/	Nf	-13	/	/
7	5769.8	-53.63	5.7	13.55	-47.93	-13	34.93	180
8	6593.6	/	/	/	Nf	-13	/	/
9	7417.8	-52.56	6.8	13.85	-47.659	-13	34.659	180
10	8242	/	/	/	Nf	-13	/	/

Nf: noise floor

Note: The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 29 of 33

GSM 850 CH190

Harmonic	TX ch.190 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.1	/	/	/	/	-13	/	/
3	2509.8	/	/	/	/	-13	/	/
4	3346.4	/	/	/	/	-13	/	/
5	4245.8	/	/	/	/	-13	/	/
6	5019.0	/	/	/	/	-13	/	/
7	5856.8	-54.617	5.7	13.55	-48.92	-13	35.917	180
8	6692.8	/	/	/	Nf	-13	/	/
9	7529.4	-51.234	6.8	13.85	-46.33	-13	33.334	180
10	8366	/	/	/	Nf	-13	/	/

Nf: noise floor

Note: The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No.: RZA1111-1844RF01R1

Page 30 of 33

GSM 850 CH251

Harmonic	TX ch.251 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1697.6	/	/	/	Nf	-13	/	/
3	2546.4	/	/	/	Nf	-13	/	/
4	3395.2	/	/	/	Nf	-13	/	/
5	4244	/	/	/	Nf	-13	/	/
6	5092.8	/	/	/	Nf	-13	/	/
7	5941.6	-56.849	5.7	13.55	-51.15	-13	38.149	180
8	6790.4	/	/	/	Nf	-13	/	/
9	7639.2	-52.374	6.8	13.85	-47.47	-13	34.474	180
10	8488	/	/	/	Nf	-13	/	/

Nf: noise floor

Note: The other Spurious RF Radiated emissions level is no more than noise floor.

TA Technology (Shanghai) Co., Ltd.
Test Report

3. Main Test Instruments

No.	Name	Type	Manufacturer	Serial Number	Calibration Date	Valid Period
01	Base Station Simulator	CMU200	R&S	118133	2011-05-26	One year
02	Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	NA	NA
03	Spectrum Analyzer	E4445A	Agilent	MY46181146	2011-06-07	One year
04	Universal Radio Communication Tester	E5515C	Agilent	MY48367192	2011-06-03	One year
05	Signal Analyzer	FSV	R&S	100815	2011-06-27	One year
06	Signal generator	SMR27	R&S	1606.6000.02	2011-06-27	One year
07	EMI Test Receiver	ESCI	R&S	100948	2011-06-30	One year
08	Loop Antenna	FMZB1516	SCHWARZB ECK	237	2010-06-29	Two years
09	Trilog Antenna	VUBL 9163	SCHWARZB ECK	9163-201	2010-06-29	Two years
10	Horn Antenna	HF907	R&S	100126	2011-07-01	Two years
11	Climatic Chamber	PT-30B	Re Ce	20101891	2010-09-10	Three years
12	Semi-Anechoic Chamber	9.6*6.7*6.6m	ETS-Lindgren	NA	NA	NA
13	EMI test software	ES-K1	R&S	NA	NA	NA

*****END OF REPORT BODY*****

**TA Technology (Shanghai) Co., Ltd.
Test Report**

Report No.: RZA1111-1844RF01R1

Page 32 of 33

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



a: EUT



b: Battery

Picture 1 EUT and Auxiliary

**TA Technology (Shanghai) Co., Ltd.
Test Report**

Report No.: RZA1111-1844RF01R1

Page 33 of 33

A.2 Test Setup



Picture 2: Radiated Spurious Emissions Test setup