

TEST REPORT

FCC ID: A2HCN6212

Product: Laptop

Model No.: CN6212

Additional Model No.: NS12A1

Trade Mark: Venturer, Avita

Report No.: TCT180724E007

Issued Date: Jul.25, 2018

Issued for:

ALCO ELECTRONICS LTD

11/F Metropole Square, 2 On Yiu Street, Sha Tin, New Territories, Hong Kong

Issued By:

Shenzhen Tongce Testing Lab.

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China**

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Genera Information.....	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	8
5. Facilities and Accreditations	9
5.1. FACILITIES	9
5.2. LOCATION	9
5.3. MEASUREMENT UNCERTAINTY	9
6. Test Results and Measurement Data	10
6.1. ANTENNA REQUIREMENT.....	10
6.2. CONDUCTED EMISSION	11
6.3. MAXIMUM CONDUCTED OUTPUT POWER	15
6.4. 6dB EMISSION BANDWIDTH	19
6.5. 26dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	31
6.6. POWER SPECTRAL DENSITY	43
6.7. BAND EDGE.....	67
6.8. SPURIOUS EMISSION.....	80
6.9. FREQUENCY STABILITY MEASUREMENT.....	85

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. Test Certification

Product:	Laptop
Model No.:	CN6212
Additional Model No.:	NS12A1
Trade Mark:	Venturer, Avita
Applicant:	ALCO ELECTRONICS LTD
Address:	11/F Metropole Square, 2 On Yiu Street, Sha Tin, New Territories, Hong Kong
Manufacturer:	ALCO ELECTRONICS LTD
Address:	11/F Metropole Square, 2 On Yiu Street, Sha Tin, New Territories, Hong Kong
Date of Test:	Jul.17,2018-Jul.25,2018
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart E Section 15.407: 2017 ANSI C63.10-2013 KDB789033 D02 General U-NII Test Procedures New Rules v02

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Date:

Jul.25,2018

Reviewed By:

Brews Xu

Date:

Jul.25,2018

Approved By:

Beryl Zhao

Date:

Jul.25,2018


Tomsin

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(a) §2.1049	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product:	Laptop
Model No.:	CN6212
Additional Model No.:	NS12A1
Trade Mark:	Venturer, Avita
Operation Frequency:	Band I: 5150MHz-5250MHz; Band IV: 5725MHz-5850MHz;
Channel Bandwidth:	802.11a/n(HT20)/ac(HT20): 20MHz 802.11n(HT40)/ac(HT40): 40MHz 802.11ac(HT80): 80MHz
Modulation Technology:	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type	BPSK, QPSK, 16QAM, 64QAM
Antenna Type:	Integral antenna
Antenna Gain:	Main antenna: 2.5dBi Auxilliary antenna: 2.5dBi
Power Supply:	DC 7.4V for internal battery
Adapter:	Model: ADS-45SN-19-3 Input: 100-240V a.c., 50/60Hz, 1.2A Output: 19V d.c., 2.1A

Operation Frequency each of channel

20MHz		40MHz		80MHz	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230	155	5775
44	5220	151	5755		
48	5240	159	5795		
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n (HT20)/ac (HT20)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
44	Mid	5220	157	Mid	5785
48	High	5240	165	High	5825

For 802.11n (HT40)/ac (HT40)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795

For 802.11ac (HT80)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
42	-	5210	155	-	5775

4. Genera Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)/ac(HT20)	MCS0
802.11n(HT40)/ac(HT40)	MCS0
802.11ac(HT80)	MCS0
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339


5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$


6. Test Results and Measurement Data

6.1. Antenna requirement

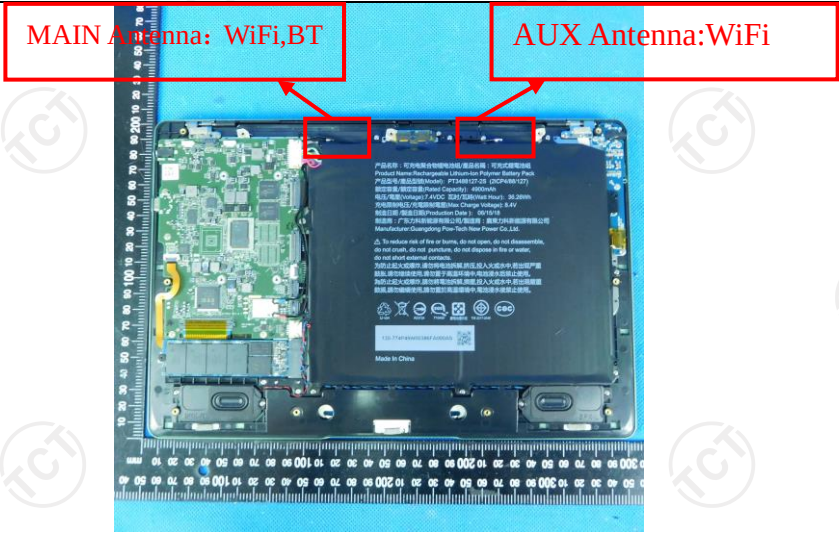Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.	
	

6.2. Conducted Emission

6.2.1. Test Specification

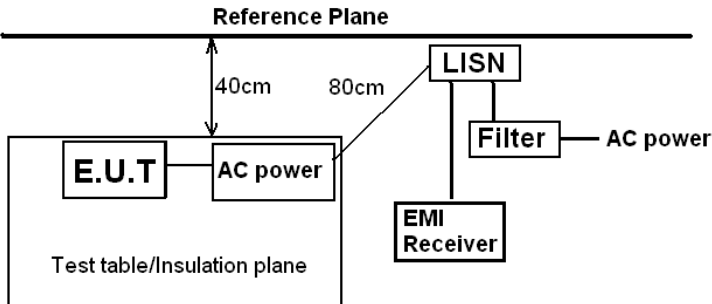Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane  Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Tx Mode														
Test Procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														


6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESPI	101401	Jun. 12, 2018
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018
Coax cable (9KHz-30MHz)	TCT	CE-05	N/A	Sep. 27, 2018
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Please refer to following diagram for individual
Conducted Emission on Line Terminal of the power line

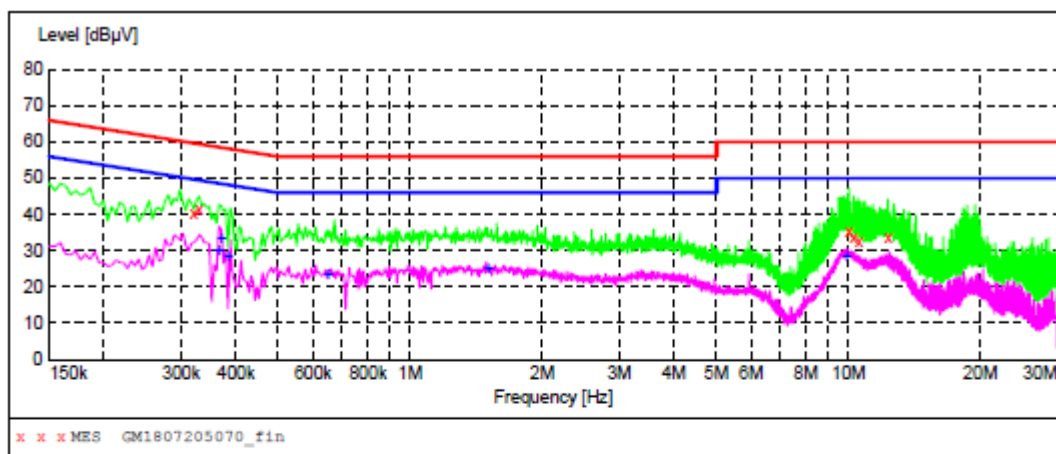

MEASUREMENT RESULT: "GM1807205070_fin"

7/20/2018 6:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.321000	40.40	9.9	60	19.3	QP	L1	GND
0.330000	41.20	9.9	60	18.3	QP	L1	GND
10.041000	35.20	10.4	60	24.8	QP	L1	GND
10.302000	33.90	10.4	60	26.1	QP	L1	GND
10.572000	32.80	10.4	60	27.2	QP	L1	GND
12.340500	33.50	10.5	60	26.5	QP	L1	GND

MEASUREMENT RESULT: "GM1807205070_fin2"


7/20/2018 6:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.366000	30.50	9.9	49	18.1	AV	L1	GND
0.370500	33.90	9.9	49	14.6	AV	L1	GND
0.384000	28.80	9.9	48	19.4	AV	L1	GND
0.649500	23.90	10.0	46	22.1	AV	L1	GND
1.504500	25.40	10.1	46	20.6	AV	L1	GND
9.919500	28.90	10.4	50	21.1	AV	L1	GND

Remark:

Transd = Cable lose+ PULSE LIMITER factor + ARTIFICIAL MAINS factor; Margin= Limit - Level

Conducted Emission on Neutral Terminal of the power line

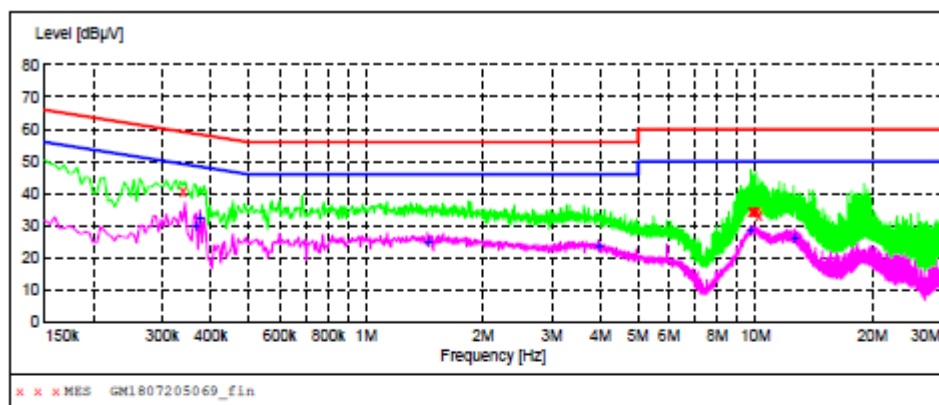

MEASUREMENT RESULT: "GM1807205069_fin"

7/20/2018 6:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.339000	40.30	9.9	59	18.9	QP	N	GND
9.780000	34.30	10.4	60	25.7	QP	N	GND
9.861000	34.20	10.4	60	25.8	QP	N	GND
9.910500	34.40	10.4	60	25.6	QP	N	GND
10.077000	34.40	10.4	60	25.6	QP	N	GND
10.212000	33.30	10.4	60	26.7	QP	N	GND

MEASUREMENT RESULT: "GM1807205069_fin2"

7/20/2018 6:41PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.366000	30.00	9.9	49	18.6	AV	N	GND
0.375000	32.40	9.9	48	16.0	AV	N	GND
1.446000	25.00	10.1	46	21.0	AV	N	GND
3.957000	23.60	10.1	46	22.4	AV	N	GND
9.703500	28.50	10.4	50	21.5	AV	N	GND
12.588000	26.40	10.5	50	23.6	AV	N	GND

Remark:

Transd = Cable lose+ PULSE LIMITER factor + ARTIFICIAL MAINS factor; Margin= Limit - Level

6.3. Maximum Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046	
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02 Section E	
Limit:	Frequency Band (MHz)	Limit
	5150-5250	250mW for client devices
	5725-5850	1 W
	Note: For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the output power effective limit shall be calculated as follows in Equation: $P_{out} = P_{Limit} - (\text{directional gain} - 6)$	
Test Setup:	 Power meter EUT	
Test Mode:	Transmitting mode with modulation	
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report.	
Test Result:	PASS	
Remark:	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power	

6.3.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018
Power Meter	Agilent	N1911A	MY45101557	Sep. 27, 2018
Power Sensor	Agilent	N1922A	MY44124432	Sep. 27, 2018
RF Cable (9KHz-40GHz)	TCT	RE-03	N/A	Sep. 27, 2018
Antenna Connector	TCT	RFC-03	N/A	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

Configuration Band I (5150 - 5250 MHz)					
Mode	Test channel	Maximum Conducted Output Power (dBm)		FCC Limit (dBm)	Result
		Main antenna	Auxilliary antenna		
11a	CH36	17.32	16.53	24	PASS
11a	CH40	17.65	16.60	24	PASS
11a	CH48	17.81	16.51	24	PASS

MIMO

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Maximum Conducted Output Power (dBm)		Total Power(dBm)	FCC Limit (dBm)	Result
		Main antenna	Auxilliary antenna			
11n(HT20)	CH36	16.39	15.38	18.92	24	PASS
11n(HT20)	CH40	16.78	15.53	19.21	24	PASS
11n(HT20)	CH48	16.86	15.56	19.27	24	PASS
11ac(HT20)	CH36	16.62	15.21	18.98	24	PASS
11ac(HT20)	CH40	16.90	15.43	19.24	24	PASS
11ac(HT20)	CH48	16.86	15.46	19.23	24	PASS
11n(HT40)	CH38	14.15	14.05	17.11	24	PASS
11n(HT40)	CH46	14.79	14.22	17.52	24	PASS
11ac(HT40)	CH38	14.23	14.20	17.23	24	PASS
11ac(HT40)	CH46	14.62	14.34	17.49	24	PASS
11ac(HT80)	CH42	12.10	12.12	15.12	24	PASS

Configuration Band IV (5725 - 5850 MHz)

Mode	Test channel	Maximum Conducted Output Power (dBm)		FCC Limit (dBm)	Result
		Main antenna	Auxilliary antenna		
11a	CH149	17.11	16.42	30	PASS
11a	CH157	17.21	16.24	30	PASS
11a	CH165	17.08	16.18	30	PASS

MIMO

Configuration Band IV (5725 - 5850 MHz)

Mode	Test channel	Maximum Conducted Output Power (dBm)		Total Power(dBm)	FCC Limit (dBm)	Result
		Main antenna	Auxilliary antenna			
11n(HT20)	CH149	16.34	15.63	19.01	30	PASS
11n(HT20)	CH157	16.68	15.47	19.13	30	PASS
11n(HT20)	CH165	16.36	15.47	18.95	30	PASS
11ac(HT20)	CH149	16.80	15.78	19.33	30	PASS
11ac(HT20)	CH157	16.72	15.61	19.21	30	PASS
11ac(HT20)	CH165	16.38	15.51	18.98	30	PASS
11n(HT40)	CH151	13.65	12.60	16.17	30	PASS
11n(HT40)	CH159	13.73	12.63	16.23	30	PASS
11ac(HT40)	CH151	13.45	12.61	16.06	30	PASS
11ac(HT40)	CH159	13.50	12.52	16.05	30	PASS
11ac(HT80)	CH155	11.47	10.48	14.01	30	PASS

6.4. 6dB Emission Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02 Section C
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018
RF Cable (9KHz-40GHz)	TCT	RE-03	N/A	Sep. 27, 2018
Antenna Connector	TCT	RFC-03	N/A	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.4.3. Test data

Band IV (5725 - 5850 MHz)						
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Limit (MHz)	Result
			Main Antenna	Auxilliary Antenna		
11a	CH149	5745	15.12	15.15	0.5	PASS
11a	CH157	5785	15.15	15.12	0.5	PASS
11a	CH165	5825	15.12	15.15	0.5	PASS
11n(HT20)	CH149	5745	15.09	15.12	0.5	PASS
11n(HT20)	CH157	5785	15.96	15.15	0.5	PASS
11n(HT20)	CH165	5825	15.75	15.12	0.5	PASS
11ac(HT20)	CH149	5745	15.96	15.15	0.5	PASS
11ac(HT20)	CH157	5785	15.15	15.15	0.5	PASS
11ac(HT20)	CH165	5825	15.36	15.15	0.5	PASS
11n(HT40)	CH151	5755	35.30	35.30	0.5	PASS
11n(HT40)	CH159	5795	35.30	35.30	0.5	PASS
11ac(HT40)	CH151	5755	35.28	35.22	0.5	PASS
11ac(HT40)	CH159	5795	35.22	35.22	0.5	PASS
11ac(HT80)	CH155	5775	72.84	72.84	0.5	PASS


Test plots as follows:

Band IV (5725 – 5850 MHz Main antenna)


802.11a

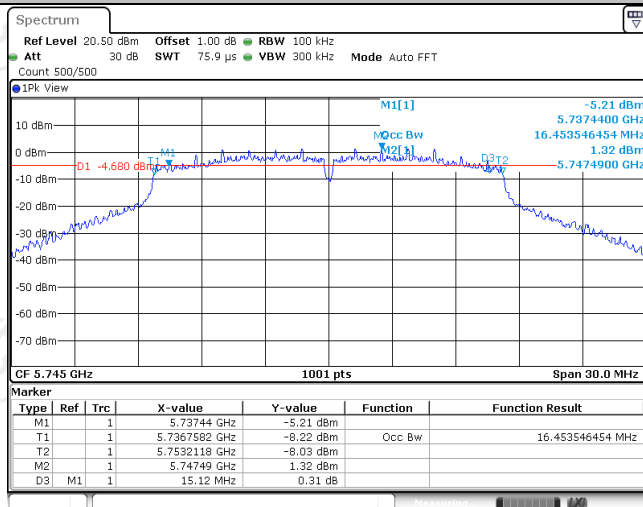

Low

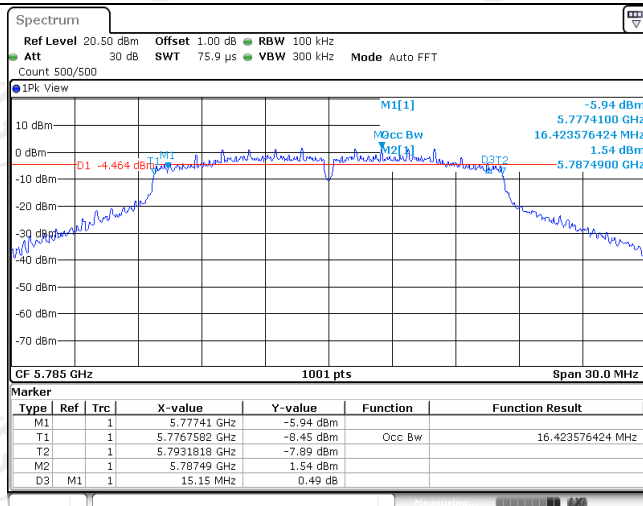


Mid

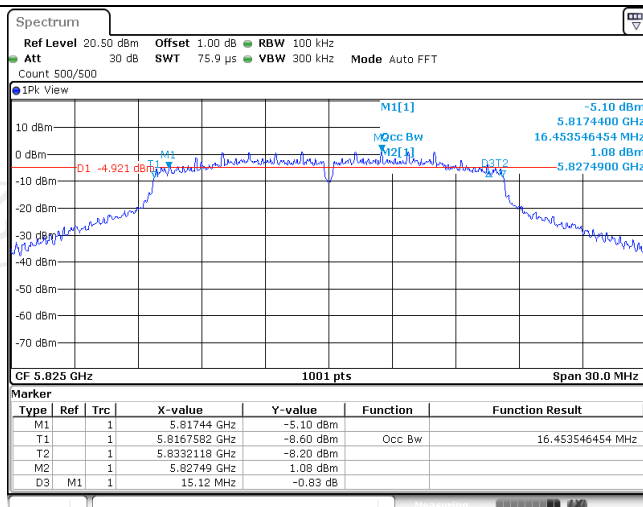


High


802.11n(HT20)

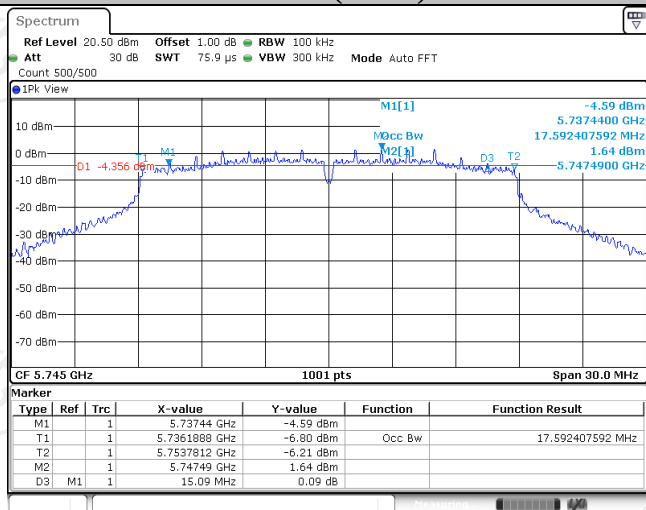

Low

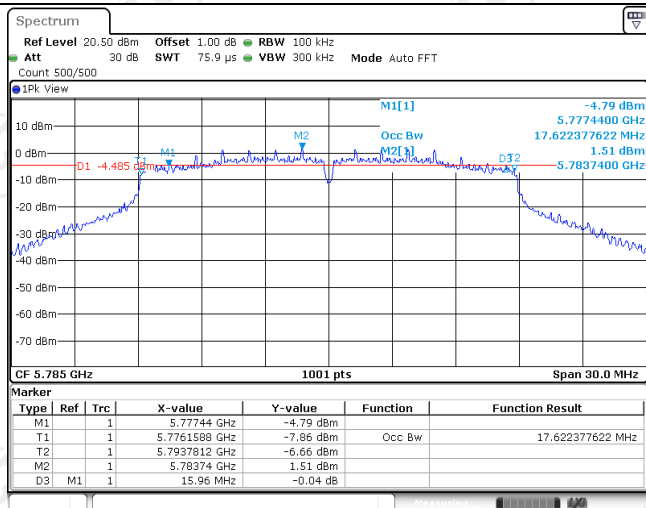


Mid

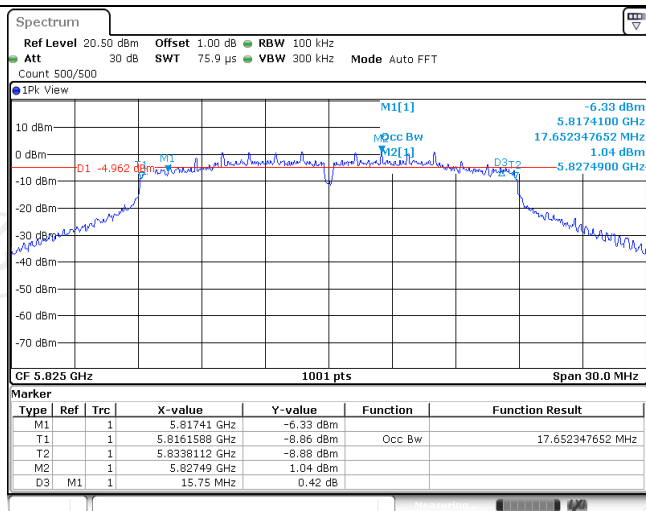


High


802.11ac(HT20)

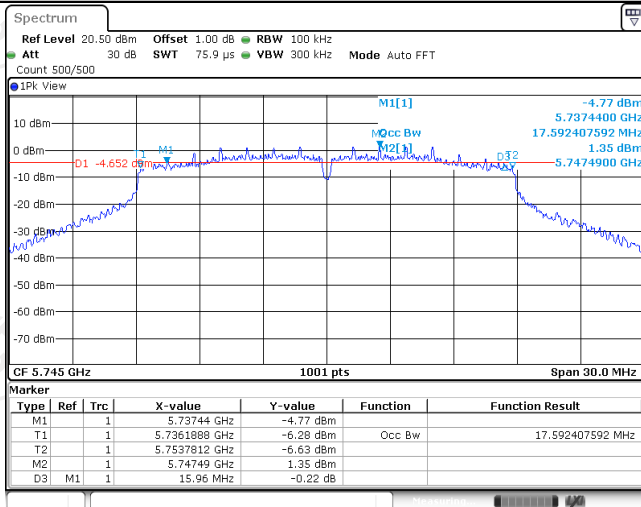

Low

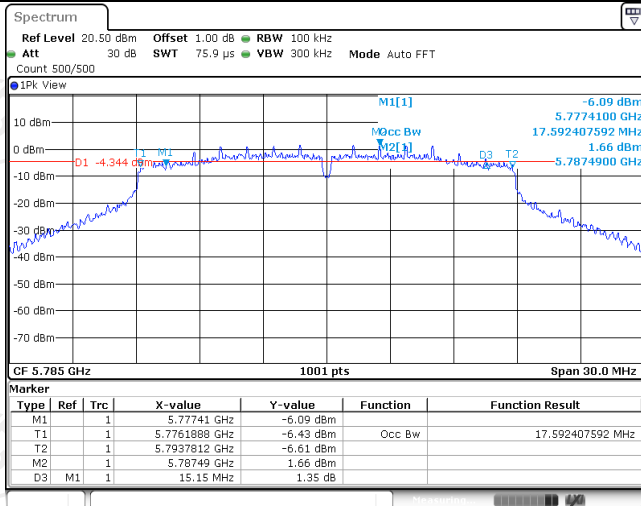


Mid

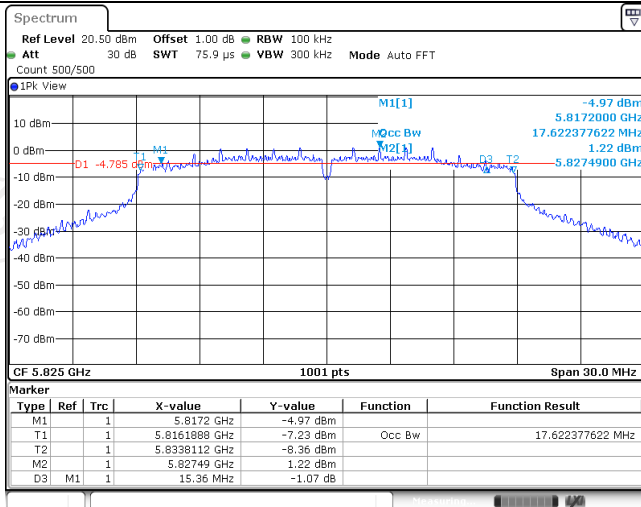


High

802.11n(HT40)

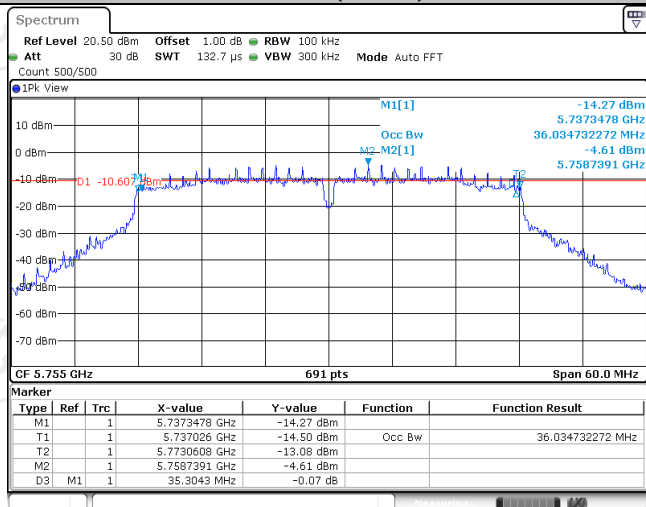


Low

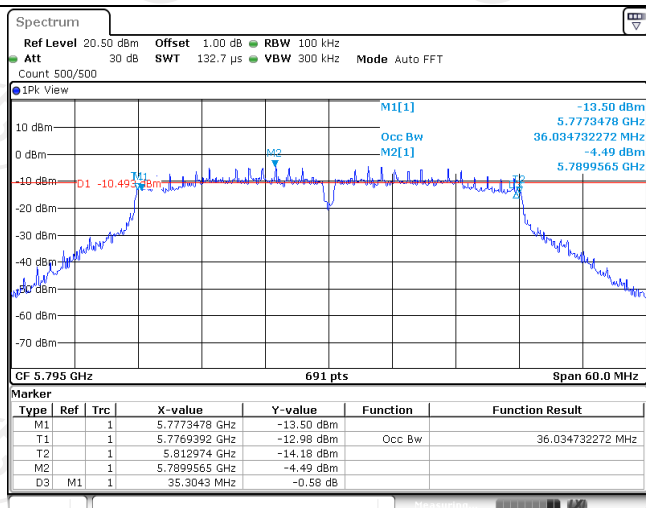


High

802.11ac(HT40)

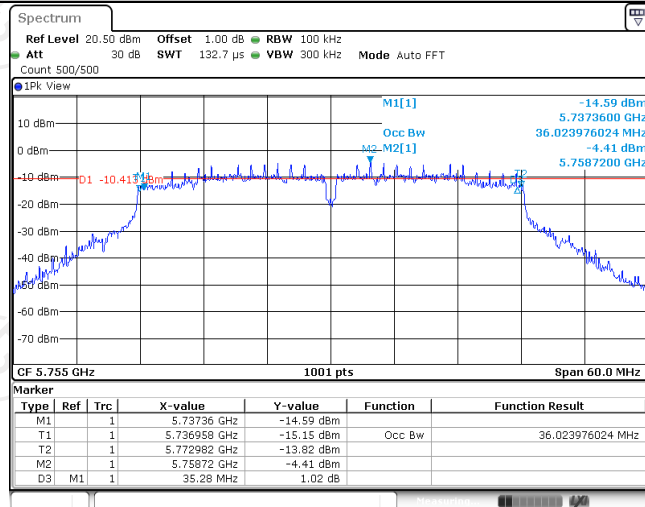


Low

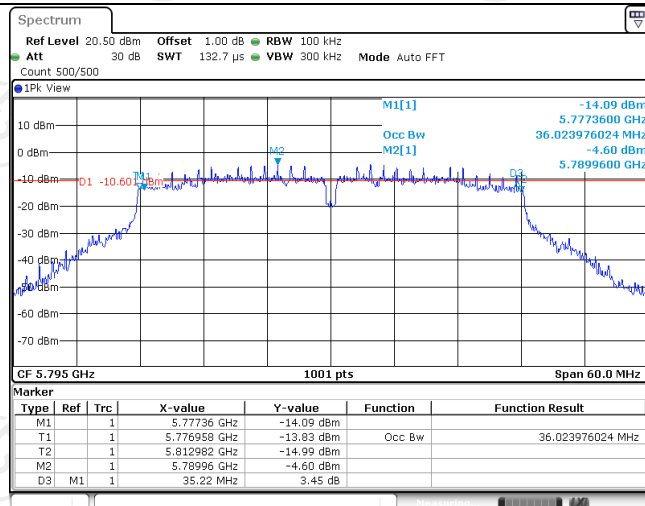

High


802.11ac(HT80)

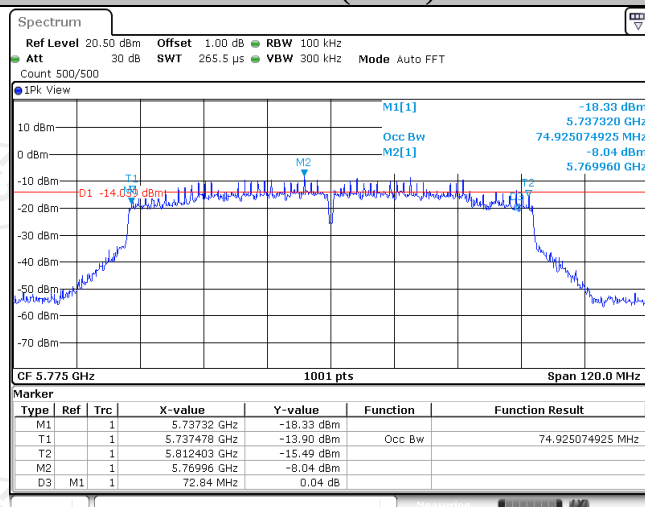


Middle

Band IV (5725 – 5850 MHz Auxilliary antenna)


802.11a

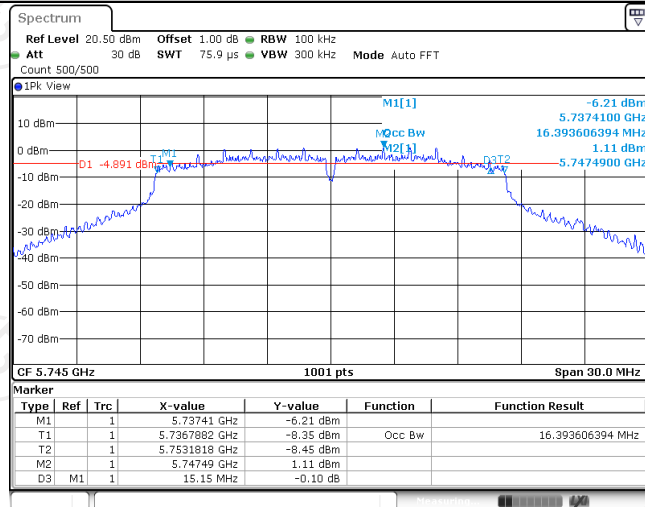

Low

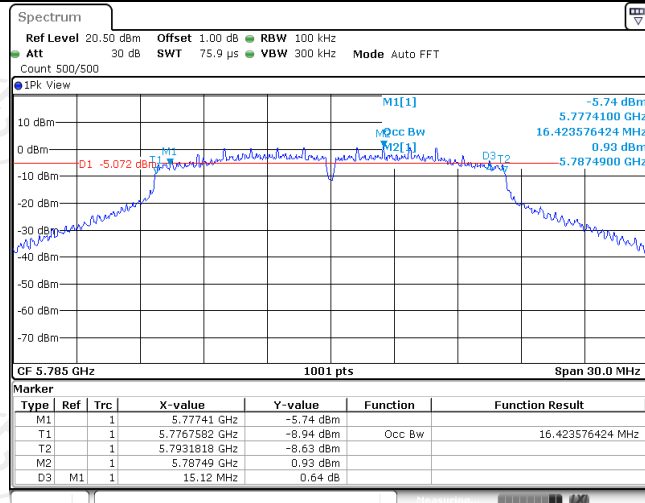


Mid

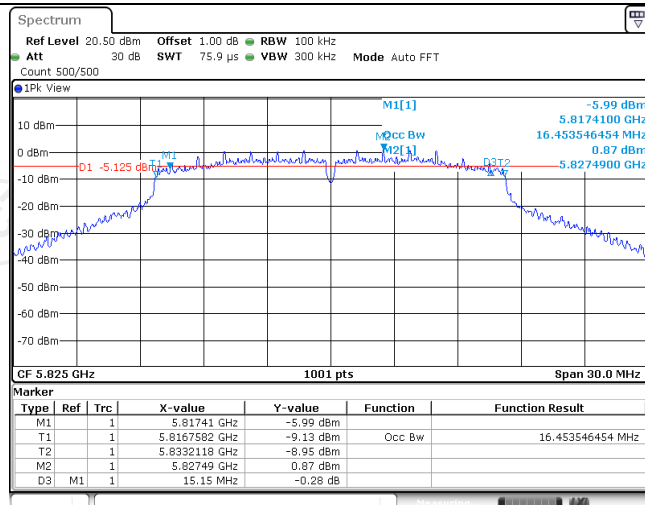


High


802.11n(HT20)

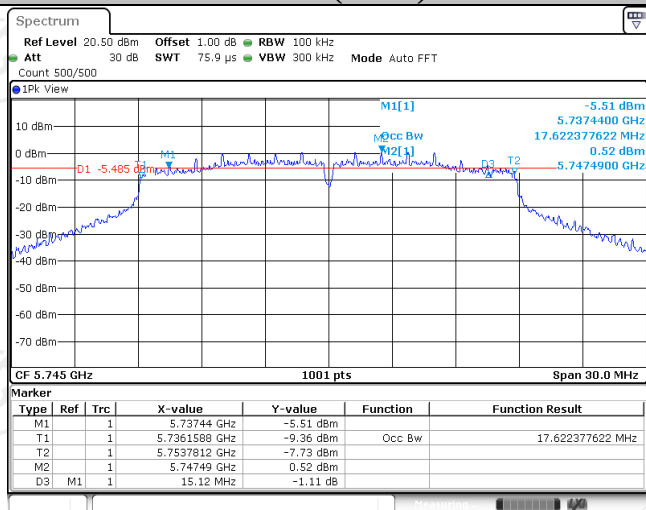

Low

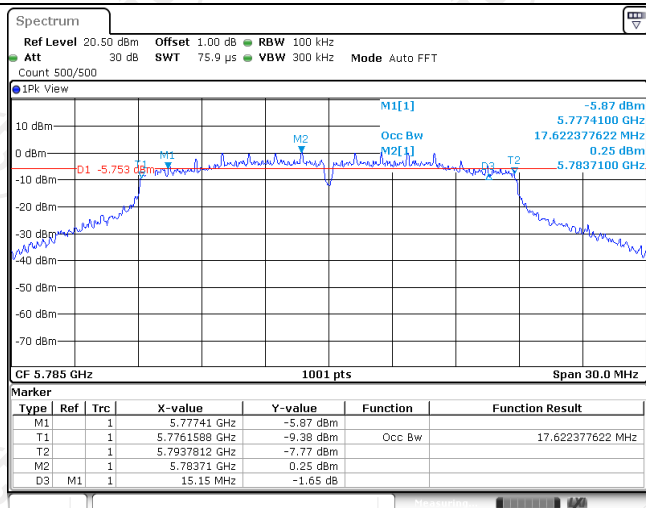


Mid

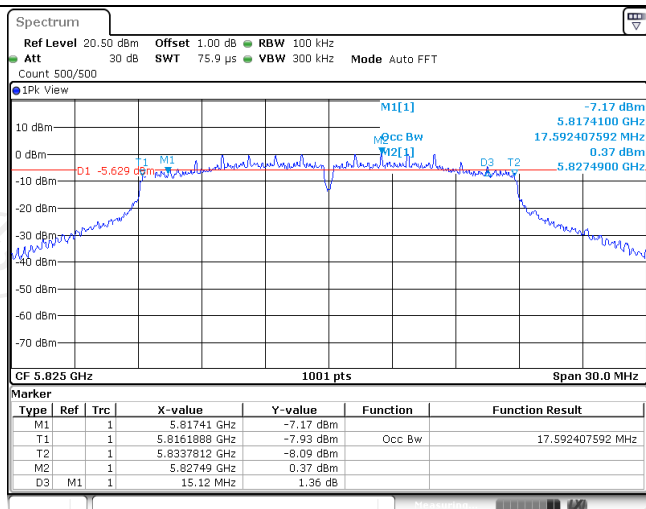


High


802.11ac(HT20)

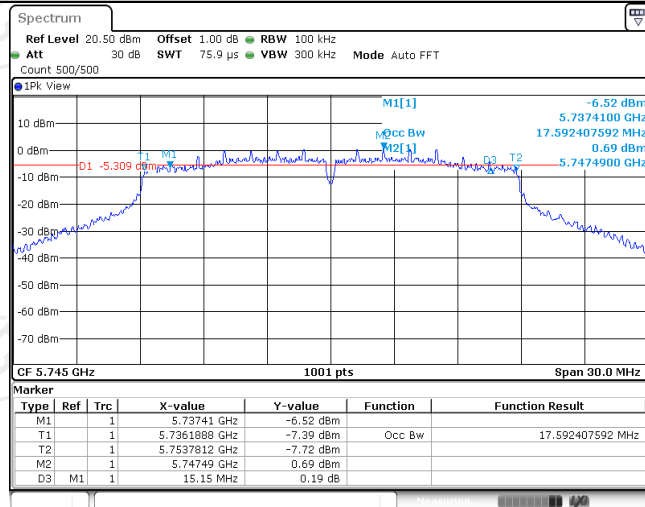

Low

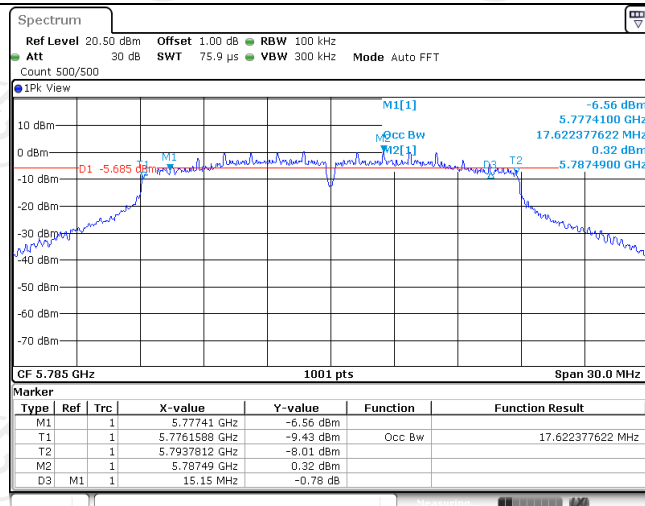


Mid

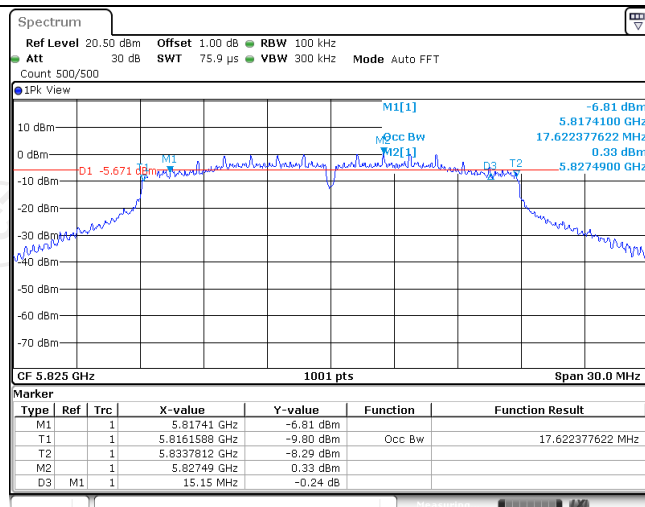


High

802.11n(HT40)

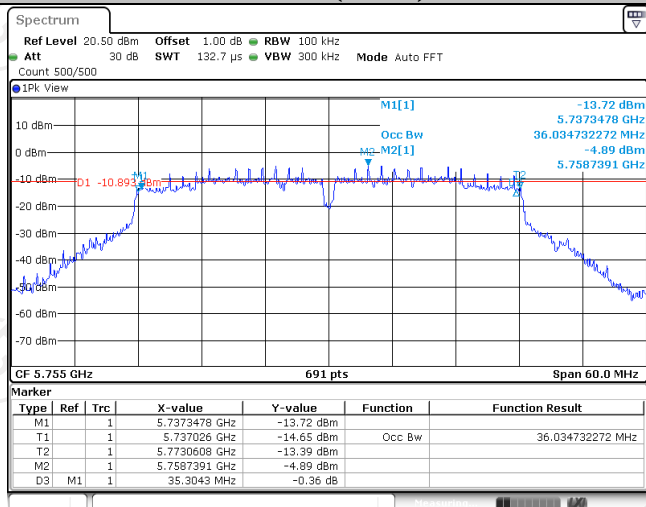


Low

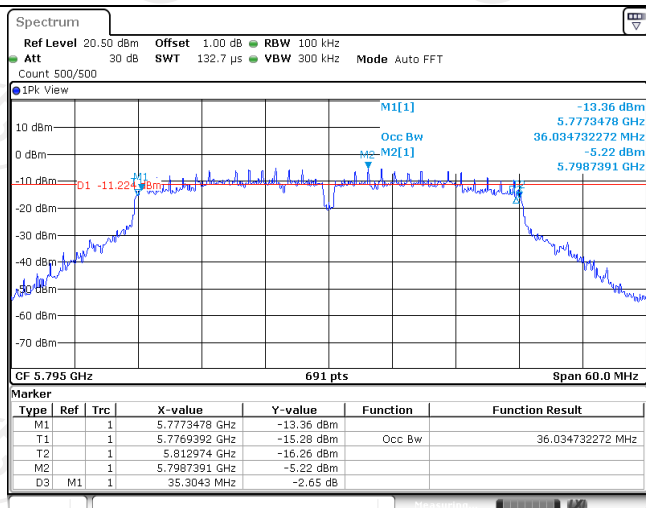


High

802.11ac(HT40)

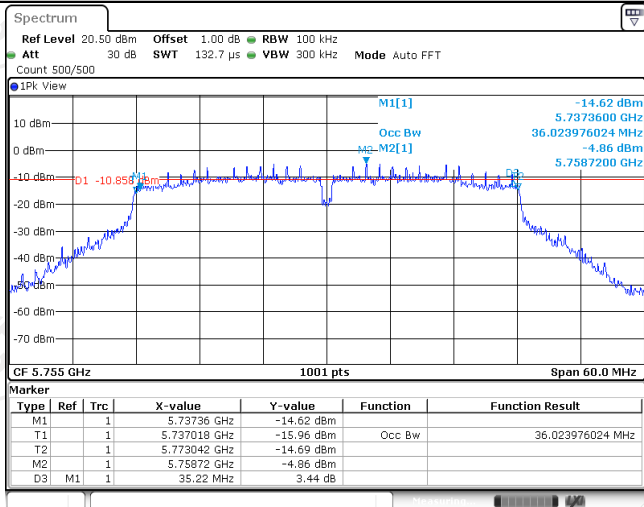


Low

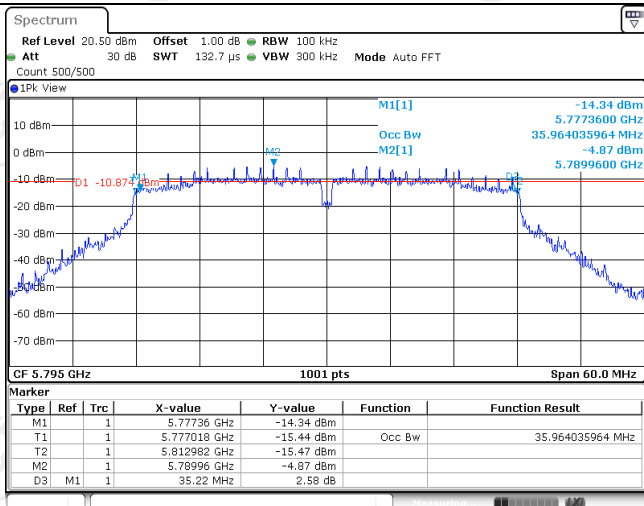

High

802.11ac(HT80)

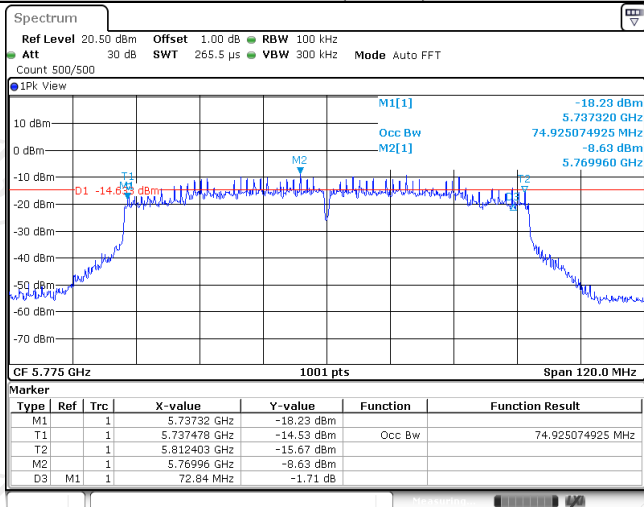

Middle

6.5. 26dB Bandwidth and 99% Occupied Bandwidth

6.5.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02 Section D
Limit:	No restriction limits
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 27, 2018
Antenna Connector	TCT	RFC-01	N/A	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.3. Test data

Band I

Main Antenna

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH36	5180	23.40	16.54
11a	CH44	5220	23.61	16.57
11a	CH48	5240	23.31	16.60
11n(HT20)	CH36	5180	23.07	17.68
11n(HT20)	CH44	5220	24.69	17.74
11n(HT20)	CH48	5240	24.00	17.68
11ac(HT20)	CH36	5180	23.31	17.68
11ac(HT20)	CH44	5220	23.13	17.68
11ac(HT20)	CH48	5240	23.67	17.68
11n(HT40)	CH38	5190	44.70	36.20
11n(HT40)	CH46	5230	45.54	36.38
11ac(HT40)	CH38	5190	44.52	36.20
11ac(HT40)	CH46	5230	45.54	36.32
11ac(HT80)	CH42	5210	85.44	75.17


Auxilliary Antenna

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH36	5180	22.17	16.51
11a	CH44	5220	22.23	16.48
11a	CH48	5240	21.84	16.54
11n(HT20)	CH36	5180	22.68	17.62
11n(HT20)	CH44	5220	23.43	17.68
11n(HT20)	CH48	5240	23.22	17.65
11ac(HT20)	CH36	5180	23.01	17.71
11ac(HT20)	CH44	5220	23.82	17.74
11ac(HT20)	CH48	5240	23.40	17.68
11n(HT40)	CH38	5190	45.00	36.20
11n(HT40)	CH46	5230	46.14	36.32
11ac(HT40)	CH38	5190	45.00	36.20
11ac(HT40)	CH46	5230	45.84	36.32
11ac(HT80)	CH42	5210	84.12	75.05


Test plots as follows:

Band I (5150 – 5250 MHz Main antenna)


802.11a

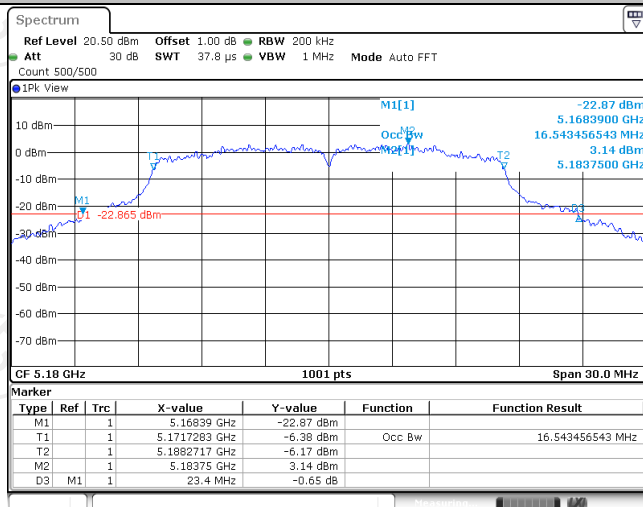

Low

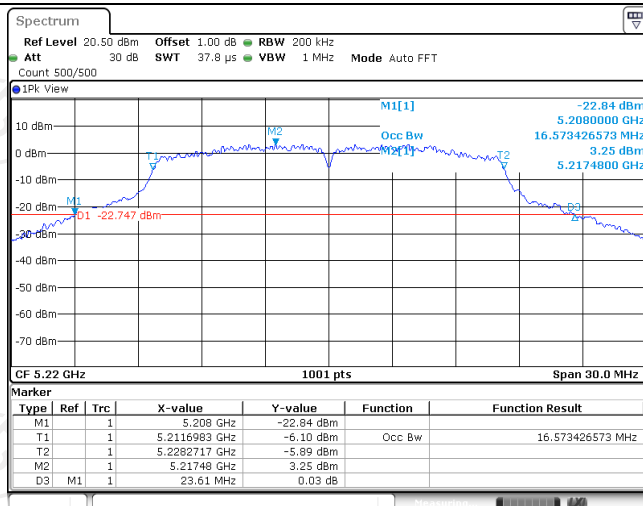


Mid

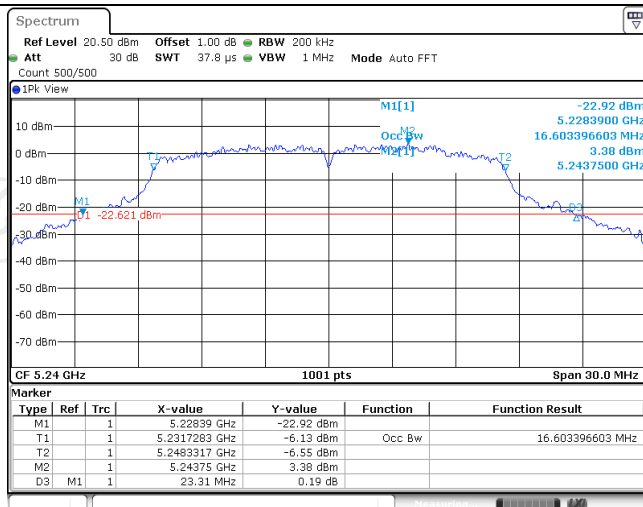


High


802.11n(HT20)

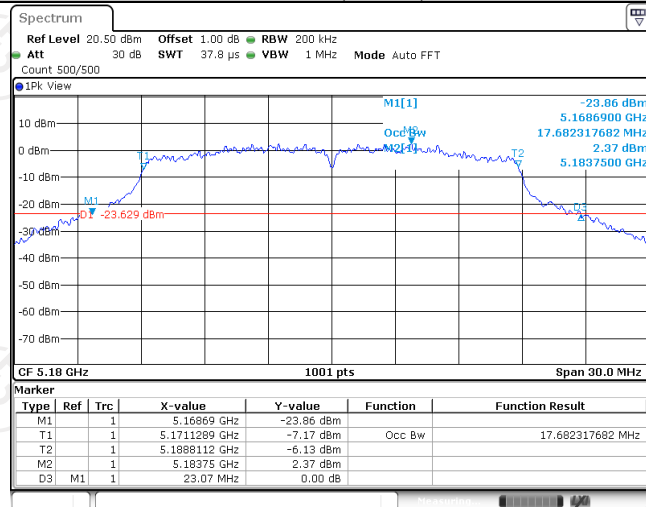

Low

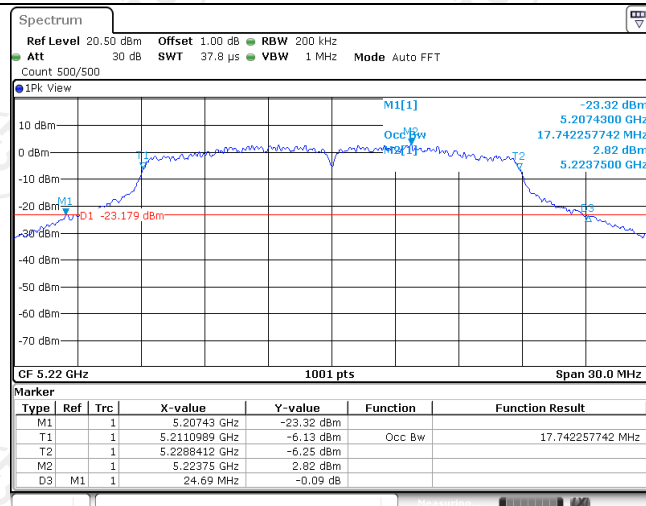


Mid

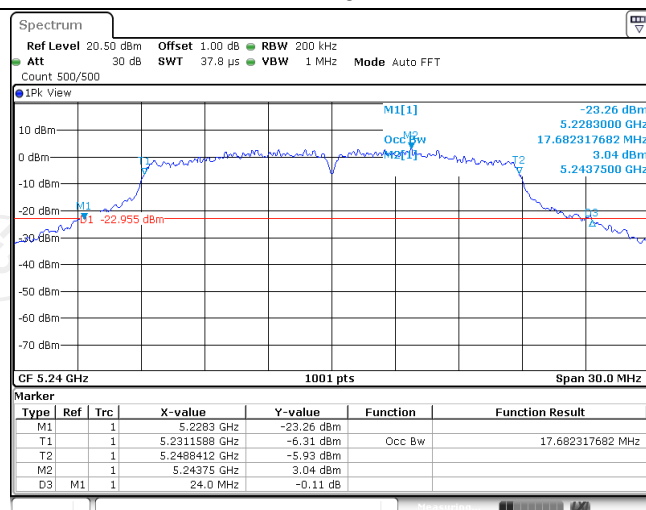


High


802.11ac(HT20)

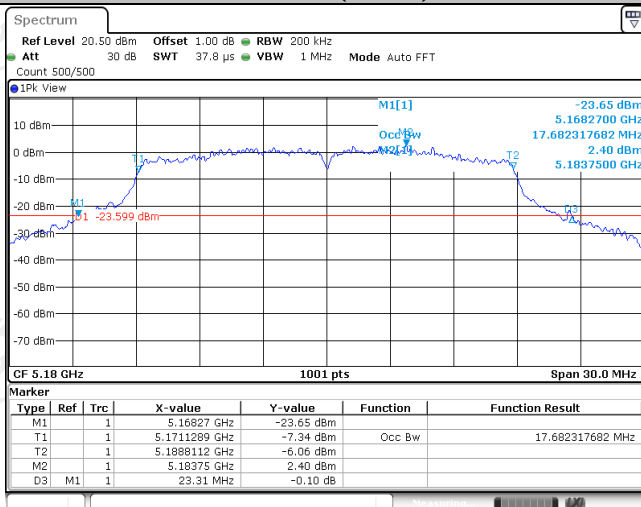

Low

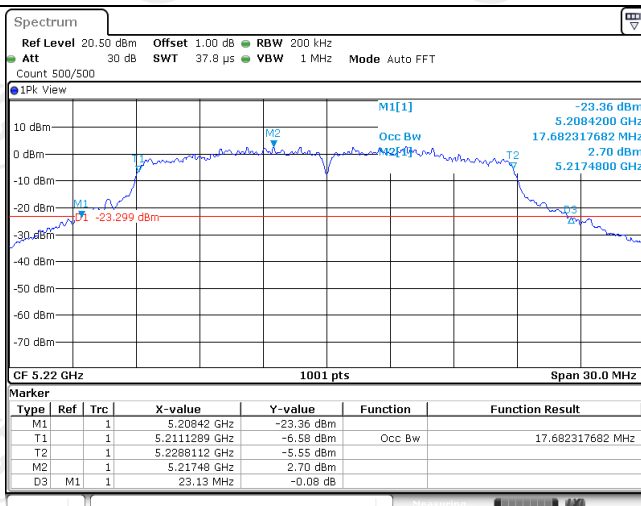


Mid

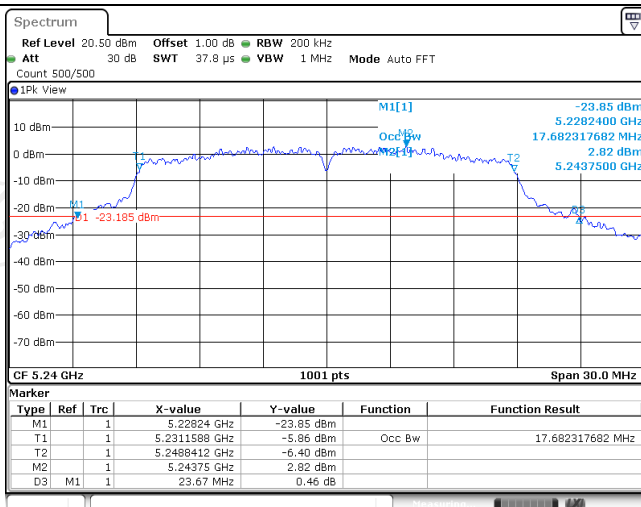


High

802.11n(HT40)

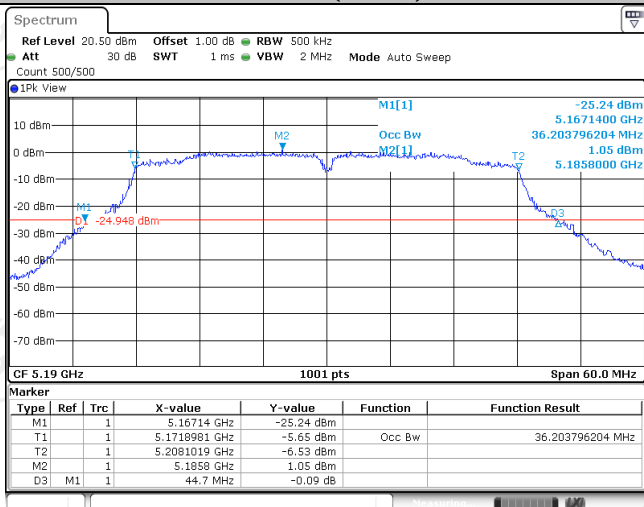


Low

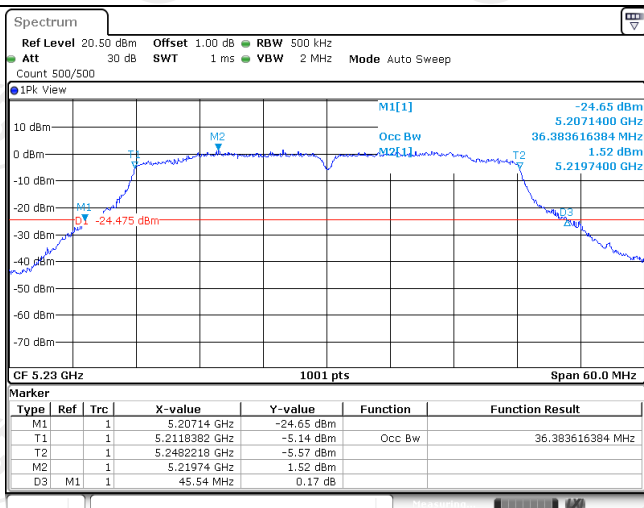


High

802.11ac(HT40)

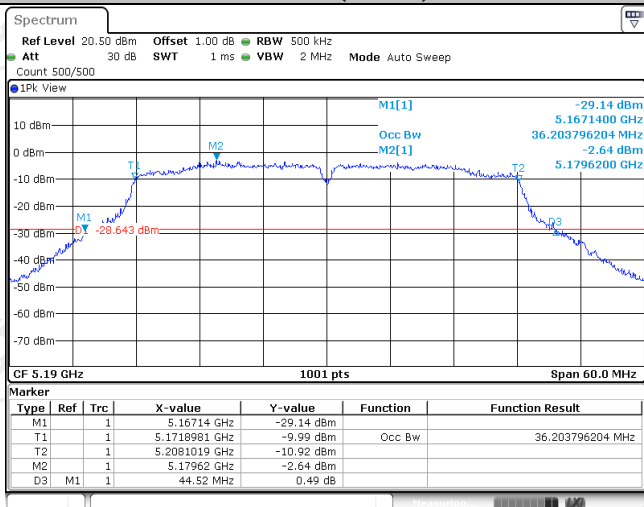


Low

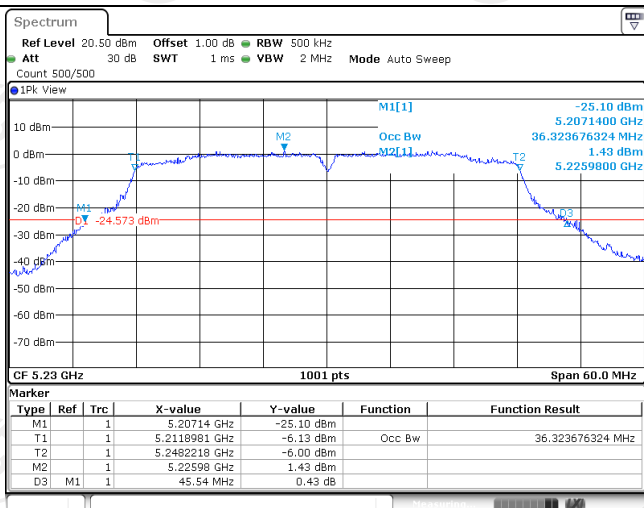

High


802.11ac(HT80)

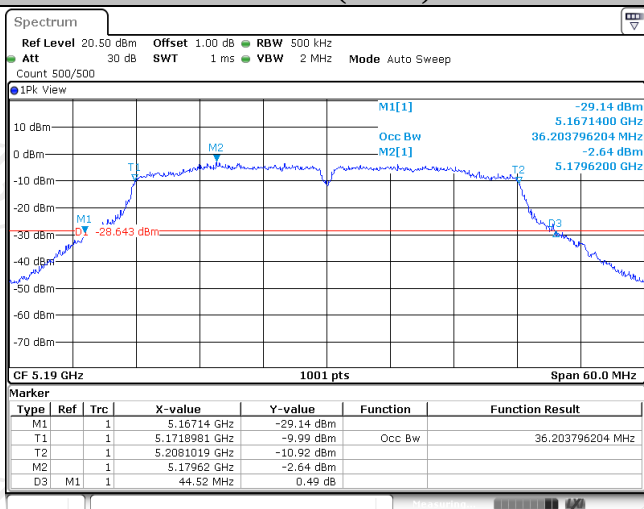


Middle

Auxilliary antenna


802.11a

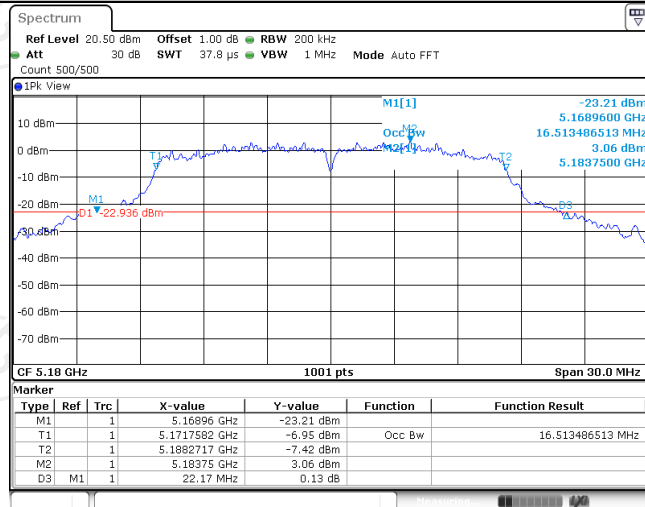

Low

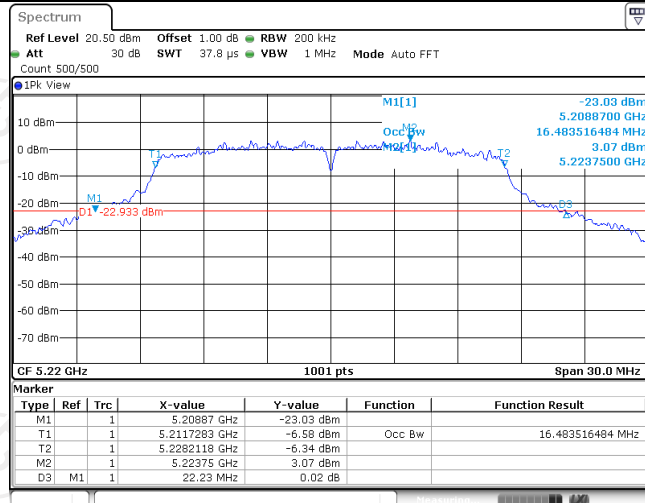


Mid

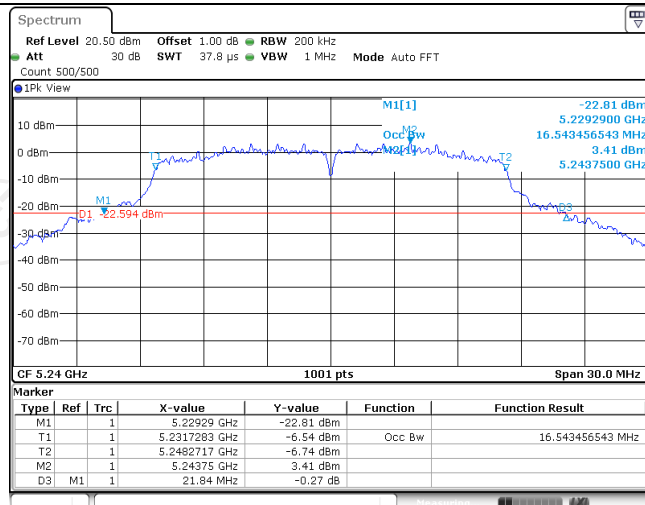


High


802.11n(HT20)

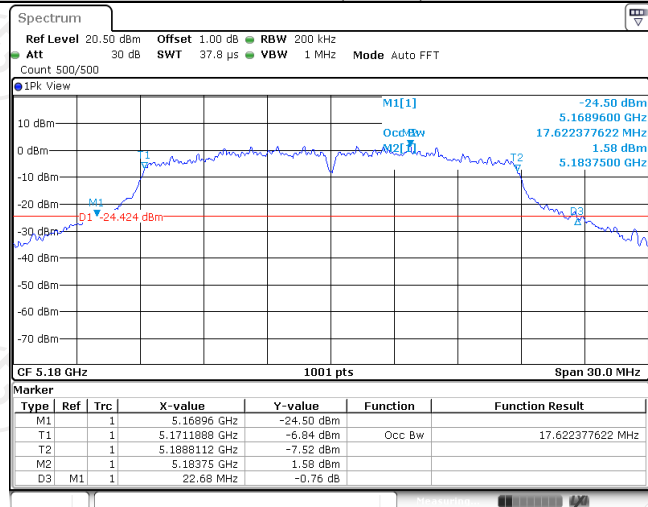

Low

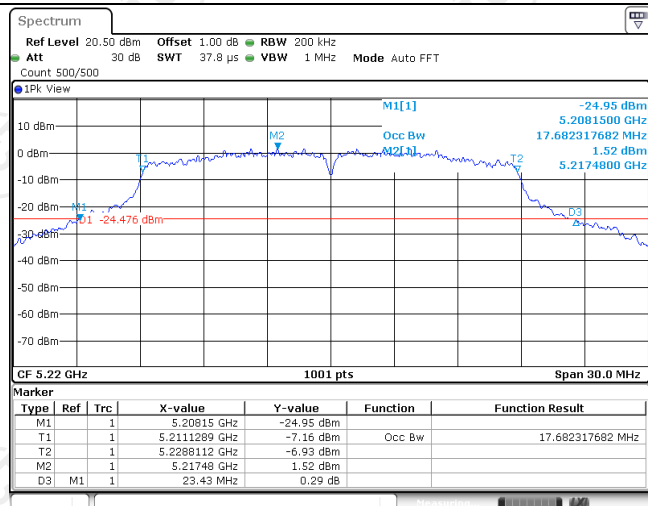


Mid

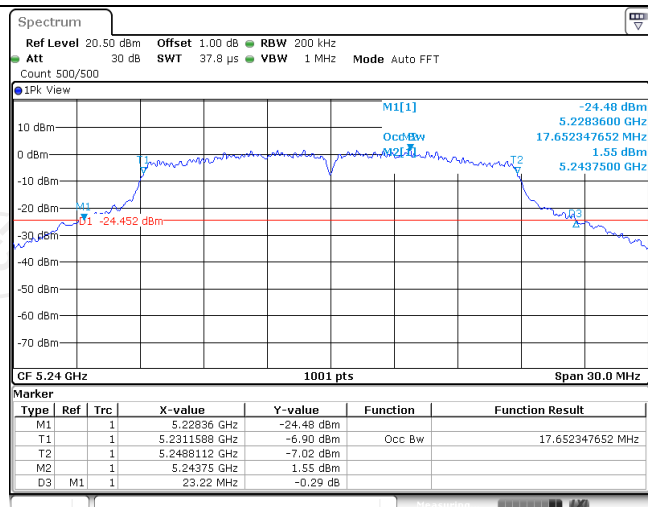


High


802.11ac(HT20)

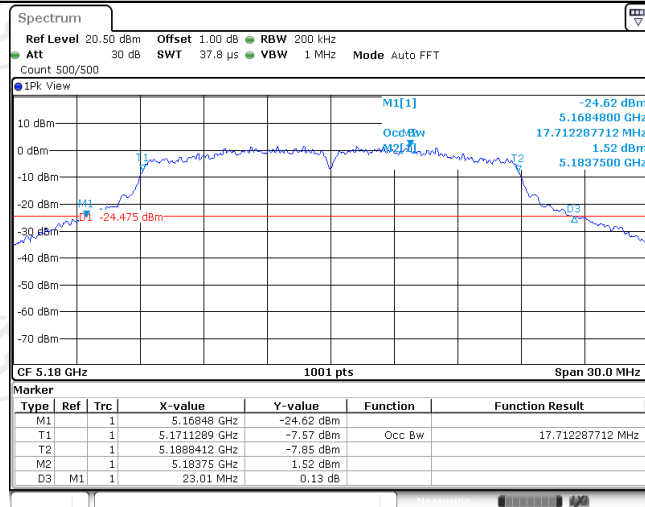

Low

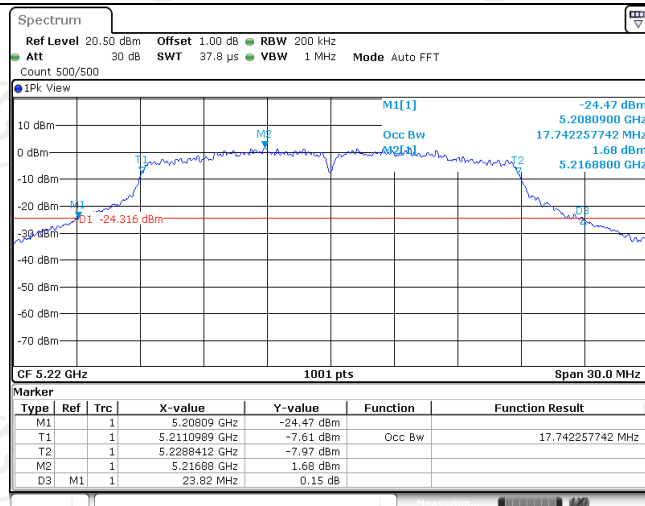


Mid

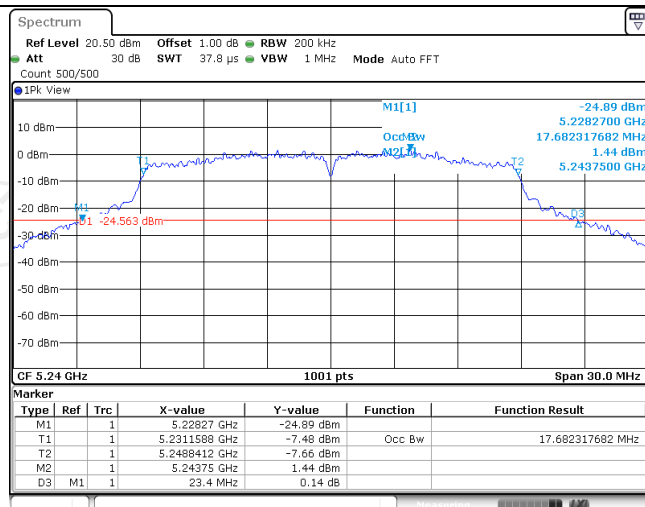


High

802.11n(HT40)

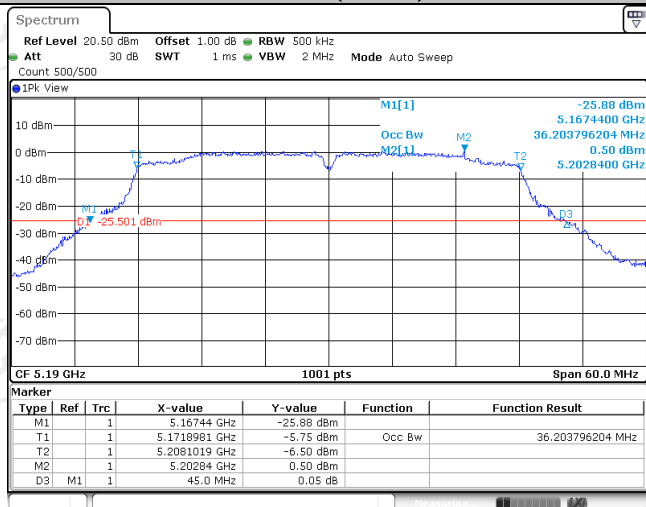


Low

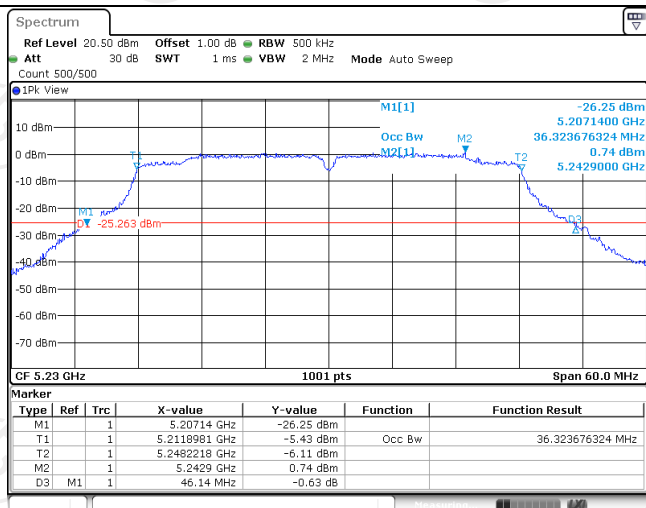


High

802.11ac(HT40)

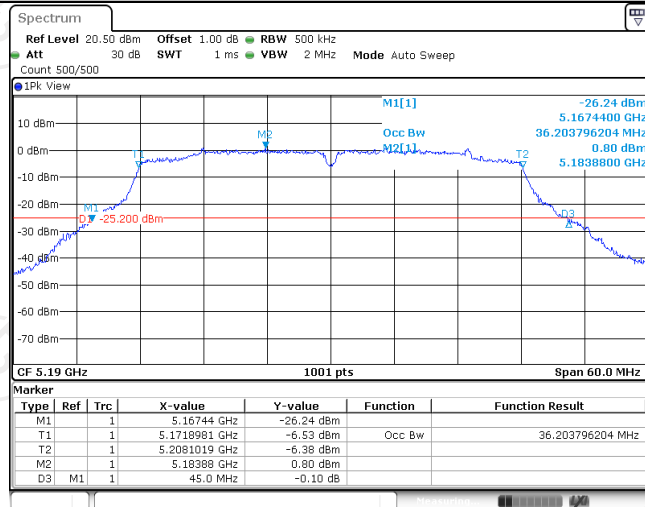


Low

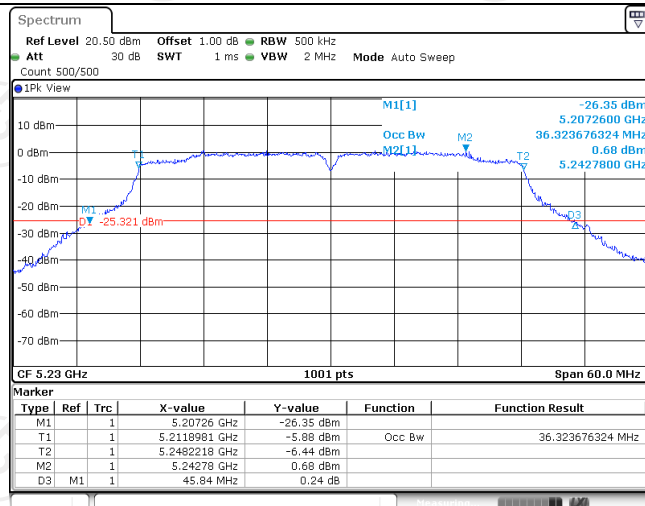

High

802.11ac(HT80)

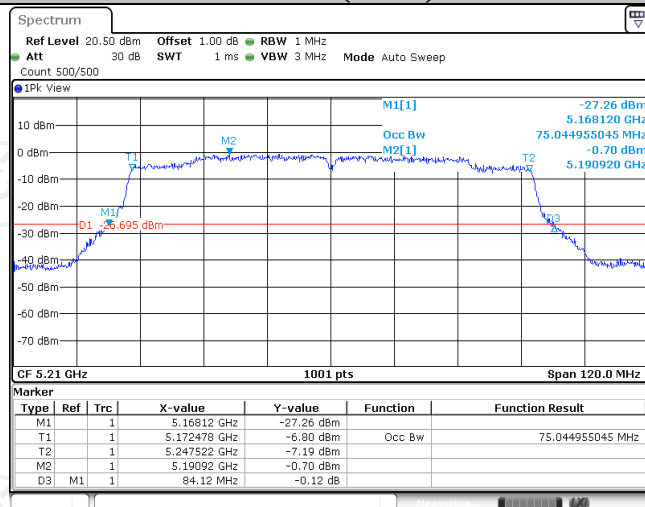

Middle

6.6. Power Spectral Density

6.6.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02 Section F
Limit:	$\leq 11.00\text{dBm/MHz}$ for Band I 5150MHz-5250MHz $\leq 30.00\text{dBm/500KHz}$ for Band IV 5725MHz-5850MHz The e.i.r.p spectral density for Band I 5150MHz – 5250 MHz should not exceed 10dBm/MHz Note: For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the PSD effective limit shall be calculated as follows in Equation: $\text{PSDout} = \text{PSDLimit} - (\text{directional gain} - 6)$
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 500 kHz/1 MHz, VBW $\geq 3 \times \text{RBW}$, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

6.6.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018
Spectrum Analyzer	ROHDE&SCHWARZ	FSP40	100056	Sep. 27, 2018
RF Cable (9KHz-40GHz)	TCT	RE-03	N/A	Sep. 27, 2018
Antenna Connector	TCT	RFC-03	N/A	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.3. Test data

Configuration Band I (5150 - 5250 MHz)					
Mode	Test channel	Power Spectral Density(dBm/MHz)		Limit (dBm/MHz)	Result
		Main Antenna	Auxilliary Antenna		
11a	CH36	7.56	6.64	11	PASS
11a	CH44	7.40	6.94	11	PASS
11a	CH48	7.57	6.99	11	PASS

MIMO

		Configuration Band I (5150 - 5250 MHz)				
Mode	Test channel	Power Spectral Density(dBm/MHz)		Total Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
		Main Antenna	Auxilliary Antenna			
11n(HT20)	CH36	6.15	5.73	8.96	11	PASS
11n(HT20)	CH44	6.42	5.62	9.05	11	PASS
11n(HT20)	CH48	6.38	6.03	9.22	11	PASS
11ac(HT20)	CH36	6.04	5.67	8.87	11	PASS
11ac(HT20)	CH44	6.58	6.75	9.68	11	PASS
11ac(HT20)	CH48	6.71	5.11	8.99	11	PASS
11n(HT40)	CH38	1.63	1.22	4.44	11	PASS
11n(HT40)	CH46	1.87	1.30	4.60	11	PASS
11ac(HT40)	CH38	1.06	1.35	4.22	11	PASS
11ac(HT40)	CH46	2.00	1.30	4.67	11	PASS
11ac(HT80)	CH42	-3.63	-3.57	-0.59	11	PASS

Configuration Band IV (5725 - 5850 MHz)

Mode	Test channel	Power Spectral Density(dBm/MHz)		Limit (dBm/MHz)	Result
		Main Antenna	Auxilliary Antenna		
11a	CH149	6.00	5.15	30	PASS
11a	CH157	5.62	5.01	30	PASS
11a	CH161	5.24	5.26	30	PASS

MIMO


Configuration Band IV (5725 - 5850 MHz)

Mode	Test channel	Power Spectral Density(dBm/MHz)		Total Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
		Main Antenna	Auxilliary Antenna			
11n(HT20)	CH149	5.24	4.10	7.72	30	PASS
11n(HT20)	CH157	5.50	4.49	8.03	30	PASS
11n(HT20)	CH161	5.28	4.31	7.83	30	PASS
11ac(HT20)	CH151	5.47	4.27	7.92	30	PASS
11ac(HT20)	CH159	5.42	4.38	7.94	30	PASS
11ac(HT20)	CH151	4.94	4.10	7.55	30	PASS
11n(HT40)	CH159	-1.53	-1.11	1.70	30	PASS
11n(HT40)	CH149	-0.99	-1.13	1.95	30	PASS
11ac(HT40)	CH157	-0.54	-1.19	2.16	30	PASS
11ac(HT40)	CH161	-0.89	-2.21	1.51	30	PASS
11ac(HT80)	CH155	-5.78	-7.07	-3.37	30	PASS


Test plots as follows:

Band I (5150 – 5250 MHz Main Antenna)


802.11a

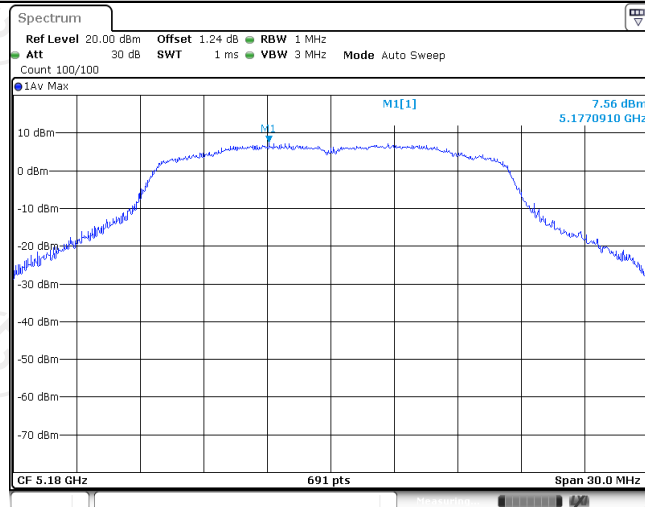

Low

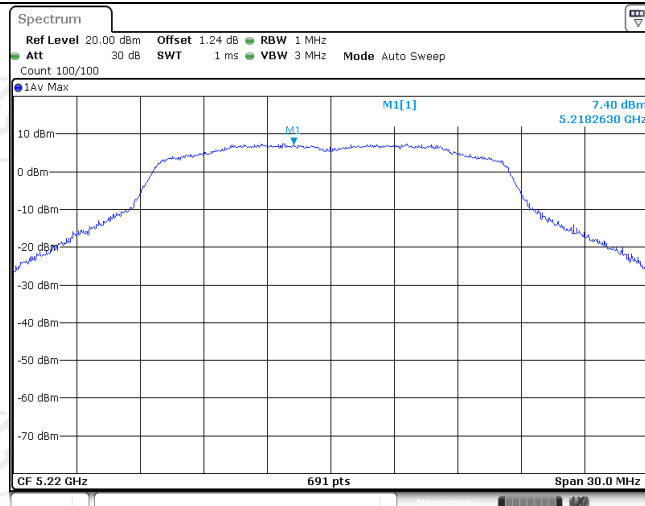


Mid

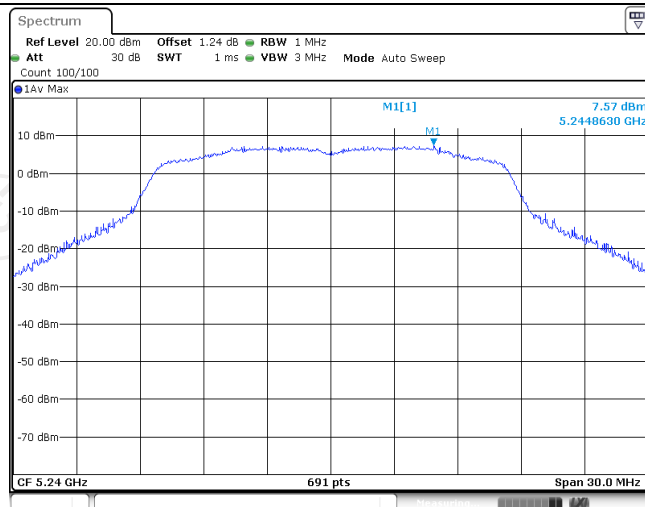


High


802.11n(HT20)

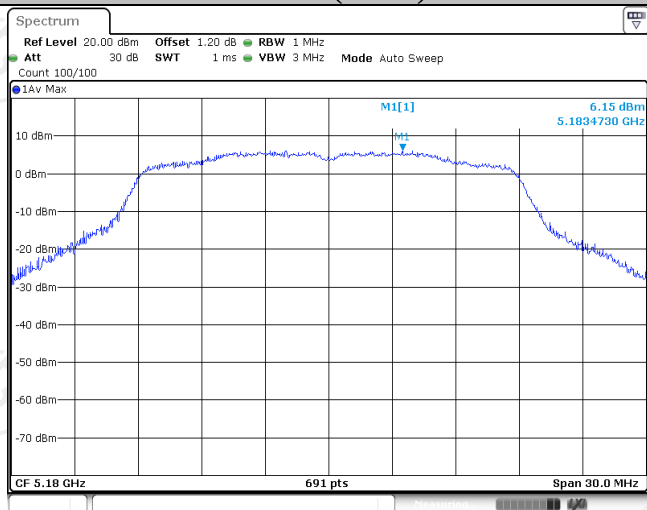

Low

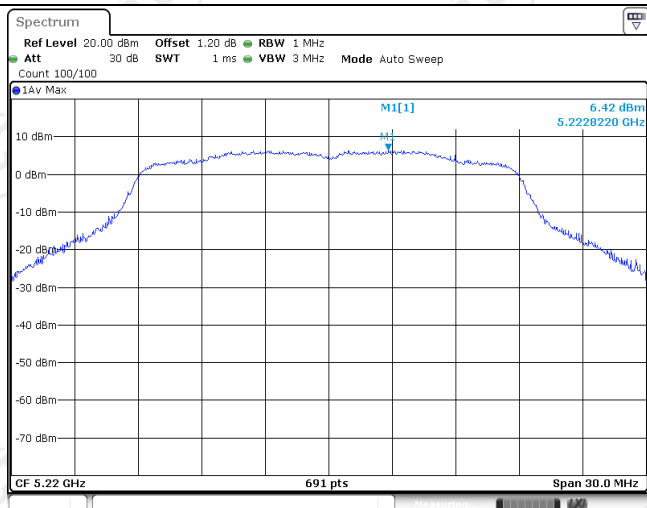


Mid

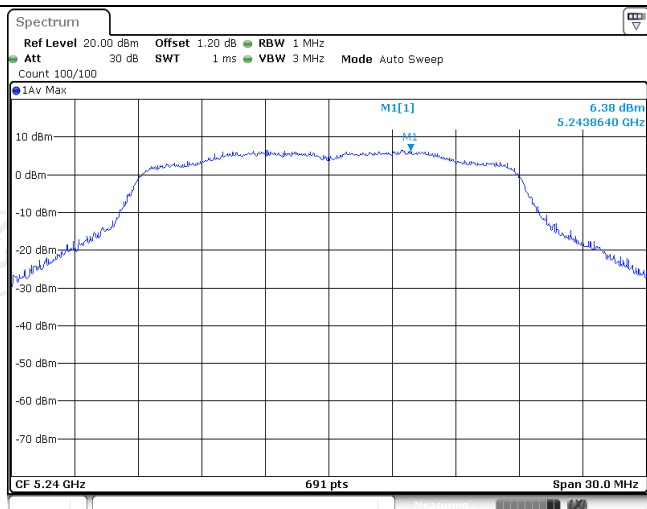


High


802.11ac(HT20)

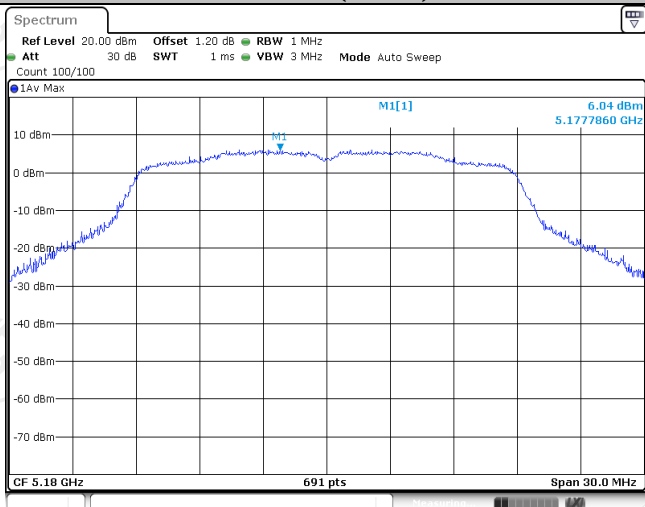

Low

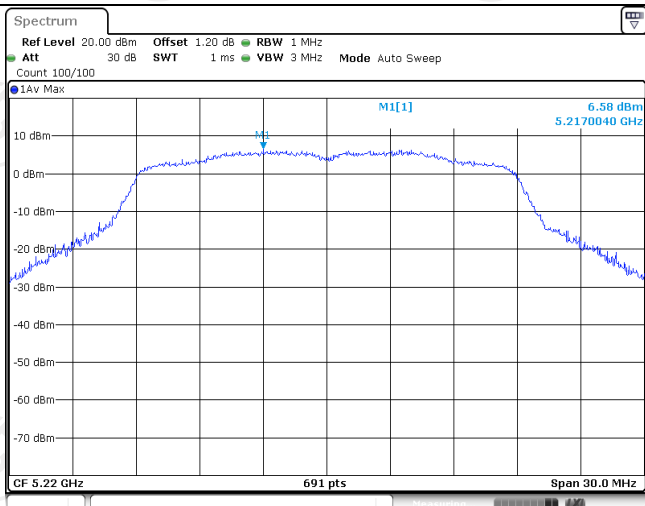


Mid

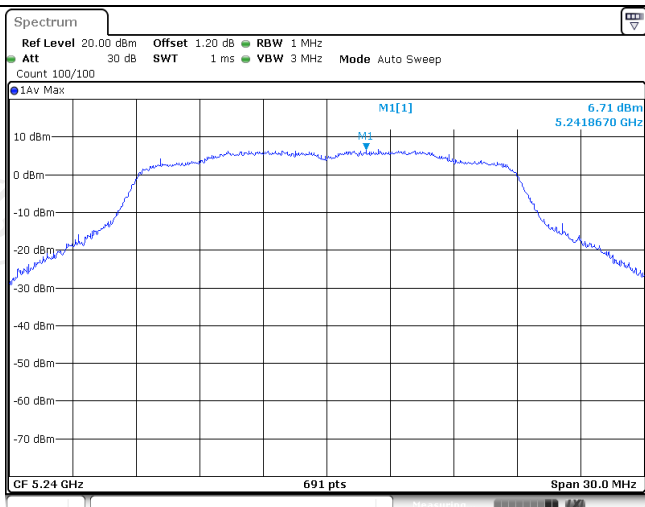


High

802.11n(HT40)

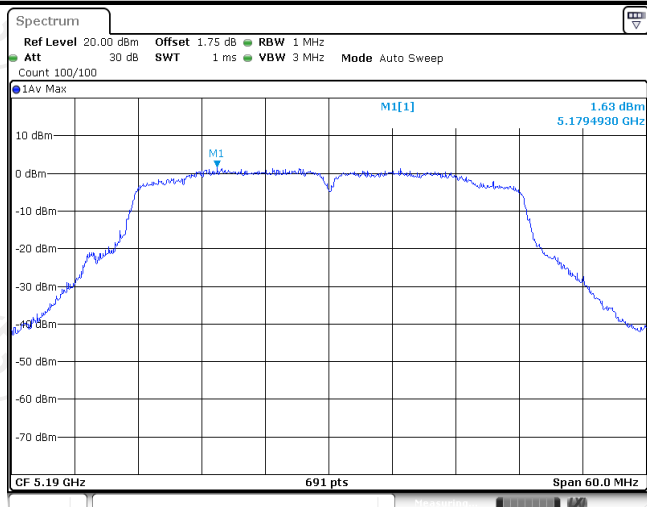


Low

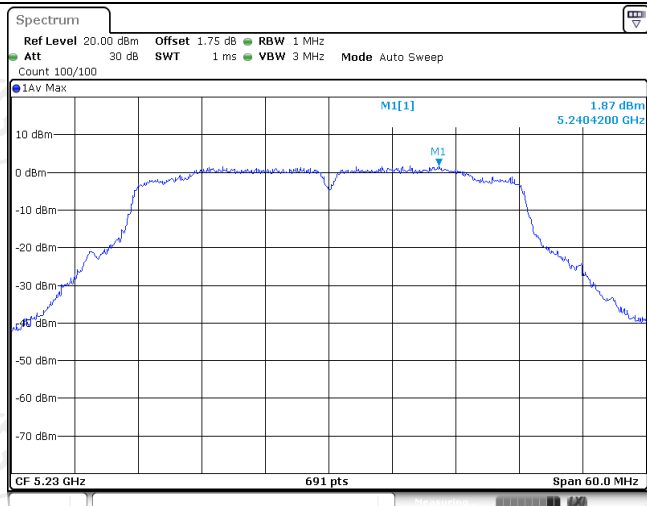


High

802.11ac(HT40)

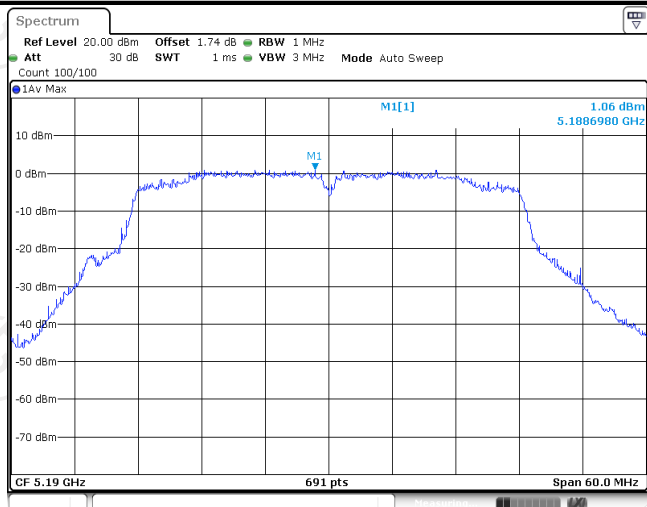


Low

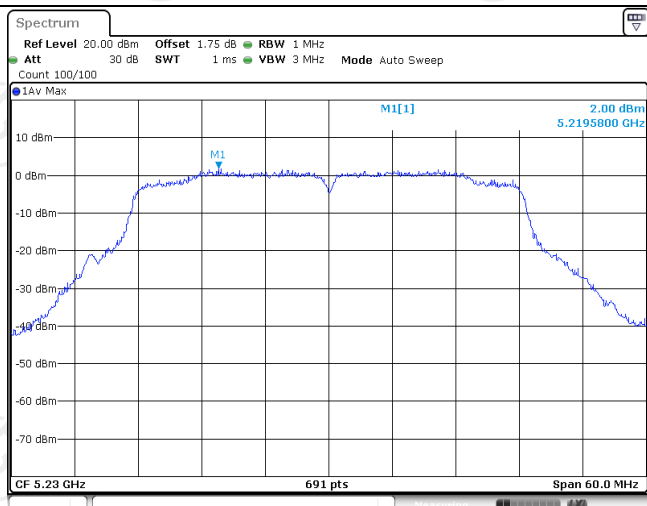

High


802.11ac(HT80)

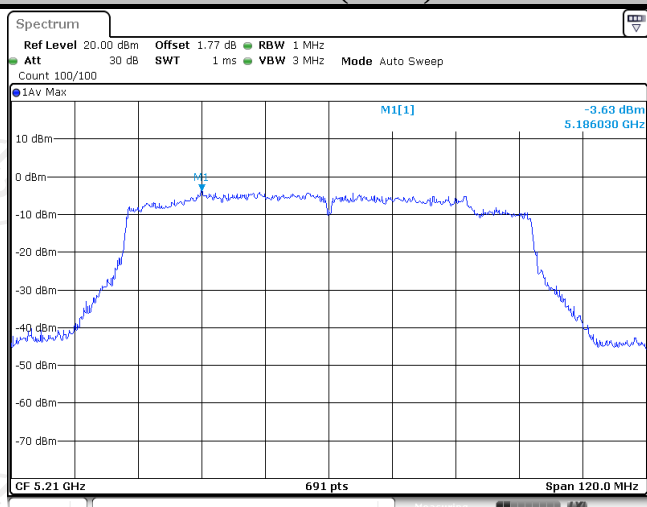


Middle

Auxiliary Antenna


802.11a

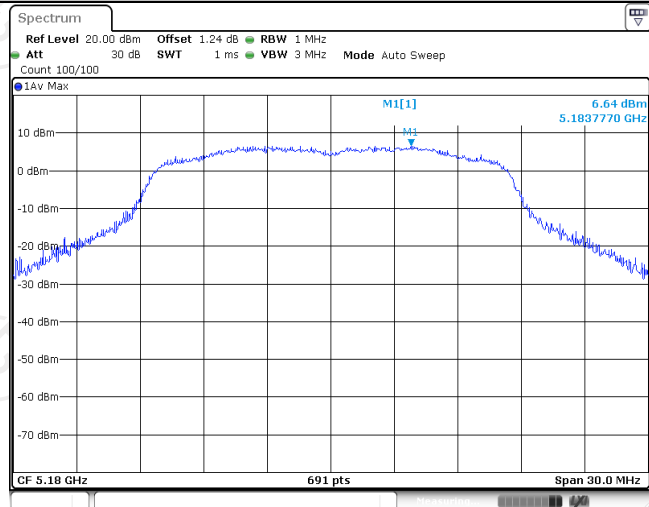

Low

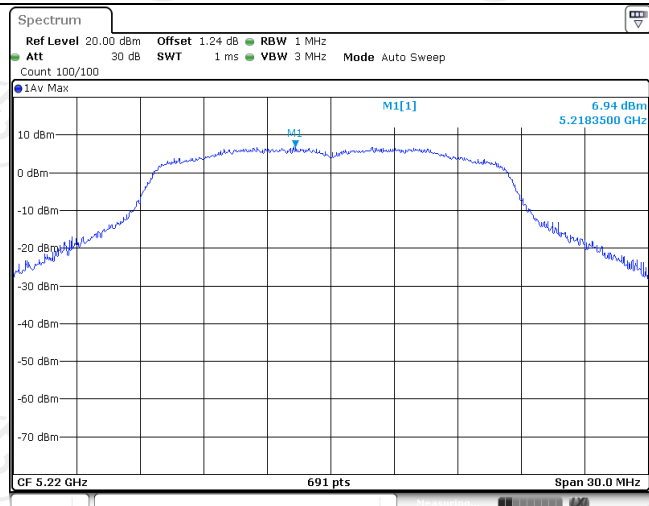


Mid

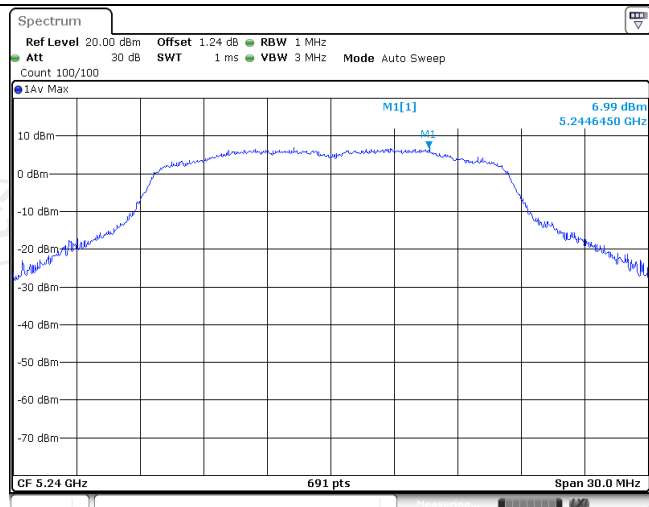


High


802.11n(HT20)

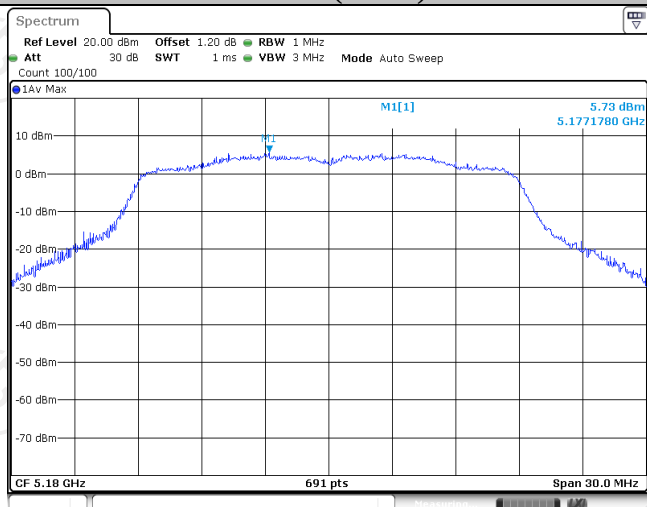

Low

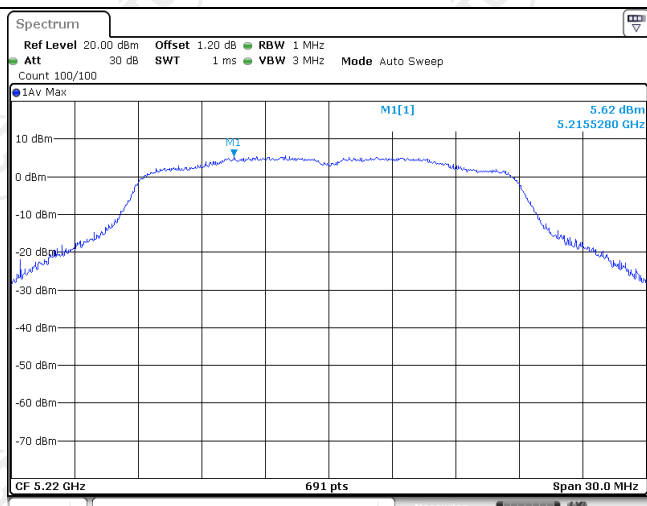


Mid

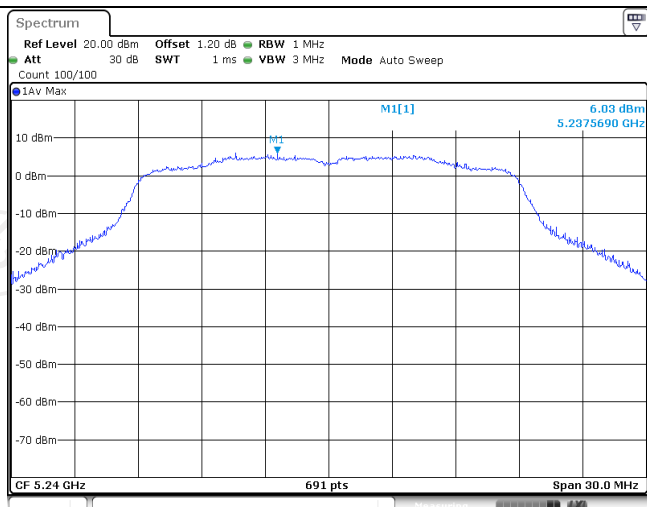


High


802.11ac(HT20)

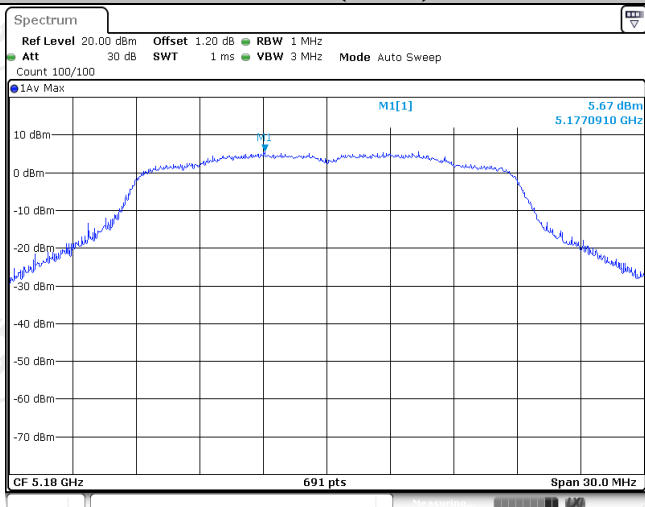

Low

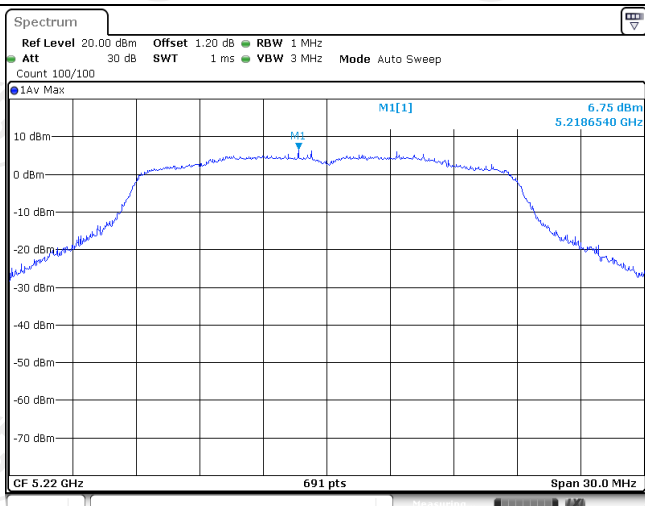


Mid

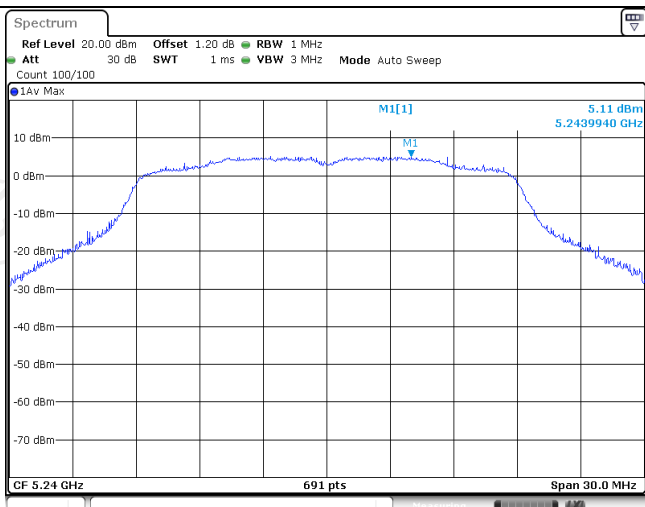


High

802.11n(HT40)

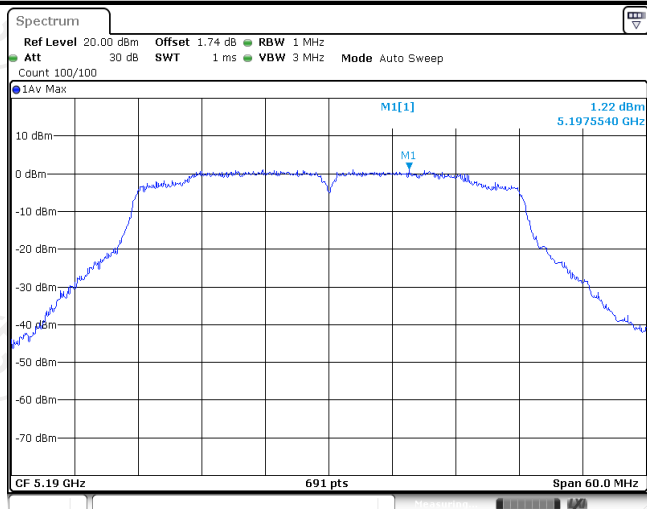


Low

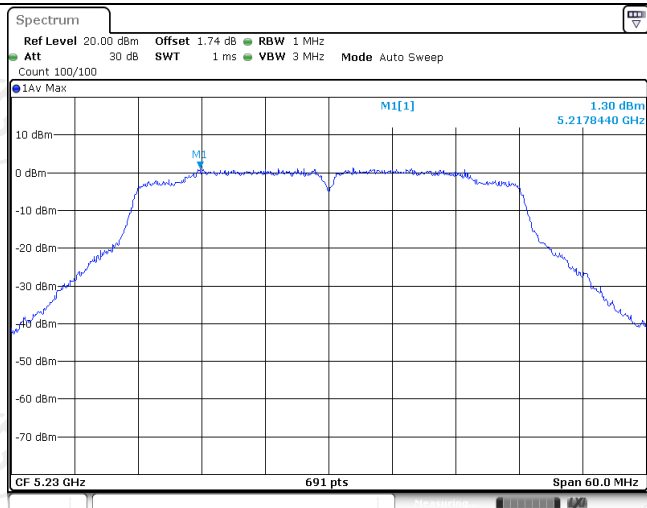


High

802.11ac(HT40)

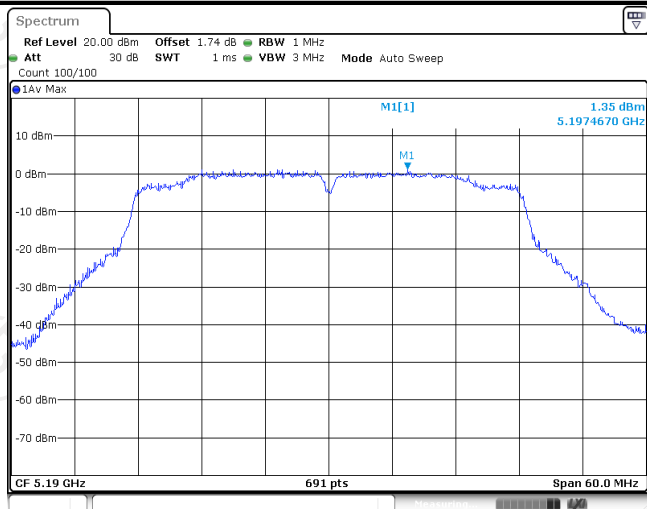


Low

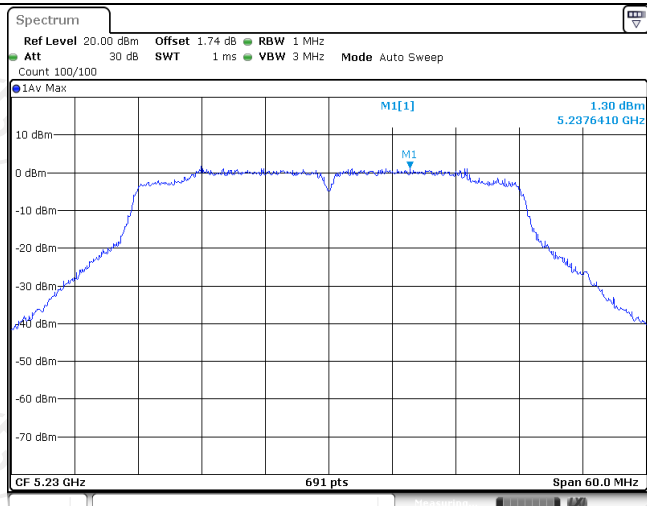

High


802.11ac(HT80)

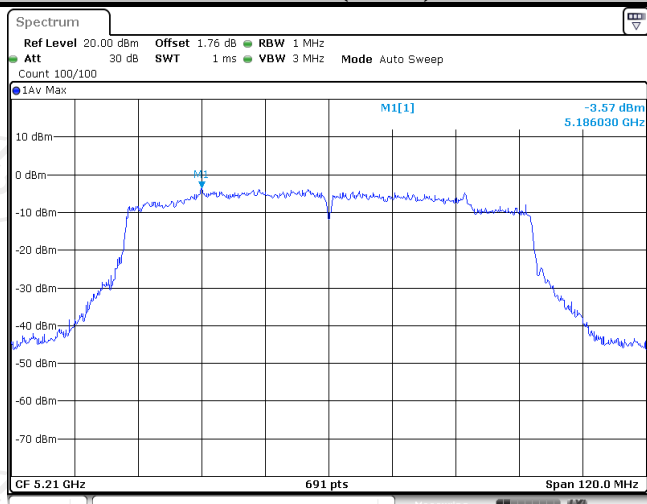


Middle

Band IV (5725 – 5850 MHz Main Antenna)


802.11a

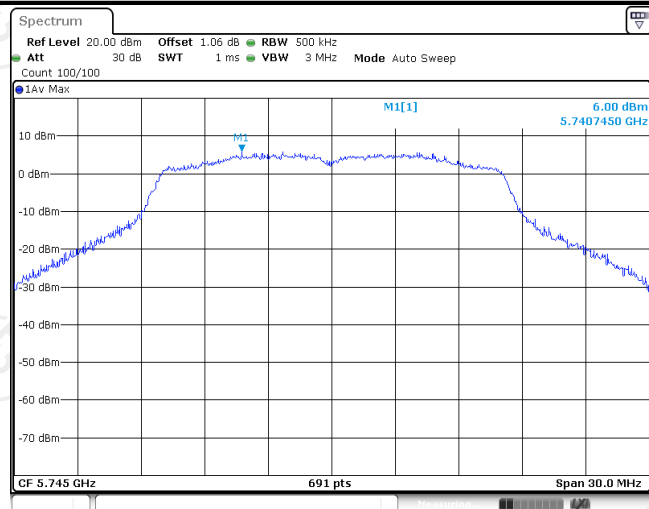

Low

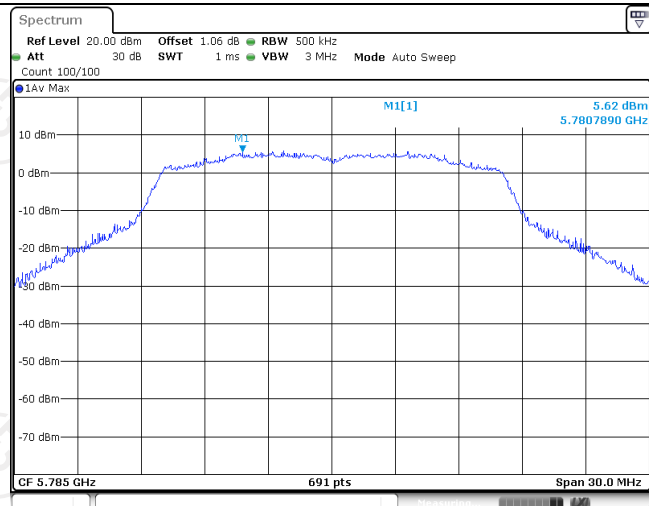


Mid

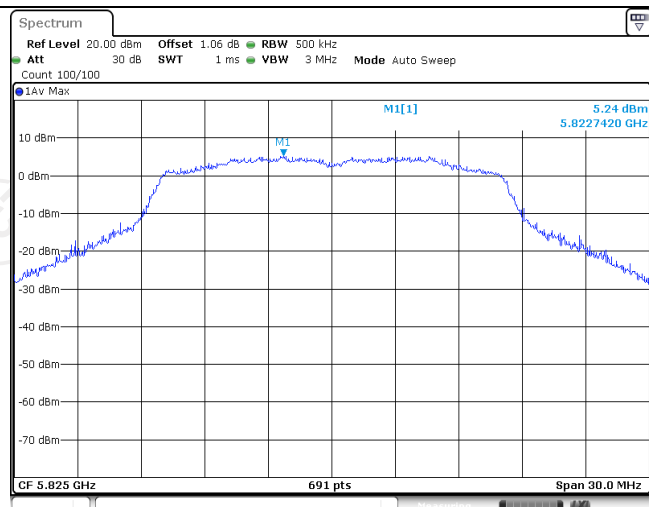


High


802.11n(HT20)

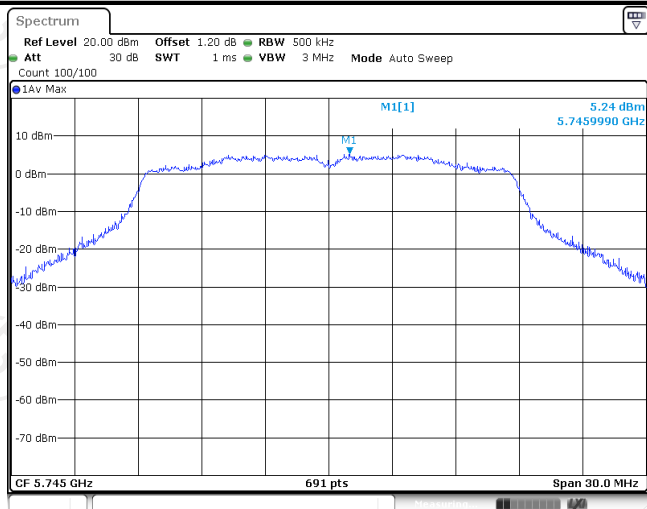

Low

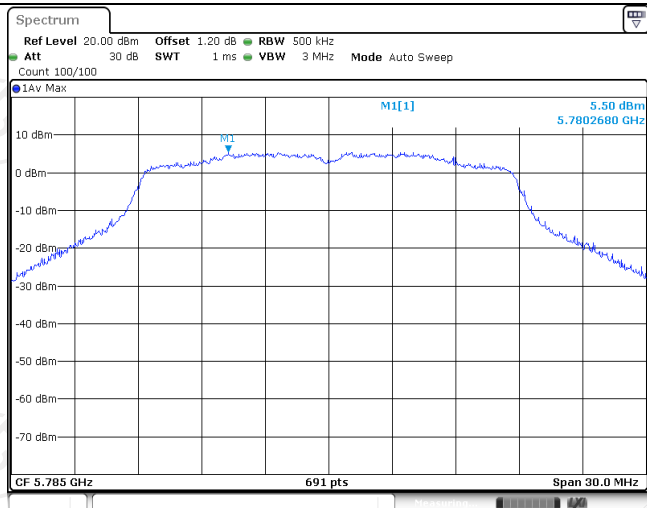


Mid

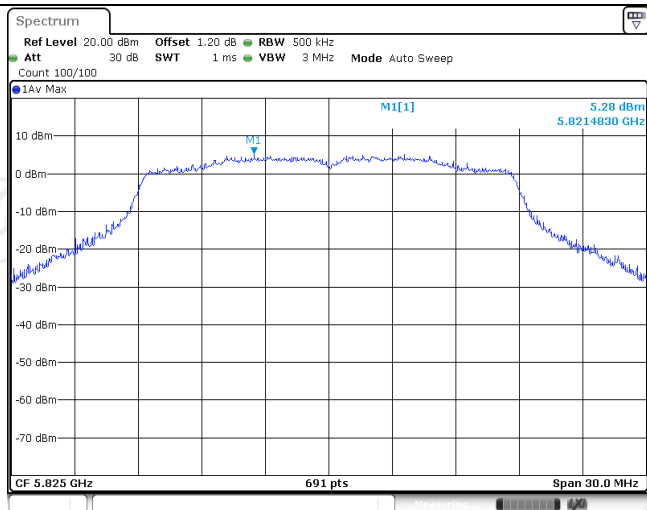


High


802.11ac(HT20)

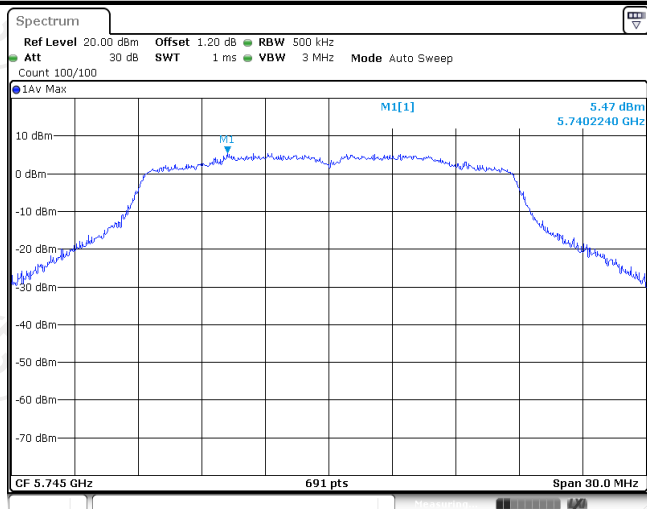

Low

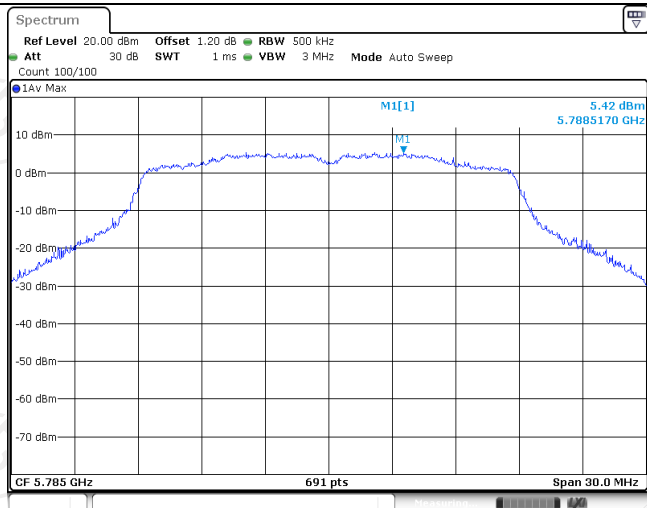


Mid

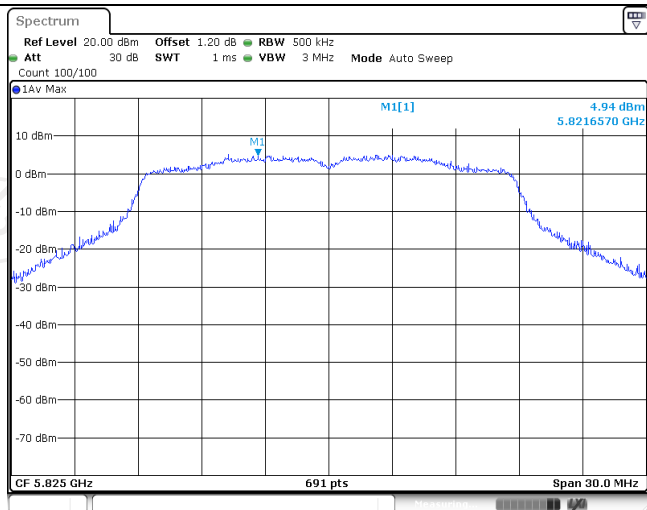


High

802.11n(HT40)

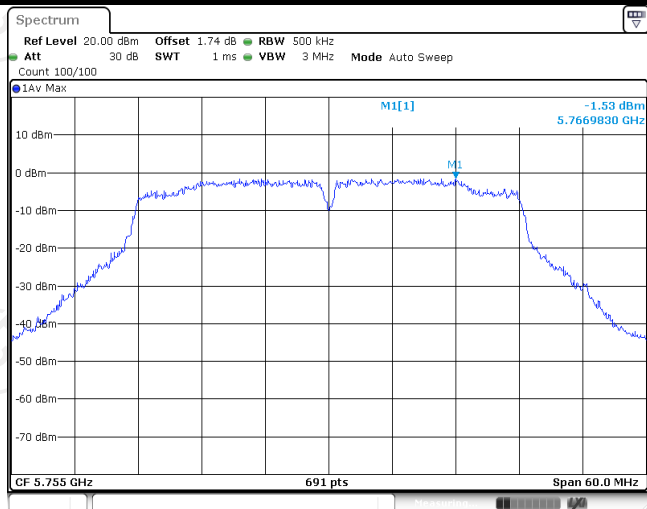


Low

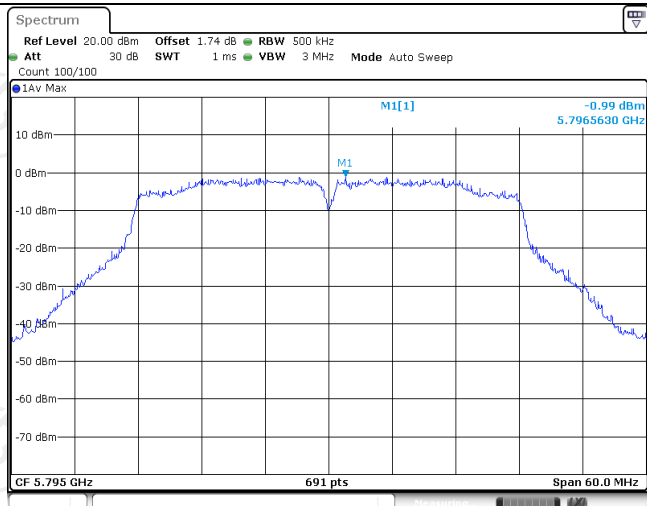


High

802.11ac(HT40)

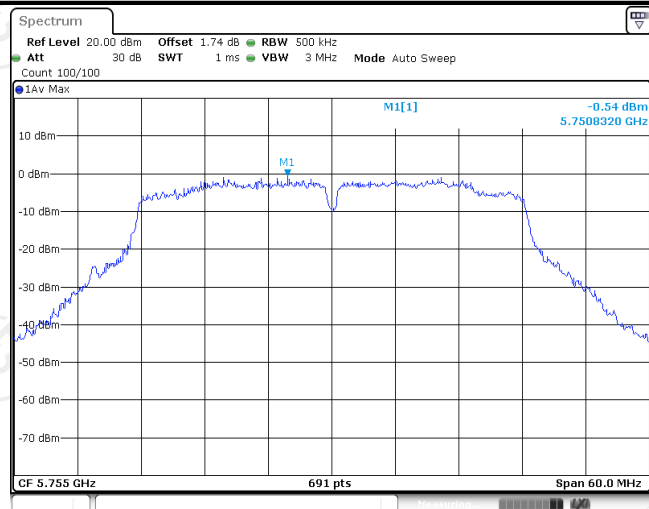


Low

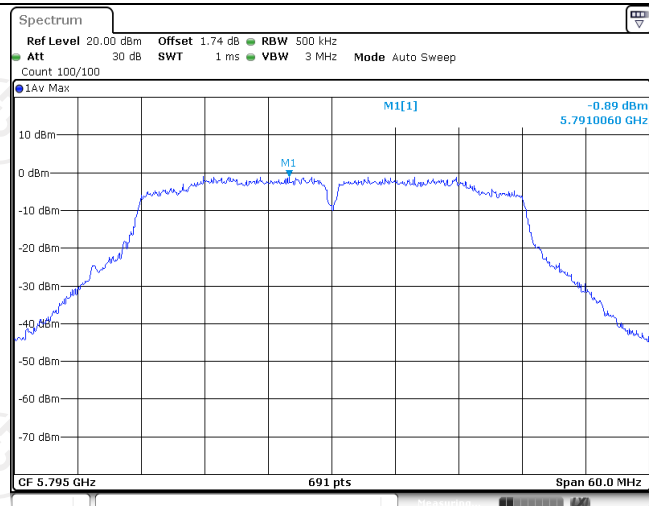

High


802.11ac(HT80)

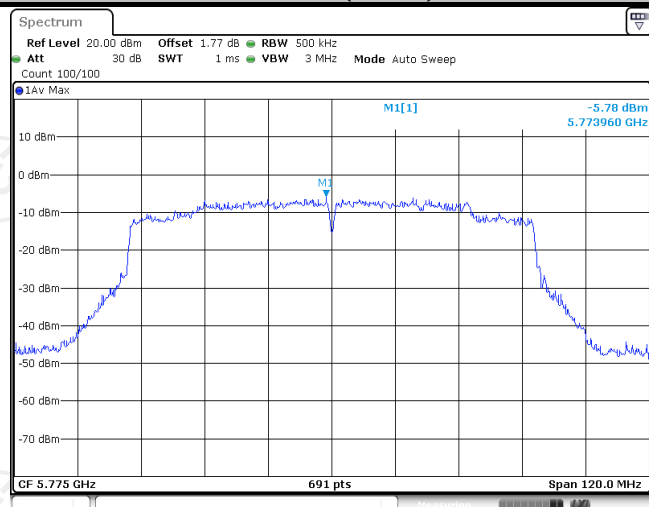


Middle

Auxiliary Antenna


802.11a

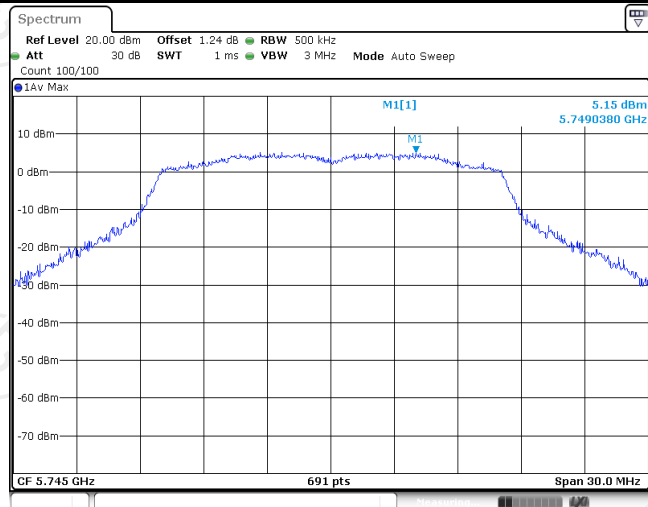

Low

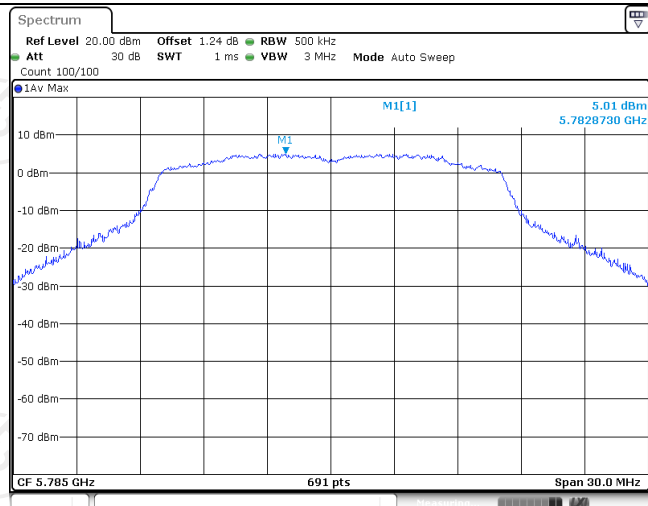


Mid

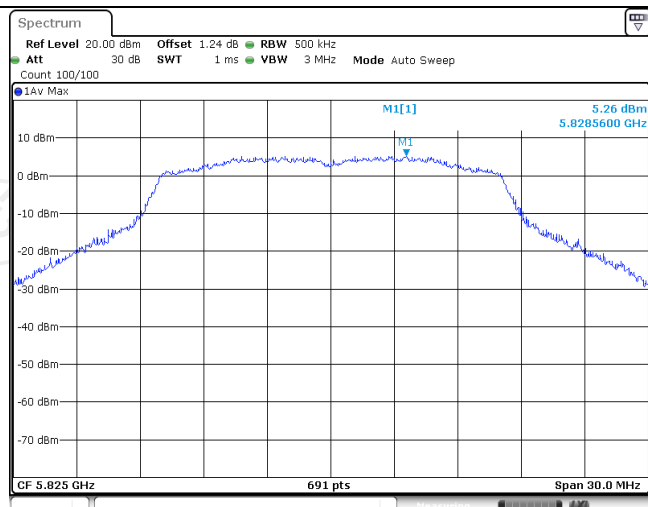


High


802.11n(HT20)

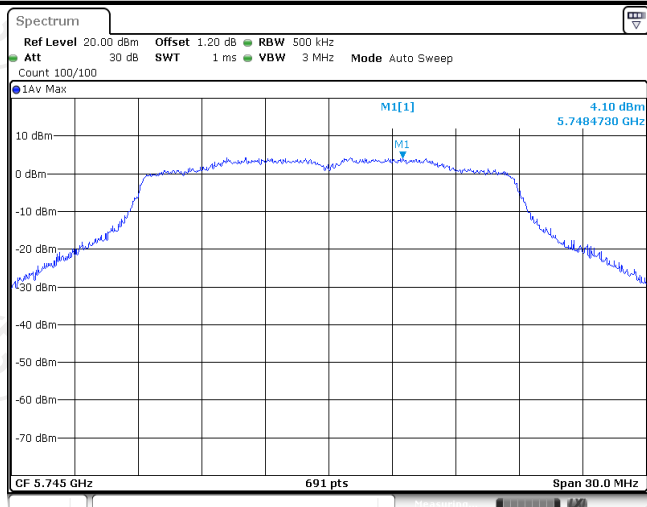

Low

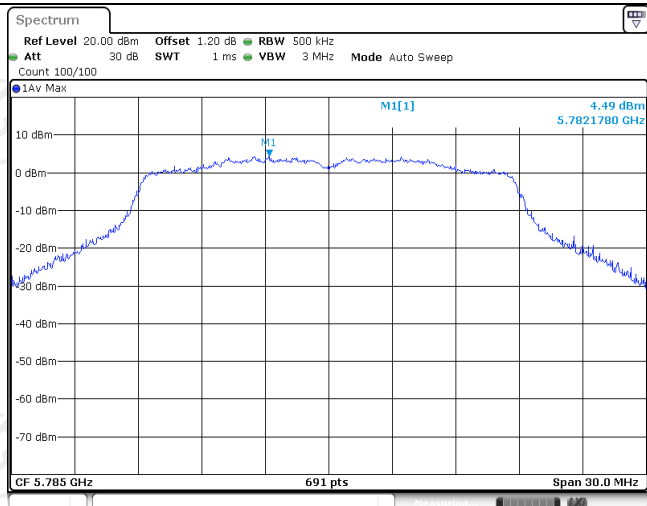


Mid

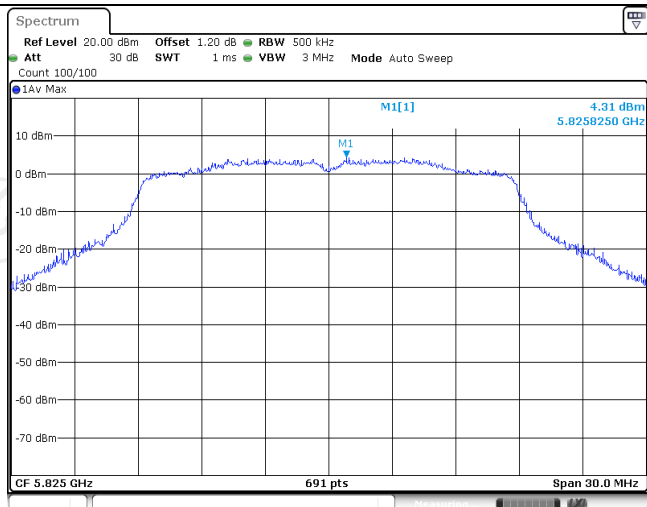


High


802.11ac(HT20)

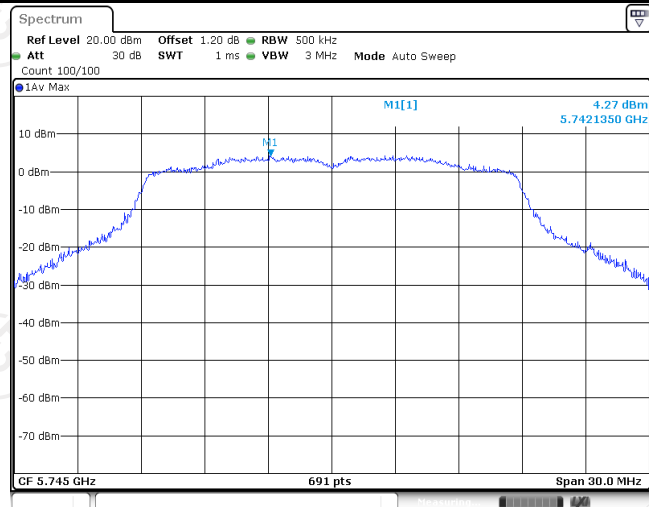

Low

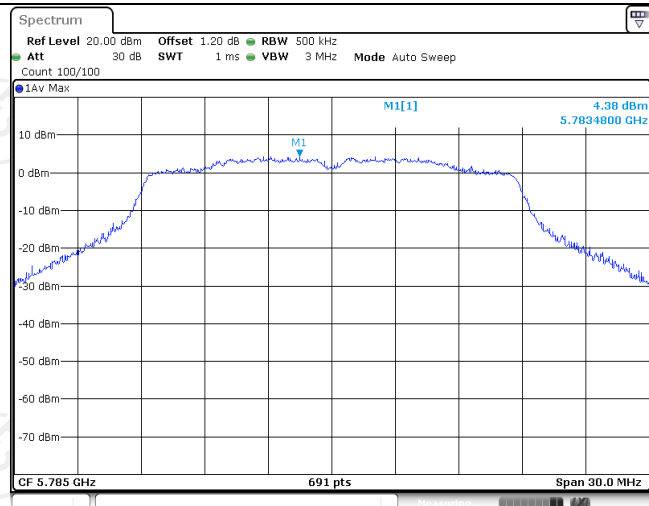


Mid

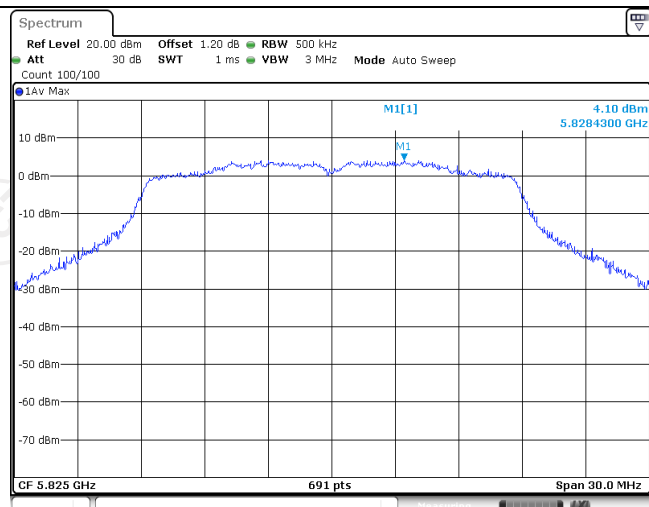


High

802.11n(HT40)

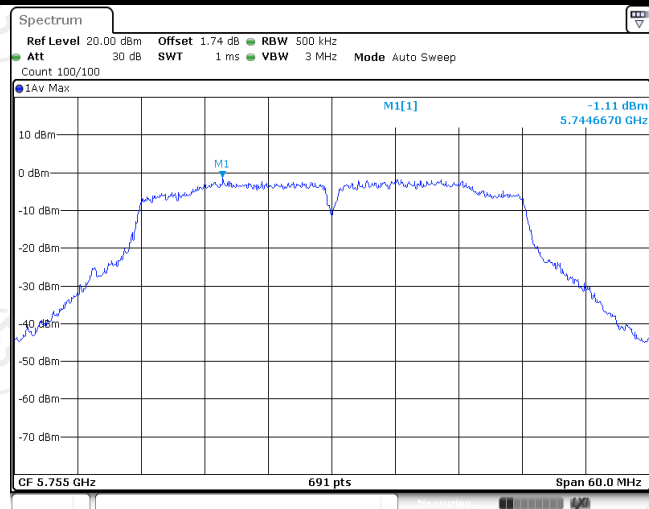


Low

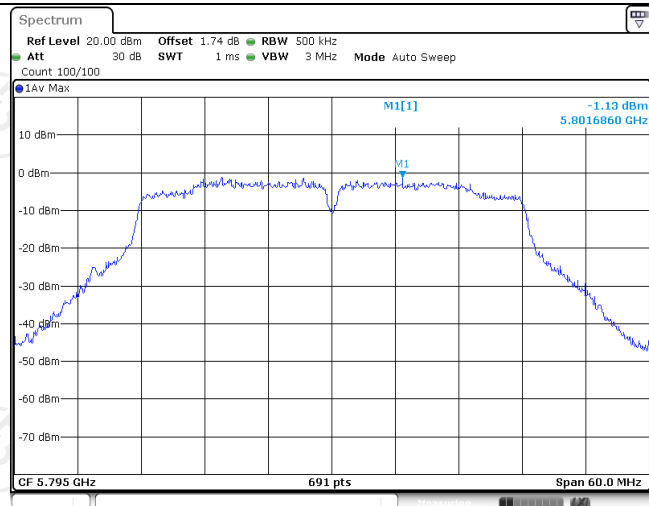


High

802.11ac(HT40)

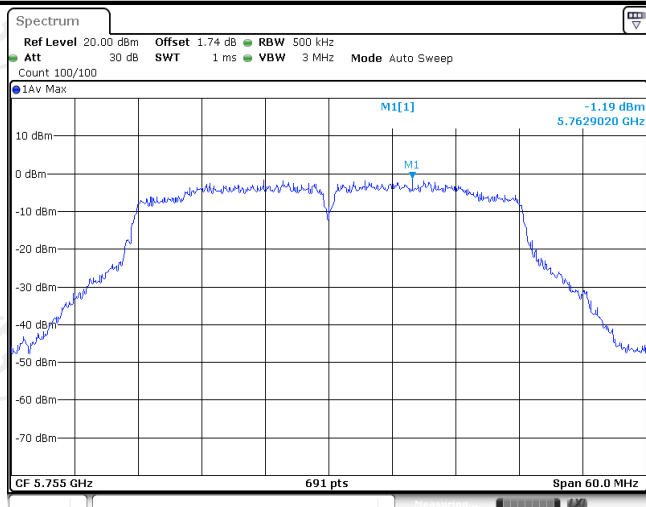


Low

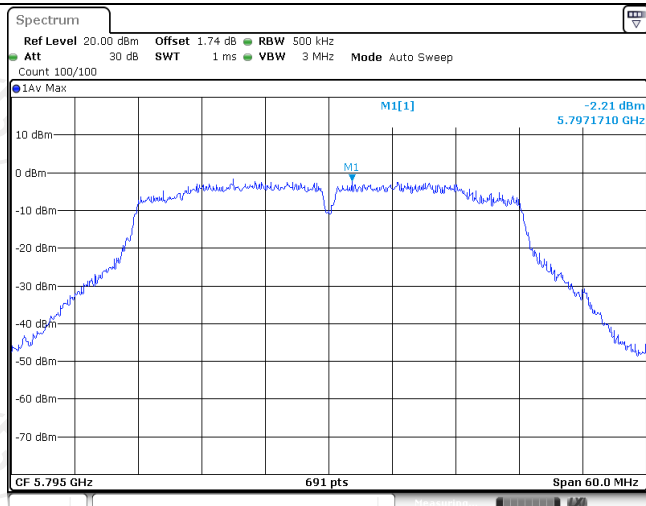

High


802.11ac(HT80)

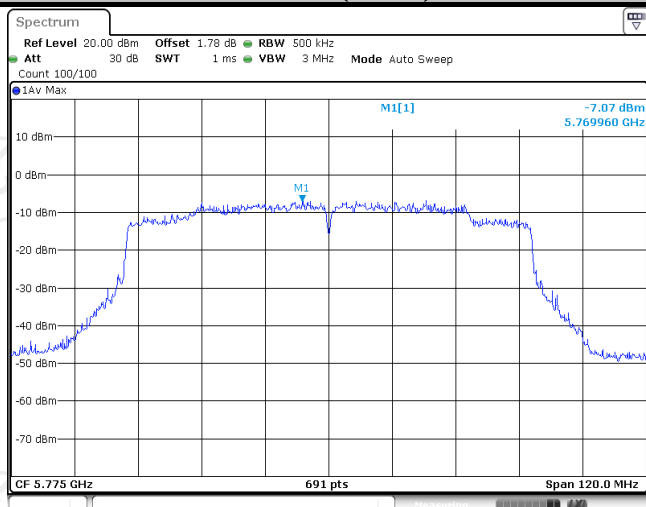

Middle

6.7. Band edge

6.7.1. Test Specification

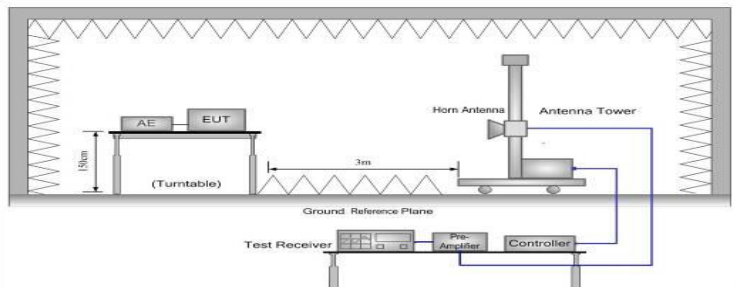Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	For band I&II&III: $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 68.2$ dB$\mu V/m$, for EIRP(dBm)= -27dBm For band IV(5715-5725MHz&5850-5860MHz): $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 78.2$ dB$\mu V/m$, for EIRP(dBm)= -17dBm; For band IV(other un-restricted band): $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 68.2$ dB$\mu V/m$, for EIRP(dBm)= -27dBm
Test Setup:	 The diagram illustrates the test setup. An Equipment Under Test (EUT) is placed on a turntable at a height of 1.5m. The turntable is rotated 360 degrees. A horn antenna is mounted on an antenna tower at a height of 3m. The antenna is connected to a test receiver, which includes a pre-amplifier and a controller. The ground reference plane is indicated.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then

	reported in a data sheet.
Test Result:	PASS

6.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 27, 2018
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ	200061	Sep. 27, 2018
Spectrum Analyzer	ROHDE&SCHW ARZ	FSP40	100056	Sep. 27, 2018
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 27, 2018
Pre-amplifier	HP	8447D	2727A05017	Sep. 27, 2018
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 27, 2018
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBH 9170	582	Jun. 07, 2018
Coax cable (9KHz-1GHz)	TCT	RE-low-01	N/A	Sep. 27, 2018
Coax cable (9KHz-40GHz)	TCT	RE-high-02	N/A	Sep. 27, 2018
Coax cable (9KHz-1GHz)	TCT	RE-low-03	N/A	Sep. 27, 2018
Coax cable (9KHz-40GHz)	TCT	RE-high-04	N/A	Sep. 27, 2018
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

Pre-scan both main antenna and auxilliary antenna, found main antenna is the worst case, so only record this case on the report.

6.7.3. Test Data

Band I for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11a		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	11.66	31.70	9.79	0.00	53.15	68.20	-15.05	Horizontal	Peak
5350.00	13.14	31.70	9.79	0.00	54.63	68.20	-13.57	Horizontal	Peak
5150.00	11.66	31.70	9.79	0.00	53.15	68.20	-15.05	Vertical	Peak
5350.00	11.27	31.70	9.79	0.00	52.76	68.20	-15.44	Vertical	Peak
5150.00	5.53	31.70	9.79	0.00	47.02	54.00	-6.98	Horizontal	Average
5350.00	5.14	31.70	9.79	0.00	46.63	54.00	-7.37	Horizontal	Average
5150.00	7.11	31.70	9.79	0.00	48.60	54.00	-5.4	Vertical	Average
5350.00	6.81	31.70	9.79	0.00	48.30	54.00	-5.7	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11a		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	12.44	31.73	10.47	0.00	54.64	68.20	-13.56	Horizontal	Peak
5850.00	13.39	31.73	10.47	0.00	55.59	68.20	-12.61	Horizontal	Peak
5725.00	12.33	31.73	10.47	0.00	54.53	68.20	-13.67	Vertical	Peak
5850.00	13.79	31.73	10.47	0.00	55.99	68.20	-12.21	Vertical	Peak
5725.00	6.01	31.73	10.47	0.00	48.21	54.00	-5.79	Horizontal	Average
5850.00	5.85	31.73	10.47	0.00	48.05	54.00	-5.95	Horizontal	Average
5725.00	8.68	31.73	10.47	0.00	50.88	54.00	-3.12	Vertical	Average
5850.00	6.93	31.73	10.47	0.00	49.13	54.00	-4.87	Vertical	Average

Band I for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11a		Test channel:	
								High	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	13.11	31.73	10.47	0.00	55.31	68.20	-12.89	Horizontal	Peak
5350.00	12.78	31.74	10.17	0.00	54.69	68.20	-13.51	Horizontal	Peak
5150.00	10.44	31.73	10.47	0.00	52.64	68.20	-15.56	Vertical	Peak
5350.00	11.48	31.74	10.17	0.00	53.39	68.20	-14.81	Vertical	Peak
5150.00	3.27	31.73	10.47	0.00	45.47	54.00	-8.53	Horizontal	Average
5350.00	5.28	31.74	10.17	0.00	47.19	54.00	-6.81	Horizontal	Average
5150.00	7.01	31.73	10.47	0.00	49.21	54.00	-4.79	Vertical	Average
5350.00	6.07	31.74	10.17	0.00	47.98	54.00	-6.02	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11a		Test channel:	
								High	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	15.54	32.20	10.61	0.00	58.35	68.20	-9.85	Horizontal	Peak
5850.00	11.54	32.20	10.61	0.00	54.35	68.20	-13.85	Horizontal	Peak
5725.00	11.65	32.20	10.61	0.00	54.46	68.20	-13.74	Vertical	Peak
5850.00	11.65	32.20	10.61	0.00	54.46	68.20	-13.74	Vertical	Peak
5725.00	7.06	32.20	10.61	0.00	49.87	54.00	-4.13	Horizontal	Average
5850.00	5.06	32.20	10.61	0.00	47.87	54.00	-6.13	Horizontal	Average
5725.00	7.29	32.20	10.61	0.00	50.10	54.00	-3.9	Vertical	Average
5850.00	5.29	32.20	10.61	0.00	48.10	54.00	-5.9	Vertical	Average

Band I for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11n		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	13.14	31.70	9.79	0.00	54.63	68.20	-13.57	Horizontal	Peak
5350.00	11.78	31.74	10.17	0.00	53.69	68.20	-14.51	Horizontal	Peak
5150.00	10.27	31.70	9.79	0.00	51.76	68.20	-16.44	Vertical	Peak
5350.00	10.48	31.74	10.17	0.00	52.39	68.20	-15.81	Vertical	Peak
5150.00	5.14	31.70	9.79	0.00	46.63	54.00	-7.37	Horizontal	Average
5350.00	4.28	31.74	10.17	0.00	46.19	54.00	-7.81	Horizontal	Average
5150.00	5.81	31.70	9.79	0.00	47.30	54.00	-6.70	Vertical	Average
5350.00	5.07	31.74	10.17	0.00	46.98	54.00	-7.02	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11n		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	12.11	31.73	10.47	0.00	54.31	68.20	-13.89	Horizontal	Peak
5850.00	12.39	31.73	10.47	0.00	54.59	68.20	-13.81	Horizontal	Peak
5725.00	9.44	31.73	10.47	0.00	51.64	68.20	-16.56	Vertical	Peak
5850.00	6.85	31.73	10.47	0.00	49.05	68.20	-19.15	Vertical	Peak
5725.00	4.27	31.73	10.47	0.00	46.47	54.00	-7.53	Horizontal	Average
5850.00	6.85	31.73	10.47	0.00	49.05	54.00	-4.95	Horizontal	Average
5725.00	6.01	31.73	10.47	0.00	48.21	54.00	-5.79	Vertical	Average
5850.00	5.93	31.73	10.47	0.00	48.13	54.00	-5.87	Vertical	Average

Band I for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11n		Test channel:	
								High	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	11.78	31.74	10.17	0.00	53.69	68.20	-14.51	Horizontal	Peak
5350.00	11.49	31.40	10.05	0.00	52.94	68.20	-15.26	Horizontal	Peak
5150.00	10.48	31.74	10.17	0.00	52.39	68.20	-15.81	Vertical	Peak
5350.00	10.45	31.40	10.05	0.00	51.90	68.20	-16.30	Vertical	Peak
5150.00	4.28	31.74	10.17	0.00	46.19	54.00	-7.81	Horizontal	Average
5350.00	7.45	31.40	10.05	0.00	48.90	54.00	-5.10	Horizontal	Average
5150.00	5.07	31.74	10.17	0.00	46.98	54.00	-7.02	Vertical	Average
5350.00	5.88	31.40	10.05	0.00	47.33	54.00	-6.67	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11n		Test channel:	
								High	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	12.39	31.73	10.47	0.00	54.59	68.20	-13.61	Horizontal	Peak
5850.00	12.51	32.20	10.61	0.00	55.32	68.20	-12.88	Horizontal	Peak
5725.00	6.85	31.73	10.47	0.00	49.05	68.20	-19.15	Vertical	Peak
5850.00	12.71	32.20	10.61	0.00	55.52	68.20	-12.68	Vertical	Peak
5725.00	6.85	31.73	10.47	0.00	49.05	54.00	-4.95	Horizontal	Average
5850.00	5.64	32.20	10.61	0.00	48.45	54.00	-5.55	Horizontal	Average
5725.00	5.93	31.73	10.47	0.00	48.13	54.00	-5.87	Vertical	Average
5850.00	6.20	32.20	10.61	0.00	49.01	54.00	-4.99	Vertical	Average

Band I for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11ac		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	11.90	31.70	9.79	0.00	53.39	68.20	-14.81	Horizontal	Peak
5350.00	10.29	31.74	10.17	0.00	52.20	68.20	-16.00	Horizontal	Peak
5150.00	11.66	31.70	9.79	0.00	53.15	68.20	-15.05	Vertical	Peak
5350.00	9.93	31.74	10.17	0.00	51.84	68.20	-16.36	Vertical	Peak
5150.00	5.53	31.70	9.79	0.00	47.02	54.00	-6.98	Horizontal	Average
5350.00	4.70	31.74	10.17	0.00	46.61	54.00	-7.39	Horizontal	Average
5150.00	7.11	31.70	9.79	0.00	48.60	54.00	-5.40	Vertical	Average
5350.00	3.33	31.74	10.17	0.00	45.24	54.00	-8.76	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11ac		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	10.44	31.73	10.47	0.00	52.64	68.20	-15.56	Horizontal	Peak
5850.00	10.39	31.73	10.47	0.00	52.59	68.20	-15.61	Horizontal	Peak
5725.00	10.33	31.73	10.47	0.00	52.53	68.20	-15.67	Vertical	Peak
5850.00	10.79	31.73	10.47	0.00	52.99	68.20	-15.21	Vertical	Peak
5725.00	7.01	31.73	10.47	0.00	49.21	54.00	-4.79	Horizontal	Average
5850.00	4.85	31.73	10.47	0.00	47.05	54.00	-6.95	Horizontal	Average
5725.00	6.68	31.73	10.47	0.00	48.88	54.00	-5.12	Vertical	Average
5850.00	5.93	31.73	10.47	0.00	48.13	54.00	-5.87	Vertical	Average

Band I for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11ac		Test channel:	
								High	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	10.29	31.74	10.17	0.00	52.20	68.20	-16.00	Horizontal	Peak
5350.00	12.49	31.40	10.05	0.00	53.94	68.20	-14.26	Horizontal	Peak
5150.00	9.93	31.74	10.17	0.00	51.84	68.20	-16.36	Vertical	Peak
5350.00	8.45	31.40	10.05	0.00	49.90	68.20	-18.30	Vertical	Peak
5150.00	4.70	31.74	10.17	0.00	46.61	54.00	-7.39	Horizontal	Average
5350.00	6.45	31.40	10.05	0.00	47.90	54.00	-6.10	Horizontal	Average
5150.00	4.88	31.40	10.05	0.00	46.33	54.00	-7.67	Vertical	Average
5350.00	3.33	31.74	10.17	0.00	45.24	54.00	-8.76	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		20MHz		Worst mode:		802.11ac		Test channel:	
								High	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	10.39	31.73	10.47	0.00	52.59	68.20	-15.61	Horizontal	Peak
5850.00	10.54	32.20	10.61	0.00	53.35	68.20	-14.85	Horizontal	Peak
5725.00	10.79	31.73	10.47	0.00	52.99	68.20	-15.21	Vertical	Peak
5850.00	9.65	32.20	10.61	0.00	52.46	68.20	-15.74	Vertical	Peak
5725.00	4.85	31.73	10.47	0.00	47.05	54.00	-6.95	Horizontal	Average
5850.00	8.06	32.20	10.61	0.00	50.87	54.00	-3.13	Horizontal	Average
5725.00	5.93	31.73	10.47	0.00	48.13	54.00	-5.87	Vertical	Average
5850.00	3.29	32.20	10.61	0.00	46.10	54.00	-7.90	Vertical	Average

Band I for Band edge emission									
Bandwidth:		40MHz		Worst mode:		802.11n		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	10.90	31.70	9.79	0.00	52.39	68.20	-15.81	Horizontal	Peak
5350.00	11.30	32.70	9.99	0.00	53.00	68.20	-15.20	Horizontal	Peak
5150.00	10.66	31.70	9.79	0.00	52.15	68.20	-16.05	Vertical	Peak
5350.00	10.70	31.80	9.20	0.00	52.00	68.20	-16.20	Vertical	Peak
5150.00	4.53	31.70	9.79	0.00	46.02	54.00	-7.98	Horizontal	Average
5350.00	4.83	31.90	9.80	0.00	47.22	54.00	-6.78	Horizontal	Average
5150.00	6.11	31.70	9.79	0.00	47.60	54.00	-6.40	Vertical	Average
5350.00	6.12	32.70	9.80	0.00	46.20	54.00	-7.80	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		40MHz		Worst mode:		802.11n		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	13.11	31.73	10.47	0.00	55.31	68.20	-12.89	Horizontal	Peak
5850.00	13.20	31.85	10.53	0.00	55.22	68.20	-12.98	Horizontal	Peak
5725.00	11.44	31.73	10.47	0.00	53.64	68.20	-14.56	Vertical	Peak
5850.00	11.50	31.80	10.50	0.00	53.75	68.20	-14.45	Vertical	Peak
5725.00	5.27	31.73	10.47	0.00	47.47	54.00	-6.53	Horizontal	Average
5850.00	5.30	31.63	10.50	0.00	47.50	54.00	-6.50	Horizontal	Average
5725.00	7.01	31.73	10.47	0.00	49.21	54.00	-4.79	Vertical	Average
5850.00	7.11	31.70	10.25	0.00	49.28	54.00	-4.72	Vertical	Average

Band I for Band edge emission

Bandwidth: 40MHz		Worst mode: 802.11n		Test channel: High					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	11.36	31.40	10.05	0.00	52.81	68.20	-15.39	Horizontal	Peak
5350.00	11.40	31.44	10.30	0.00	52.50	68.20	-15.70	Horizontal	Peak
5150.00	9.83	31.40	10.05	0.00	51.28	68.20	-16.92	Vertical	Peak
5350.00	9.95	31.45	10.01	0.00	51.00	68.20	-17.20	Vertical	Peak
5150.00	6.23	31.40	10.05	0.00	47.68	54.00	-6.32	Horizontal	Average
5350.00	6.33	31.50	10.20	0.00	47.70	54.00	-6.30	Horizontal	Average
5150.00	3.57	31.40	10.05	0.00	45.02	54.00	-8.98	Vertical	Average
5350.00	3.60	31.50	10.15	0.00	45.12	54.00	-8.88	Vertical	Average

Band IV for Band edge emission

Bandwidth: 40MHz		Worst mode: 802.11n		Test channel: High					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	12.51	32.20	10.61	0.00	55.32	68.20	-12.88	Horizontal	Peak
5850.00	12.22	32.25	10.63	0.00	55.35	68.20	-12.85	Horizontal	Peak
5725.00	10.71	32.20	10.61	0.00	53.52	68.20	-14.68	Vertical	Peak
5850.00	10.66	32.25	10.71	0.00	53.60	68.20	-14.60	Vertical	Peak
5725.00	5.64	32.20	10.61	0.00	48.45	54.00	-5.55	Horizontal	Average
5850.00	5.65	32.25	10.63	0.00	48.55	54.00	-5.45	Horizontal	Average
5725.00	6.20	32.20	10.61	0.00	49.01	54.00	-4.99	Vertical	Average
5850.00	6.25	32.23	10.65	0.00	49.22	54.00	-4.78	Vertical	Average

Band I for Band edge emission									
Bandwidth:		40MHz		Worst mode:		802.11ac		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	9.90	31.70	9.79	0.00	51.39	68.20	-16.81	Horizontal	Peak
5350.00	9.93	31.60	9.77	0.00	51.40	68.20	-16.80	Horizontal	Peak
5150.00	10.66	31.70	9.79	0.00	52.15	68.20	-16.05	Vertical	Peak
5350.00	10.67	31.72	9.80	0.00	52.16	68.20	-16.04	Vertical	Peak
5150.00	4.53	31.70	9.79	0.00	46.02	54.00	-7.98	Horizontal	Average
5350.00	4.54	31.72	9.80	0.00	46.03	54.00	-7.97	Horizontal	Average
5150.00	7.11	31.70	9.79	0.00	48.60	54.00	-5.40	Vertical	Average
5350.00	7.15	31.75	9.80	0.00	48.65	54.00	-5.35	Vertical	Average

Band IV for Band edge emission									
Bandwidth:		40MHz		Worst mode:		802.11ac		Test channel:	
								Low	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	14.11	31.73	10.47	0.00	56.31	68.20	-11.89	Horizontal	Peak
5850.00	15.10	31.93	10.55	0.00	57.20	68.20	-11.00	Horizontal	Peak
5725.00	8.44	31.73	10.47	0.00	50.64	68.20	-17.56	Vertical	Peak
5850.00	8.45	31.22	10.45	0.00	51.23	68.20	-16.97	Vertical	Peak
5725.00	3.27	31.73	10.47	0.00	45.47	54.00	-8.53	Horizontal	Average
5850.00	3.37	31.83	10.50	0.00	46.20	54.00	-7.80	Horizontal	Average
5725.00	5.01	31.73	10.47	0.00	47.21	54.00	-6.79	Vertical	Average
5850.00	5.22	31.83	10.45	0.00	48.21	54.00	-5.79	Vertical	Average

Band I for Band edge emission


Bandwidth: 40MHz		Worst mode: 802.11ac		Test channel: High					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5150.00	10.36	31.40	10.05	0.00	51.81	68.20	-16.39	Horizontal	Peak
5350.00	10.46	31.45	10.15	0.00	51.77	68.20	-16.43	Horizontal	Peak
5150.00	9.83	31.40	10.05	0.00	51.28	68.20	-16.92	Vertical	Peak
5350.00	9.85	31.45	10.25	0.00	51.35	68.20	-16.85	Vertical	Peak
5150.00	4.23	31.40	10.05	0.00	45.68	54.00	-8.32	Horizontal	Average
5350.00	4.53	31.50	10.45	0.00	46.00	54.00	-8.00	Horizontal	Average
5150.00	3.57	31.40	10.05	0.00	45.02	54.00	-8.98	Vertical	Average
5350.00	3.67	31.50	10.55	0.00	45.34	54.00	-8.66	Vertical	Average



Band IV for Band edge emission

Bandwidth: 40MHz		Worst mode: 802.11ac		Test channel: High					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Detector
5725.00	13.54	32.20	10.61	0.00	56.35	68.20	-11.85	Horizontal	Peak
5850.00	13.64	32.23	10.66	0.00	56.60	68.20	-11.60	Horizontal	Peak
5725.00	8.65	32.20	10.61	0.00	51.46	68.20	-16.74	Vertical	Peak
5850.00	8.70	32.50	10.65	0.00	52.46	68.20	-15.74	Vertical	Peak
5725.00	5.06	32.20	10.61	0.00	47.87	54.00	-6.13	Horizontal	Average
5850.00	5.20	32.32	10.71	0.00	47.25	54.00	-6.75	Horizontal	Average
5725.00	5.29	32.20	10.61	0.00	48.10	54.00	-5.90	Vertical	Average
5850.00	5.30	32.25	10.55	0.00	48.25	54.00	-5.75	Vertical	Average

6.8. Spurious Emission

6.8.1.1. Test Specification

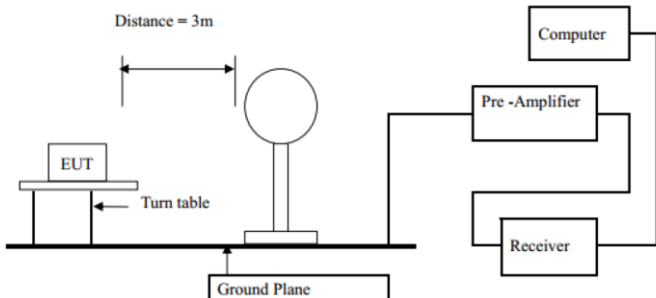Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Limit (dBuV/m @3m)		Detector
	Above 1G		74.0		Peak
			54.0		Average
Test setup:	For radiated emissions below 30MHz				
					

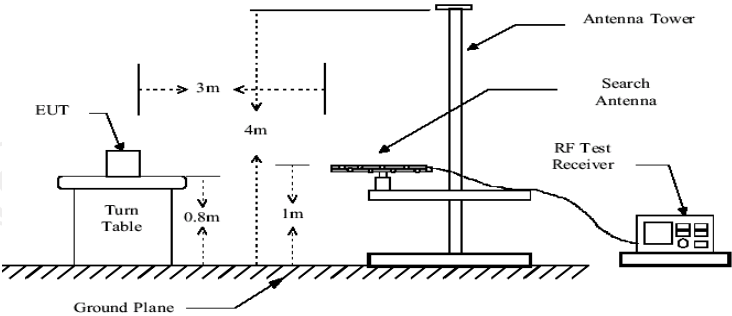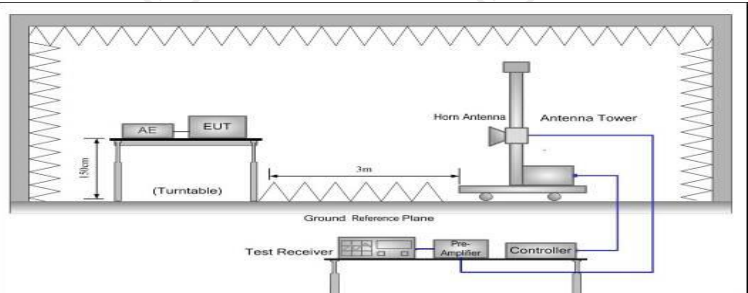
	30MHz to 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test results:	PASS

6.8.2. Test Data


Note: Pre-scan 802.11a, 802.11n and 802.11ac mode of both main antenna and auxilliary antenna, found 802.11 n(HT20) MIMO mode is the worst case, so only record this case on the report.

Please refer to following diagram for individual

Below 1GHz

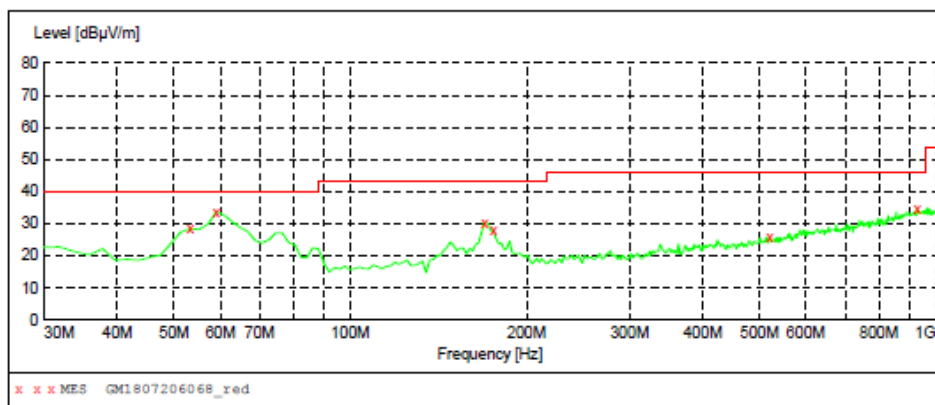

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	28.30	-9.0	40.0	11.7	QP	100.0	334.00	VERTICAL
59.100000	33.70	-9.8	40.0	6.3	QP	100.0	105.00	VERTICAL
169.680000	30.30	-13.0	43.5	13.2	QP	100.0	311.00	VERTICAL
175.500000	27.90	-12.7	43.5	15.6	QP	100.0	311.00	VERTICAL
520.820000	25.80	-1.3	46.0	20.2	QP	100.0	39.00	VERTICAL
930.160000	34.50	7.1	46.0	11.5	QP	100.0	0.00	VERTICAL

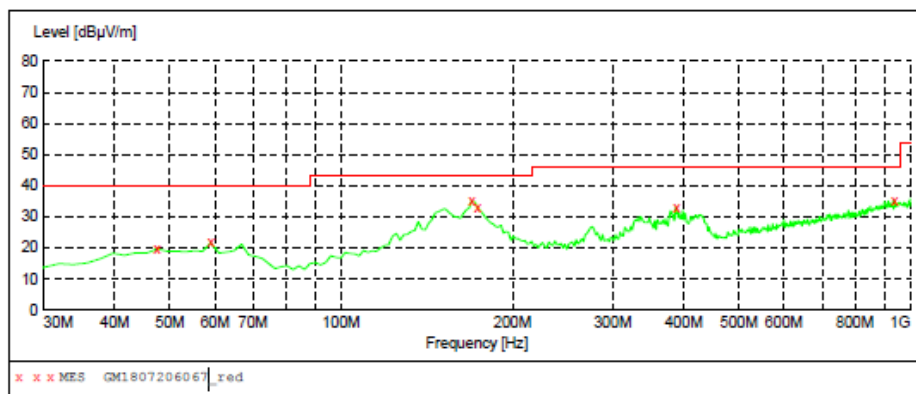

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	19.60	-8.8	40.0	20.4	QP	300.0	83.00	HORIZONTAL
59.100000	21.70	-9.8	40.0	18.3	QP	100.0	129.00	HORIZONTAL
169.680000	35.00	-13.0	43.5	8.5	QP	100.0	140.00	HORIZONTAL
173.560000	33.20	-12.8	43.5	10.3	QP	100.0	197.00	HORIZONTAL
388.900000	33.10	-4.6	46.0	12.9	QP	100.0	261.00	HORIZONTAL
937.920000	35.30	7.1	46.0	10.7	QP	300.0	122.00	HORIZONTAL

Remark:

1. Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level
2. The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Above 1GHz

Band I for Low									
Bandwidth: 20MHz				Worst mode: 802.11a					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1842.14	35.43	25.36	6.03	37.17	29.65	68.20	-38.55	Vertical	Peak
6730.19	31.03	34.14	11.52	35.12	41.57	68.20	-26.63	Vertical	Peak
7470.56	31.15	36.16	12.30	34.88	44.73	68.20	-23.47	Vertical	Peak
12086.33	30.31	39.66	14.61	33.11	51.47	68.20	-16.73	Vertical	Peak
1918.72	32.75	25.49	6.14	37.23	27.15	68.20	-41.05	Horizontal	Peak
5925.86	30.47	32.35	10.64	35.40	38.06	68.20	-30.14	Horizontal	Peak
8229.29	30.51	36.61	12.78	34.51	45.39	68.20	-22.81	Horizontal	Peak
9734.78	31.13	39.10	13.67	35.52	48.38	68.20	-19.82	Horizontal	Peak

Band I for Mid									
Bandwidth: 20MHz				Worst mode: 802.11a					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1663.80	36.08	25.09	5.69	36.85	30.01	68.20	-38.19	Vertical	Peak
3815.03	34.68	29.62	8.52	38.22	34.60	68.20	-33.60	Vertical	Peak
5791.65	32.34	32.06	10.58	35.34	39.64	68.20	-28.56	Vertical	Peak
9960.38	30.19	39.10	13.56	33.65	49.20	68.20	-19.00	Vertical	Peak
1693.72	32.87	25.18	5.75	36.92	26.88	68.20	-41.32	Horizontal	Peak
3625.67	32.72	29.30	8.30	38.26	32.06	68.20	-36.14	Horizontal	Peak
6094.14	30.33	32.50	10.83	35.37	38.29	68.20	-29.91	Horizontal	Peak
10011.21	29.30	39.10	13.54	33.25	48.69	68.20	-19.51	Horizontal	Peak

Band I for High									
Bandwidth: 20MHz				Worst mode: 802.11a					
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1589.29	36.21	24.99	5.54	36.71	30.03	68.20	-38.17	Vertical	Peak
4920.96	32.84	31.42	9.62	36.62	37.26	68.20	-30.94	Vertical	Peak
9370.08	30.55	39.06	13.66	35.38	47.89	68.20	-20.31	Vertical	Peak
11226.25	29.34	40.30	13.48	33.47	49.65	68.20	-18.55	Vertical	Peak
1851.54	33.10	25.35	6.04	37.18	27.31	68.20	-40.89	Horizontal	Peak
3543.55	32.49	29.13	8.18	38.35	31.45	68.20	-36.75	Horizontal	Peak
8250.27	30.19	36.55	12.79	34.48	45.05	68.20	-23.15	Horizontal	Peak
10427.37	29.62	39.75	13.59	35.28	47.68	68.20	-20.52	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Measuring frequencies from 1 GHz to 40GHz of highest fundamental frequency.

Band IV for Low									
Bandwidth:		20MHz			Worst mode:			802.11a	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1948.25	35.47	25.79	6.19	37.26	30.19	68.20	-38.01	Vertical	Peak
4478.63	32.67	30.66	9.26	37.43	35.16	68.20	-33.04	Vertical	Peak
7081.70	30.79	35.55	11.85	34.91	43.28	68.20	-24.92	Vertical	Peak
10805.68	30.45	40.27	13.58	34.61	49.69	68.20	-18.51	Vertical	Peak
1948.25	33.76	25.79	6.19	37.26	28.48	68.20	-39.72	Horizontal	Peak
4004.08	33.30	29.71	8.78	38.10	33.69	68.20	-34.51	Horizontal	Peak
7840.75	31.27	36.35	13.06	34.96	45.72	68.20	-22.48	Horizontal	Peak
10888.51	29.02	40.56	13.58	34.31	48.85	68.20	-19.35	Horizontal	Peak

Band IV for Mid									
Bandwidth:		20MHz			Worst mode:			802.11a	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1741.81	36.09	25.29	5.85	37.02	30.21	68.20	-37.99	Vertical	Peak
3883.62	34.87	29.68	8.62	38.18	34.99	68.20	-33.21	Vertical	Peak
7135.98	30.96	35.82	11.86	34.99	43.65	68.20	-24.55	Vertical	Peak
11254.86	28.35	40.30	13.47	33.58	48.54	68.20	-19.66	Vertical	Peak
2246.74	32.93	27.78	6.52	37.47	29.76	68.20	-38.44	Horizontal	Peak
6833.77	29.85	34.24	11.64	34.96	40.77	68.20	-27.43	Horizontal	Peak
9636.16	29.81	39.08	13.72	35.26	47.35	68.20	-20.85	Horizontal	Peak
11399.03	28.87	40.30	13.41	34.17	48.41	68.20	-19.79	Horizontal	Peak


Band IV for High									
Bandwidth:		20MHz			Worst mode:			802.11a	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1711.05	35.48	25.22	5.79	36.95	29.54	68.20	-38.66	Vertical	Peak
4299.89	34.39	30.20	9.03	37.61	36.01	68.20	-32.19	Vertical	Peak
8859.77	30.65	37.76	13.16	34.32	47.25	68.20	-20.95	Vertical	Peak
11112.52	30.12	40.30	13.52	33.60	50.34	68.20	-17.86	Vertical	Peak
1933.42	34.05	25.64	6.17	37.25	28.61	68.20	-39.59	Horizontal	Peak
5151.68	31.88	31.69	9.79	36.25	37.11	68.20	-31.09	Horizontal	Peak
10062.31	29.98	39.10	13.55	33.71	48.92	68.20	-19.28	Horizontal	Peak
11603.96	29.91	40.16	13.64	33.16	50.55	68.20	-17.65	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Measuring frequencies from 1 GHz to 40GHz of highest fundamental frequency.

6.9. Frequency Stability Measurement

6.9.1. Test Specification

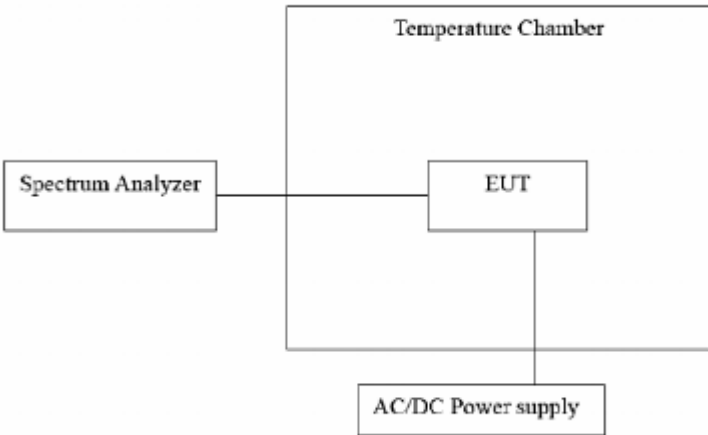Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	 <pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end P[AC/DC Power supply] --- EUT </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	Pre-scan was performed at Low/ Mid /High channel, the worst case was found. Only the test data of Low channel was shown in this report.


Test plots as follows:

Band I for 802.11a Low					
Voltage(%)	Power(VDC)	TEMP(°C)	Test Frequency (MHz)	Freq.Dev (Hz)	Deviation (ppm)
100%	7.40	-20	5180	-8000.00	-1.54440
100%		-10	5180	-8000.00	-1.54440
100%		0	5180	-7000.00	-1.35135
100%		10	5180	-7000.00	-1.35135
100%		20	5180	-7000.00	-1.35135
100%		30	5180	-7000.00	-1.35135
100%		40	5180	-7000.00	-1.35135
100%		50	5180	-7000.00	-1.35135
85%	6.40	25	5180	-7000.00	-1.35135
115%	8.40	25	5180	-7000.00	-1.35135


Band IV for 802.11a Low					
Voltage(%)	Power(VDC)	TEMP(°C)	Test Frequency (MHz)	Freq.Dev (Hz)	Deviation (ppm)
100%	7.40	-20	5745	-10000.00	-1.74064
100%		-10	5745	-9000.00	-1.56658
100%		0	5745	-9000.00	-1.56658
100%		10	5745	-9000.00	-1.56658
100%		20	5745	-9000.00	-1.56658
100%		30	5745	-10000.00	-1.74064
100%		40	5745	-9000.00	-1.56658
100%		50	5745	-9000.00	-1.56658
85%	6.40	25	5745	-9000.00	-1.56658
115%	8.40	25	5745	-9000.00	-1.56658

Appendix A: Photographs of Test Setup

Radiated Emission

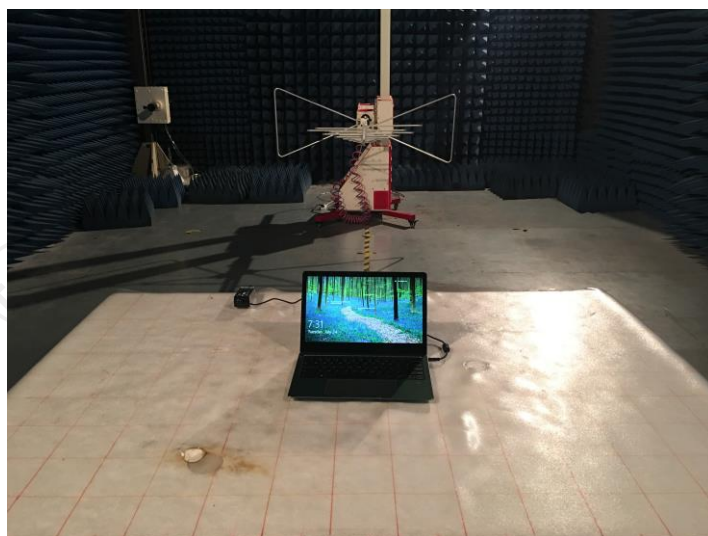

CE

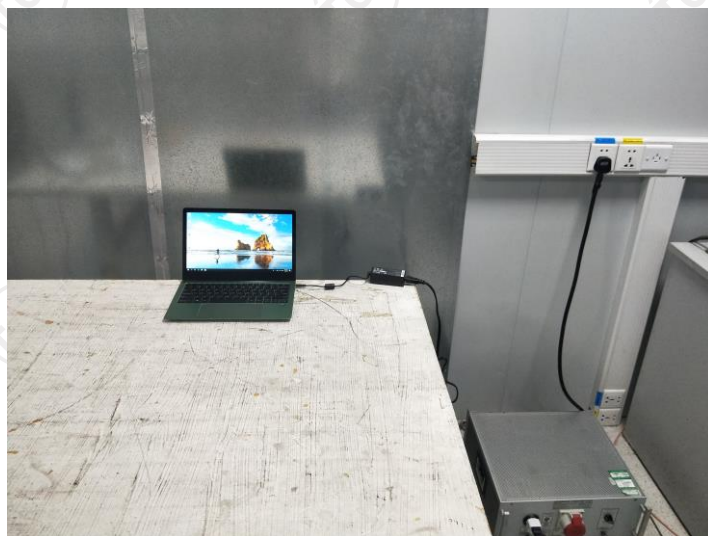

Appendix B: Photographs of EUT

Reference to the test report No.: TRE1807009701

*******END OF REPORT*******