


The worst case of Radiated Emission 9kHz ~ 1GHz and 18GHz ~ 25GHz:

Site: AC2	Time: 2020/02/03
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: AC2_VULB9162_0.03-7GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

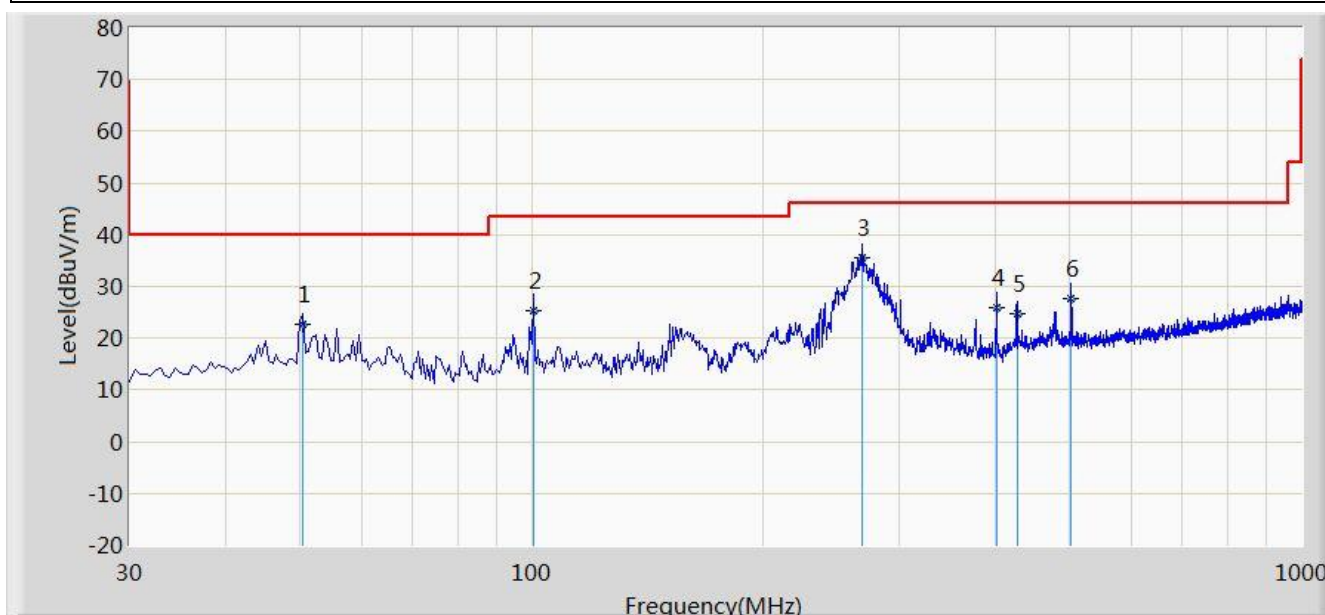


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			50.370	22.811	8.320	-17.189	40.000	14.491	QP
2		*	100.325	25.339	12.840	-18.161	43.500	12.499	QP
3			268.135	35.600	21.320	-10.400	46.000	14.280	QP
4			401.510	26.002	8.540	-19.998	46.000	17.462	QP
5			427.215	24.637	6.760	-21.363	46.000	17.877	QP
6			501.905	27.719	8.432	-18.281	46.000	19.287	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC2	Time: 2020/02/03
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

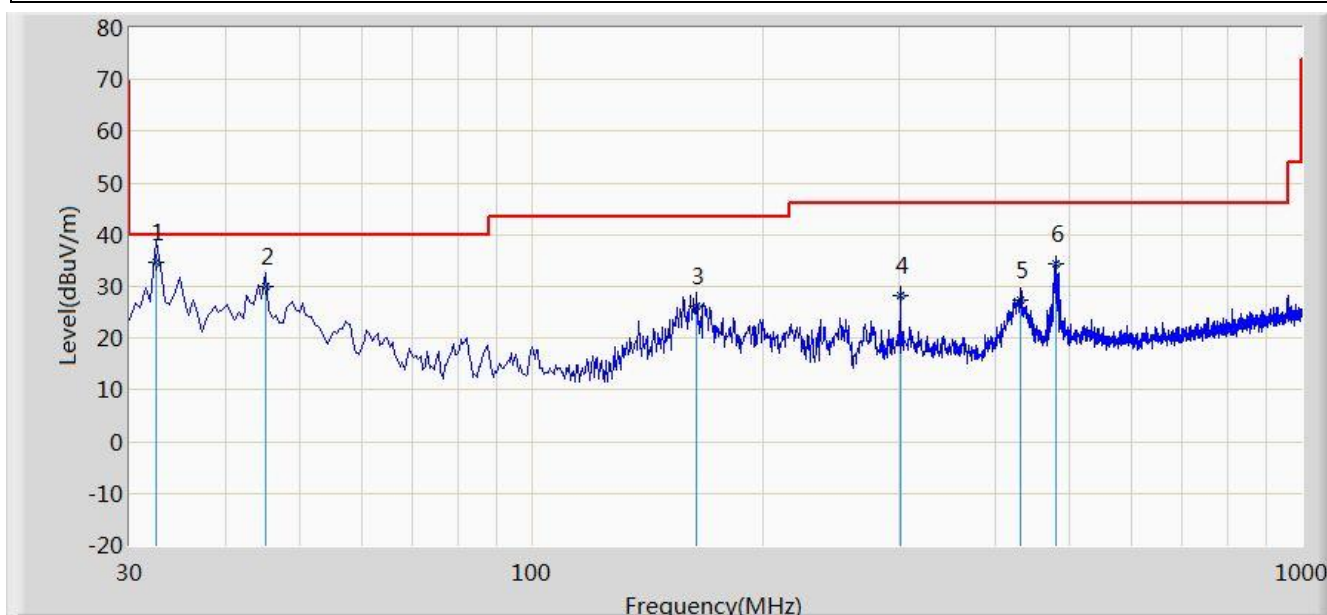

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	32.425	34.559	23.340	-5.441	40.000	11.220	QP
2			45.035	29.966	15.450	-10.034	40.000	14.516	QP
3			163.860	26.181	16.320	-17.319	43.500	9.861	QP
4			301.115	28.310	13.430	-17.690	46.000	14.879	QP
5			430.610	27.315	9.430	-18.685	46.000	17.886	QP
6			480.080	34.334	15.430	-11.666	46.000	18.905	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in below table.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.10.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)


7.10.3.Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

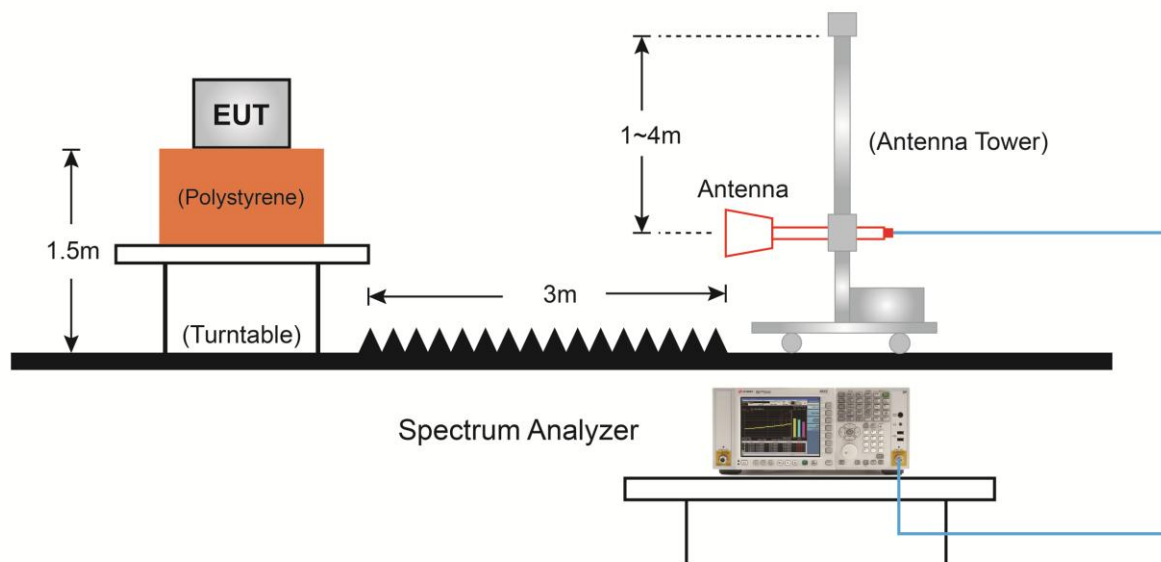7.10.4.Test Setup

1.10.1. Test Result

Site: AC2	Time: 2020/02/03 - 18:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

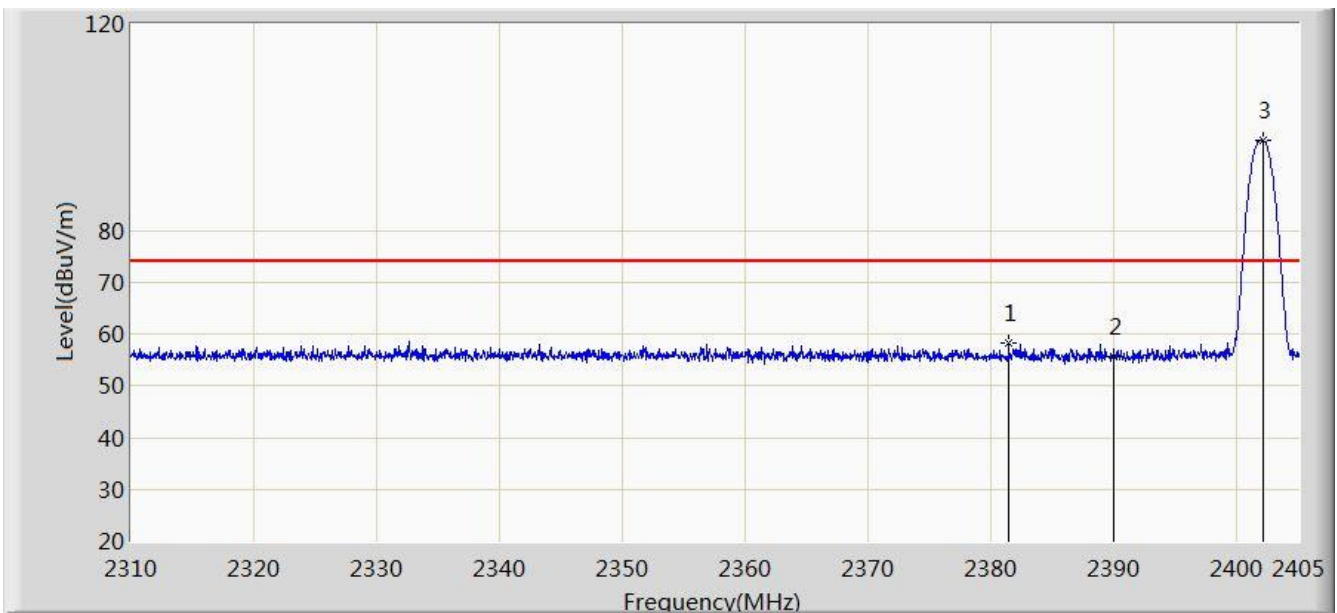


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.393	58.242	25.766	-15.758	74.000	32.476	PK
2			2390.000	55.669	23.184	-18.331	74.000	32.485	PK
3		*	2402.150	97.382	64.868	N/A	N/A	32.514	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

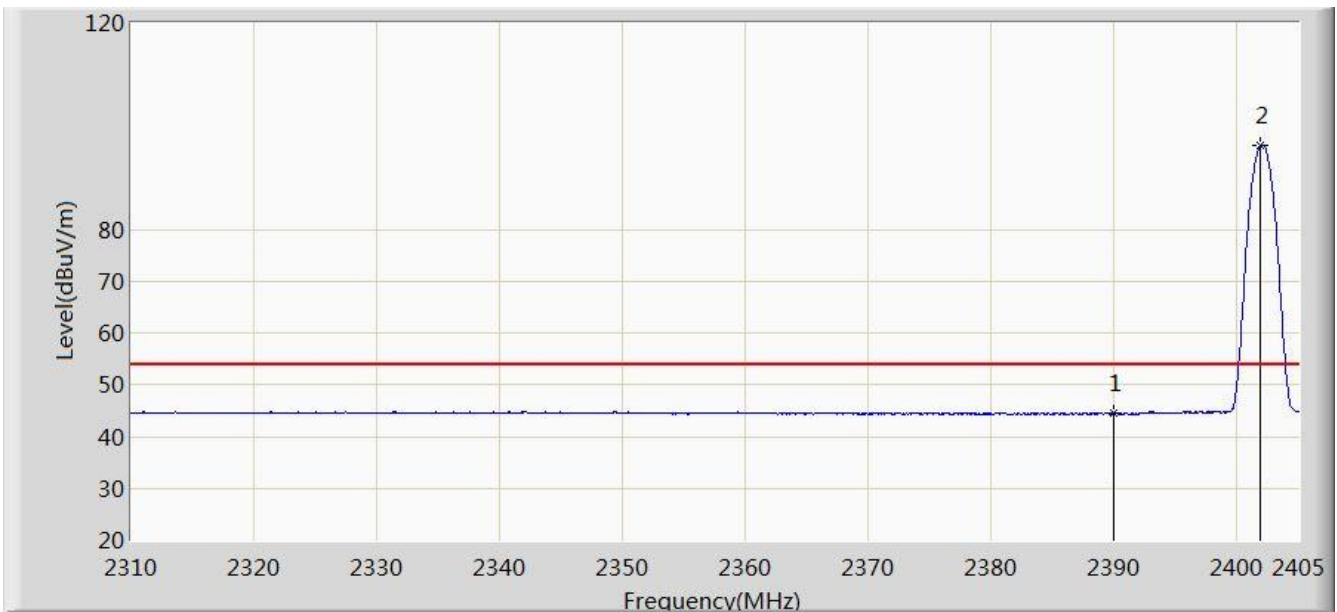


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.458	11.973	-9.542	54.000	32.485	AV
2		*	2401.865	96.246	63.733	N/A	N/A	32.514	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

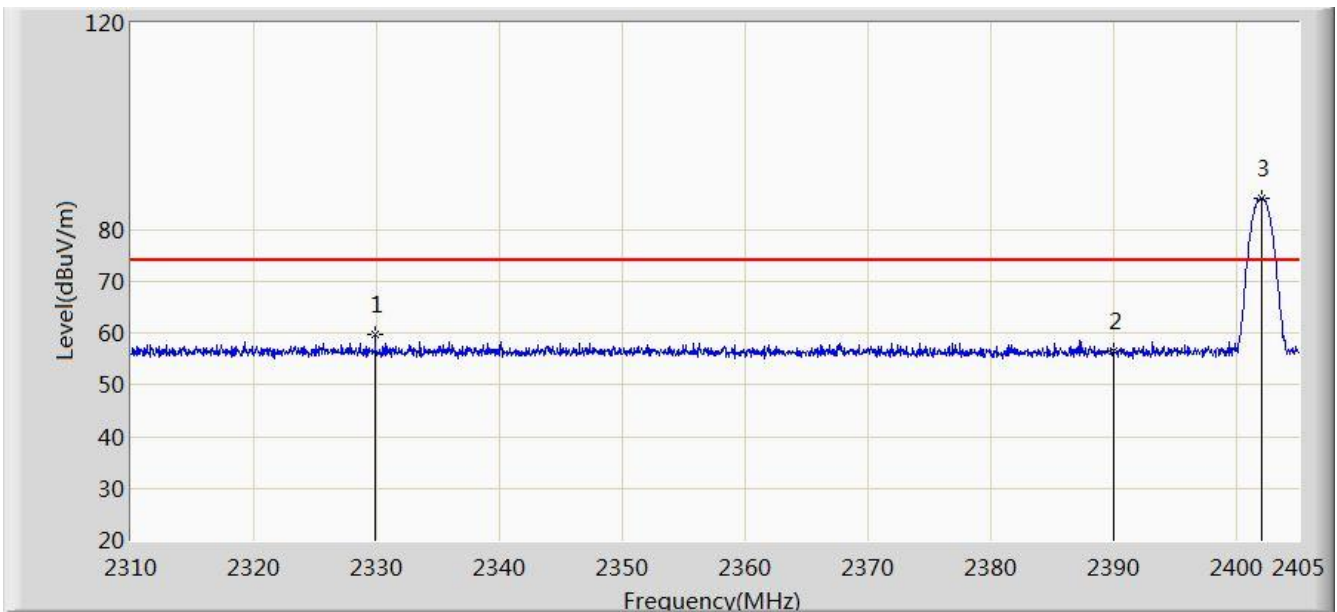


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2329.855	59.805	27.212	-14.195	74.000	32.594	PK
2			2390.000	56.445	23.960	-17.555	74.000	32.485	PK
3		*	2402.008	86.013	53.500	N/A	N/A	32.513	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

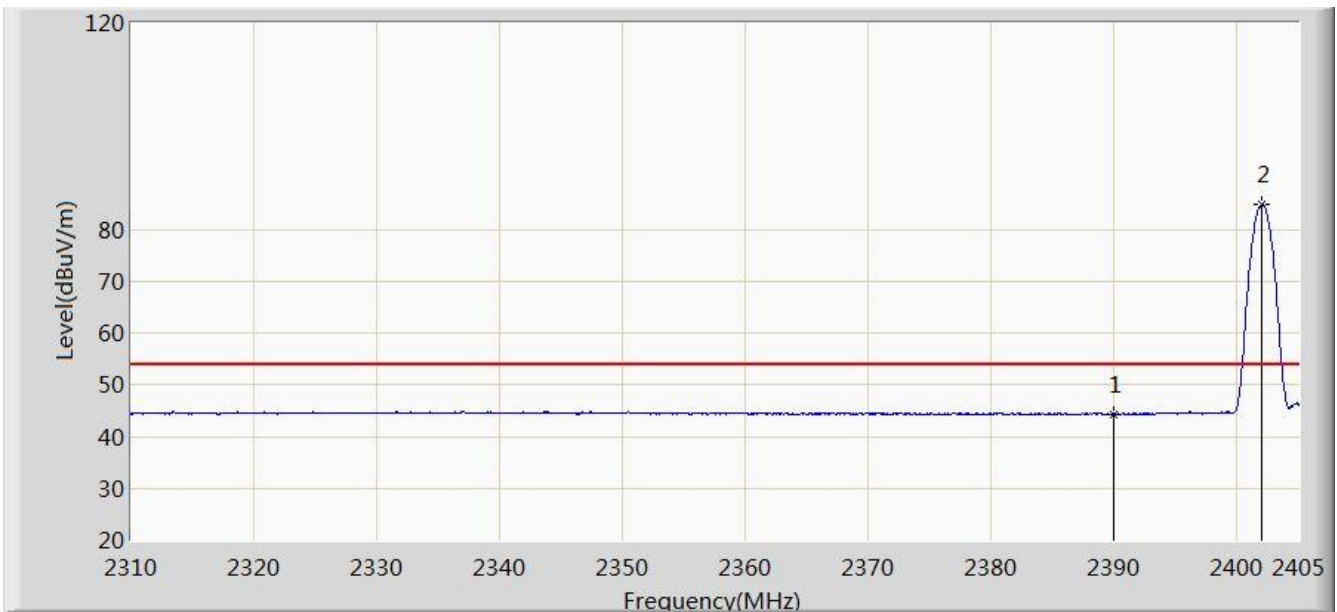


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.321	11.836	-9.679	54.000	32.485	AV
2		*	2401.960	84.769	52.256	N/A	N/A	32.513	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

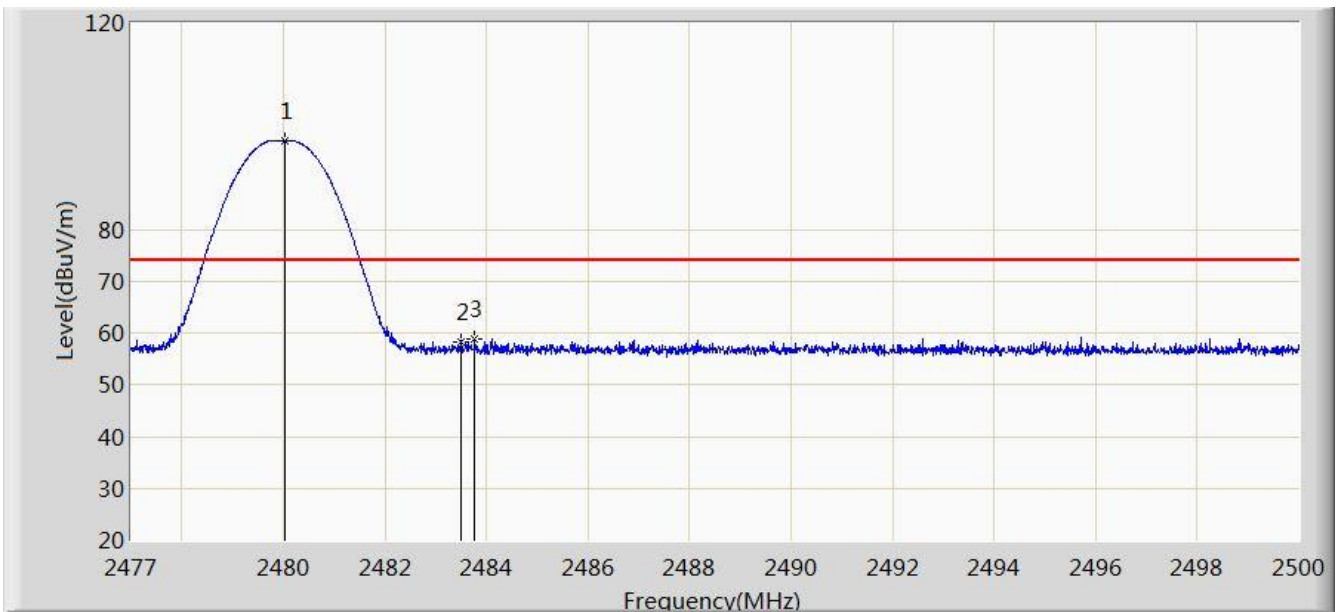


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	97.264	64.881	N/A	N/A	32.383	PK
2			2483.500	58.390	26.015	-15.610	74.000	32.375	PK
3			2483.773	58.818	26.444	-15.182	74.000	32.374	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

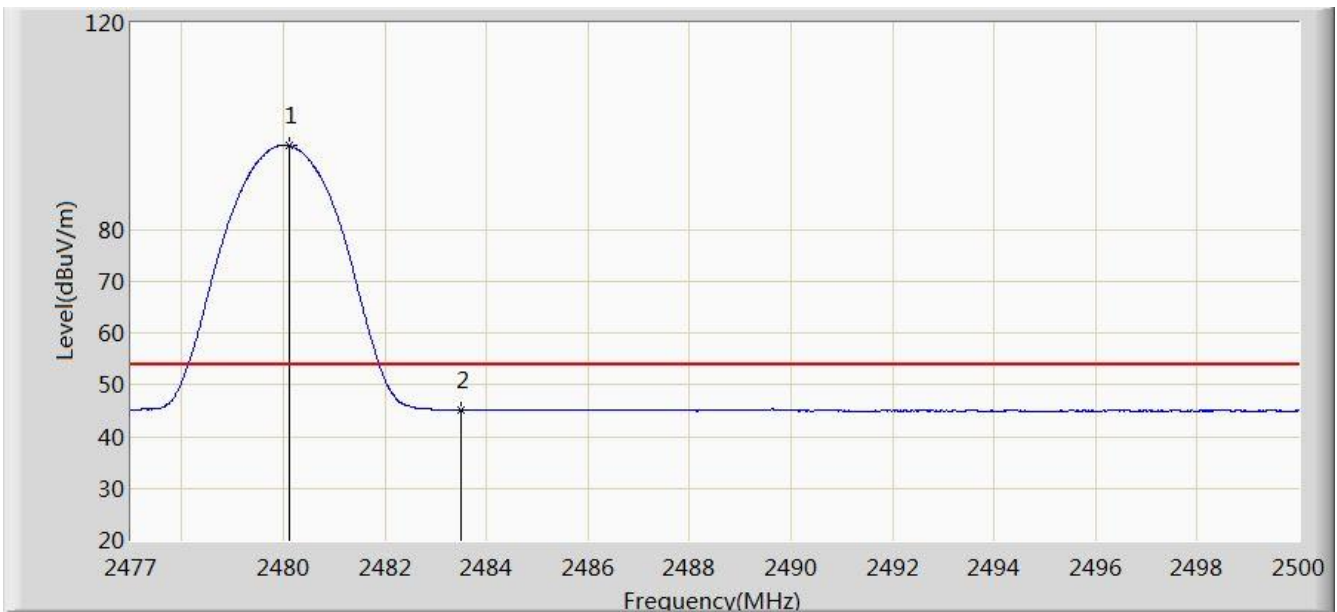


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	96.276	63.894	N/A	N/A	32.382	AV
2			2483.500	45.175	12.800	-8.825	54.000	32.375	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

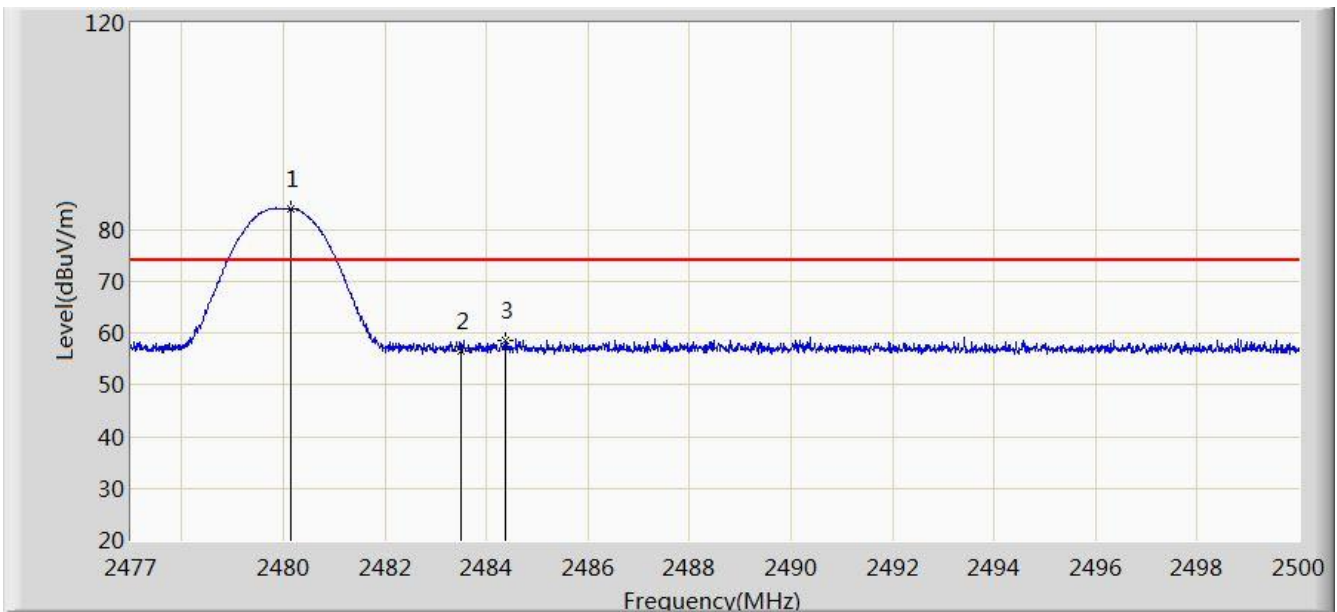


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.151	84.130	51.748	N/A	N/A	32.382	PK
2			2483.500	56.670	24.295	-17.330	74.000	32.375	PK
3			2484.383	58.718	26.345	-15.282	74.000	32.373	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

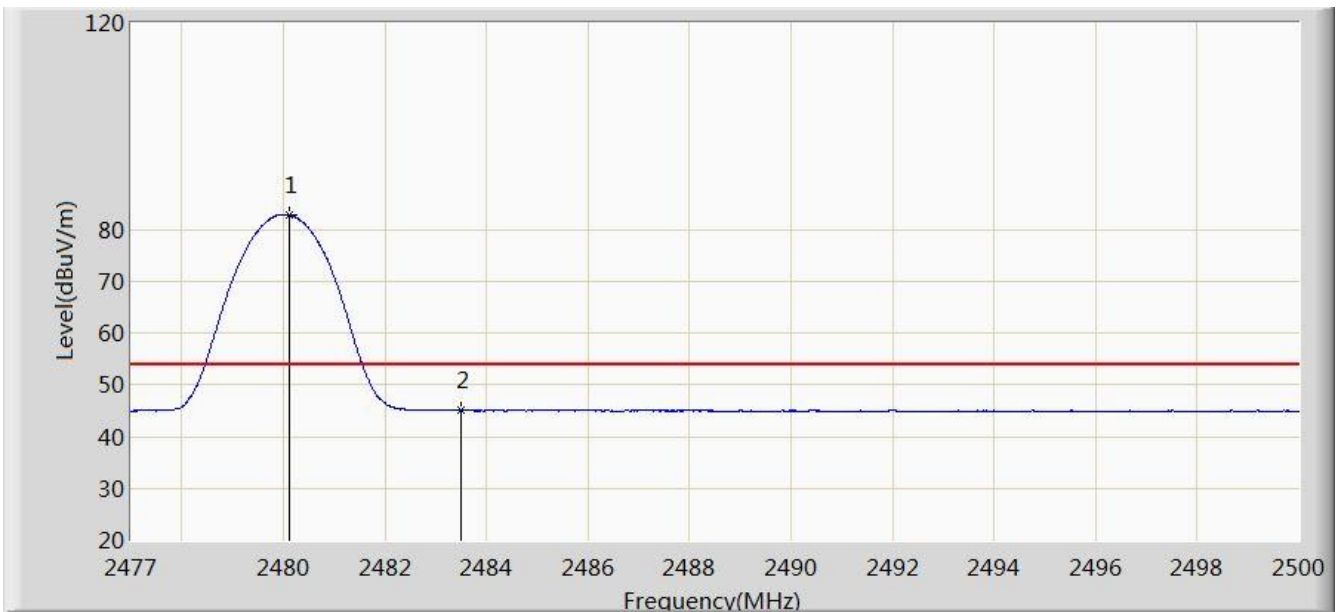


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.105	82.922	50.540	N/A	N/A	32.382	AV
2			2483.500	45.092	12.717	-8.908	54.000	32.375	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

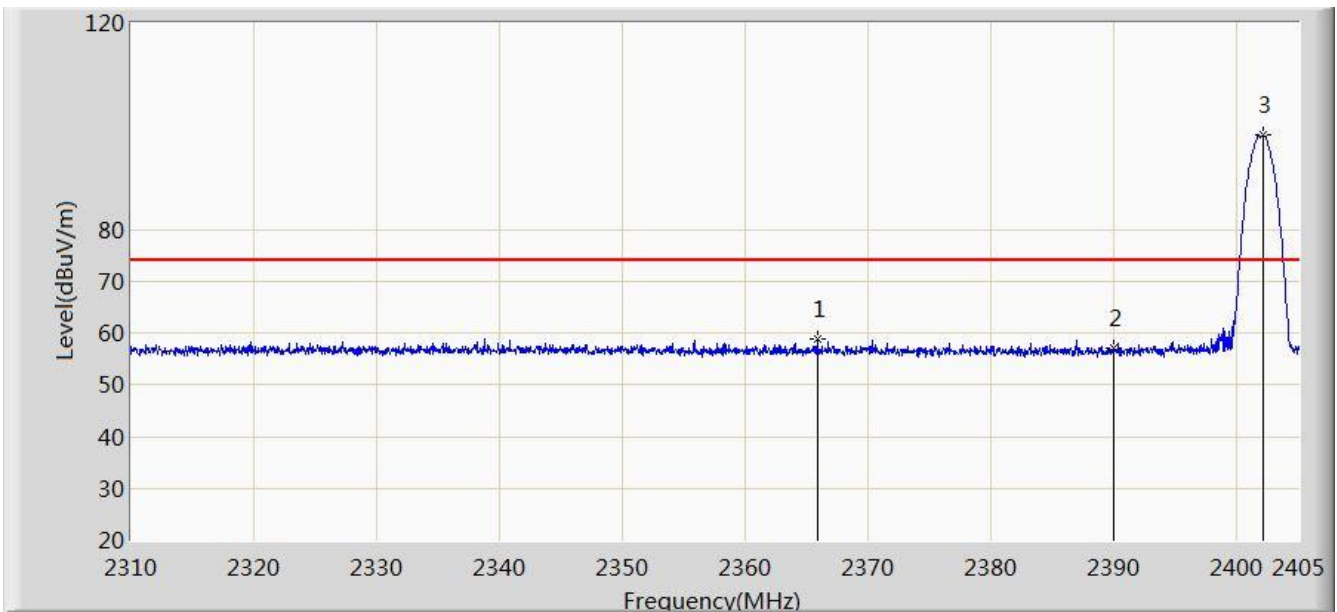


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2365.860	59.028	26.485	-14.972	74.000	32.544	PK
2			2390.000	57.145	24.660	-16.855	74.000	32.485	PK
3		*	2402.150	98.224	65.710	N/A	N/A	32.514	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

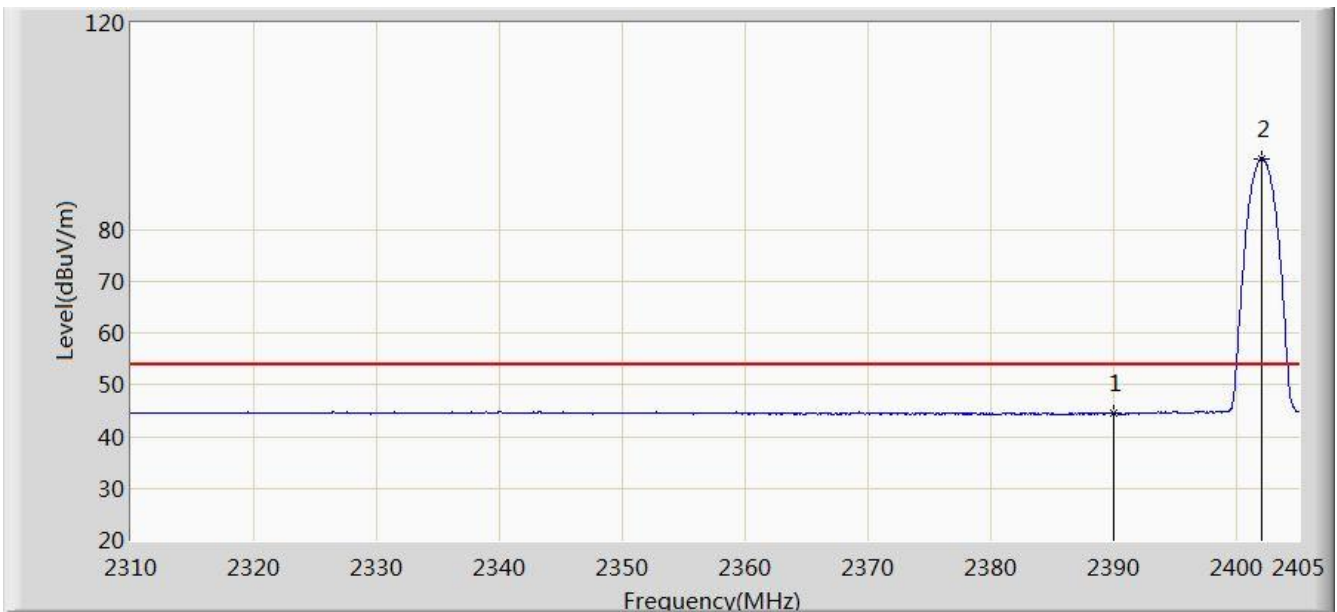


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.590	12.105	-9.410	54.000	32.485	AV
2		*	2402.008	93.816	61.303	N/A	N/A	32.513	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

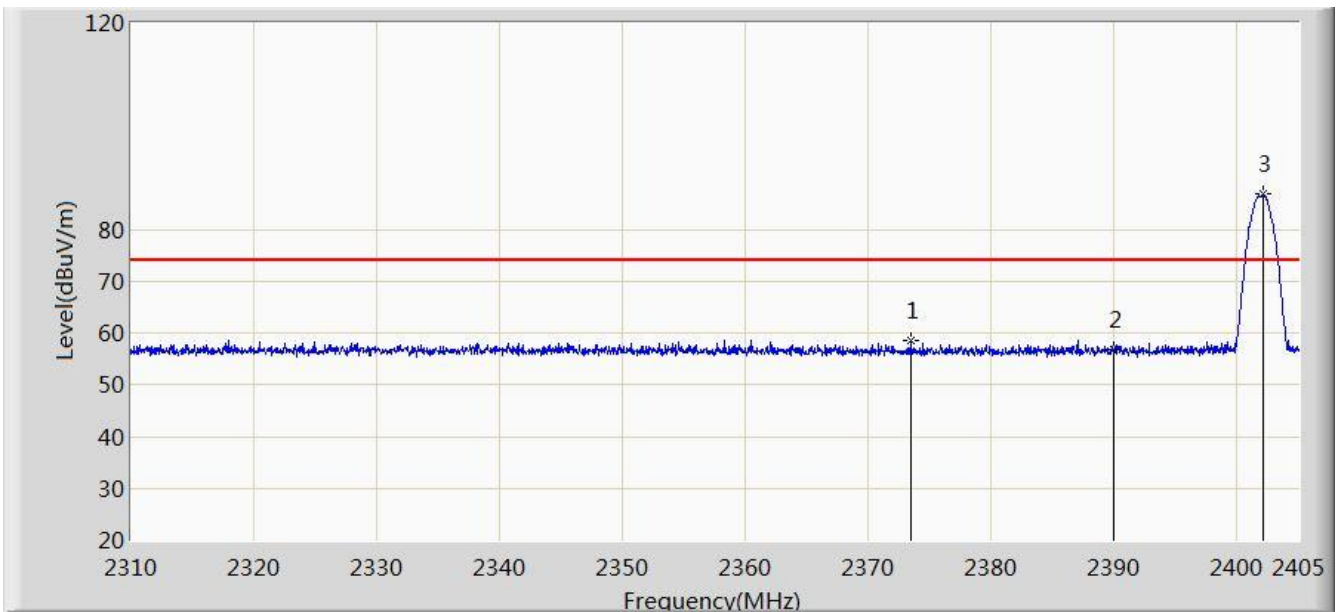


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.413	58.680	26.185	-15.320	74.000	32.495	PK
2			2390.000	56.788	24.303	-17.212	74.000	32.485	PK
3		*	2402.103	86.827	54.313	N/A	N/A	32.514	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

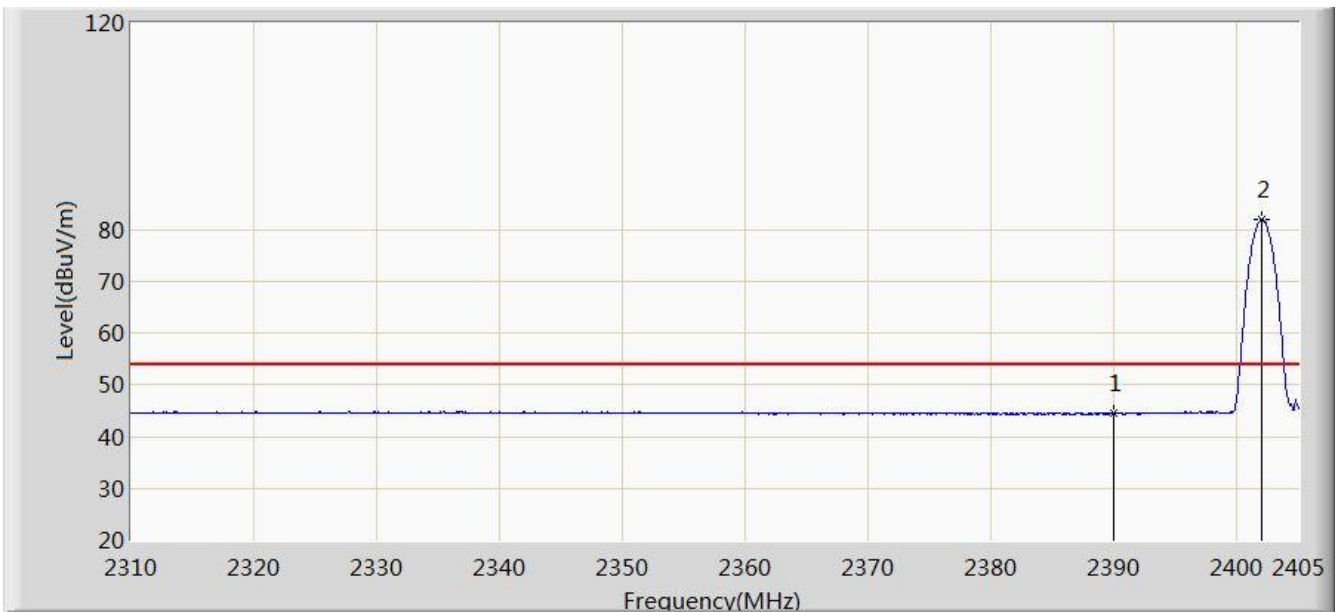


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.437	11.952	-9.563	54.000	32.485	AV
2		*	2402.008	82.028	49.515	N/A	N/A	32.513	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

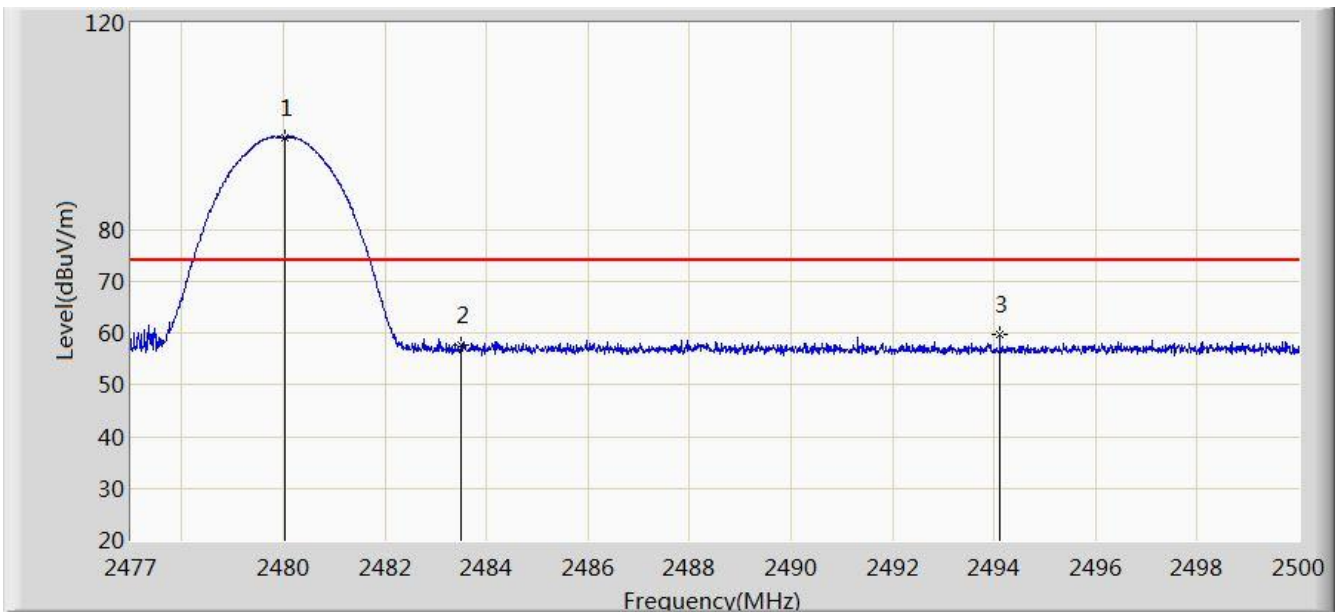


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	97.920	65.537	N/A	N/A	32.383	PK
2			2483.500	57.626	25.251	-16.374	74.000	32.375	PK
3			2494.112	59.856	27.506	-14.144	74.000	32.350	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

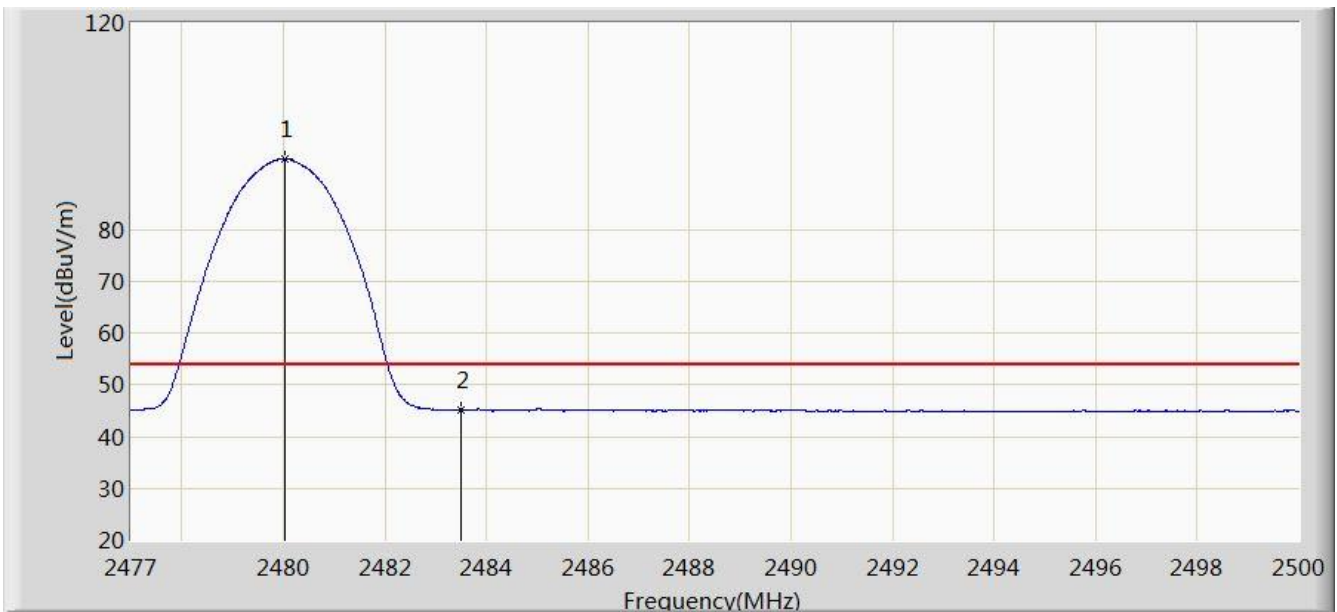


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	93.686	61.303	N/A	N/A	32.383	AV
2			2483.500	45.275	12.900	-8.725	54.000	32.375	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

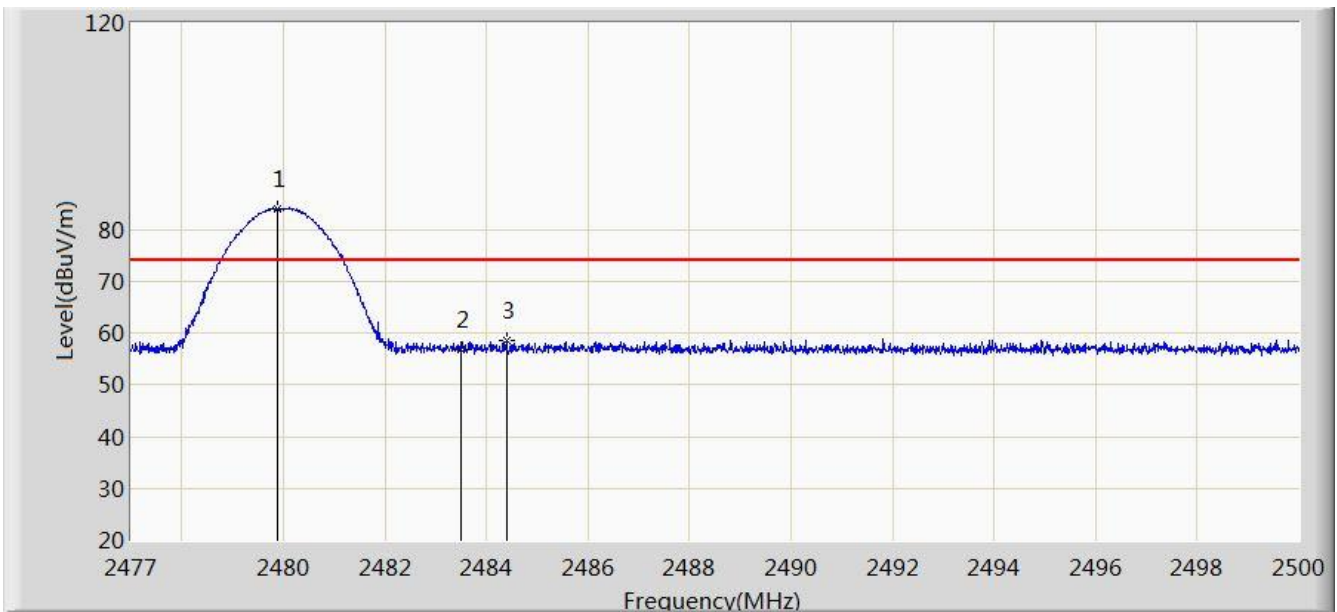


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.898	84.180	51.797	N/A	N/A	32.383	PK
2			2483.500	56.735	24.360	-17.265	74.000	32.375	PK
3			2484.395	58.686	26.313	-15.314	74.000	32.373	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

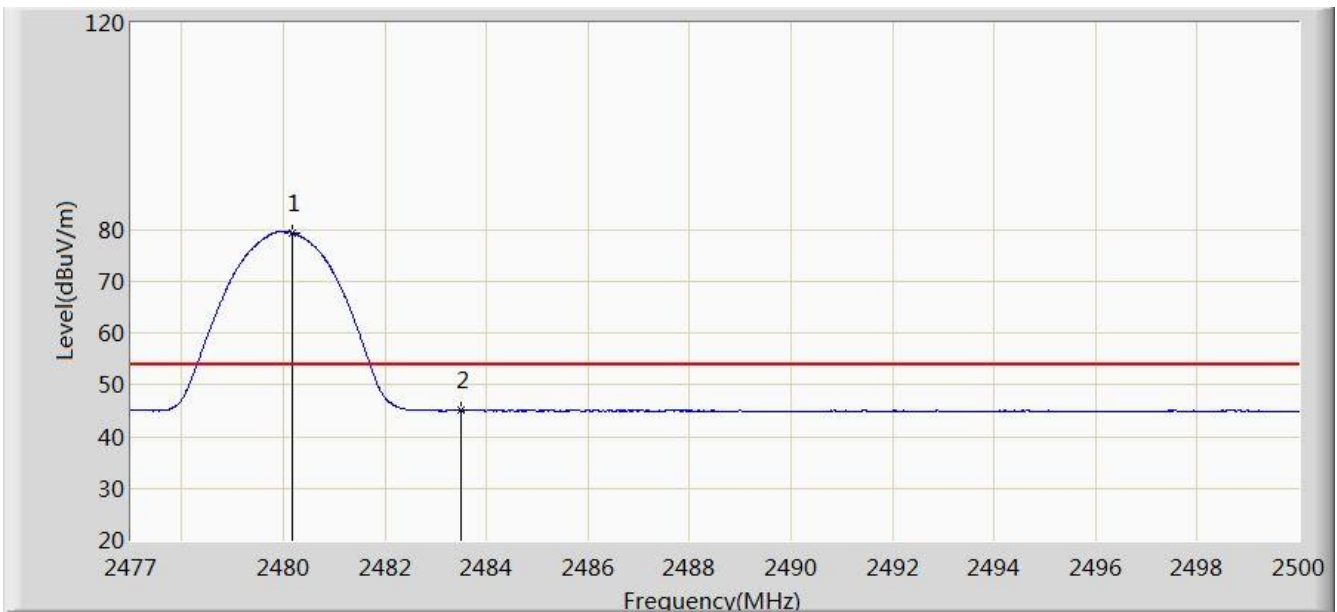


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.174	79.474	47.092	N/A	N/A	32.382	AV
2			2483.500	45.049	12.674	-8.951	54.000	32.375	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

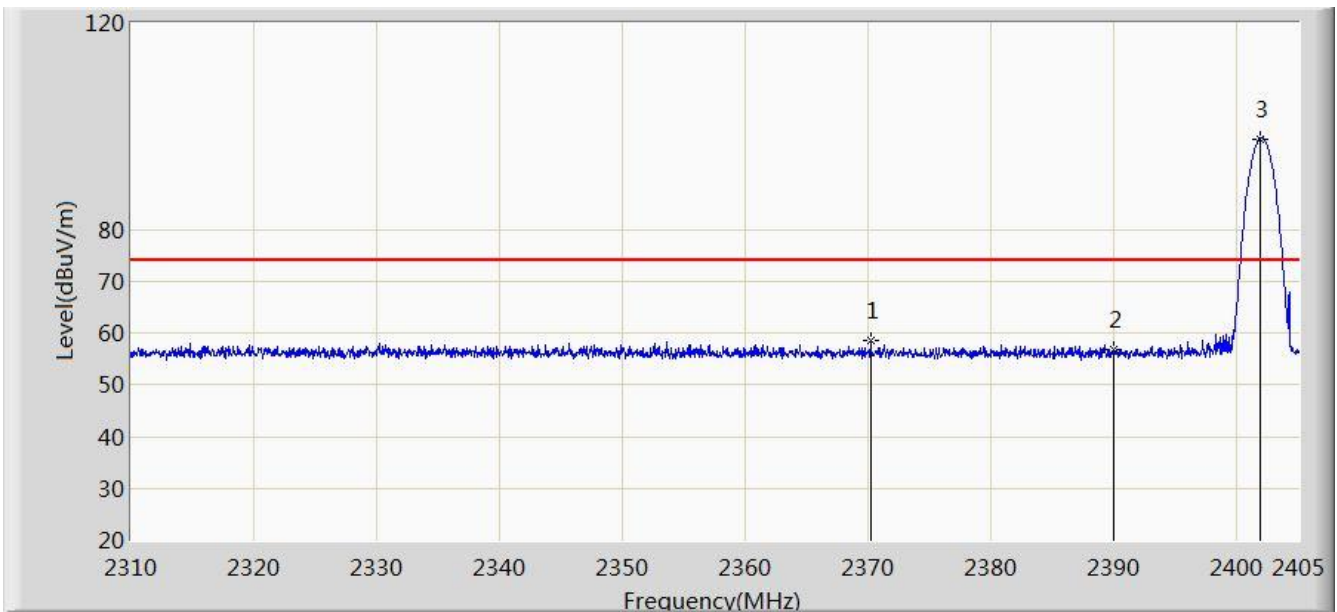


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2370.183	58.624	26.108	-15.376	74.000	32.516	PK
2			2390.000	56.845	24.360	-17.155	74.000	32.485	PK
3		*	2401.817	97.609	65.096	N/A	N/A	32.513	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

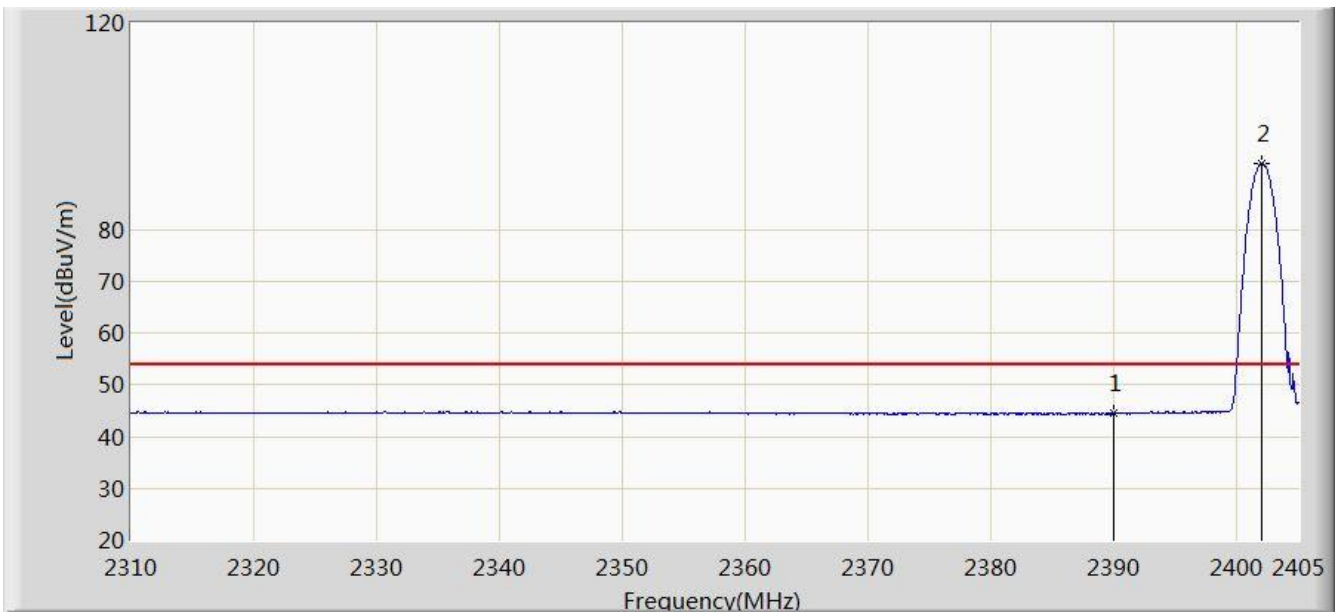


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.443	11.958	-9.557	54.000	32.485	AV
2		*	2402.008	92.841	60.328	N/A	N/A	32.513	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

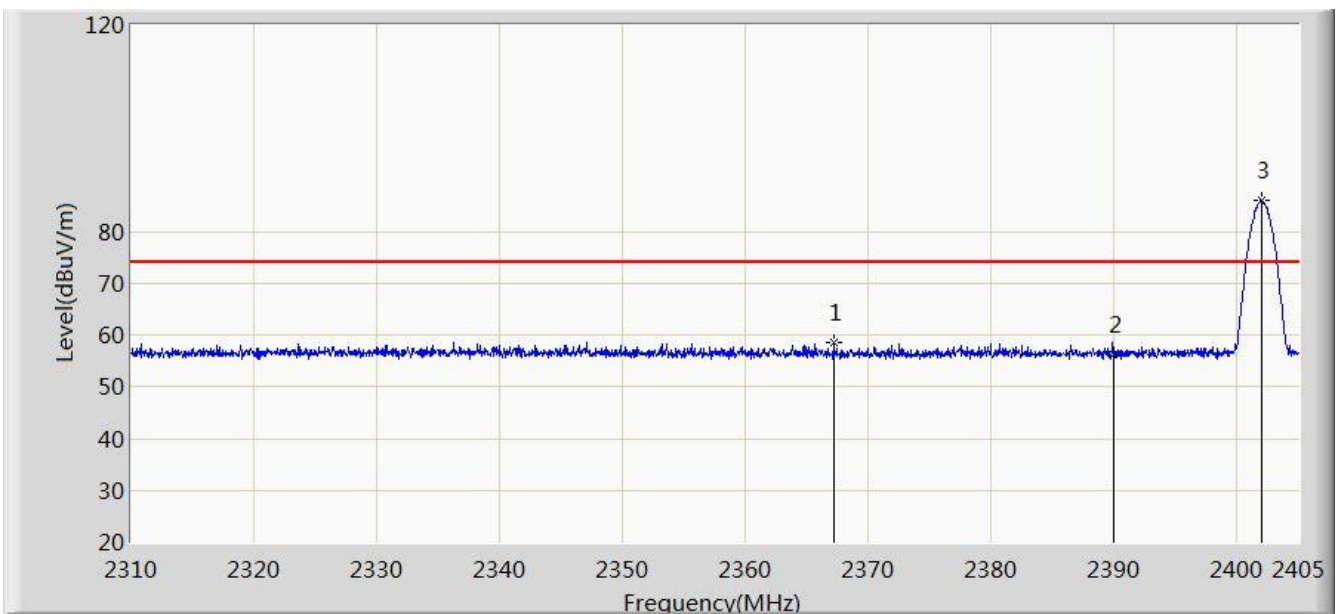


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.143	58.500	25.965	-15.500	74.000	32.535	PK
2			2390.000	56.258	23.773	-17.742	74.000	32.485	PK
3		*	2401.960	86.057	53.544	N/A	N/A	32.513	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

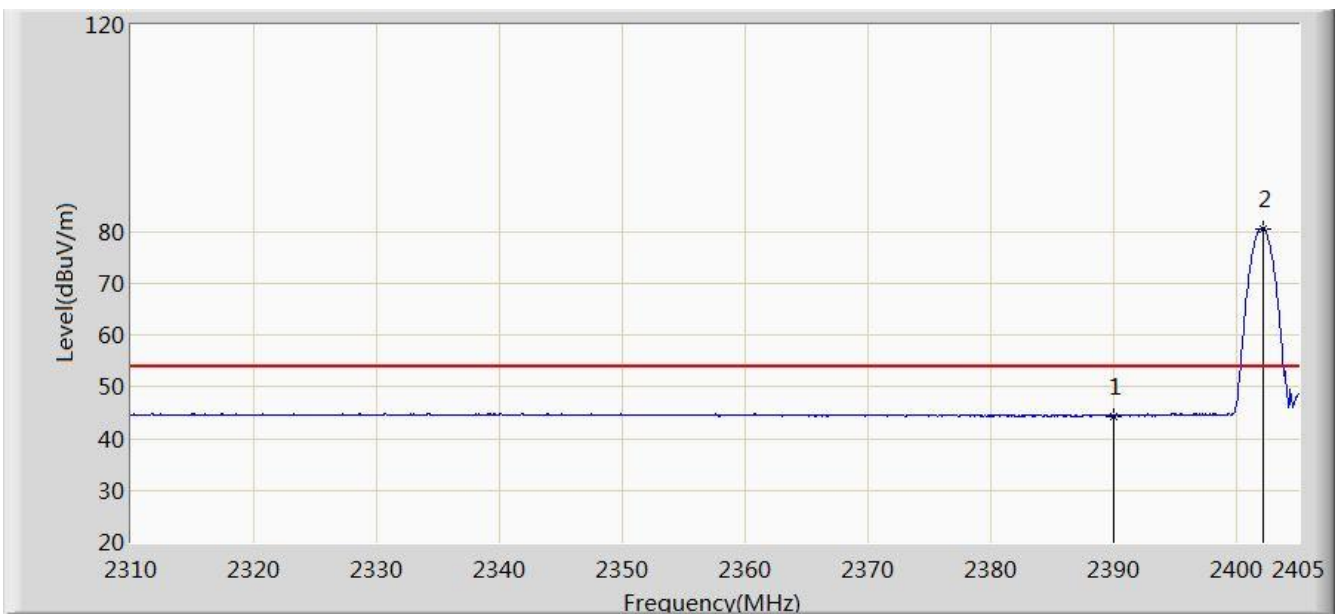


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.357	11.872	-9.643	54.000	32.485	AV
2		*	2402.150	80.554	48.040	N/A	N/A	32.514	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

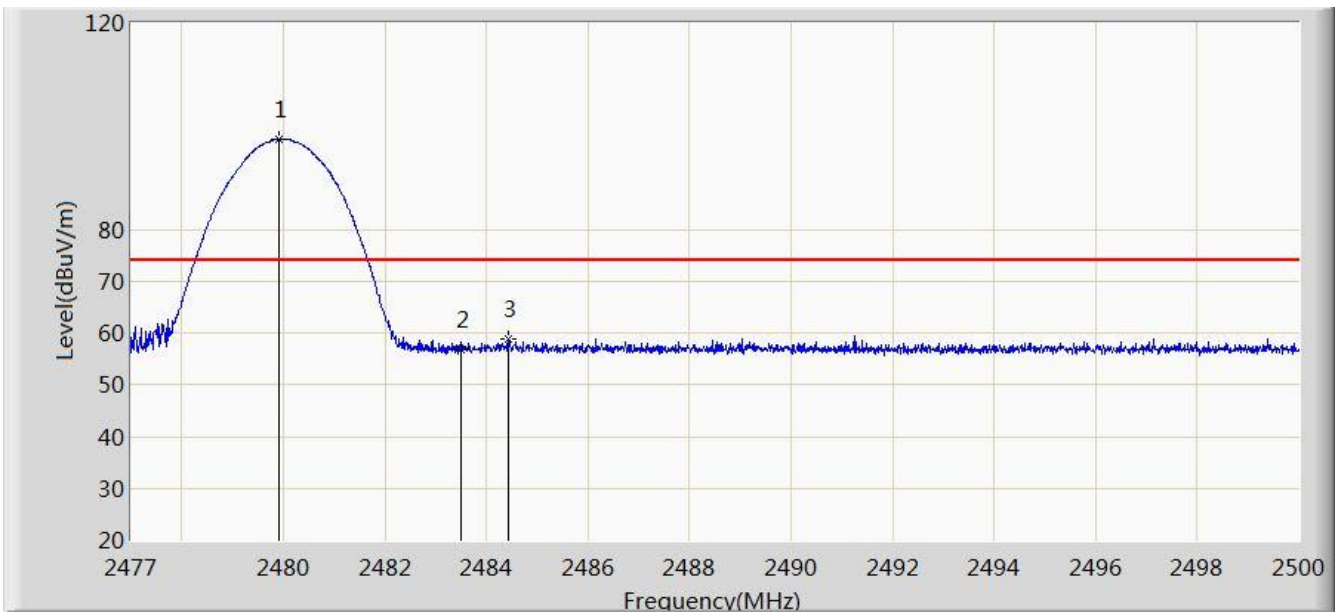


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.921	97.581	65.198	N/A	N/A	32.383	PK
2			2483.500	56.721	24.346	-17.279	74.000	32.375	PK
3			2484.429	58.808	26.435	-15.192	74.000	32.373	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

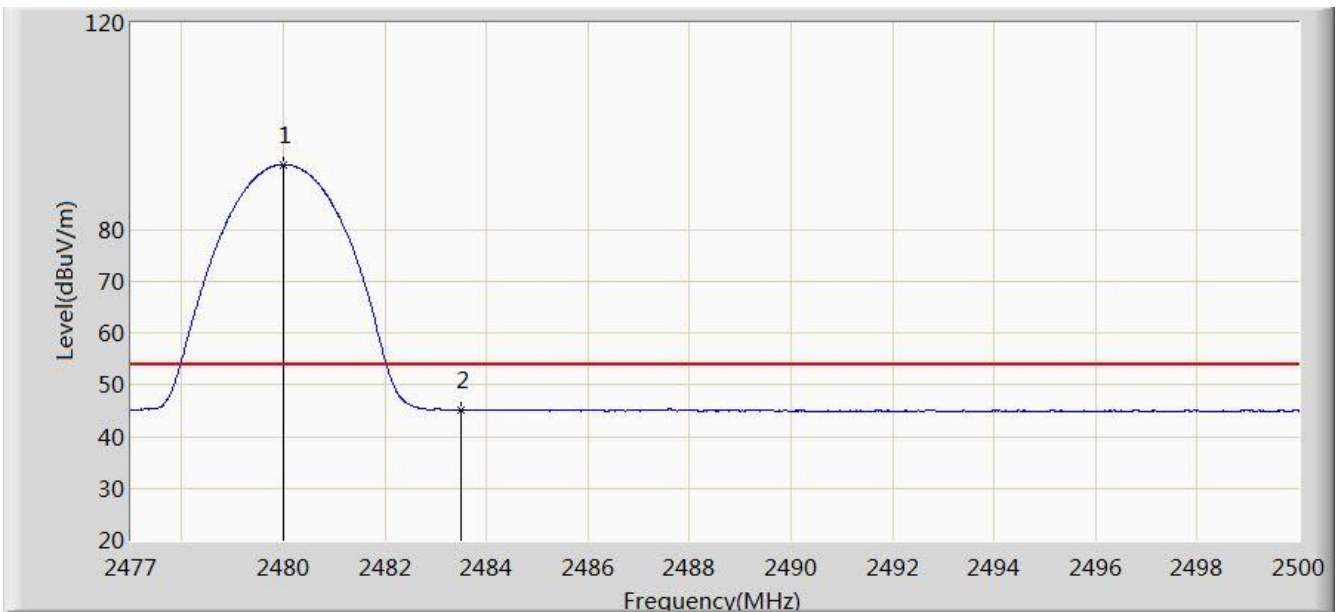


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.990	92.659	60.276	N/A	N/A	32.383	AV
2			2483.500	45.143	12.768	-8.857	54.000	32.375	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

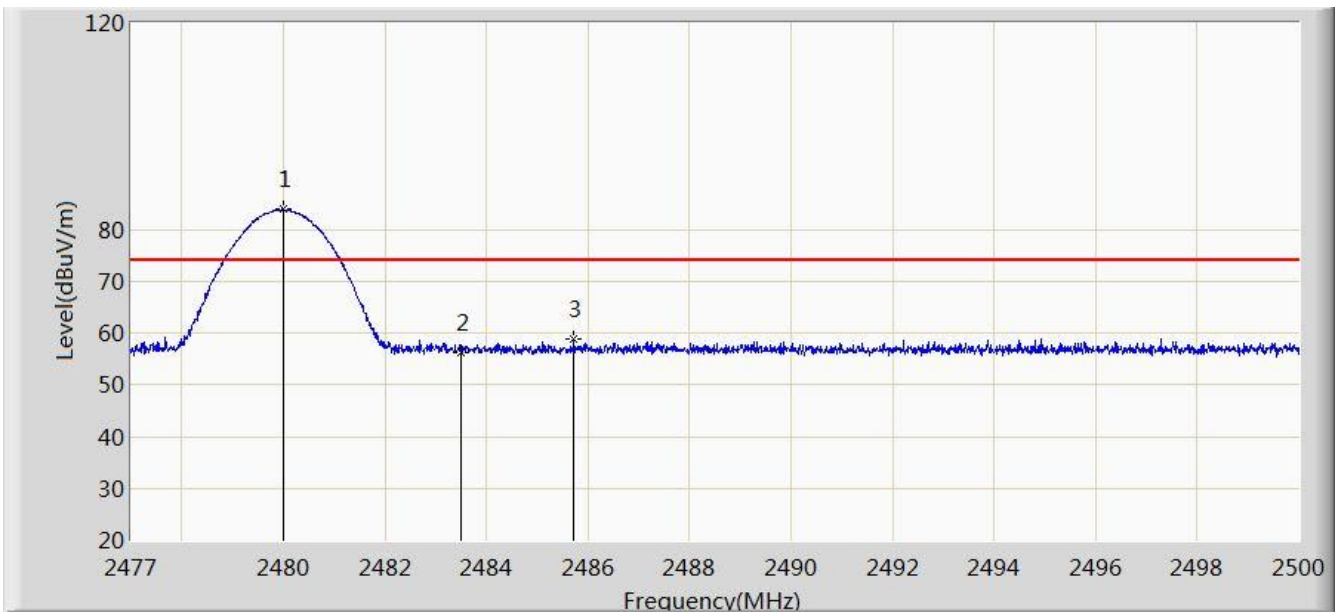


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.990	83.937	51.554	N/A	N/A	32.383	PK
2			2483.500	56.201	23.826	-17.799	74.000	32.375	PK
3			2485.729	58.812	26.442	-15.188	74.000	32.370	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2020/02/03 - 18:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Lewis Huang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

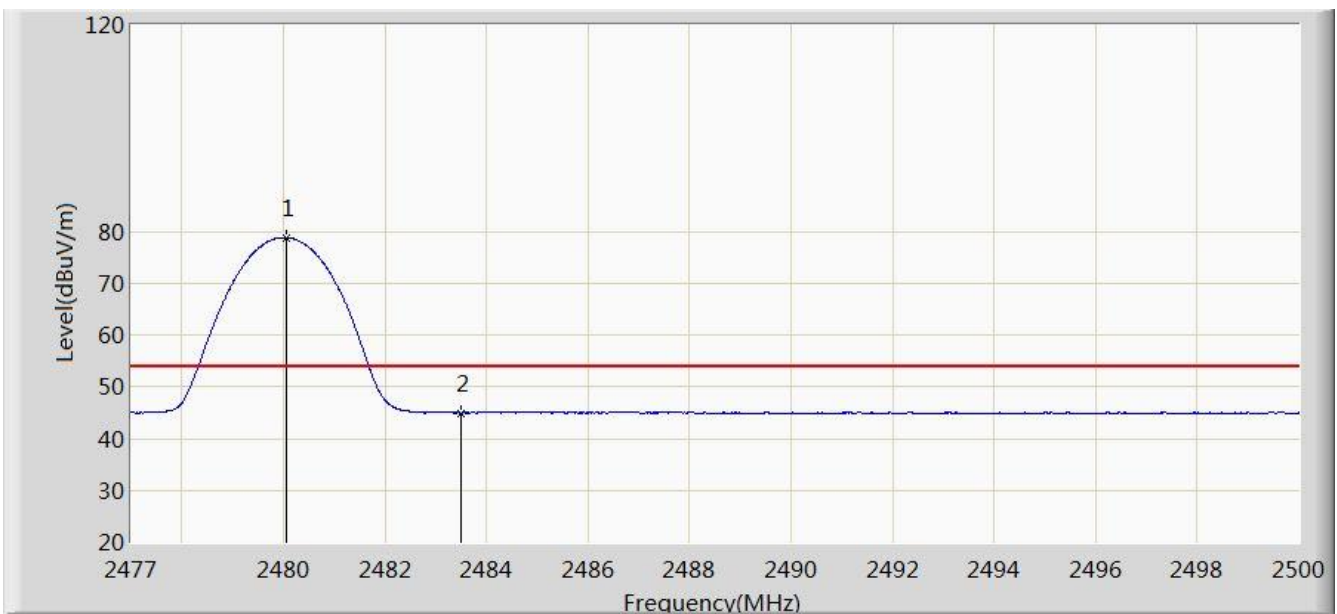

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.059	78.884	46.501	N/A	N/A	32.383	AV
2			2483.500	44.956	12.581	-9.044	54.000	32.375	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

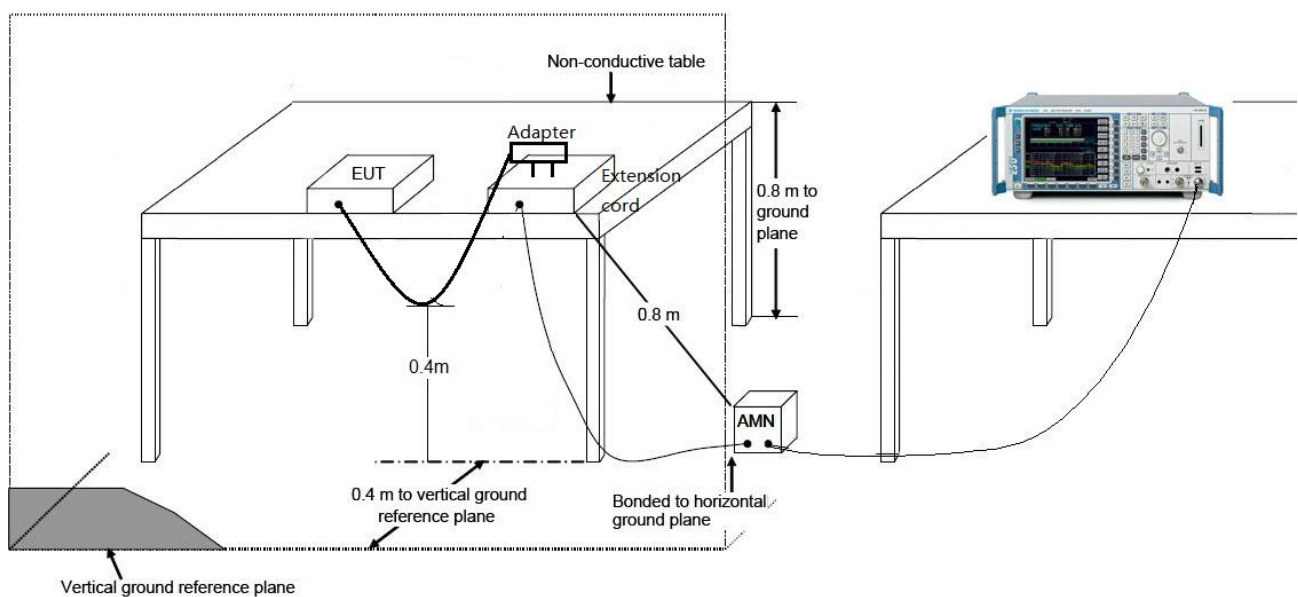

7.11.3.Test Result

Site: SR2	Time: 2020/02/05 - 16:25
Limit: FCC_Part15.207_CE_AC Power	Engineer: Lewis Huang
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Notebook	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

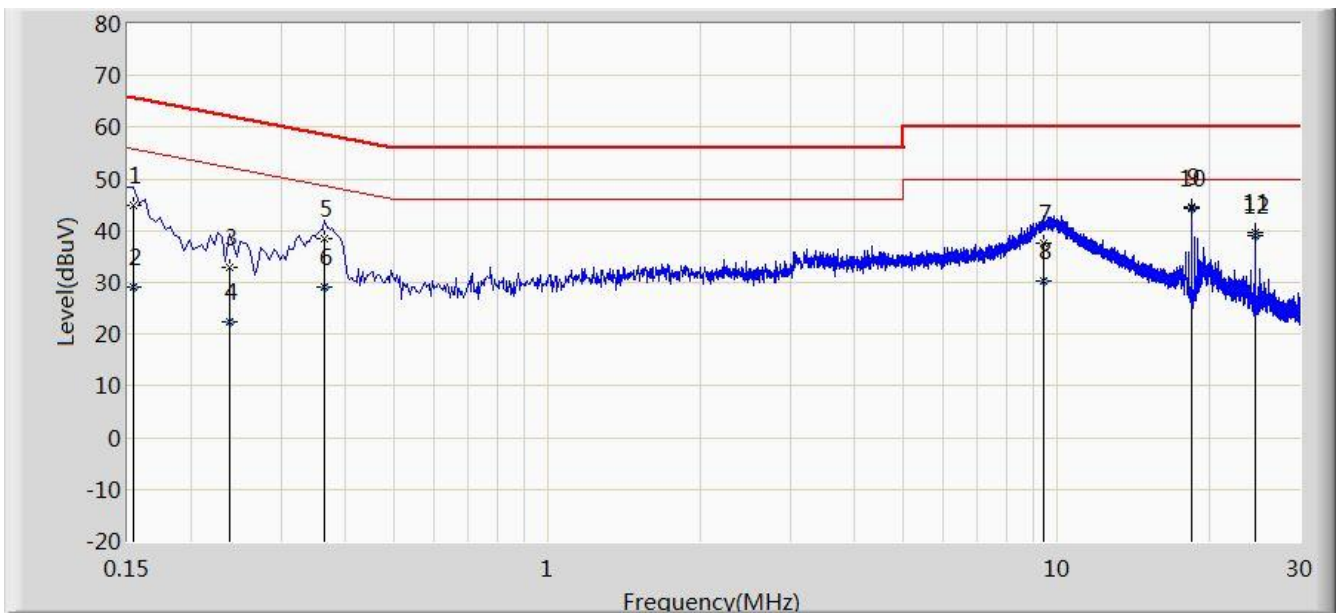


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	44.926	34.186	-20.856	65.781	10.740	QP
2			0.154	29.009	18.269	-26.773	55.781	10.740	AV
3			0.238	32.913	22.959	-29.253	62.166	9.954	QP
4			0.238	22.526	12.572	-29.640	52.166	9.954	AV
5			0.366	38.579	28.521	-20.012	58.591	10.058	QP
6			0.366	29.048	18.990	-19.543	48.591	10.058	AV
7			9.414	37.630	27.482	-22.370	60.000	10.149	QP
8			9.414	30.256	20.108	-19.744	50.000	10.149	AV
9			18.434	44.742	34.642	-15.258	60.000	10.100	QP
10		*	18.434	44.465	34.365	-5.535	50.000	10.100	AV
11			24.574	39.725	29.523	-20.275	60.000	10.202	QP
12			24.574	39.161	28.959	-10.839	50.000	10.202	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2020/02/05 - 16:32
Limit: FCC_Part15.207_CE_AC Power	Engineer: Lewis Huang
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Notebook	Power: AC 120V/60Hz
Worst Case Mode: Transmit at Channel 2402MHz by DH5	

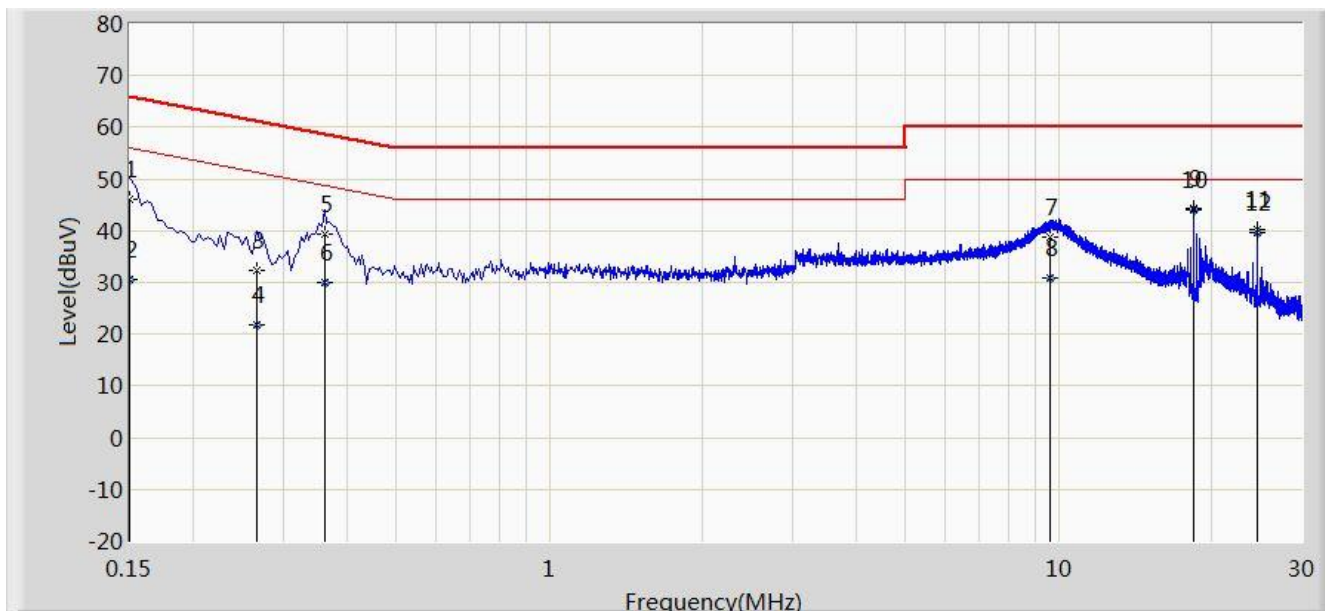

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	46.194	35.052	-19.806	66.000	11.142	QP
2			0.150	30.548	19.406	-25.452	56.000	11.142	AV
3			0.266	32.290	22.277	-28.952	61.242	10.013	QP
4			0.266	21.811	11.798	-29.431	51.242	10.013	AV
5			0.362	39.267	29.183	-19.415	58.682	10.084	QP
6			0.362	30.083	19.999	-18.599	48.682	10.084	AV
7			9.634	38.839	28.658	-21.161	60.000	10.181	QP
8			9.634	30.923	20.742	-19.077	50.000	10.181	AV
9			18.430	44.310	34.173	-15.690	60.000	10.137	QP
10		*	18.430	44.000	33.863	-6.000	50.000	10.137	AV
11			24.578	40.116	29.829	-19.884	60.000	10.287	QP
12			24.578	39.539	29.252	-10.461	50.000	10.287	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A - Test Setup Photograph

Refer to “2002RSU005-UT” file.

Appendix B - EUT Photograph

Refer to "2002RSU005-UE" file.