

EMC TEST REPORT

COMPANY: AGA RANGEMASTER LIMITED

**PRODUCT : TESTING TO CFR47 PART15:249 and
RSS210 ISSUE 8 ON A
TOTAL CONTROL (COOKER)**

REPORT : 11055686LHD-001a

WRITTEN BY: G Aldridge



REVIEWED BY: D Legge



TEST ENGINEER: G Aldridge



ISSUE: 1

DATE: 17th April 2012

TOTAL PAGES: 65

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Intertek



Intertek



Intertek



Intertek



Intertek



Intertek



Intertek



TABLES

Table 1 Conducted Emissions Test Results – Live Line – Transmit Mode	10
Table 2 Conducted Emissions Test Results – Neutral Line – Transmit Mode.....	12
Table 3 Conducted Emissions Test Results – Neutral Line – Standby Mode	14
Table 4 Conducted Emissions Test Results – Live Line – Standby Mode	16
Table 5 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Vertical....	19
Table 6 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Horizontal	21
Table 7 Radiated Spurious Emissions Test Results – TX Mode - 30-1000MHz Vertical Polarisation.....	24
Table 8 Radiated Spurious Emissions Test Results – TX Mode - 30-1000MHz Horizontal Polarisation	26
Table 9 Radiated Spurious Emissions Test Results – Standby Mode 30-1000MHz – Vertical Polarisation	28
Table 10 Radiated Spurious Emissions Test Results – Standby Mode 30- 1000MHz – Horizontal Polarisation.....	30
Table 11 Radiated Spurious Emissions Test Results – TX Mode - 1 - 10GHz Vertical & Horizontal Polarisations	32
Table 12 Radiated Emissions Test Results – Standby Mode 1 - 10GHz Vertical & Horizontal	45

GRAPHS

Graph 1 Conducted Emissions Test Results – Live Line – Transmit Mode	11
Graph 2 Conducted Emissions Test Results – Neutral Line – Transmit Mode	13
Graph 3 Conducted Emissions Test Results – Neutral Line – Standby Mode	14
Graph 4 Conducted Emissions Test Results – Live Line – Standby Mode	17
Graph 5 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Vertical...	20
Graph 6 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Horizontal	22
Graph 7 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Vertical...	25
Graph 8 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Horizontal	27
Graph 9 Radiated Emissions Test Results – Standby Mode - 30-1000MHz - Vertical.....	29
Graph 10 Radiated Emissions Test Results – Standby Mode - 30-1000MHz - Horizontal	31
Graph 11 Radiated Emissions Test Results – TX Mode - 1 - 2GHz Vertical – Peak	33
Graph 12 Radiated Emissions Test Results – TX Mode - 1 - 2GHz Vertical – Average	34
Graph 13 Radiated Emissions Test Results – TX Mode 1 - 2GHz Horizontal – Peak	35
Graph 14 Radiated Emissions Test Results – TX Mode 1 - 2GHz Horizontal – Average	36
Graph 15 Radiated Emissions Test Results – TX Mode 2 - 4GHz Vertical – Peak	37
Graph 16 Radiated Emissions Test Results – TX Mode 2 - 4GHz Vertical – Average	38
Graph 17 Radiated Emissions Test Results – TX Mode 2 - 4GHz Horizontal – Peak	39
Graph 18 Radiated Emissions Test Results Tx Mode 2 - 4GHz Horizontal – Average	40

Graph 19 Radiated Emissions Test Results – TX Mode 4 - 10GHz Vertical – Peak	41
Graph 20 Radiated Emissions Test Results – TX Mode 4 - 10GHz Vertical – Average	42
Graph 21 Radiated Emissions Test Results – TX Mode 4 - 10GHz Horizontal – Peak	43
Graph 22 Radiated Emissions Test Results – TX Mode 4 - 10GHz Horizontal – Average	44
Graph 23 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Vertical – Peak	46
Graph 24 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Vertical – Average	47
Graph 25 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Horizontal – Peak	48
Graph 26 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Horizontal – Average	49
Graph 27 Radiated Emissions Test Results – Standby Mode 2 - 4GHz Vertical – Peak	50
Graph 28 Radiated Emissions Test Results – Standby Mode 2 - 4GHz Vertical – Average	51
Graph 29 Radiated Emissions Test Results – Standby Mode 2 - 4GHz Horizontal – Peak	52
Graph 30 Radiated Emissions Test Results – StandbyX Mode 2 - 4GHz Horizontal – Average	53
Graph 31 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Vertical – Peak	54
Graph 32 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Vertical – Average	55
Graph 33 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Horizontal – Peak	56
Graph 34 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Horizontal – Average	57
Graph 35 - Occupied Bandwidth	58
Graph 36 – 6dB Bandwidth	59

1. JOB DESCRIPTION

Equipment: Total Control Cooker

Equipment Model No.: A2M-AGA-TC3CKR

Equipment Serial No.: None

Phase: Compliance

Customer: AGA Rangemaster Limited
Station Road
Ketley
Telford
TF1 5AQ
United Kingdom

Test Plan Reference: -

Test Standards: CFR 47 Part 15:249, RSS 210 Issue 8

FCC : Ident

A2M-AGA-TC3CKR

IC: Ident

10181A-AGA-TC3KRC

Test Location:

Intertek ETL Semko (Leatherhead)
Unit D
Randalls Way
Leatherhead
Surrey KT22 7SB

Test Work Started: 7th December 2011

Test Work Completed: 23rd January 2012

2. TEST SUMMARY

2.1. AGA Total Control Cooker

2.1.1. CFR 47 Part 15:249 and RSS210 Issue 8

TEST STANDARD	TEST	COMMENT
CFR47:Part15:249.a	Fundamental Radiated Field Strength	Pass
CFR47:Part15:249.a & d	Harmonic Radiated Field Strength	Pass
CFR47:Part15:207	Conducted Emissions	Pass
CFR47:Part15:205	Restricted Band Emissions	Pass
RSS 210: A8.4.4	Transmitter Effective Radiated Power	Pass
RSS 210: A8.5	100kHz out of band emissions	Pass
RSS 210:2.2	Restricted Band Emissions	Pass
RSS – Gen: 4.6.1	Occupied Bandwidth	Pass

2.1.2. CFR 47 Part 15 and RSS 210 Issue 8

TEST STANDARD	TEST	COMMENT
CFR47 15: 209	Radiated Emissions (Note 1)	Pass
CFR47 15: 205	Restricted Bands of Operation	Pass
RSS 210:2.2	Restricted Bands of Operation	Pass
RSS 210.2.5	Radiated Emissions(note1)	Pass

Note 1:This test was carried out in a FCC registered test chamber, which complies with FCC limits for Radiated Emissions over the frequency range 30MHz to 1000MHz. The test chamber is also registered with Industry Canada.

All the above tests have been carried out to meet the requirements of ANSI C63.4:2003 Test procedures.

3. EQUIPMENT UNDER TEST (EUT)

3.1. Description of the EUT

The Equipment Under Test (EUT) was an electric cooker using a remote wireless control. The cooker required 200vac 60Hz power supply and the remote handset was battery powered.

The cooker had two hobs, one oven and vent fan switched on for the radiated field testing(worst case).


For the mains conducted emissions, top oven, bottom left oven and vent fan were switched on(worst case).

3.2. EUT's Modes of Operation

Mode 1: Continuously transmitting for transmit mode.

Mode 2: Powered and on but not transmitting.

3.3. EUT Configuration Diagram



3.4. EUT Support Equipment

Power Supply Unit – EF20SFC/16.0Kw/3:1

3.5. Cables Associated With the EUT

None

4. TESTS

4.1. Transmitter Output Power (Conducted)

There was no external antenna connector and therefore this test was not carried out.

4.2. Radiated Peak Powers: CFR47 Part 15:249a

These tests were carried out in a semi lined Anechoic chamber at a distance of three metres, using a Bi-log antenna and N type and micro wave cables. The radiated peak power test was with the transmitter in continuous transmit mode for both horizontal and vertical polarisations and average and peak detectors.

5. CONDUCTED EMISSIONS – CFR 47 PART15:207

5.1. AC Conducted Emissions Test Method

The testing was performed in accordance with ANSI C63.4:2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.

The test was performed in a screened room using a Line Impedance Stabilising Network (LISN).

5.2. Conducted Emissions Test Results

The final measurements within 6dB below the average and quasi-peak limit lines performed with the average and quasi-peak detectors respectively are given in Table 1. The emissions signature is given in Graph 1.

5.3. Conducted Emissions Conclusions

The EUT complied with the limits of FCC Part 15 Clause 207 Class B.

5.4. Measurement Uncertainty

150kHz to 30MHz $\pm 3.8\text{dB}$

The measurement uncertainties have been determined at a confidence level of not less than 95%.

Table 1 Conducted Emissions Test Results – Live Line – Transmit Mode

Standard: FCC Part 15

Test: Conducted Emissions

Port: AC Power

Units of measurement:

Frequency: MHz Amplitude: dB μ V

Bandwidth: 10kHz

EM11055686

12 Dec 2011 14:3

Conducted Emissions

EUT: AGA Total Control Cooker
 Manuf: AGA Rangemaster Limited
 Op Cond: 200V, 60Hz
 Operator: CWY
 Test Spec: FCC Part 15
 Comment: Mode: Transmit Mode with Top oven, Bottom left oven & Fan Running
 Lines: Live
 Result File: agac4i.dat : AGA, CE, FCC, Live, Tx

Scan Settings		(1 Range)			Receiver Settings					
		Frequencies			IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step		10kHz	PK+AV	20msec	Auto	OFF	60dB	
150kHz	30MHz	5kHz								

Transducer	No.	Start	Stop	Name
1	21	9kHz	30MHz	8157
	22	150kHz	30MHz	LISN7061

Final Measurement: Detectors: X QP / + AV
 Meas Time: 2sec
 Subranges: 50
 Acc Margin: 10 dB

Final Measurement Results

Frequency	QP Level	QP Limit	QP Delta	Phase	PE
MHz	dB μ V	dB μ V	dB	-	-
0.15	36.04	66.00	29.96	L1	fl
0.165	33.96	65.21	31.25	L1	fl
0.185	34.39	64.26	29.87	L1	fl
8.525	28.19	60.00	31.81	L1	fl
17.955	28.25	60.00	31.75	N	fl
20.405	33.22	60.00	26.78	L1	fl

Frequency	AV Level	AV Limit	AV Delta	Phase	PE
MHz	dB μ V	dB μ V	dB	-	-
0.15	26.75	56.00	29.25	N	fl
0.165	28.14	55.21	27.07	N	fl
0.185	28.90	54.26	25.36	L1	fl
8.525	19.67	50.00	30.33	N	fl
17.955	24.83	50.00	25.17	N	fl
20.405	27.31	50.00	22.69	L1	fl

Graph 1 Conducted Emissions Test Results – Live Line – Transmit Mode

EM11055686

12 Dec 2011 14:33

Conducted Emissions

EUT: AGA Total Control Cooker
 Manuf: AGA Rangemaster Limited
 Op Cond: 200V, 60Hz
 Operator: CWY
 Test Spec: FCC Part 15
 Comment: Mode: Transmit Mode with Top oven, Bottom left oven & Fan Running
 Lines: Live
 Result File: agac4i.dat : AGA, CE, FCC, Live, Tx

Scan Settings		(1 Range)				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB	

Transducer	No.	Start	Stop	Name
1	21	9kHz	30MHz	8157
	22	150kHz	30MHz	LISN7061

Final Measurement: Detectors: X QP / + AV
 Meas Time: 2sec
 Subranges: 50
 Acc Margin: 10 dB

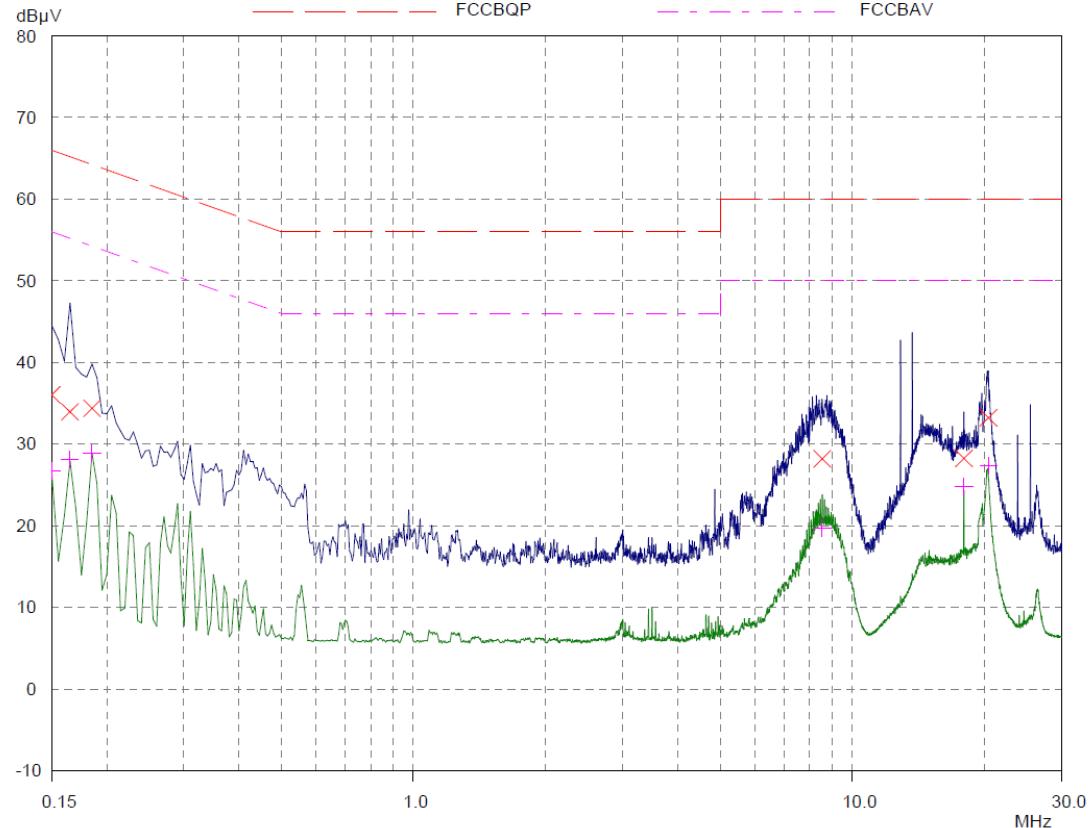


Table 2 Conducted Emissions Test Results – Neutral Line – Transmit Mode

Standard: FCC Part 15

Test: Conducted Emissions

Port: AC Power

Units of measurement:

Frequency: MHz Amplitude: dB μ V

Bandwidth: 10kHz

EM11055686

12 Dec 2011 14:16

Conducted Emissions

EUT: AGA Total Control Cooker
 Manuf: AGA Rangemaster Limited
 Op Cond: 200V, 60Hz
 Operator: CWY
 Test Spec: FCC Part 15
 Comment: Mode: Transmit Mode with Top oven, Bottom left oven & Fan Running
 Lines: Neutral
 Result File: agac3i.dat : AGA, CE, FCC, Neutral, Tx

Scan Settings		(1 Range)				Receiver Settings			
		Frequencies		IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step		10kHz	PK+AV	20msec	Auto	OFF	60dB
150kHz	30MHz	5kHz							
Transducer	No.	Start	Stop		Name				
1	21	9kHz	30MHz		8157				
	22	150kHz	30MHz		LISN7061				
Final Measurement:		Detectors:	X QP / + AV						
		Meas Time:	2sec						
		Subranges:	50						
		Acc Margin:	10 dB						

Final Measurement Results

Frequency MHz	QP Level dB μ V	QP Limit dB μ V	QP Delta dB	Phase	PE
0.15	37.26	66.00	28.74	L1	fl
0.165	35.70	65.21	29.51	L1	fl
0.185	36.13	64.26	28.13	L1	fl
0.44	19.44	57.06	37.62	L1	fl
8.655	28.67	60.00	31.33	N	fl
17.955	28.53	60.00	31.47	L1	fl
20.205	30.30	60.00	29.70	L1	fl

Frequency MHz	AV Level dB μ V	AV Limit dB μ V	AV Delta dB	Phase	PE
0.15	28.09	56.00	27.91	N	fl
0.165	29.97	55.21	25.24	N	fl
0.185	29.84	54.26	24.42	N	fl
0.44	7.12	47.06	39.94	N	fl
8.655	20.44	50.00	29.56	N	fl
17.955	24.98	50.00	25.02	N	fl
20.205	25.50	50.00	24.50	L1	fl

Graph 2 Conducted Emissions Test Results – Neutral Line – Transmit Mode

EM11055686

12 Dec 2011 14:16

Conducted Emissions

EUT: AGA Total Control Cooker
 Manuf: AGA Rangemaster Limited
 Op Cond: 200V, 60Hz
 Operator: CWY
 Test Spec: FCC Part 15
 Comment: Mode: Transmit Mode with Top oven, Bottom left oven & Fan Running
 Lines: Neutral
 Result File: agac3i.dat : AGA, CE, FCC, Neutral, Tx

Scan Settings		(1 Range)				Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge				
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB				
Transducer		No.	Start	Stop	Name							
1		21	9kHz	30MHz	8157							
		22	150kHz	30MHz	LISN7061							
Final Measurement:		Detectors:		X QP / + AV								
		Meas Time:		2sec								
		Subranges:		50								
		Acc Margin:		10 dB								

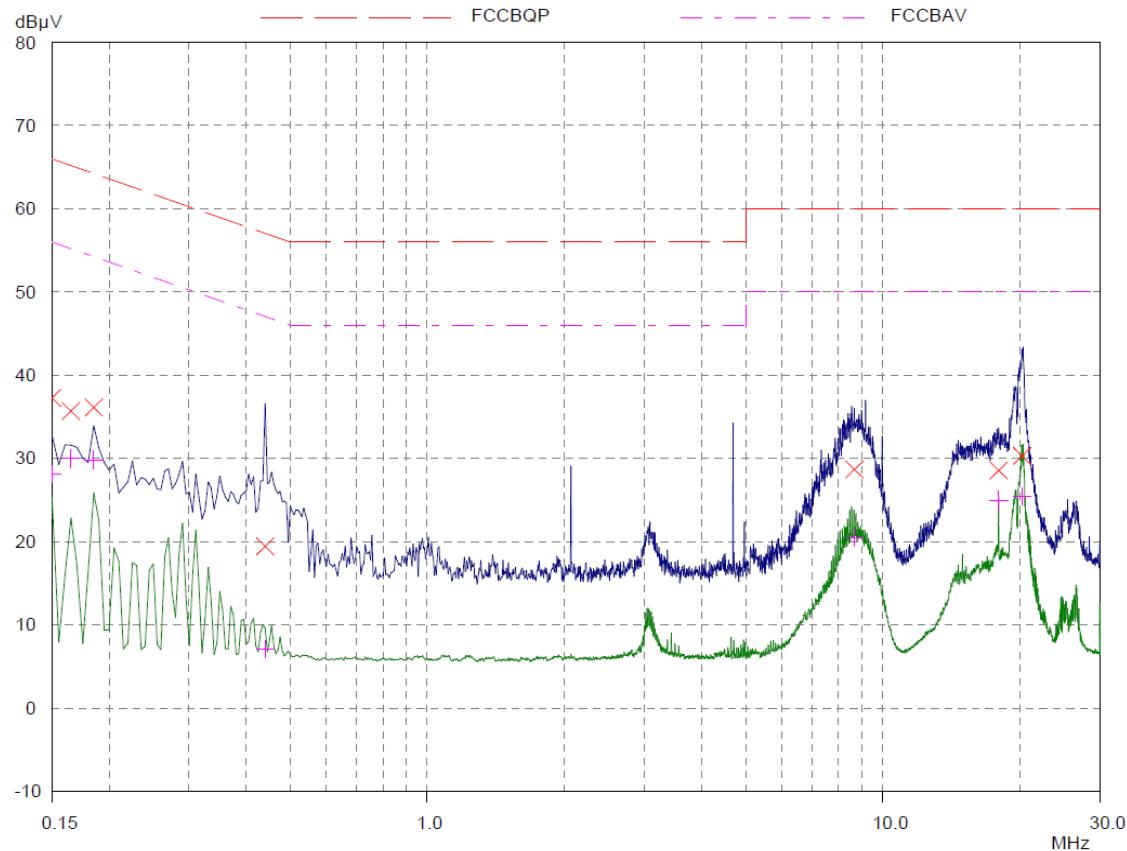


Table 3 Conducted Emissions Test Results – Neutral Line – Standby Mode

Standard: FCC Part 15

Test: Conducted Emissions

Port: AC Power

Units of measurement:

Frequency: MHz Amplitude: dB μ V

Bandwidth: 10kHz

EM11055686

12 Dec 2011 13:41

Conducted Emissions

EUT: AGA Total Control Cooker
 Manuf: AGA Rangemaster Limited
 Op Cond: 200V, 60Hz
 Operator: CWY
 Test Spec: FCC Part 15
 Comment: Mode: Standby Mode
 Lines: Neutral
 Result File: agac2i.dat : AGA, CE, FCC, Neutral

Scan Settings		(1 Range)				Receiver Settings				
		Frequencies		IF BW	Detector	M-Time	Atten	Preamp	OpRge	
Start	Stop	Step		10kHz	PK+AV	20msec	Auto	OFF	60dB	
150kHz	30MHz	5kHz								

Transducer	No.	Start	Stop	Name
1	21	9kHz	30MHz	8157
	22	150kHz	30MHz	LISN7061

Final Measurement:	Detectors:	X QP / + AV
	Meas Time:	2sec
	Subranges:	50
	Acc Margin:	10 dB

Final Measurement Results

Frequency MHz	QP Level dB μ V	QP Limit dB μ V	QP Delta dB	Phase	PE
0.15	45.40	66.00	20.60	N	fl
0.165	42.84	65.21	22.37	N	fl
0.185	43.69	64.26	20.57	N	fl
4.395	13.99	56.00	42.01	L1	fl
8.76	28.64	60.00	31.36	N	fl
20.245	40.56	60.00	19.44	N	fl

Frequency MHz	AV Level dB μ V	AV Limit dB μ V	AV Delta dB	Phase	PE
0.15	35.21	56.00	20.79	L1	fl
0.165	38.06	55.21	17.15	L1	fl
0.185	37.68	54.26	16.58	N	fl
4.395	7.07	46.00	38.93	N	fl
8.76	20.60	50.00	29.40	N	fl
20.245	32.41	50.00	17.59	N	fl

Graph 3 Conducted Emissions Test Results – Neutral Line – Standby Mode

EM11055686

12 Dec 2011 13:40

Conducted Emissions

EUT: AGA Total Control Cooker
Manuf: AGA Rangemaster Limited
Op Cond: 200V, 60Hz
Operator: CWY
Test Spec: FCC Part 15
Comment: Mode: Standby Mode
Lines: Neutral
Result File: agac2i.dat : AGA, CE, FCC, Neutral

Scan Settings (1 Range)

Scan Settings		Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB	
Transducer	No.	Start	Stop	Name					
1	21	9kHz	30MHz	8157					
	22	150kHz	30MHz	LISN7061					

Final Measurement: Detectors: X QP / + AV
Meas Time: 2sec
Subranges: 50
Acc Margin: 10 dB

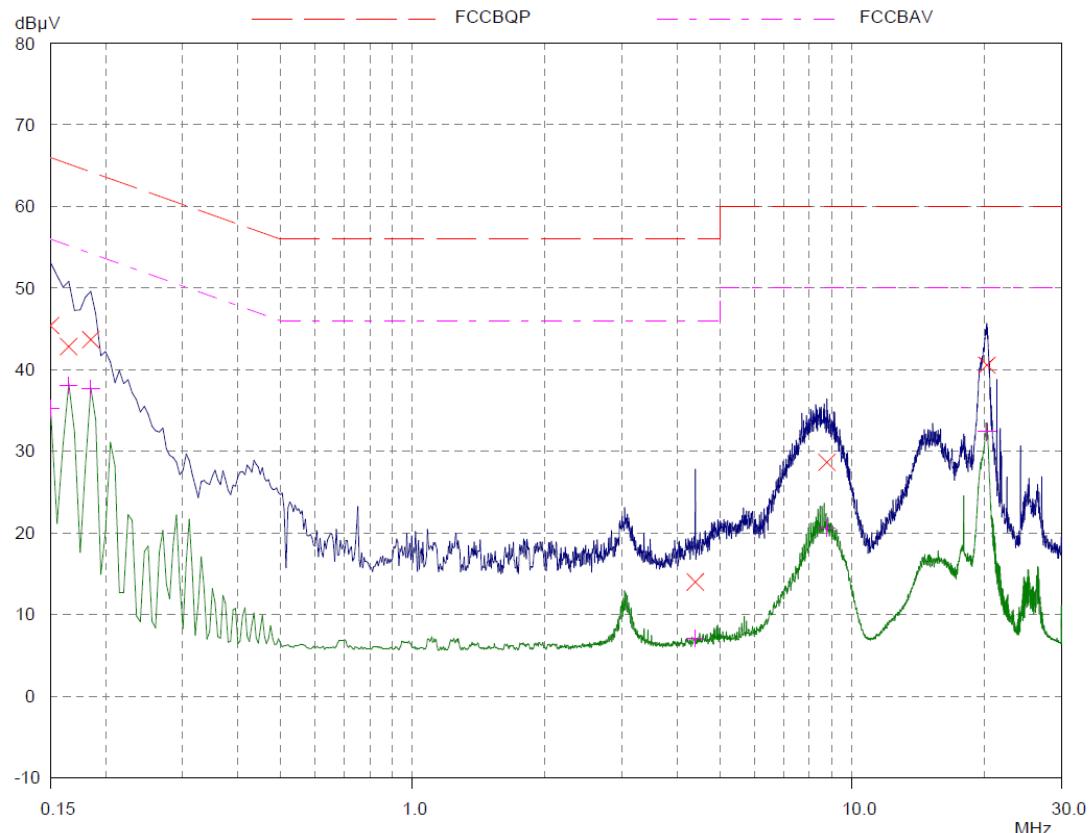


Table 4 Conducted Emissions Test Results – Live Line – Standby Mode

Standard: FCC Part 15

Test: Conducted Emissions

Port: AC Power

Units of measurement:

Frequency: MHz Amplitude: dB μ V

Bandwidth: 10kHz

EM11055686

12 Dec 2011 13:25

Conducted Emissions

EUT: AGA Total Control Cooker
 Manuf: AGA Rangemaster Limited
 Op Cond: 200V, 60Hz
 Operator: CWY
 Test Spec: FCC Part 15
 Comment: Mode: Standby Mode
 Lines: Live
 Result File: agac1i.dat : AGA, CE, FCC, Live

Scan Settings		(1 Range)			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB	
Transducer	No.	Start	Stop	Name					
1	21	9kHz	30MHz	8157					
	22	150kHz	30MHz	LISN7061					
Final Measurement:		Detectors:	X QP / + AV						
		Meas Time:	2sec						
		Subranges:	50						
		Acc Margin:	10 dB						

Final Measurement Results

Frequency MHz	QP Level dB μ V	QP Limit dB μ V	QP Delta dB	Phase	PE
0.15	44.84	66.00	21.16	N	fl
0.165	41.70	65.21	23.51	N	fl
0.185	42.83	64.26	21.43	N	fl
0.2	32.70	63.61	30.91	L1	fl
2.9	11.68	56.00	44.32	L1	fl
20.01	38.96	60.00	21.04	N	fl
20.195	40.68	60.00	19.32	N	fl
25.76	17.14	60.00	42.86	L1	fl
Frequency MHz	AV Level dB μ V	AV Limit dB μ V	AV Delta dB	Phase	PE
0.15	33.89	56.00	22.11	L1	fl
0.165	36.50	55.21	18.71	N	fl
0.185	36.76	54.26	17.50	N	fl
0.2	19.26	53.61	34.35	N	fl
2.9	7.43	46.00	38.57	N	fl
20.195	32.45	50.00	17.55	N	fl
25.76	10.52	50.00	39.48	N	fl

Graph 4 Conducted Emissions Test Results – Live Line – Standby Mode


EM11055686

12 Dec 2011 13:25

Conducted Emissions

EUT: AGA Total Control Cooker
 Manuf: AGA Rangemaster Limited
 Op Cond: 200V, 60Hz
 Operator: CWY
 Test Spec: FCC Part 15
 Comment: Mode: Standby Mode
 Lines: Live
 Result File: agac1i.dat : AGA, CE, FCC, Live

Scan Settings		(1 Range)				Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge				
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB				
Transducer		No.	Start	Stop	Name							
1		21	9kHz	30MHz	8157							
		22	150kHz	30MHz	LISN7061							
Final Measurement:		Detectors:	X QP / + AV									
		Meas Time:	2sec									
		Subranges:	50									
		Acc Margin:	10 dB									

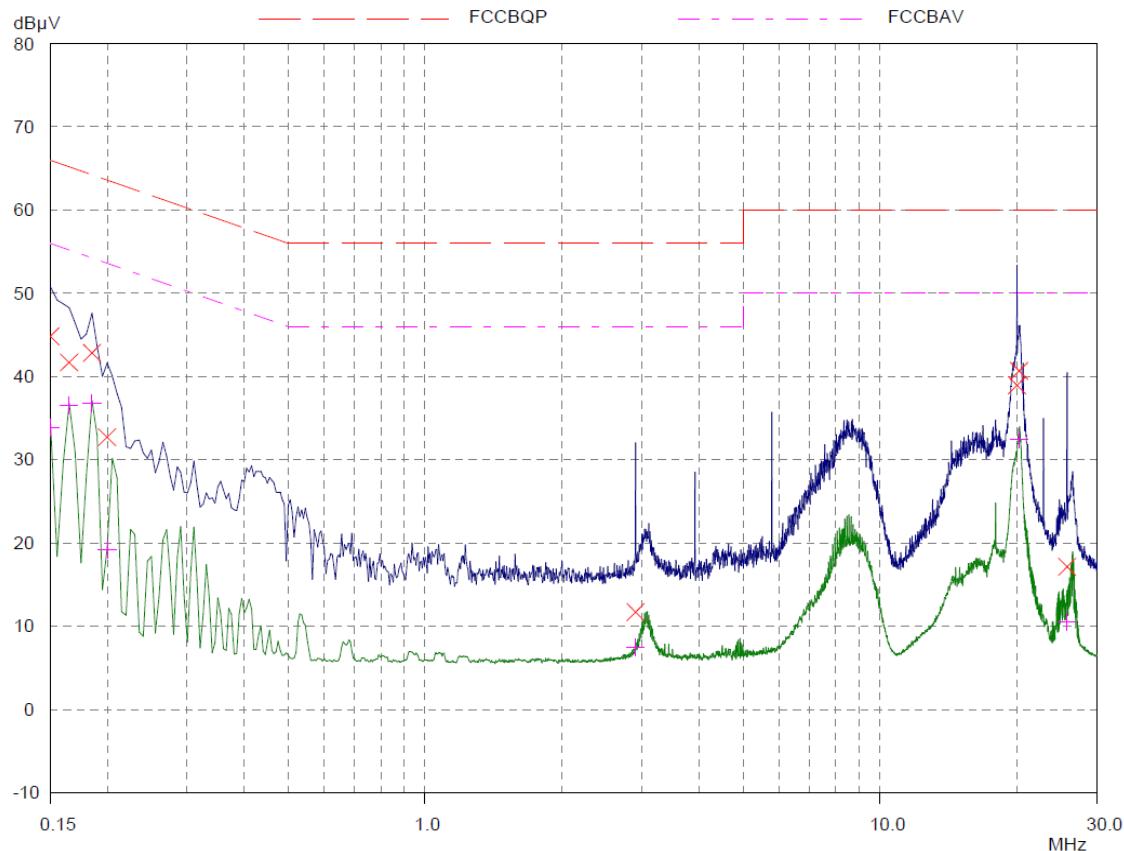

6. RADIATED EMISSIONS – CFR 47 PART15:249A

6.1. Transmitter Output Power (Conducted)

There was no external antenna connector. This test not carried out.

6.2. Radiated Peak Powers: CFR47 Part 15:249a

The testing was performed in accordance with ANSI C63.4:2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.

Testing was conducted in a semi-lined anechoic chamber which meets the NSA requirements of CISPR 16 and CISPR 22. An emissions signature was obtained with the measuring antenna placed 3m from the EUT using a bi-log antenna and N type cables. All transducer factors were incorporated into the final result.

The radiated peak power test was carried out with the transmitter in continuous transmit mode for both horizontal and vertical polarisations using quasi peak detectors and peak detectors. The following tables 5 - 6 and graphs 5 – 6 show the results.

Table 5 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Vertical

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure


Units of measurement:

Frequency: MHz Amplitude: dB μ V/m

Bandwidth: 120kHz

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	FCC15B3M				
Trace2:	---				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA	LIMIT dB	
1 Quasi Peak	30.04375 MHz	34.67	-5.32		
1 Quasi Peak	30.80625 MHz	34.07	-5.92		
1 Quasi Peak	479.74 MHz	34.65	-11.36		
1 Quasi Peak	516.48 MHz	35.59	-10.42		
1 Quasi Peak	785.355 MHz	39.27	-6.74		
1 Quasi Peak	914.62 MHz	68.72	-25.27		
1 Quasi Peak	914.64 MHz	68.16	-25.83		

Graph 5 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Vertical

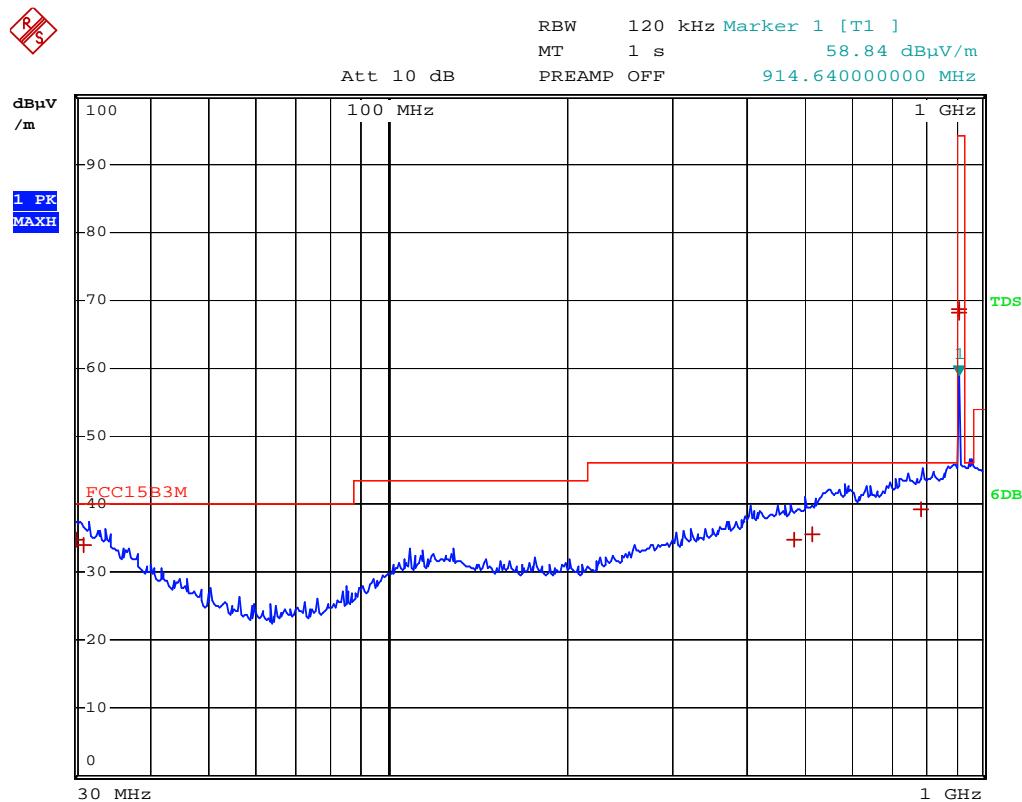

50C

Date: 7.DEC.2011 10:24:21

Table 6 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Horizontal

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure


Units of measurement:

Frequency: MHz Amplitude: dB μ V/m

Bandwidth: 120kHz

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	FCC15B3M				
Trace2:	---				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA	LIMIT	dB
1 Quasi Peak	30.1875 MHz	34.54	-5.45		
1 Quasi Peak	31.69375 MHz	33.31	-6.68		
1 Quasi Peak	162.335 MHz	30.04	-13.45		
1 Quasi Peak	503.94 MHz	35.17	-10.84		
1 Quasi Peak	796.44 MHz	39.41	-6.60		
1 Quasi Peak	825.34 MHz	39.28	-6.73		
1 Quasi Peak	866.24 MHz	40.04	-5.97		
1 Quasi Peak	914.62 MHz	71.82	-22.17		
1 Quasi Peak	914.64 MHz	71.22	-22.77		

Graph 6 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Horizontal

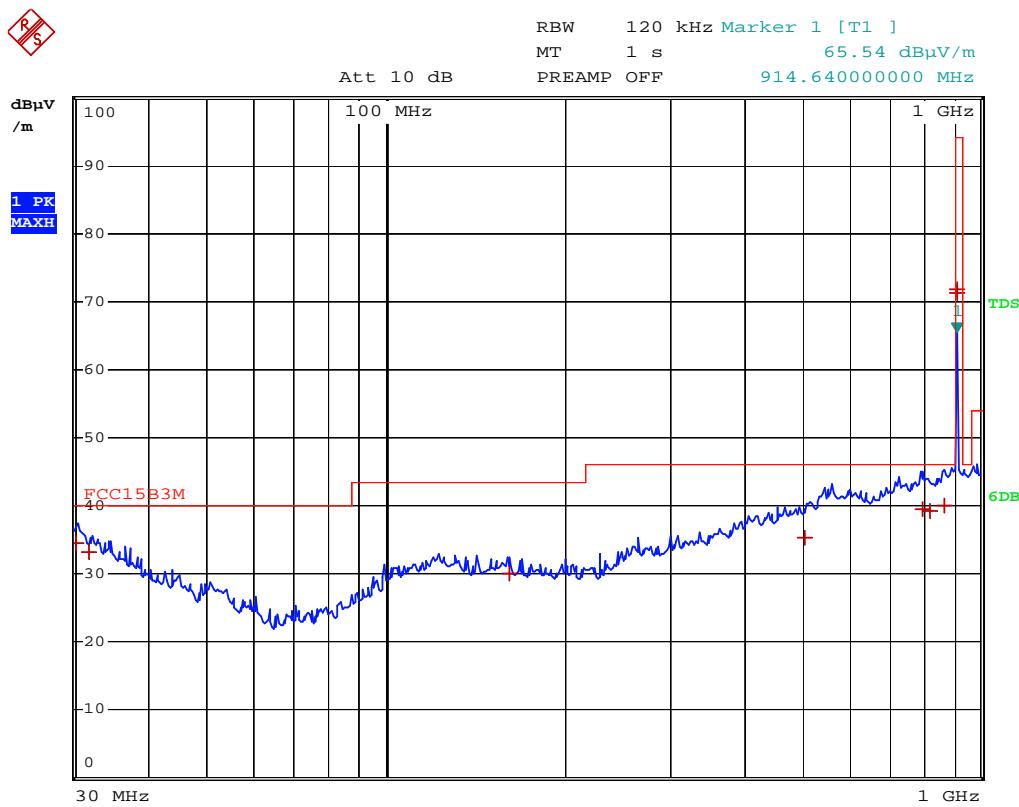

50C

Date: 7.DEC.2011 10:38:47

6.3. Radiated Emissions Test Method

The testing was performed in accordance with ANSI C63.4:2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.

Testing was carried out in a semi-anechoic chamber which meets the NSA requirements of CISPR 16 and CISPR 22 for the frequency range 30MHz to 1000MHz. An emissions signature was obtained with the measuring antenna placed 3m from the EUT. Final measurements were carried out at frequencies falling within 10dB of the limit line.

6.4. Radiated Emissions Test Results

The results are given in Tables 7 to 12 and Graphs 7 to 36.

6.5. Radiated Emissions Conclusions

The EUT complied with the limits of FCC part 15, Clause 209 Class B.

6.6. Measurement Uncertainty

30MHz to 1000MHz $\pm 5.7\text{dB}$

The measurement uncertainties have been determined at a confidence level of not less than 95%.

**Table 7 Radiated Spurious Emissions Test Results – TX Mode - 30-1000MHz
Vertical Polarisation**

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure

Units of measurement:

Frequency: MHz Amplitude: dB μ V/m


Bandwidth: 120kHz

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15B3M			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA	LIMIT dB
1 Quasi Peak	30.04375 MHz	34.67	-5.32	
1 Quasi Peak	30.80625 MHz	34.07	-5.92	
1 Quasi Peak	479.74 MHz	34.65	-11.36	
1 Quasi Peak	516.48 MHz	35.59	-10.42	
1 Quasi Peak	785.355 MHz	39.27	-6.74	
1 Quasi Peak	914.62 MHz	68.72	-25.27	
1 Quasi Peak	914.64 MHz	68.16	-25.83	

50C

Date: 7.DEC.2011 10:23:35

Graph 7 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Vertical

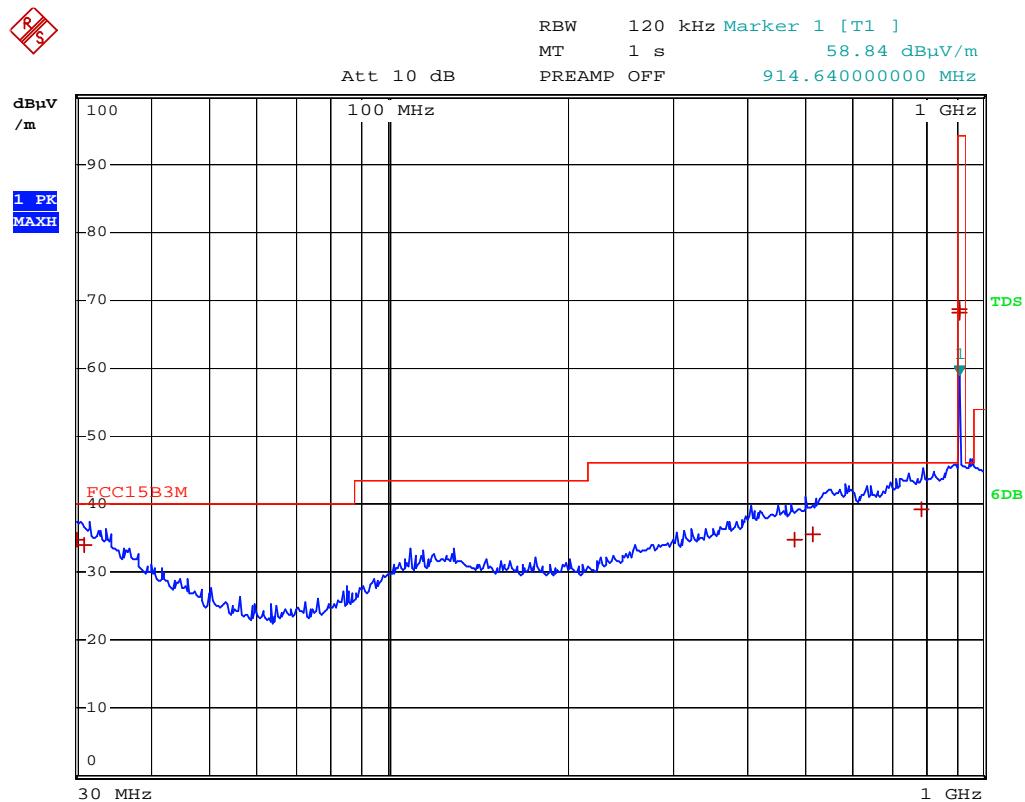

50C

Date: 7.DEC.2011 10:24:21

Table 8 Radiated Spurious Emissions Test Results – TX Mode - 30-1000MHz Horizontal Polarisation

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure

Units of measurement:

Frequency: MHz Amplitude: dB μ V/m


Bandwidth: 120kHz

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	FCC15B3M				
Trace2:	---				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA	LIMIT	dB
1 Quasi Peak	30.1875 MHz	34.54	-5.45		
1 Quasi Peak	31.69375 MHz	33.31	-6.68		
1 Quasi Peak	162.335 MHz	30.04	-13.45		
1 Quasi Peak	503.94 MHz	35.17	-10.84		
1 Quasi Peak	796.44 MHz	39.41	-6.60		
1 Quasi Peak	825.34 MHz	39.28	-6.73		
1 Quasi Peak	866.24 MHz	40.04	-5.97		
1 Quasi Peak	914.62 MHz	71.82	-22.17		
1 Quasi Peak	914.64 MHz	71.22	-22.77		

50C

Date: 7.DEC.2011 10:38:08

Graph 8 Radiated Emissions Test Results – TX Mode - 30-1000MHz - Horizontal

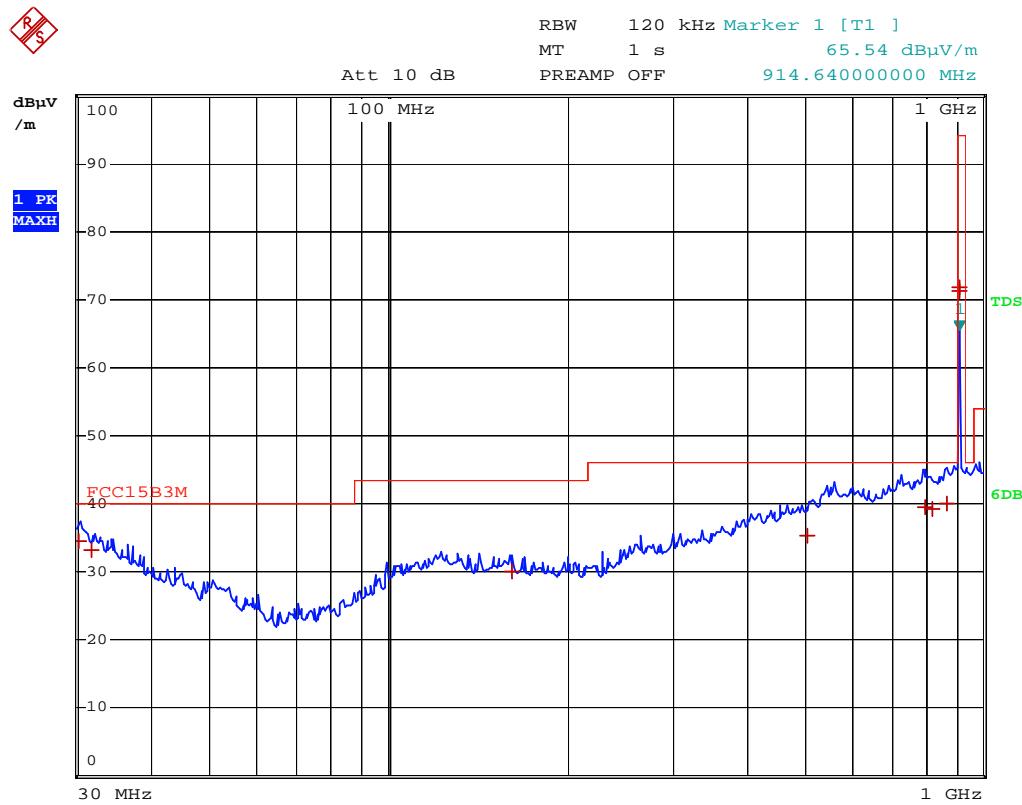

50C

Date: 7.DEC.2011 10:38:47

**Table 9 Radiated Spurious Emissions Test Results – Standby Mode
30-1000MHz – Vertical Polarisation**

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure

Units of measurement:

Frequency: MHz Amplitude: dB μ V/m


Bandwidth: 120kHz

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15B3M			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA	LIMIT dB
1 Quasi Peak	30.65625 MHz	26.45	-	-13.54
1 Quasi Peak	59.19375 MHz	30.12	-	-9.87
1 Quasi Peak	59.2 MHz	29.97	-	-10.02
1 Quasi Peak	167.2 MHz	23.07	-	-20.42
1 Quasi Peak	424.465 MHz	26.75	-	-19.26
1 Quasi Peak	509.825 MHz	27.80	-	-18.21
1 Quasi Peak	548.98 MHz	30.26	-	-15.75
1 Quasi Peak	933.64 MHz	33.10	-	-12.91

50C

Date: 8.DEC.2011 13:14:47

Graph 9 Radiated Emissions Test Results – Standby Mode - 30-1000MHz - Vertical

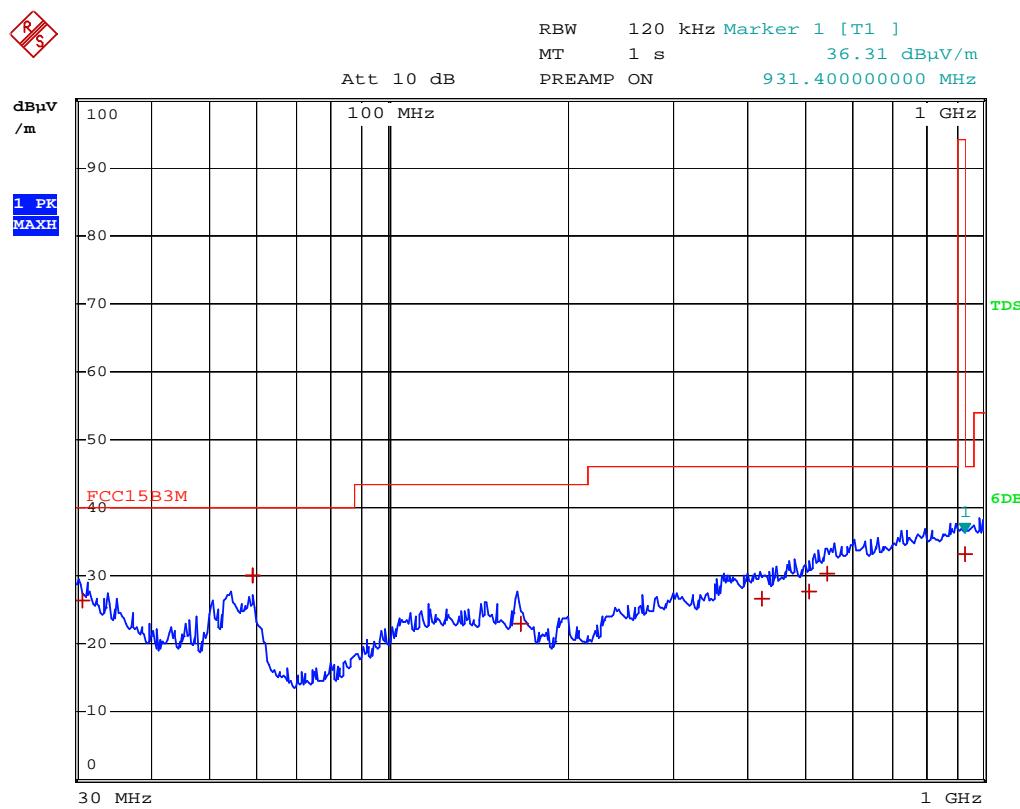

50C

Date: 8.DEC.2011 13:15:43

**Table 10 Radiated Spurious Emissions Test Results – Standby Mode
30-1000MHz – Horizontal Polarisation**

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure

Units of measurement:

Frequency: MHz Amplitude: dB μ V/m


Bandwidth: 120kHz

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15B3M			
Trace2:	---			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V/m	DELTA	LIMIT dB
1 Quasi Peak	30.3875 MHz	26.56	-	-13.43
1 Quasi Peak	33.1875 MHz	24.35	-	-15.64
1 Quasi Peak	243.625 MHz	19.92	-	-26.09
1 Quasi Peak	494.095 MHz	27.34	-	-18.67
1 Quasi Peak	800.8 MHz	32.28	-	-13.73
1 Quasi Peak	951.52 MHz	33.23	-	-12.78

50C

Date: 8.DEC.2011 13:09:20

Graph 10 Radiated Emissions Test Results – Standby Mode - 30-1000MHz - Horizontal

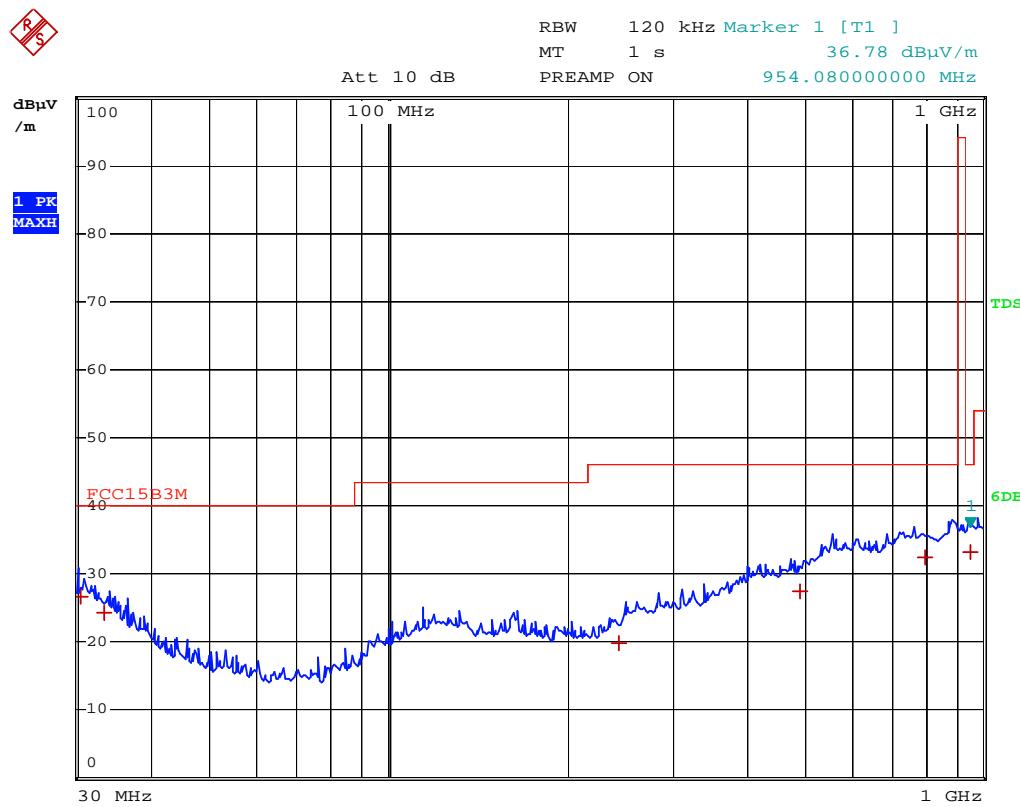

50C

Date: 8.DEC.2011 13:09:49

**Table 11 Radiated Spurious Emissions Test Results – TX Mode - 1 - 10GHz
Vertical & Horizontal Polarisations**

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure


Units of measurement:

Frequency: MHz Amplitude: dB μ V/m


Bandwidth: 1MHz

No measurements were made as all emissions were >6dB from the limit line.

Graph 11 Radiated Emissions Test Results – TX Mode - 1 - 2GHz Vertical – Peak

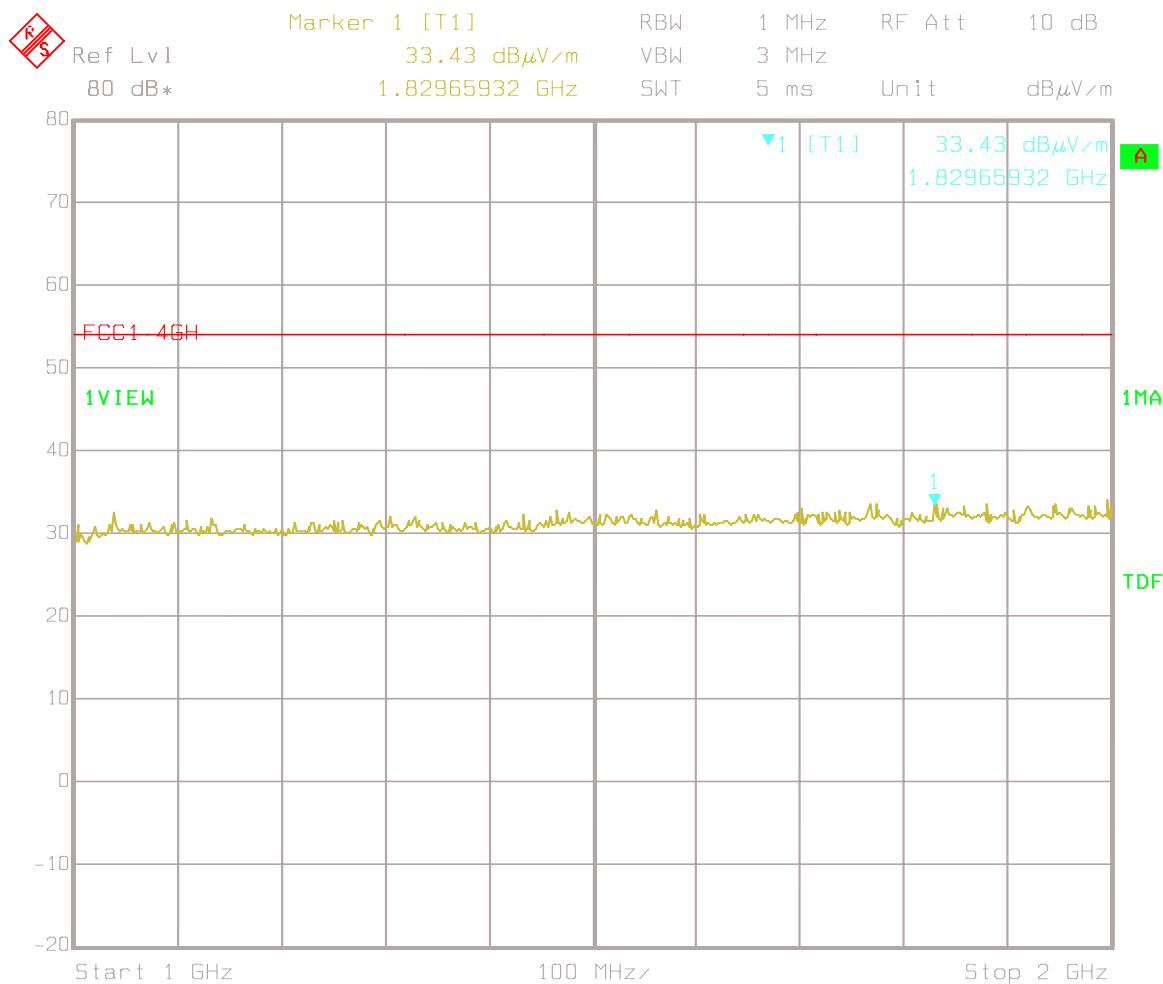


Graph 12 Radiated Emissions Test Results – TX Mode - 1 - 2GHz Vertical – Average

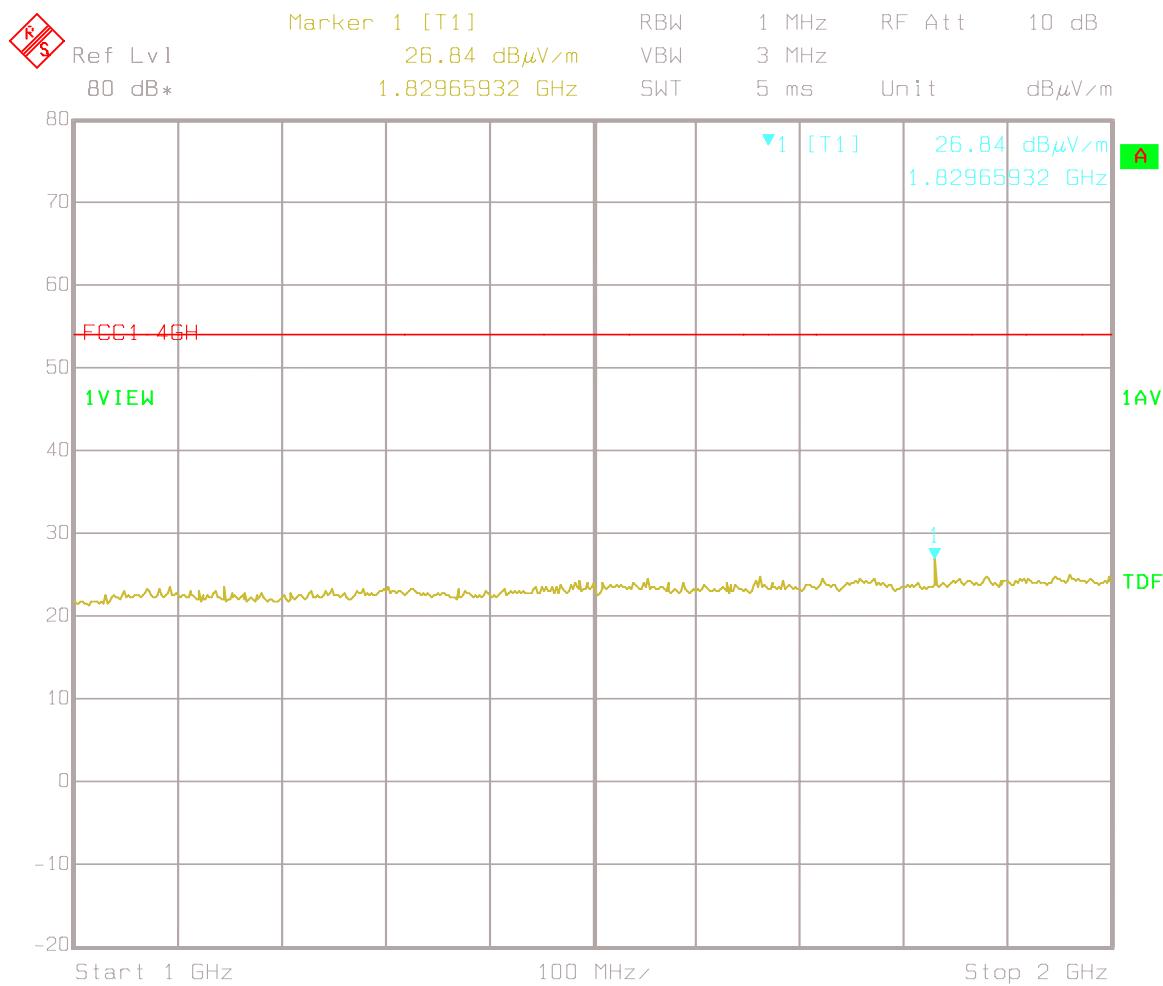


Date: 08.DEC.2011 09:59:25

Graph 13 Radiated Emissions Test Results – TX Mode 1 - 2GHz Horizontal – Peak

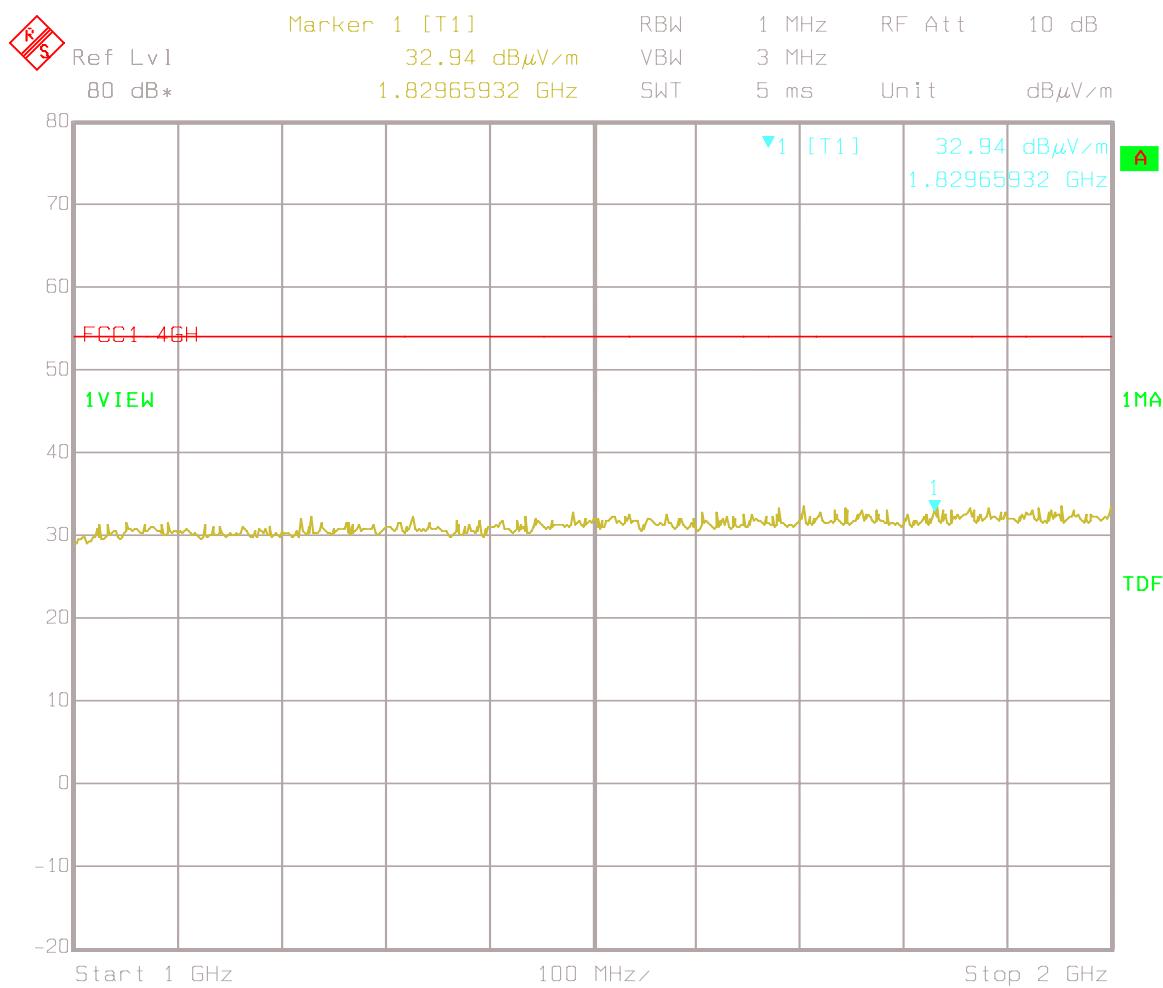


Date: 08.DEC.2011 10:03:59

Graph 14 Radiated Emissions Test Results – TX Mode 1 - 2GHz Horizontal – Average

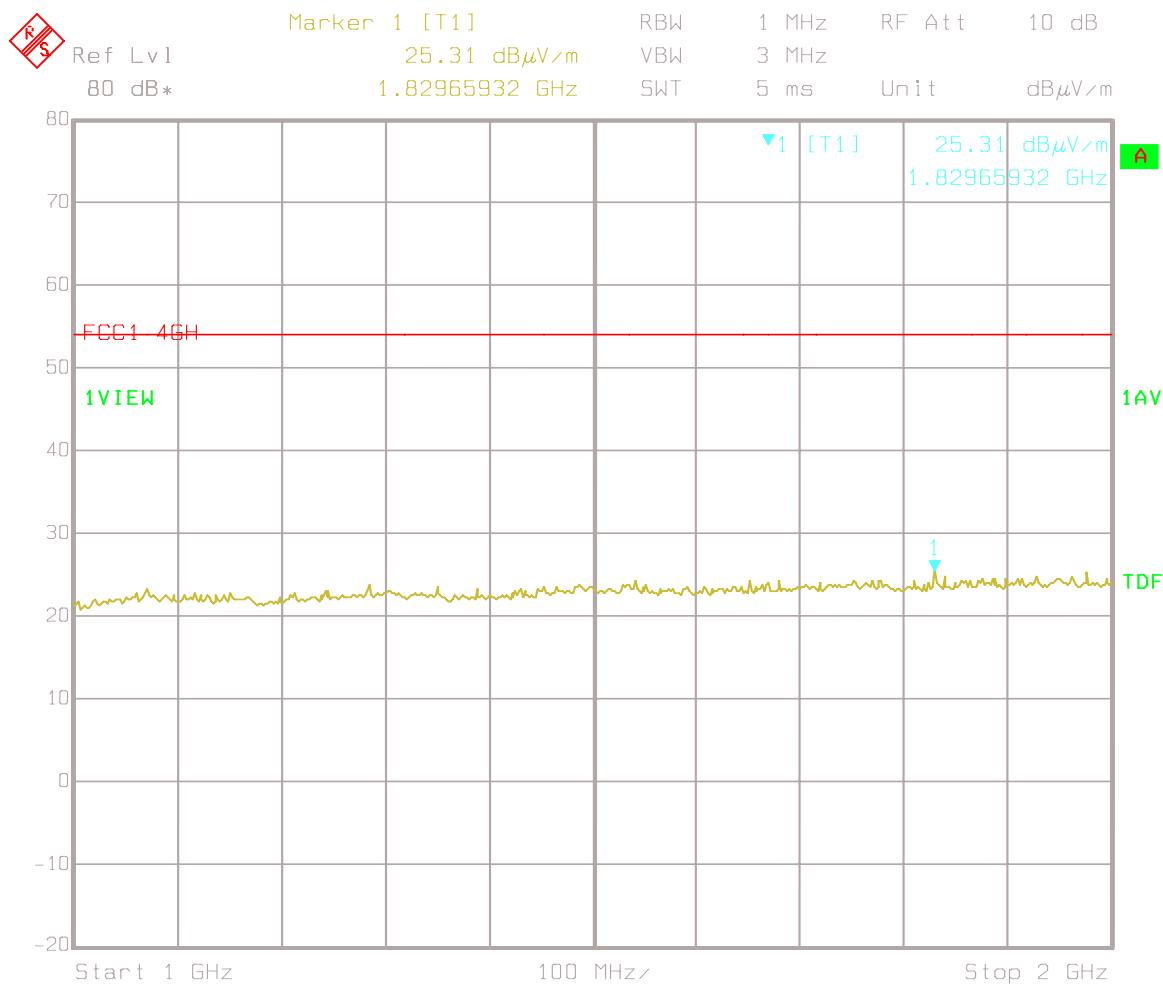


Date: 08.DEC.2011 10:06:40

**Graph 15 Radiated Emissions Test Results – TX Mode 2 - 4GHz
Vertical – Peak**

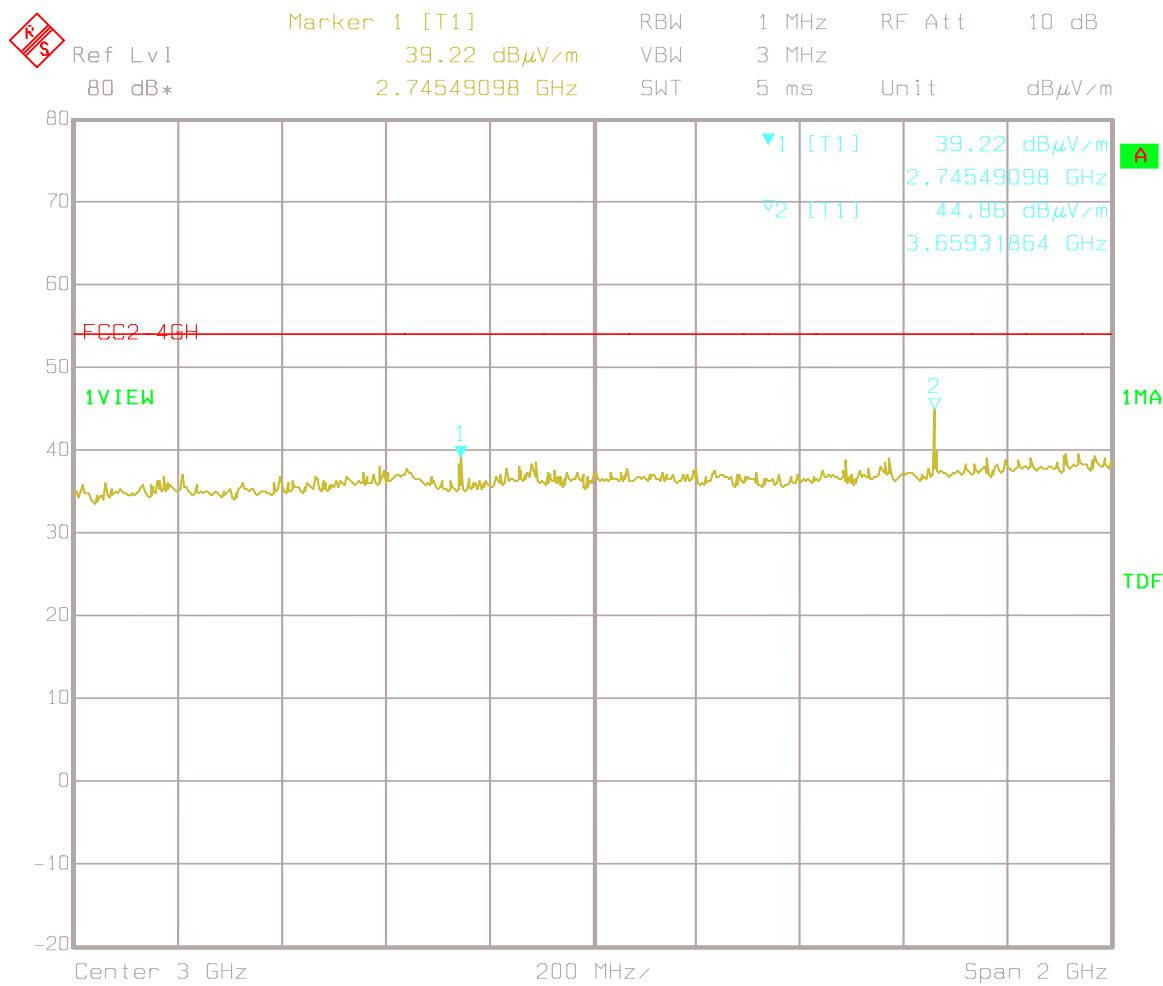


Date: 08.DEC.2011 09:40:29

Graph 16 Radiated Emissions Test Results – TX Mode 2 - 4GHz Vertical – Average

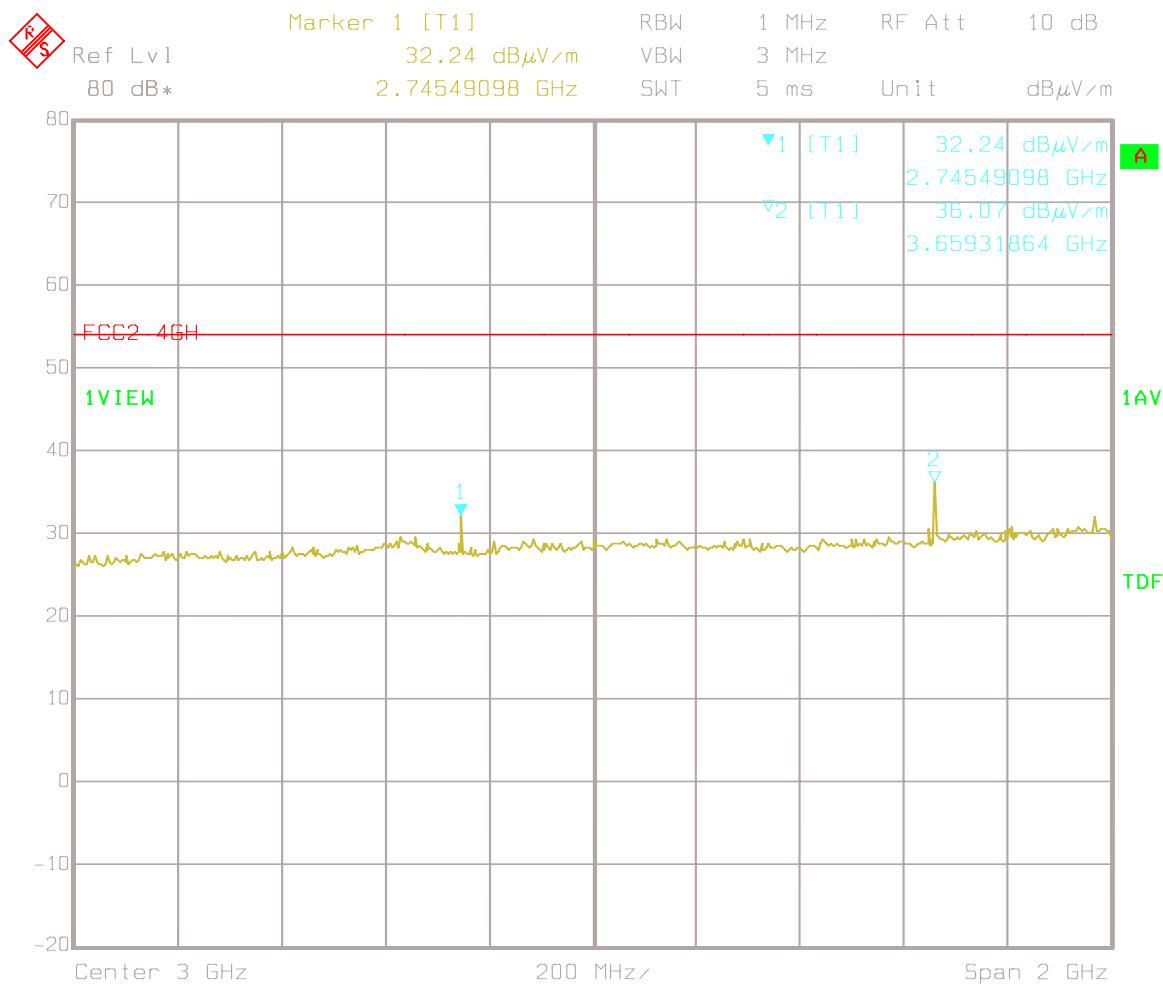


Date: 08.DEC.2011 09:28:15

Graph 17 Radiated Emissions Test Results – TX Mode 2 - 4GHz Horizontal – Peak

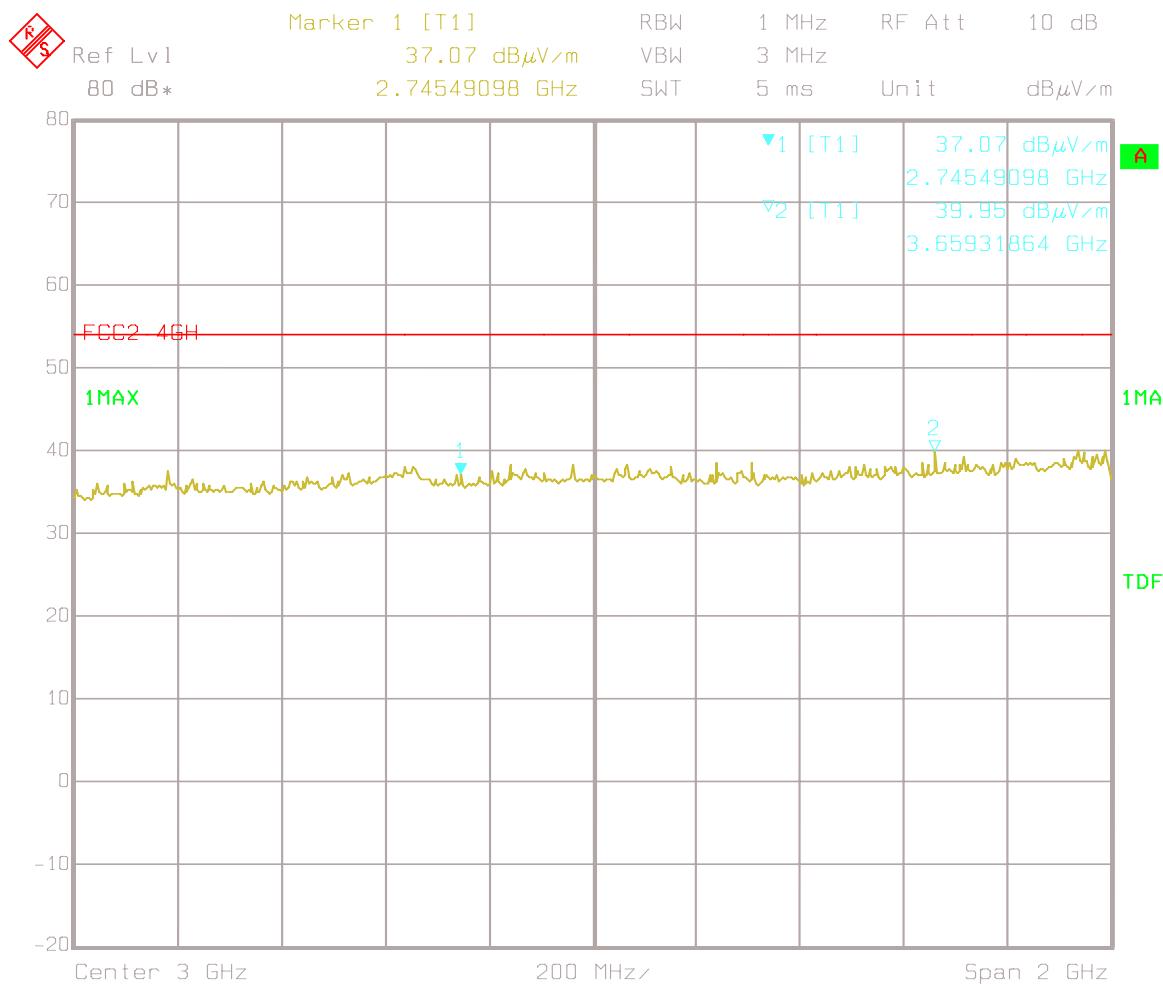


Graph 18 Radiated Emissions Test Results Tx Mode 2 - 4GHz Horizontal – Average

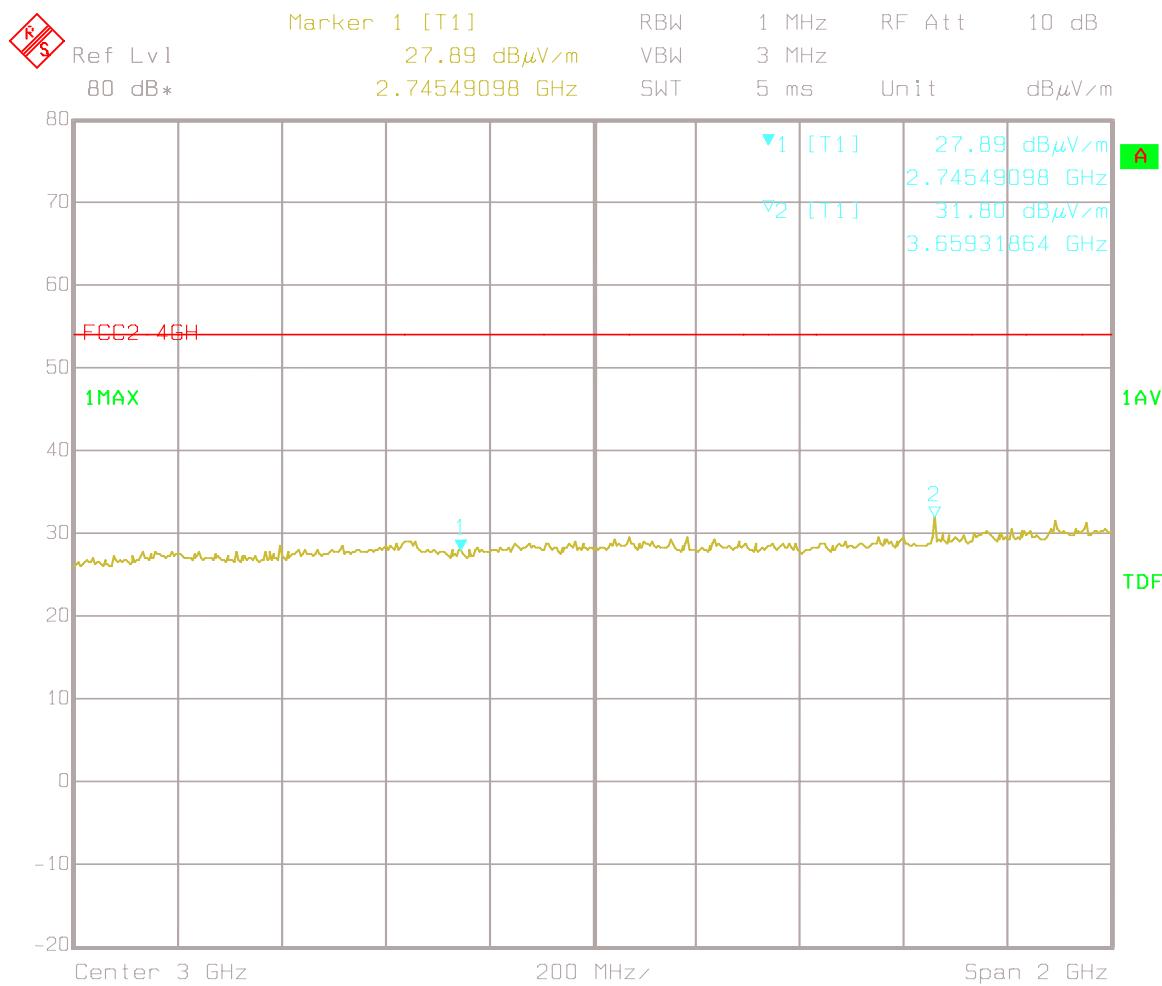


Date: 08.DEC.2011 09:16:24

Graph 19 Radiated Emissions Test Results – TX Mode 4 - 10GHz Vertical – Peak

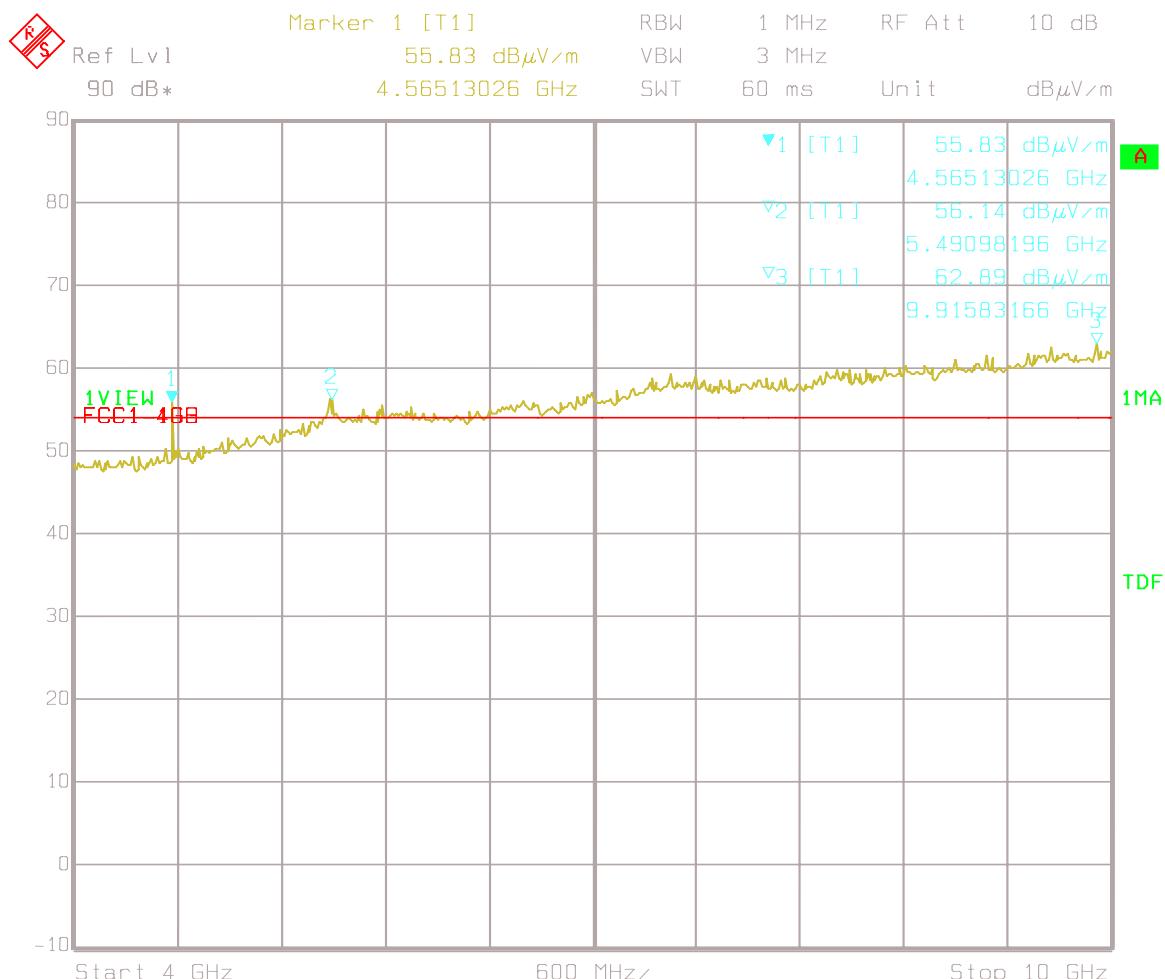


Date: 08.DEC.2011 10:24:51

Graph 20 Radiated Emissions Test Results – TX Mode 4 - 10GHz Vertical – Average

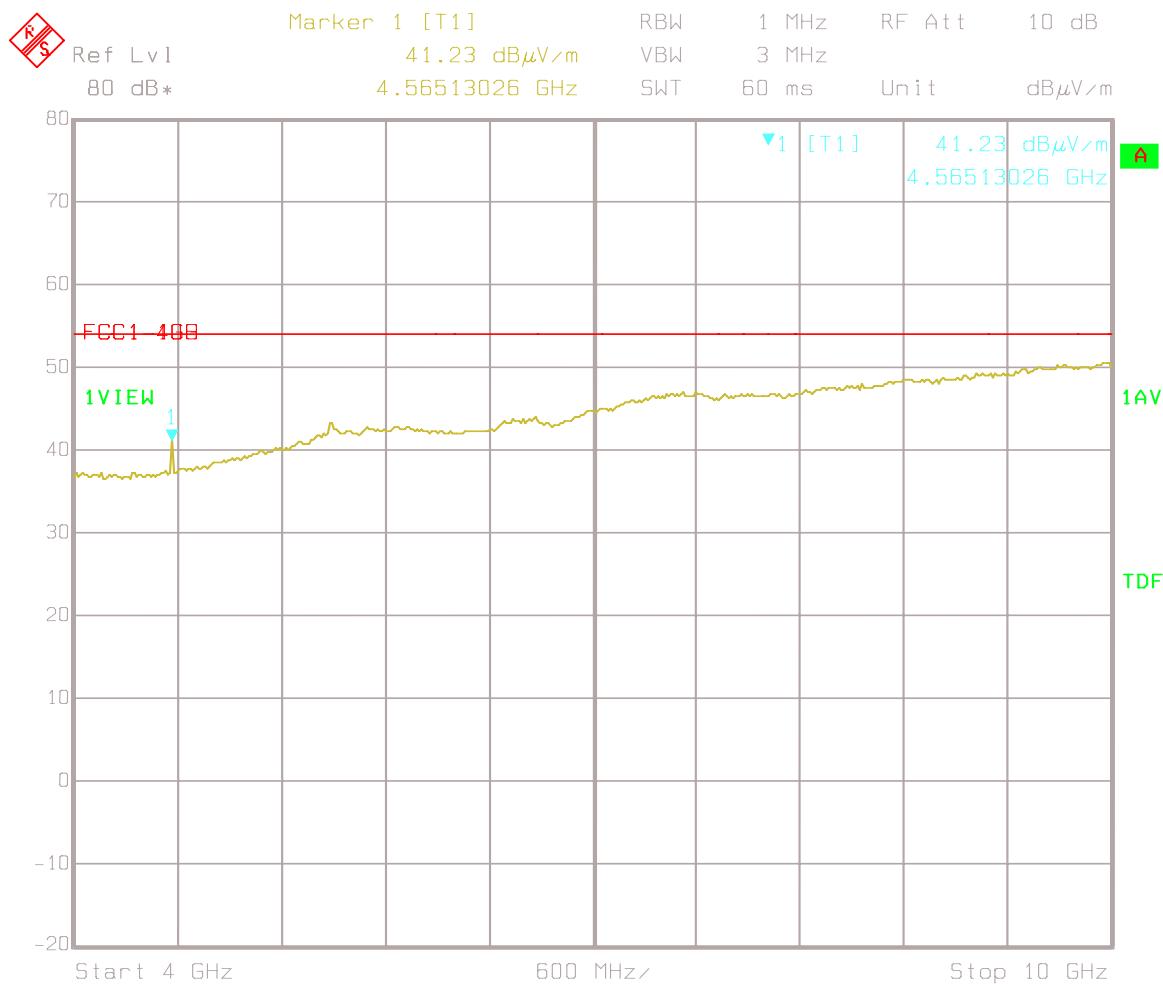


Date: 08.DEC.2011 10:22:05

Graph 21 Radiated Emissions Test Results – TX Mode 4 - 10GHz Horizontal – Peak

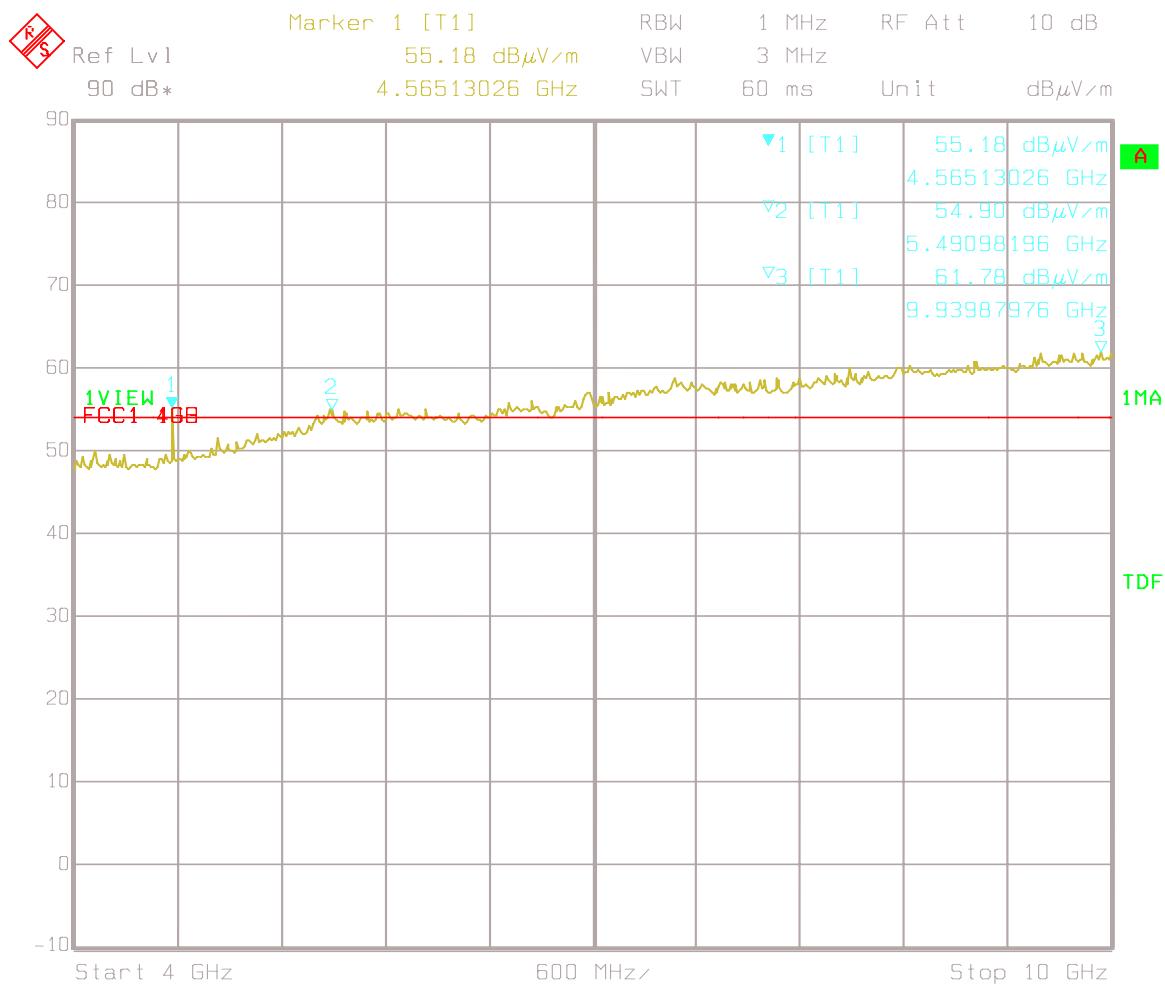

Date: 08.DEC.2011 10:34:41

Graph 22 Radiated Emissions Test Results – TX Mode 4 - 10GHz Horizontal – Average

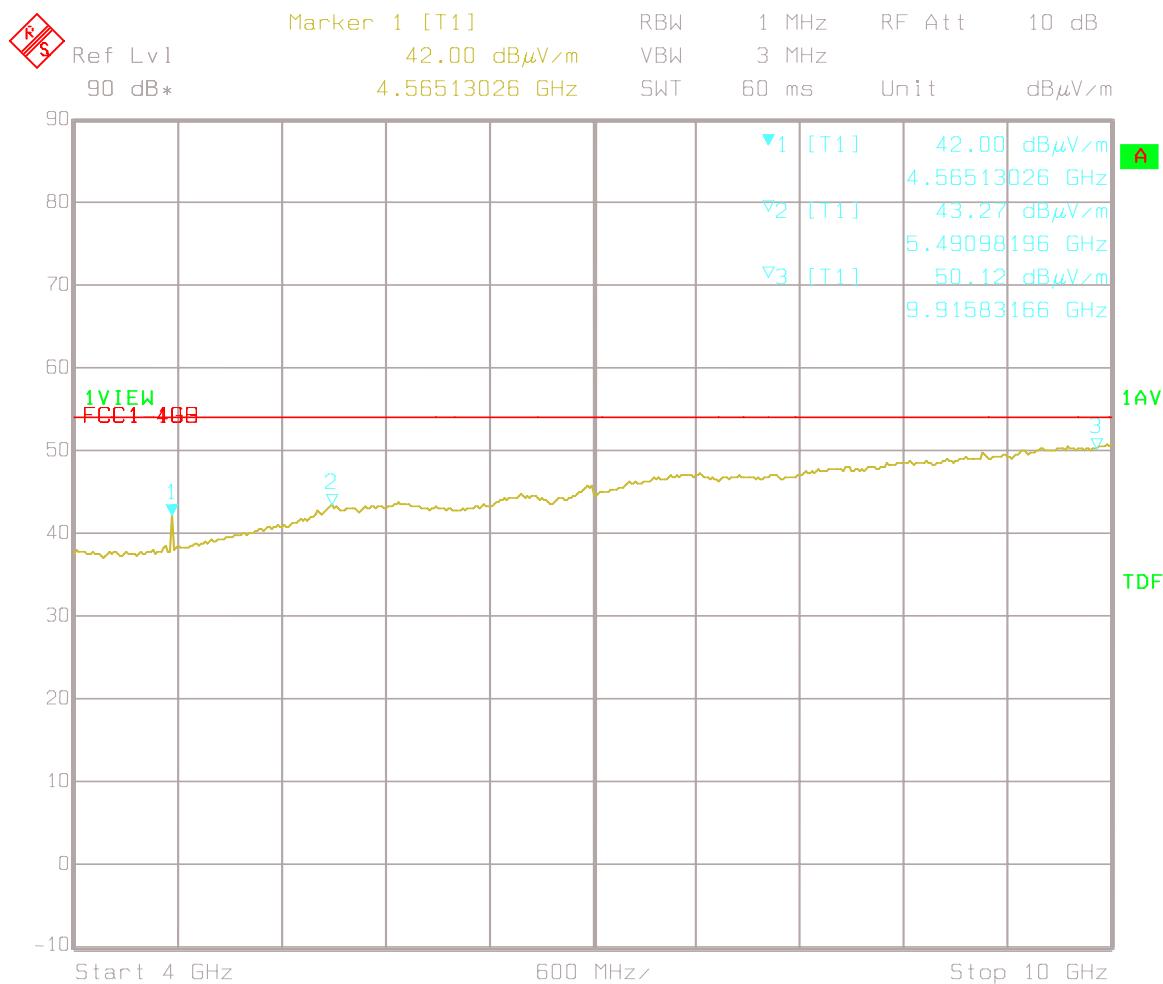

**Table 12 Radiated Emissions Test Results – Standby Mode 1 - 10GHz
Vertical & Horizontal**

Standard: FCC Part 15

Test: Radiated Emissions

Port: Enclosure


Units of measurement:

Frequency: MHz Amplitude: dB μ V/m


Bandwidth: 1MHz

No measurements were made as all emissions were >6dB from the limit line.

Graph 23 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Vertical – Peak

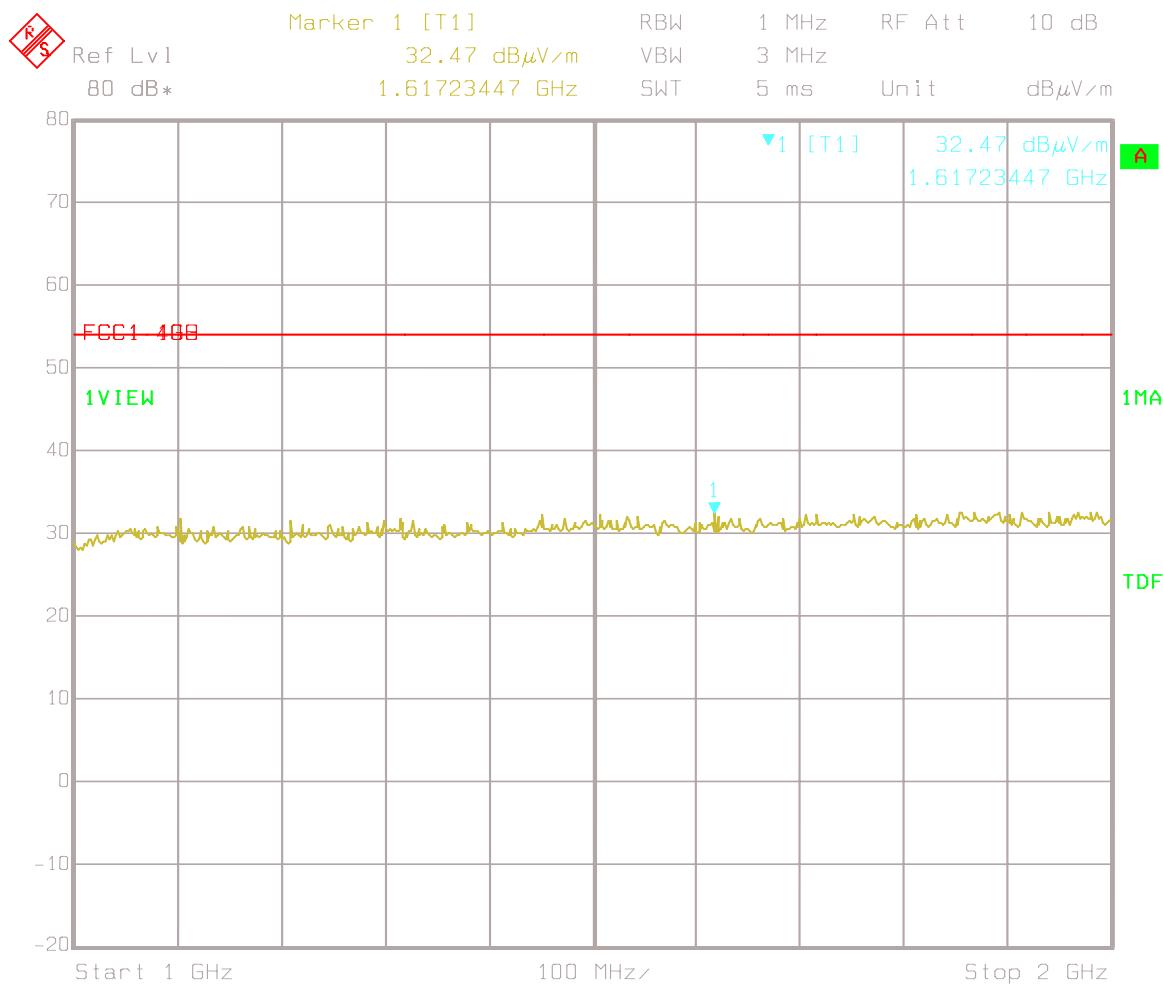


Graph 24 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Vertical – Average

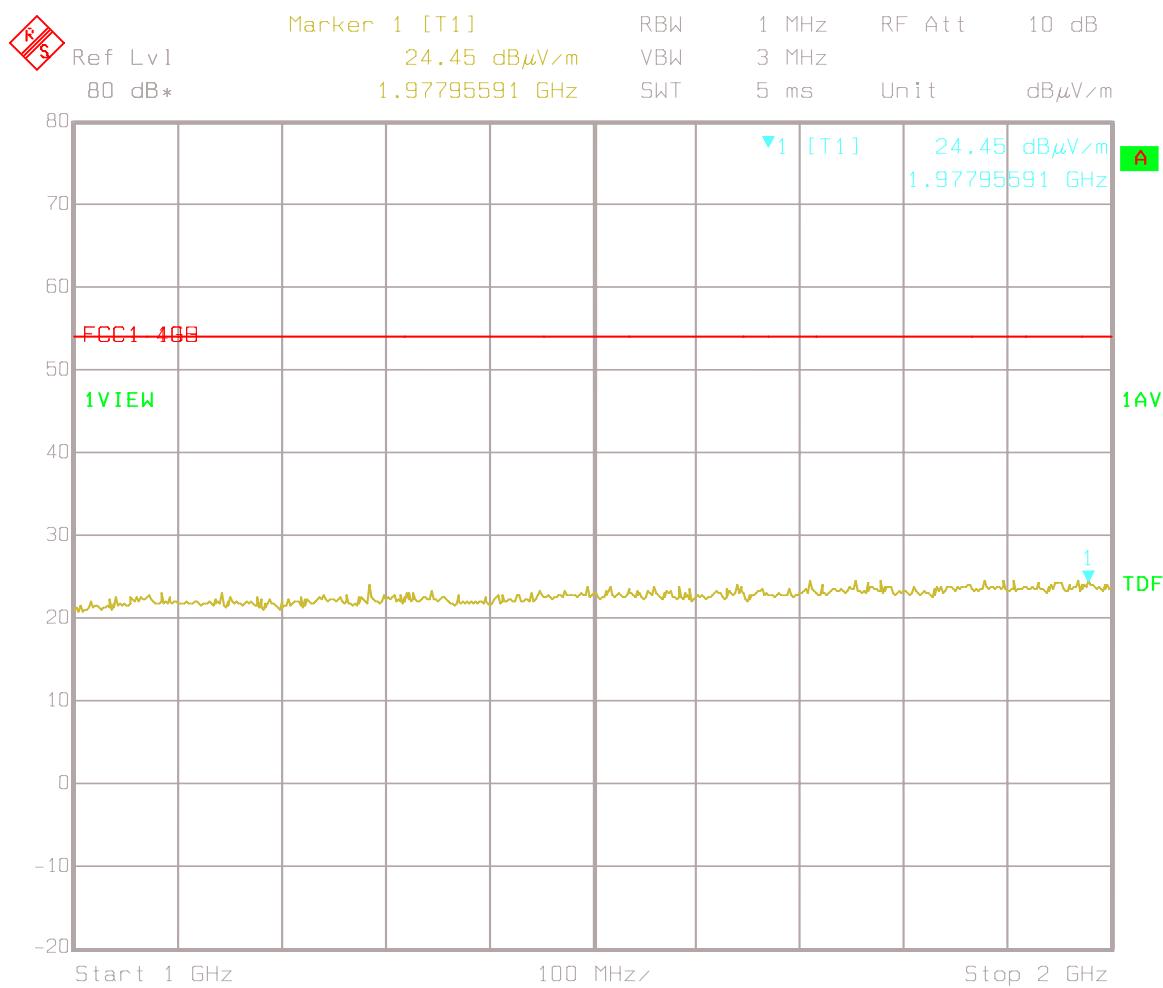


Date: 08.DEC.2011 13:14:05

Graph 25 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Horizontal – Peak

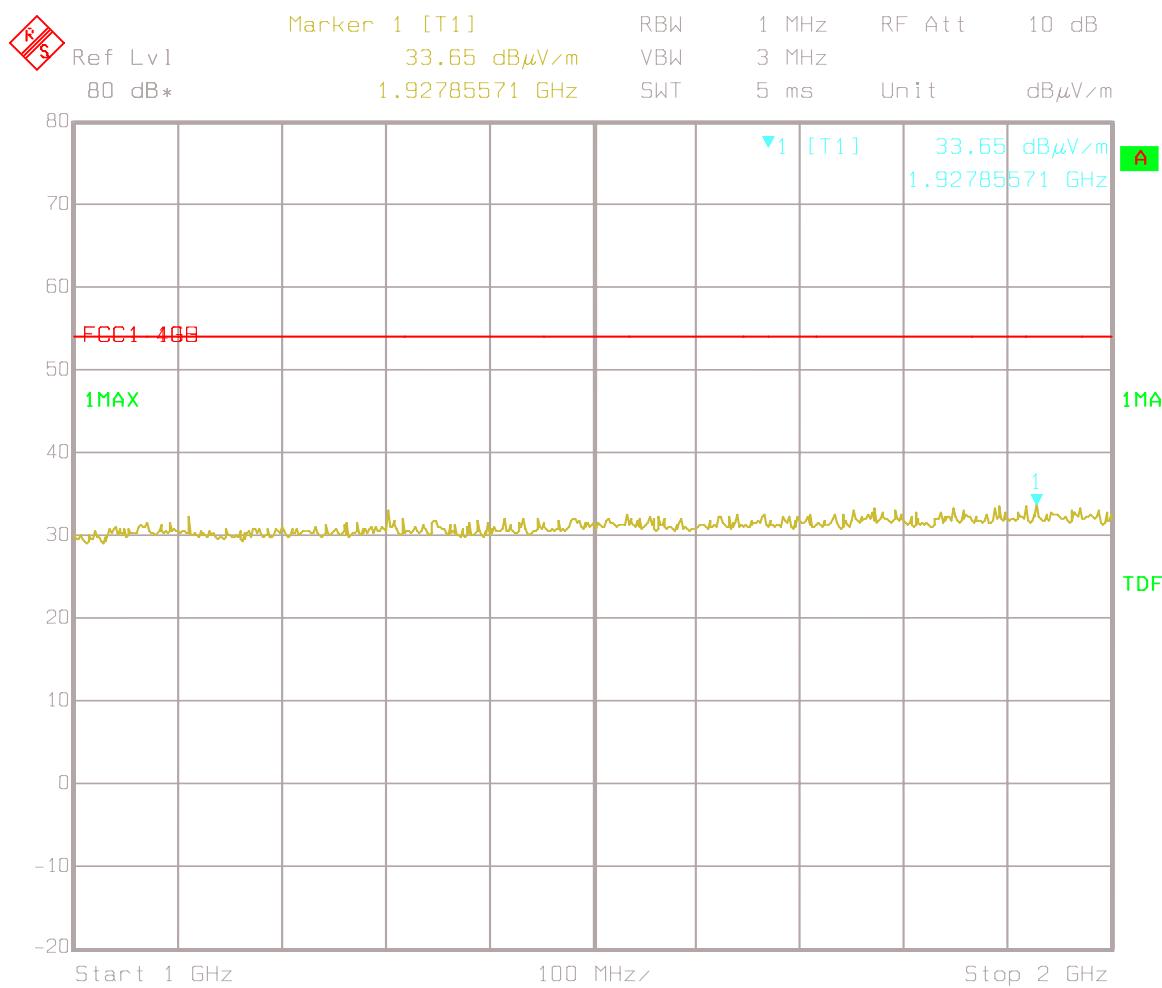


Date: 08.DEC.2011 13:09:00

Graph 26 Radiated Emissions Test Results – Standby Mode 1 - 2GHz Horizontal – Average

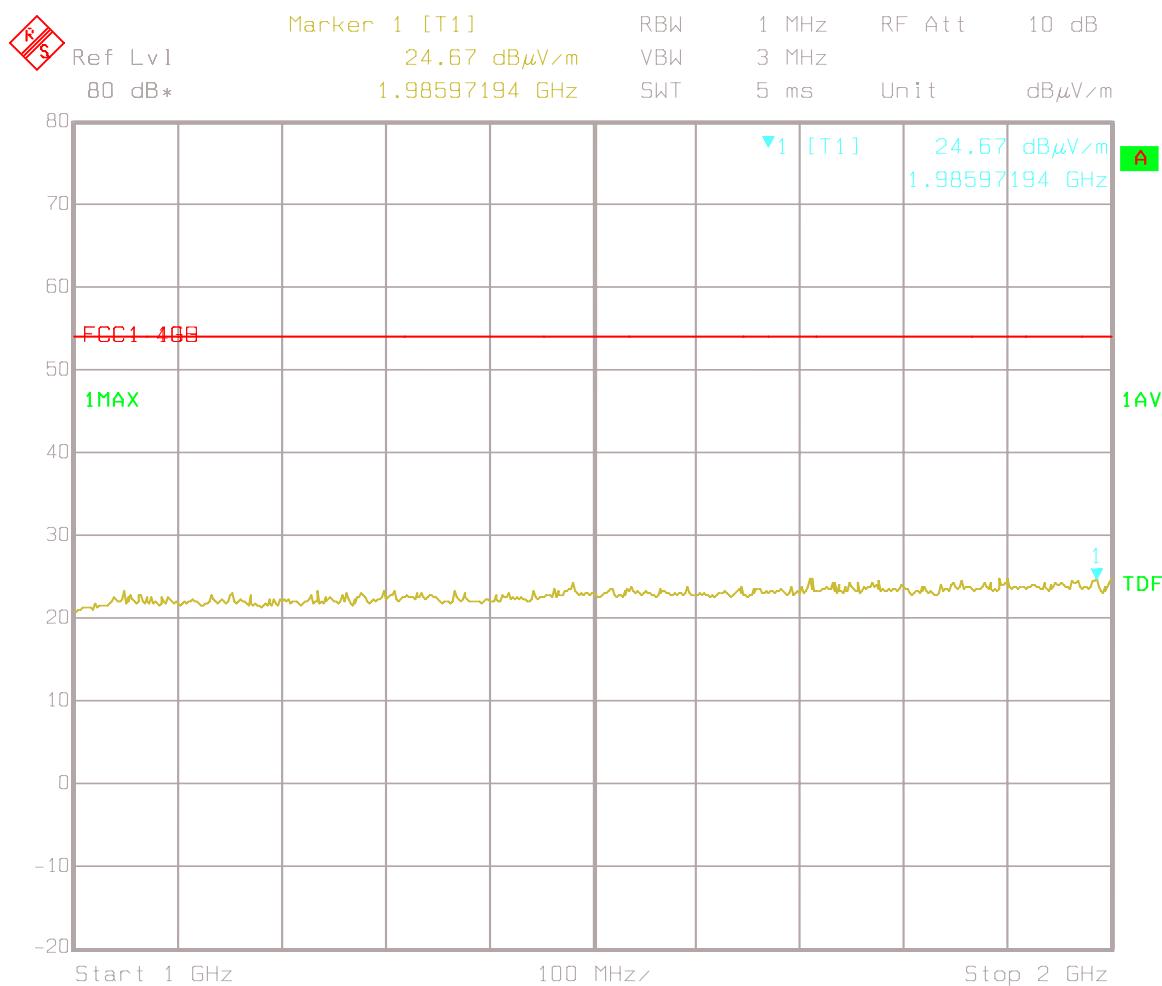


Date: 08.DEC.2011 13:07:18

Graph 27 Radiated Emissions Test Results – Standby Mode 2 - 4GHz Vertical - Peak

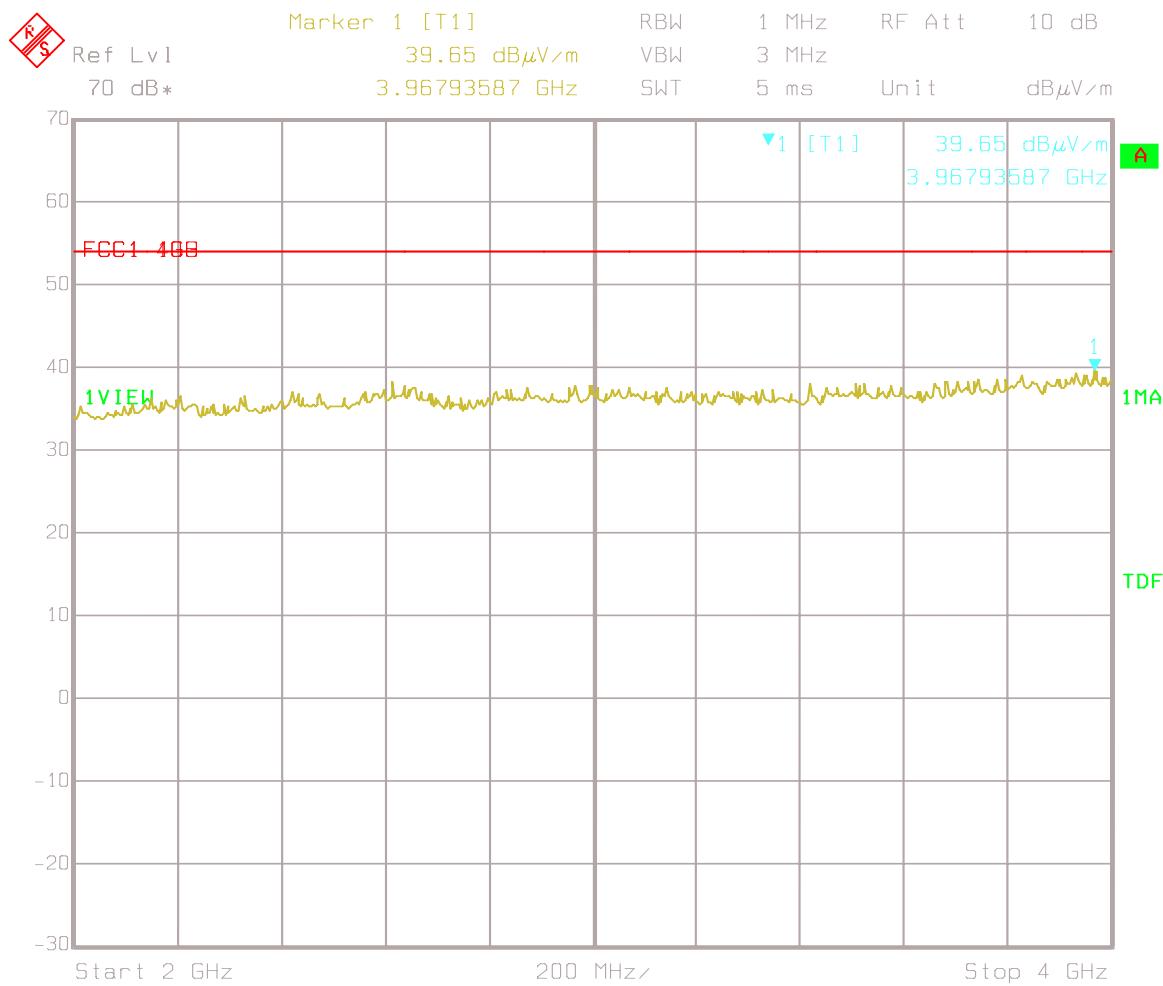


Date: 08.DEC.2011 13:26:52


Graph 28 Radiated Emissions Test Results – Standby Mode 2 - 4GHz Vertical – Average

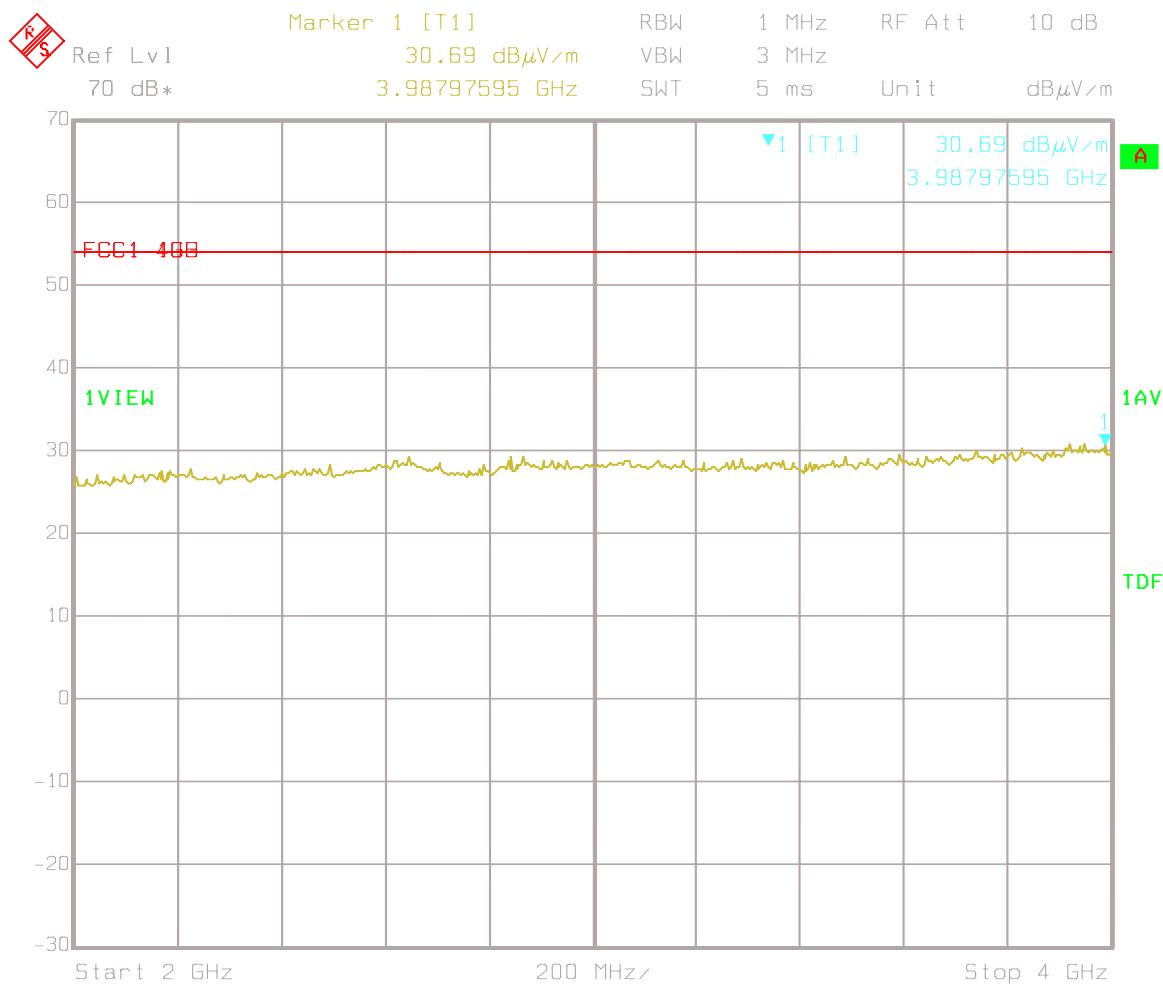

Graph 29 Radiated Emissions Test Results – Standby Mode 2 - 4GHz Horizontal – Peak

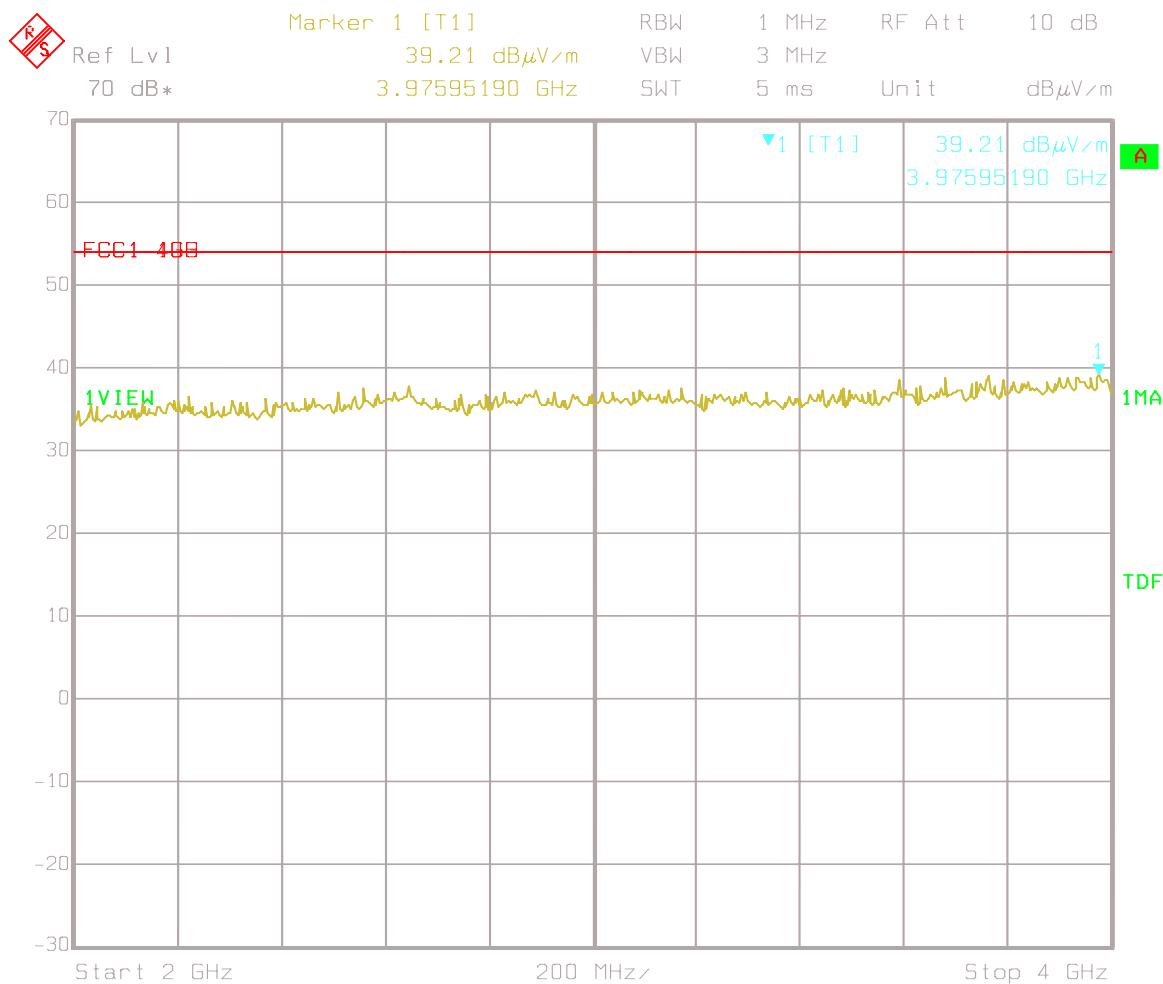


Graph 30 Radiated Emissions Test Results – StandbyX Mode 2 - 4GHz Horizontal – Average

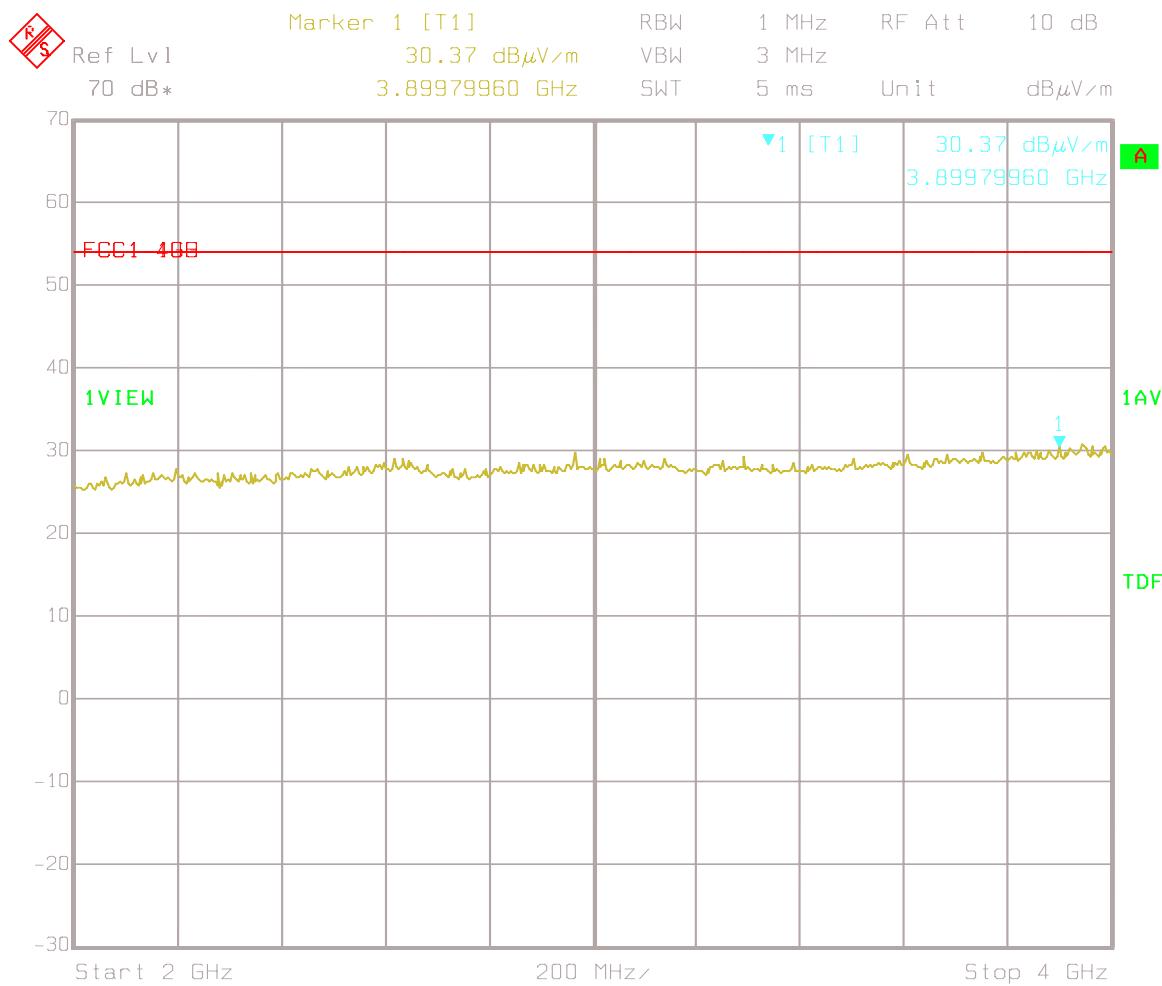


Date: 08.DEC.2011 13:30:55

Graph 31 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Vertical – Peak

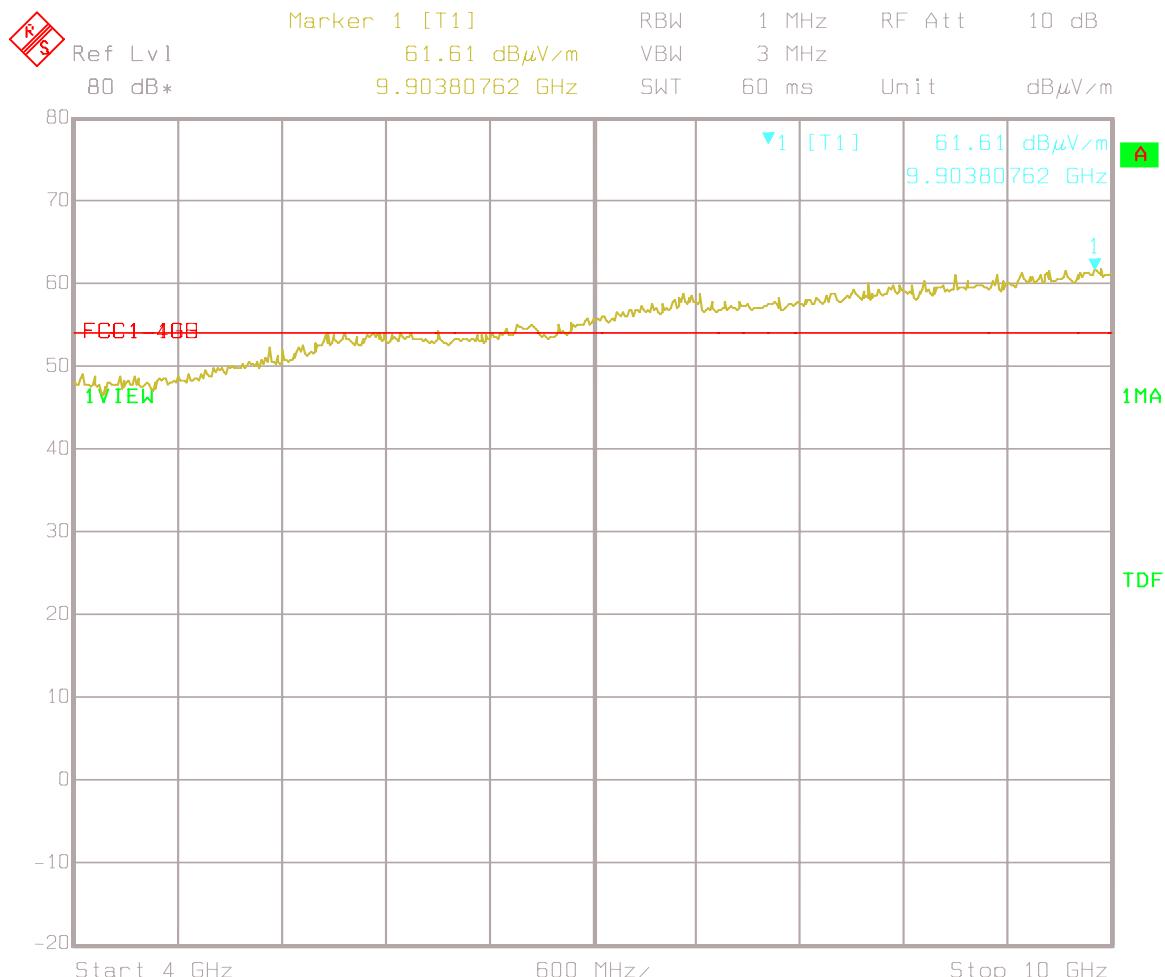


Graph 32 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Vertical – Average

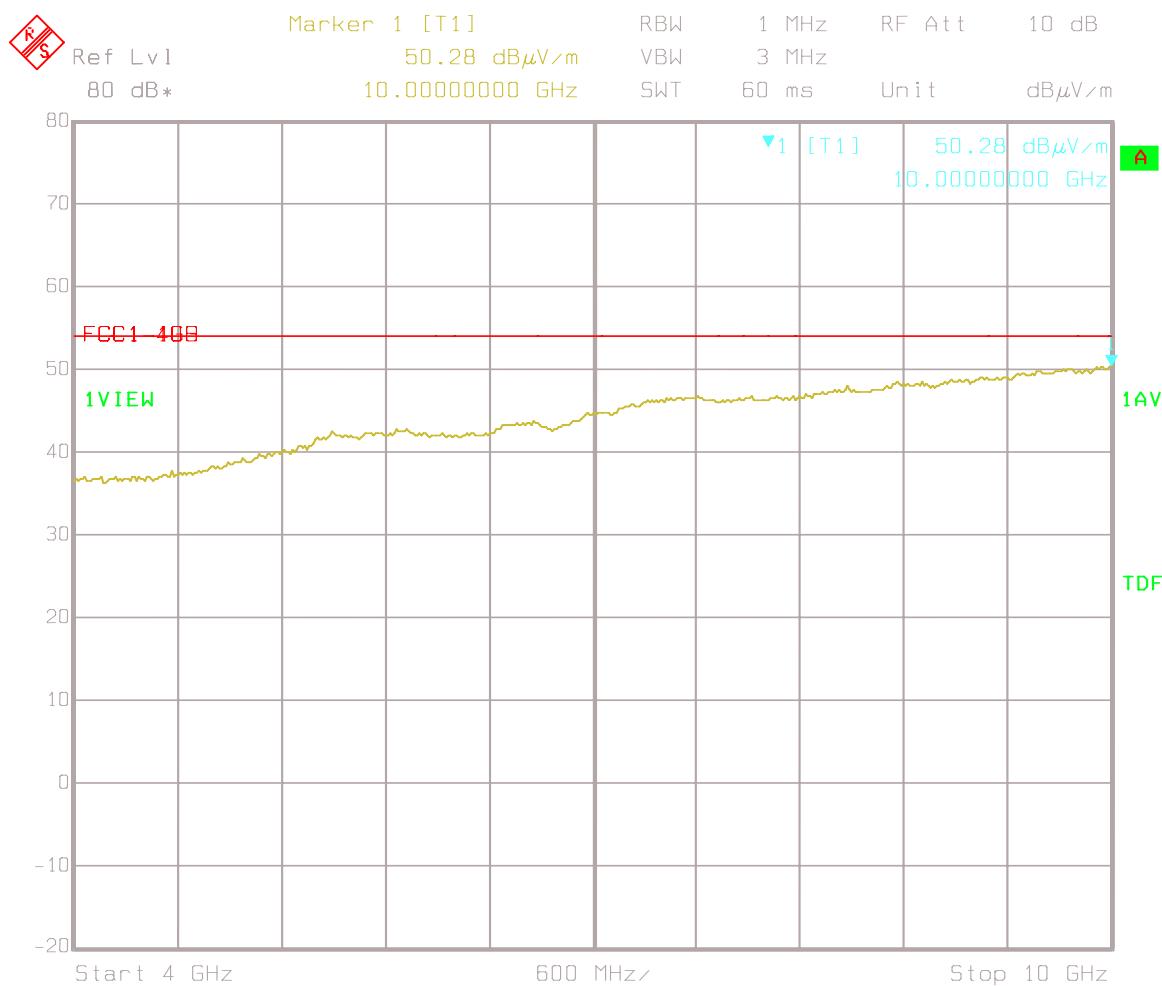


Date: 08.DEC.2011 13:57:00

Graph 33 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Horizontal – Peak

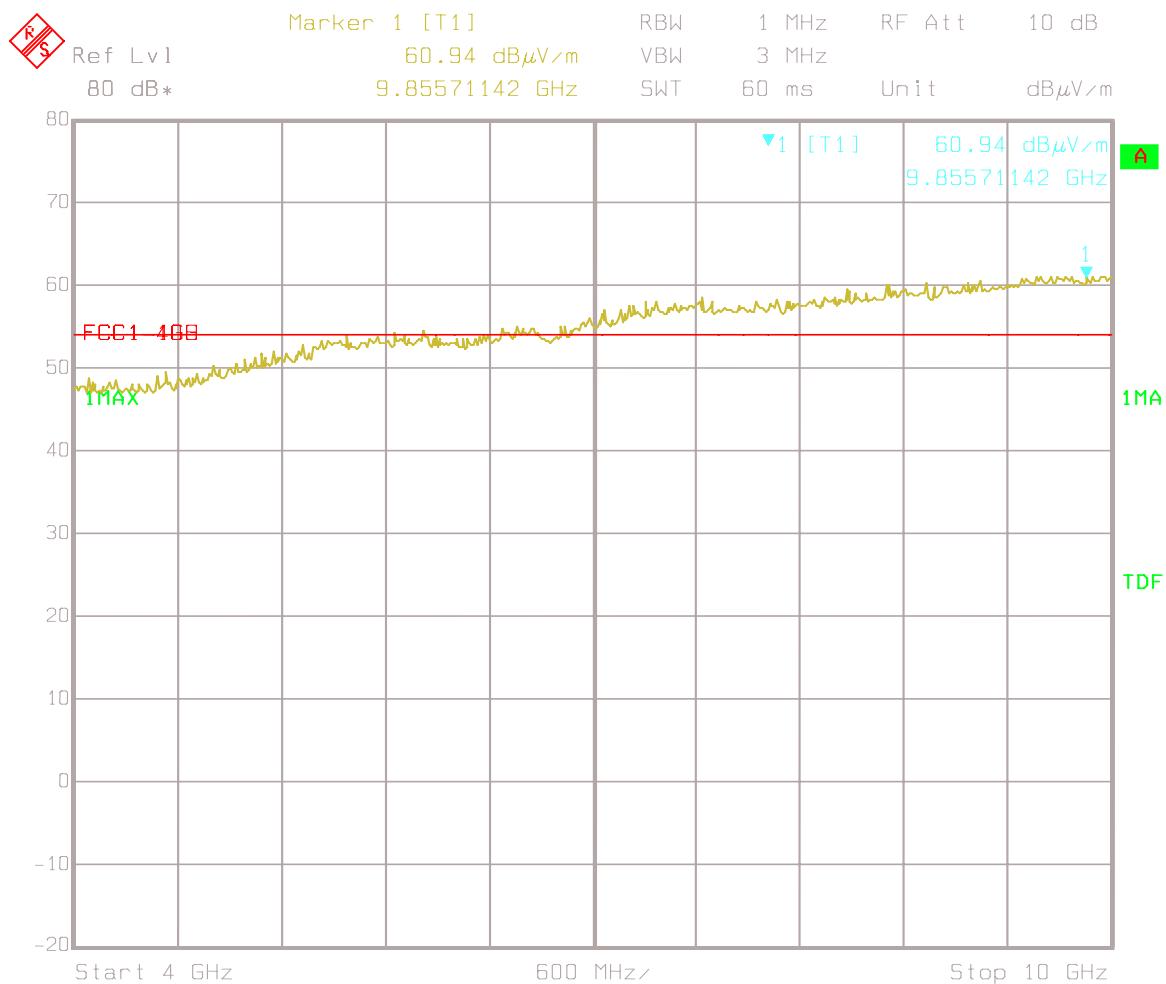


Date: 08.DEC.2011 13:54:56

Graph 34 Radiated Emissions Test Results – Standby Mode 4 - 10GHz Horizontal – Average

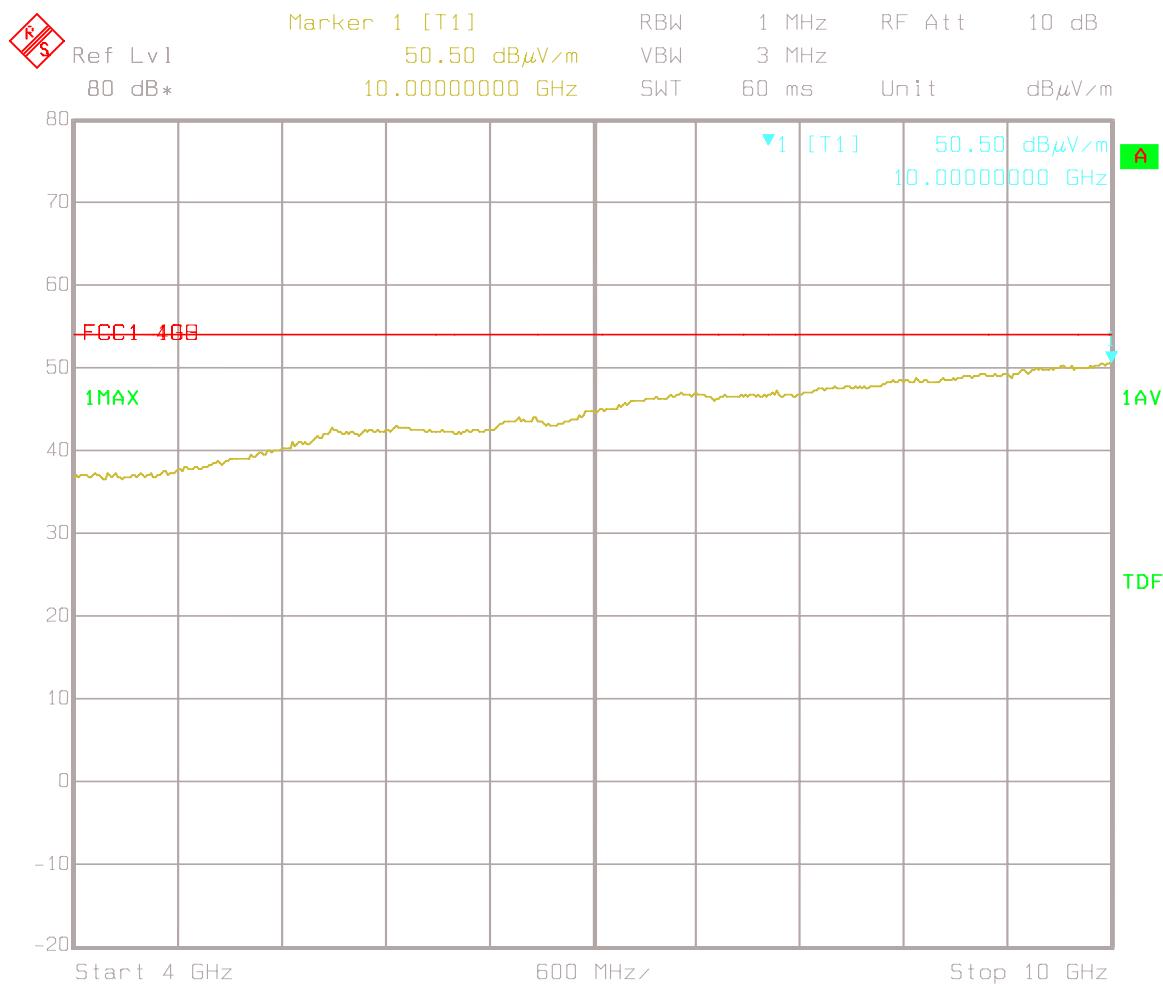

Date: 08.DEC.2011 13:53:32

Graph 35 - Occupied Bandwidth

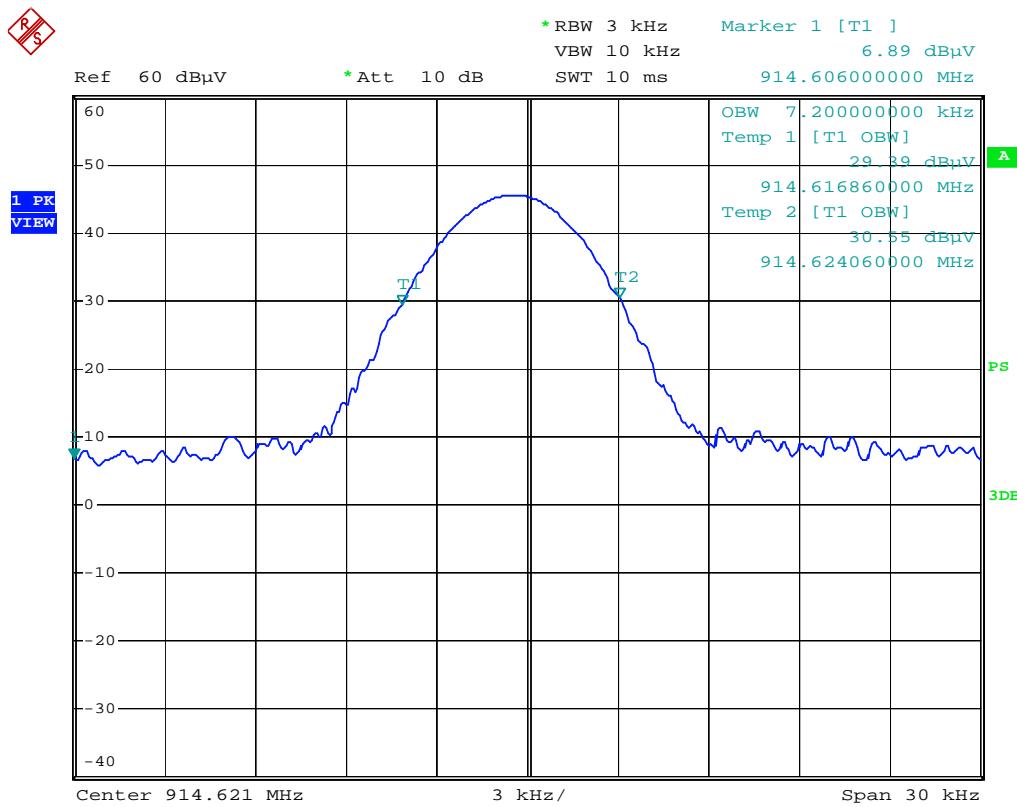


50C

Date: 8.DEC.2011 11:34:29

Occupied Bandwidth = 7.2kHz

Graph 36 – 6dB Bandwidth

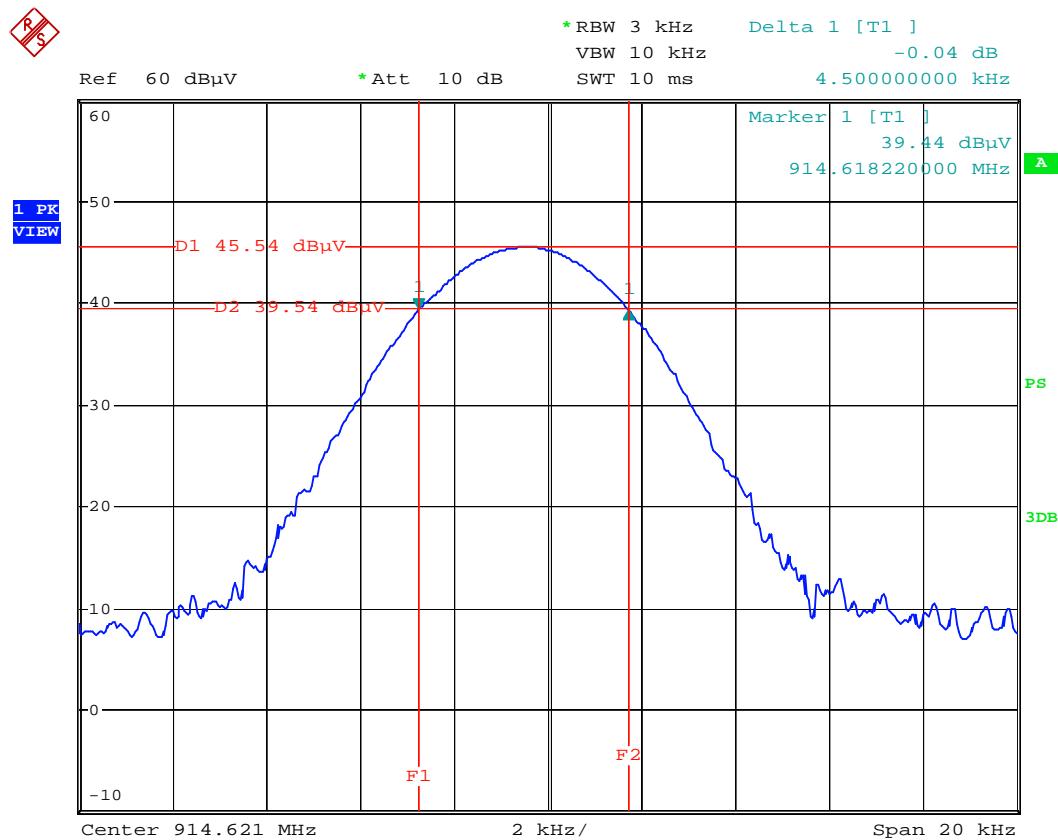

50C

Date: 8.DEC.2011 11:41:01

- 6 dB Bandwidth = 4.5kHz


Uncertainty Budget Calculation(s)

Symbol	Source of Uncertainty	Value	Probability distribution	Divisor	c_i	$u_i(y)$	$(u_i(y))^2$	v_i or v_{eff}	$u_i^4(y)$
RI	Receiver Indication	0.05	normal 2	2.000	1	0.03	0.001	∞	0
$dVsw$	Receiver Sine Wave	1.60	normal 2	2.000	1	0.80	0.640	∞	0
$dVpa$	Receiver Pulse Amplitude	1.60	normal 2	2.000	1	0.80	0.640	∞	0
$dVpr$	Receiver Pulse repetition	1.60	normal 2	2.000	1	0.80	0.640	∞	0
$dVnf$	Noise Floor Proximity	1.60	normal 2	2.000	1	0.80	0.640	∞	0
AF	Antenna Factor Calibration	1.20	normal 2	2.000	1	0.60	0.360	∞	0
CL	Cable Loss	0.50	normal 2	2.000	1	0.25	0.063	∞	0
AD	Antenna Directivity	3.00	rectangular	1.732	1	1.73	3.000	∞	0
AH	Antenna Factor Height Dependence	1.00	rectangular	1.732	1	0.58	0.333	∞	0
AP	Antenna Phase Centre Variation	0.50	rectangular	1.732	1	0.29	0.083	∞	0
AI	Antenna Factor Frequency Interpolation	0.68	rectangular	1.732	1	0.39	0.154	∞	0
SI	Site Imperfections	4.00	triangular	2.449	1	1.63	2.667	∞	0
DV	Measurement Distance Variation	0.60	rectangular	1.732	1	0.35	0.120	∞	0
$Fstep$	Frequency step error	0.00	rectangular	1.732	1	0.00	0.000	∞	0
M	Mismatch	-1.99	U-shaped	1.414	1	-1.41	1.990	∞	0
	Receiver VRC	0.216		-					0
	Antenna +Cable VRC	0.95		-					0
R_S	Measurement System Repeatability	0.96	normal 1	1.000	1	0.96	0.922	13	0.0653
R_{EUT}	Repeatability of EUT	0.00	normal 1	1.000	1	0.00	0.000		0.051
$u_c(F_S)$	Combined Standard Uncertainty						12.25	229	0.653
$U(F_S)$	Expanded Uncertainty		normal k=	1.64		3.50	2	8	343
						5.7			51


7. PHOTOGRAPHS OF TEST SETUP



Conducted Emissions 0.15 – 30MHz

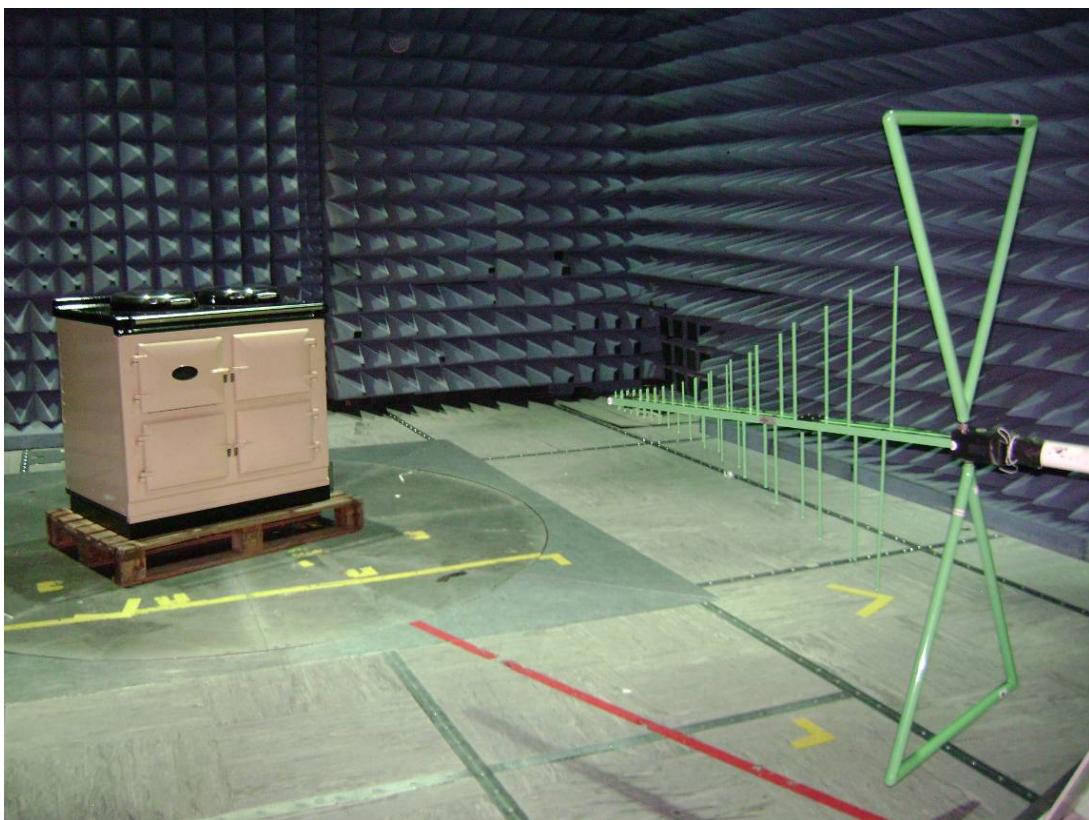

Radiated Power and Spurious Emissions <1GHz

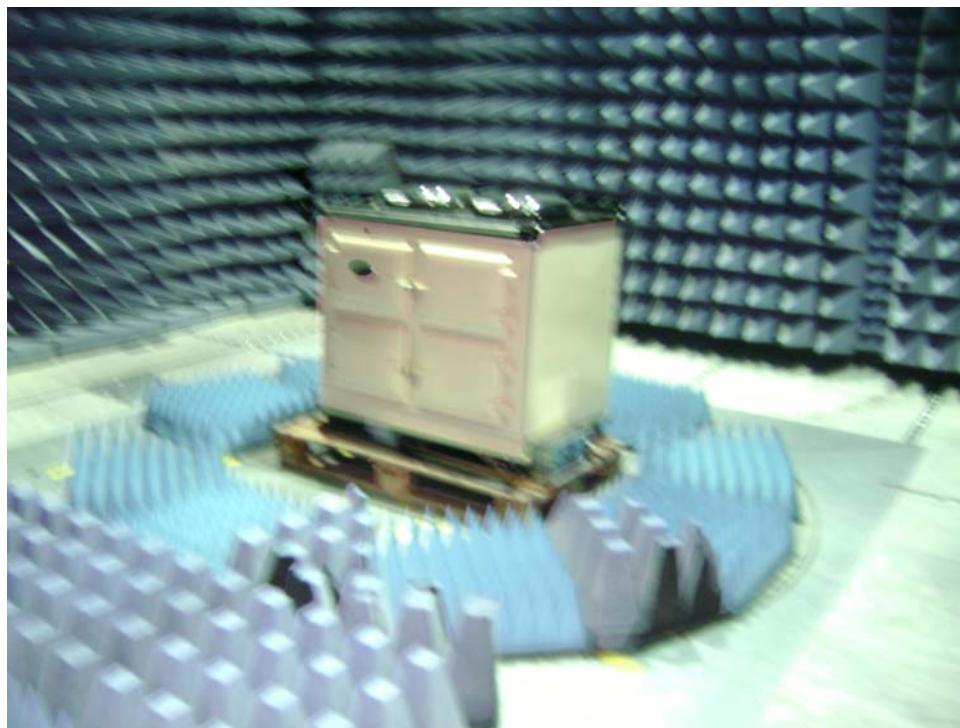

Radiated Power and Spurious Emissions 1- 10GHz

8. TEST EQUIPMENT

Equipment	Type	ID
Test Bay 1	Environment	7400
Chase Bilog	Antenna	8164
3115 Horn	Antenna	7512
ETS Lindgren Horn	Antenna	8327
ETS Lindgren Horn	Antenna	8334
Rohde & Schwarz FSEK	Spectrum Analyser	7811
Rohde & Schwarz ESCI	EMC Receiver	8283
ERA Microwave Pre-amp	WBA3-4	7534
Oregon Scientific	Environmental Sensor	7729
Cable	N Type	7602
Cable	N Type	8183
Cable	N Type	7569
Cable	N Type	7287
Cable	Microwave	7176
Cable	Microwave	7177

All test equipment used was within its calibration period.

ANNEX A

REGISTRATION SITES

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

March 27, 2009

Registration Number: 737726

Intertek
Unit D,
Imperial Park,
Leatherhead, KT22 7TS
United Kingdom

Attention: David Peasey

Re: Measurement facility located at Leatherhead, United Kingdom

Date of Listing: March 27, 2009

Dear Sir or Madam:

Your request for registration of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC rules. The information has, therefore, been placed on file and the name of your organization added to the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years. Please also note that this registration does not recognize the measurement facility to perform testing for products authorized under the Declaration of Conformity (DoC) process. In order to test products subject to DoC authorization process, a measurement facility must be accredited and recognized by the FCC.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,



Katie Hawkins
Electronics Engineer



February 7, 2011

OUR FILE: 46405-2042
Submission No: 145396

Intertek Commercial & Electrical
Unit D Imperial Park Randalls Way
Leatherhead, SRY, KT22 7SB
United Kingdom

Attention: Dave Feasey

Dear Sir/Madame:

The Bureau has received your application for the renewal of a 3m alternative test site. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (Site# 2042F-1). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information:

- The company address code associated to the site(s) located at the above address is: **2042F**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL:

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

A handwritten signature in black ink that reads "Dalwinder Gill".

Dalwinder Gill
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: dalwinder.gill@ic.gc.ca
Tel. No. (613) 998-8363
Fax. No. (613) 990-4752