

FCC PART 15.247

TEST REPORT

For

Shanghai KOHLER Electronics, Ltd.

Building E, 18 Jindian Road, Pudong New Area,
Shanghai, China

FCC ID: A2PSKE-KOHLER3673

Report Type: Original Report	Product Type: Wi-Fi Device (Entertainment Remote Controller)
Test Engineer: <u>Jim Huang</u> <i>Jim Huang</i>	
Report Number: <u>RSZ110609001-00B</u>	
Report Date: <u>2011-12-09</u>	
Reviewed By: <u>Alvin Huang</u> <i>Alvin Huang</i> EMC Engineer	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1093 - RF EXPOSURE (SAR).....	9
STANDARD APPLICABLE	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (2) – 6 dB BANDWIDTH TESTING.....	23
APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	36
APPLICABLE STANDARD	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(e) - POWER SPECTRAL DENSITY	40
APPLICABLE STANDARD	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST PROCEDURE	40
TEST DATA	40

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shanghai KOHLER Electronics, Ltd.*'s product, model number: 1143673 (FCC ID: A2PSKE-KOHLER3673) (the "EUT") in this report is an *Entertainment Remote Controller*, which was measured approximately: 15.3 cm (L) x 8.7 cm (W) x 1.9 cm (H), rated input voltage: 3.7V battery, DC 5V from adapter for charging.

Adapter information:

Model: SAW10-05.0-2000US

Input: AC 100-240 V, 50-60 Hz, 0.5 A

Output: DC 5 V, 2000 mA

** All measurement and test data in this report was gathered from production sample serial number: 1106009 (Assigned by BACL, Shenzhen). The EUT was received on 2011-06-09.*

Objective

This Type approval report is prepared on behalf of *Shanghai KOHLER Electronics, Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submission with FCC ID: A2PSKE-KOHLER3673

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g mode, 11 channels are provided to test.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT Exercise Software

Test software provided by client.

The test was performed under:

802.11b: Data rate: 1 Mbps.

802.11g: Data rate: 6 Mbps.

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
-	-	-	-


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable Power Cable	2.0	Adapter	EUT

Configuration of Test Setup

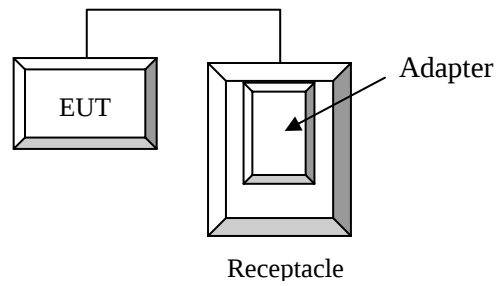

Block Diagram of Test Setup

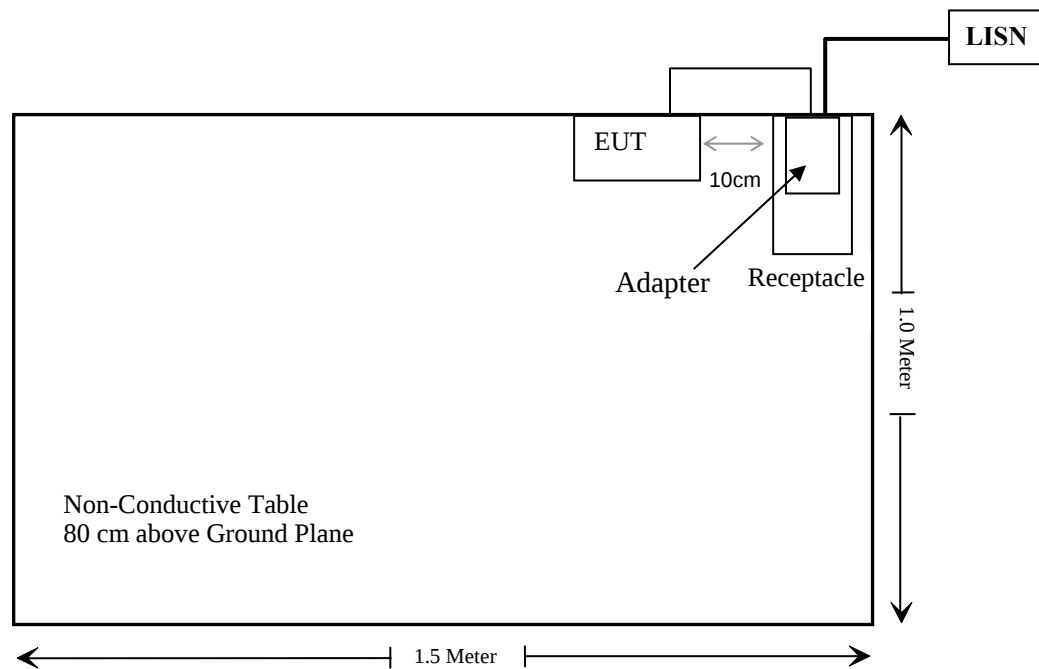

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure (SAR)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a),	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §2.1093 - RF EXPOSURE (SAR)

Standard Applicable

FCC §15.247 (i) & §2.1093

Result: Compliance, please refer to the SAR report, report No.: RSZ110609001-20.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in 1 dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a chip antenna, which in accordance to section 15.203, the maximum gain is 2.5 dBi; please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB ($k=2$, 95% level of confidence).

EUT Setup

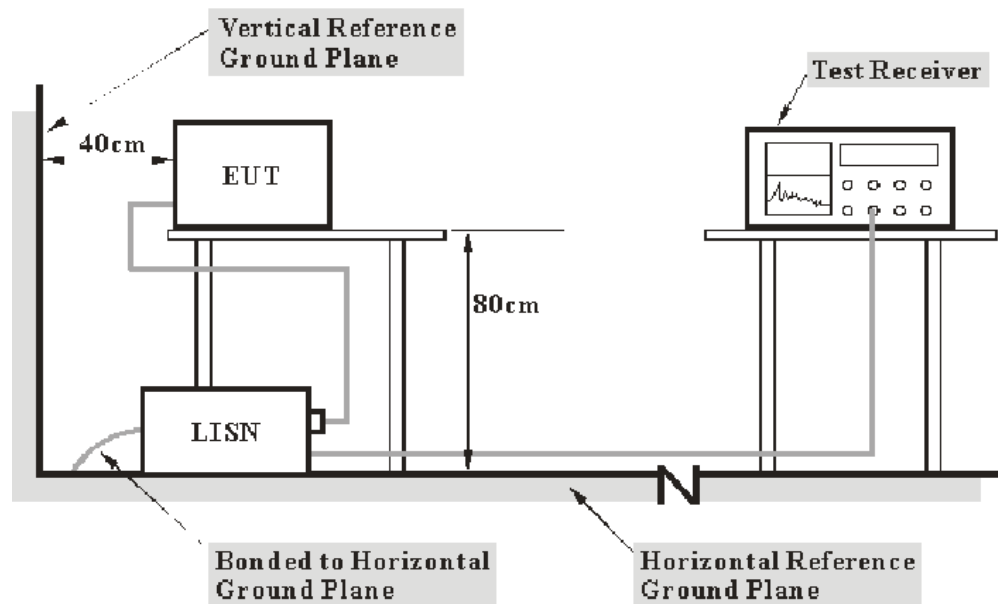

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

29.07 dB at 0.545 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jim Huang on 2011-10-28.


Test Mode: Transmitting

AC 120 V, 60 Hz, Line:

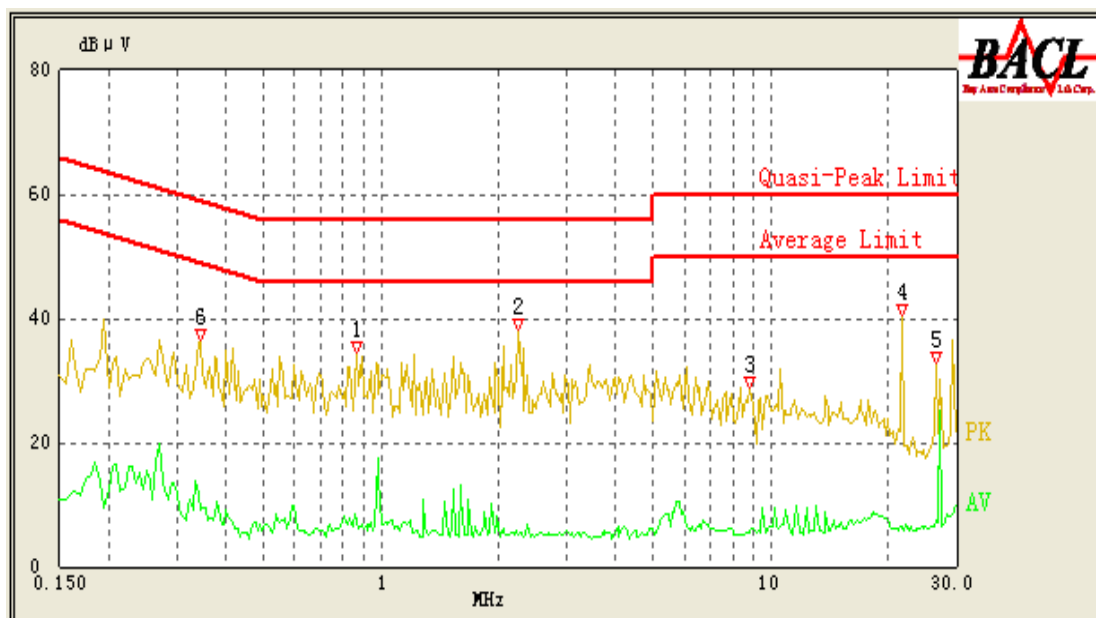

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
2.245	19.32	9.97	56.00	36.68	QP
0.345	23.15	9.96	60.43	37.28	QP
0.865	18.09	9.97	56.00	37.91	QP
0.865	7.61	9.97	46.00	38.39	Ave.
2.240	5.12	9.97	46.00	40.88	Ave.
0.345	9.12	9.96	50.43	41.31	Ave.
26.605	7.43	10.13	50.00	42.57	Ave.
21.675	6.39	10.08	50.00	43.61	Ave.
8.865	5.37	9.99	50.00	44.63	Ave.
26.605	10.40	10.13	60.00	49.60	QP
21.675	9.68	10.08	60.00	50.32	QP
8.785	9.35	9.99	60.00	50.65	QP

AC 120V, 60 Hz, Neutral:

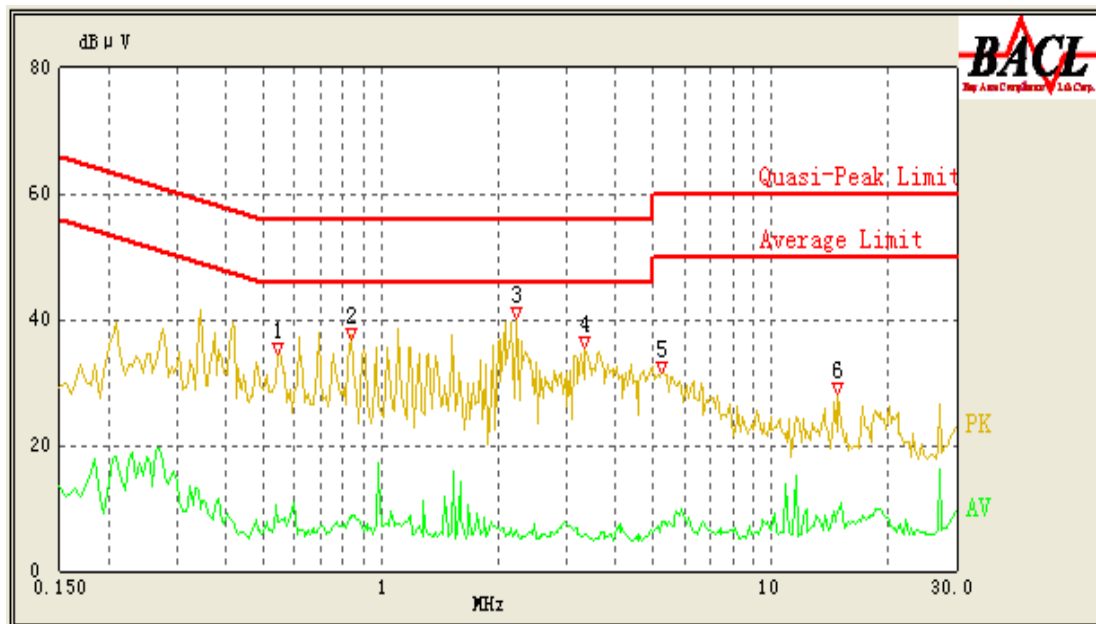

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.545	26.93	9.96	56.00	29.07	QP
0.840	18.78	9.97	56.00	37.22	QP
0.840	8.44	9.97	46.00	37.56	Ave.
0.545	7.93	9.96	46.00	38.07	Ave.
2.215	6.53	9.97	46.00	39.47	Ave.
3.330	16.28	9.97	56.00	39.72	QP
3.330	5.82	9.97	46.00	40.18	Ave.
15.055	9.69	10.05	50.00	40.31	Ave.
2.225	14.64	9.97	56.00	41.36	QP
5.275	18.37	9.97	60.00	41.63	QP
5.270	7.94	9.97	50.00	42.06	Ave.
14.885	15.86	10.05	60.00	44.14	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB($k=2$, 95% level of confidence) .

EUT Setup

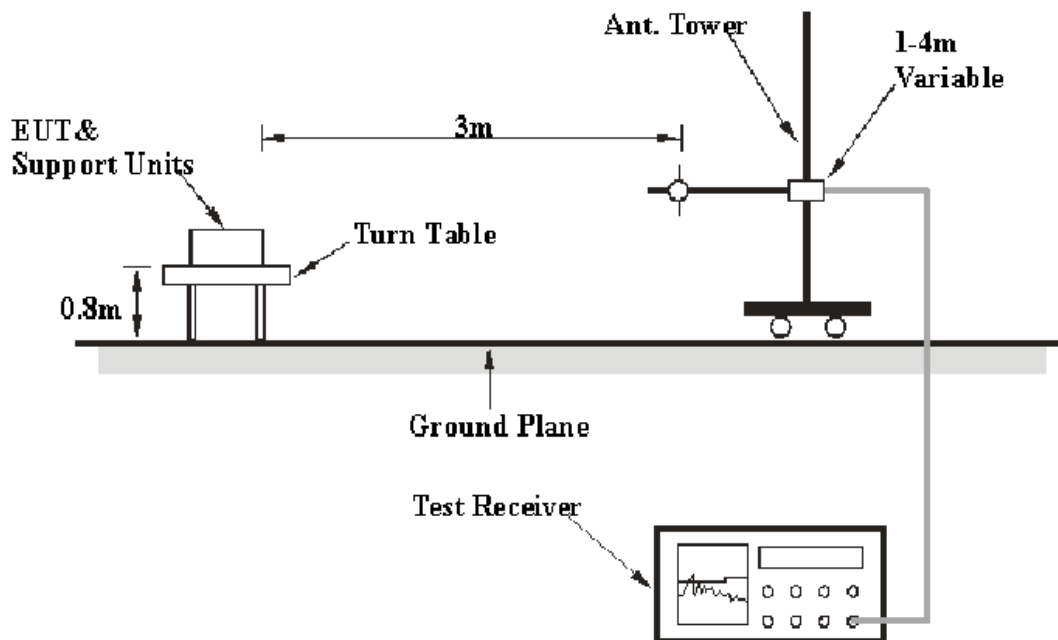

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-03-11	2012-03-10
Mini-circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
The Electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-05-05	2012-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

2.01 dB at 4924 MHz in the Horizontal polarization in 802.11b Mode

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jim Huang on 2011-10-28.

30 MHz ~25 GHz:*Test Mode: Transmitting*



802.11b Mode:

Indicated		Detector (PK/QP/ Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)												
4824	39.12	Ave.	205	1.1	H	36.2	3.3	26.8	51.82	54	2.18*	harmonic
4824	39.21	Ave.	168	1.5	V	35.2	3.3	26.8	50.91	54	3.09*	harmonic
565.24	48.4	QP	245	1.5	H	16.7	3.4	26.4	42.10	46	3.90*	spurious
2386.64	40.91	Ave.	334	1.0	V	30.3	3.03	26.85	47.39	54	6.61	spurious
565.24	44.45	QP	236	1.3	V	16.7	3.4	26.4	38.15	46	7.85	spurious
2386.64	58.9	PK	334	1.0	V	30.3	3.03	26.85	65.38	74	8.62	spurious
2386.64	36.48	Ave.	145	1.0	H	30.90	3.03	26.85	43.56	54	10.44	spurious
2386.64	56.36	PK	145	1.0	H	30.90	3.03	26.85	63.44	74	10.56	spurious
4824	40.73	PK	205	1.1	H	36.2	3.3	26.8	53.43	74	20.57	harmonic
4824	41.15	PK	168	1.5	V	35.2	3.3	26.8	52.85	74	21.15	harmonic
Middle Channel (2437 MHz)												
4874	39.46	Ave.	176	1.2	H	35.8	3.3	26.78	51.78	54	2.22*	harmonic
4874	39.29	Ave.	302	1.6	V	34.8	3.3	26.78	50.61	54	3.39*	harmonic
565.24	48.1	QP	241	1.6	H	16.7	3.4	26.4	41.80	46	4.20	spurious
565.24	45.31	QP	176	1.4	V	16.7	3.4	26.4	39.01	46	6.99	spurious
4874	40.43	PK	176	1.2	H	35.8	3.3	26.78	52.75	74	21.25	harmonic
4874	41.28	PK	302	1.6	V	34.8	3.3	26.78	52.60	74	21.40	harmonic
High Channel (2462 MHz)												
4924	39.67	Ave.	175	1.2	H	35.8	3.3	26.78	51.99	54	2.01*	harmonic
4924	39.86	Ave.	304	1.6	V	34.8	3.3	26.78	51.18	54	2.82*	harmonic
565.24	48.53	QP	254	1.5	H	16.7	3.4	26.4	42.23	46	3.77*	spurious
2487.69	40.2	Ave.	145	1.0	V	30.3	3.03	26.85	46.68	54	7.32	spurious
565.24	44.92	QP	135	1.4	V	16.7	3.4	26.4	38.62	46	7.38	spurious
2487.69	58.97	PK	145	1.0	V	30.3	3.03	26.85	65.45	74	8.55	spurious
2487.69	36.21	Ave.	130	1.0	H	30.90	3.03	26.85	43.29	54	10.71	spurious
2487.69	55.08	PK	130	1.0	H	30.90	3.03	26.85	62.16	74	11.84	spurious
4924	41.7	PK	304	1.6	V	34.8	3.3	26.78	53.02	74	20.98	harmonic
4924	40.34	PK	175	1.2	H	35.8	3.3	26.78	52.66	74	21.34	harmonic


* Within measurement uncertainty.

802.11g Mode:


Indicated		Detector (PK/QP/ Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)												
565.24	48.12	QP	310	1.7	H	16.7	3.4	26.4	41.82	46	4.18	spurious
565.24	44.57	QP	173	1.6	V	16.7	3.4	26.4	38.27	46	7.73	spurious
2389.64	55.69	PK	34	1.0	V	30.3	3.03	26.85	62.17	74	11.83	spurious
2389.64	54.63	PK	54	1.0	H	30.9	3.03	26.85	61.71	74	12.29	spurious
2389.64	33.28	Ave.	54	1.0	H	30.9	3.03	26.85	40.36	54	13.64	spurious
4824	23.21	Ave.	86	1.5	V	35.2	3.3	26.8	34.91	54	19.09	harmonic
4824	22.12	Ave.	68	1.1	H	36.2	3.3	26.8	34.82	54	19.18	harmonic
4824	40.15	PK	86	1.5	V	35.2	3.3	26.8	51.85	74	22.15	harmonic
4824	38.45	PK	68	1.1	H	36.2	3.3	26.8	51.15	74	22.85	harmonic
2389.64	23.91	Ave.	34	1.0	V	30.3	3.03	26.85	30.39	54	23.61	spurious
Middle Channel (2437 MHz)												
565.24	48.32	QP	342	1.5	H	16.7	3.4	26.4	42.02	46	3.98*	spurious
565.24	44.35	QP	164	1.5	V	16.7	3.4	26.4	38.05	46	7.95	spurious
4874	22.46	Ave.	106	1.2	H	35.8	3.3	26.78	34.78	54	19.22	harmonic
4874	23.29	Ave.	32	1.6	V	34.8	3.3	26.78	34.61	54	19.39	harmonic
4874	40.28	PK	32	1.6	V	34.8	3.3	26.78	51.6	74	22.4	harmonic
4874	38.43	PK	106	1.2	H	35.8	3.3	26.78	50.75	74	23.25	harmonic
High Channel (2462 MHz)												
565.24	48.64	QP	232	1.5	H	16.7	3.4	26.4	42.34	46	3.66*	spurious
565.24	45.02	QP	166	1.4	V	16.7	3.4	26.4	38.72	46	7.28	spurious
2483.69	56.97	PK	45	1.0	V	30.3	3.03	26.85	63.45	74	10.55	spurious
2483.69	35.21	Ave.	30	1.0	H	30.9	3.03	26.85	42.29	54	11.71	spurious
2483.69	54.89	PK	30	1.0	H	30.9	3.03	26.85	61.97	74	12.03	spurious
4924	23.86	Ave.	34	1.6	V	34.8	3.3	26.78	35.18	54	18.82	harmonic
4924	22.67	Ave.	75	1.2	H	35.8	3.3	26.78	34.99	54	19.01	harmonic
4924	40.79	PK	34	1.6	V	34.8	3.3	26.78	52.11	74	21.89	harmonic
4924	38.65	PK	75	1.2	H	35.8	3.3	26.78	50.97	74	23.03	harmonic
2483.69	24.02	Ave.	45	1.0	V	30.3	3.03	26.85	30.50	54	23.50	spurious

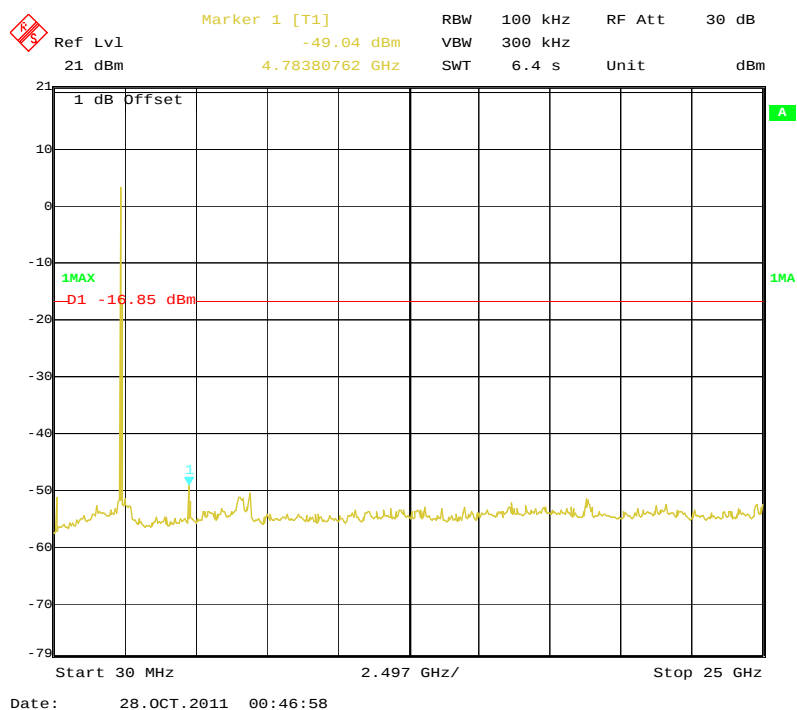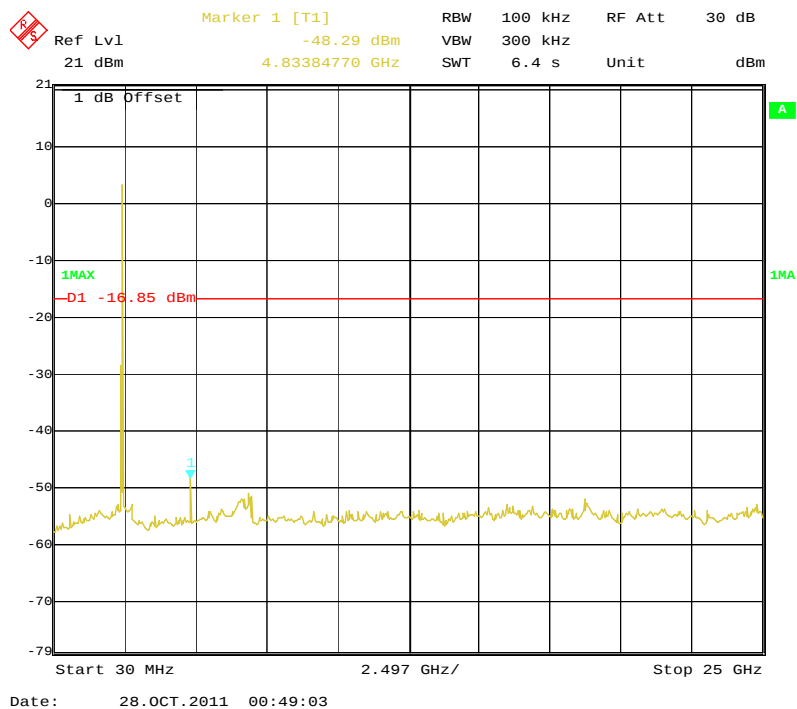Antenna Port Conducted Spurious Emissions:**802.11b Low Channel****802.11b Middle Channel**


802.11b High Channel

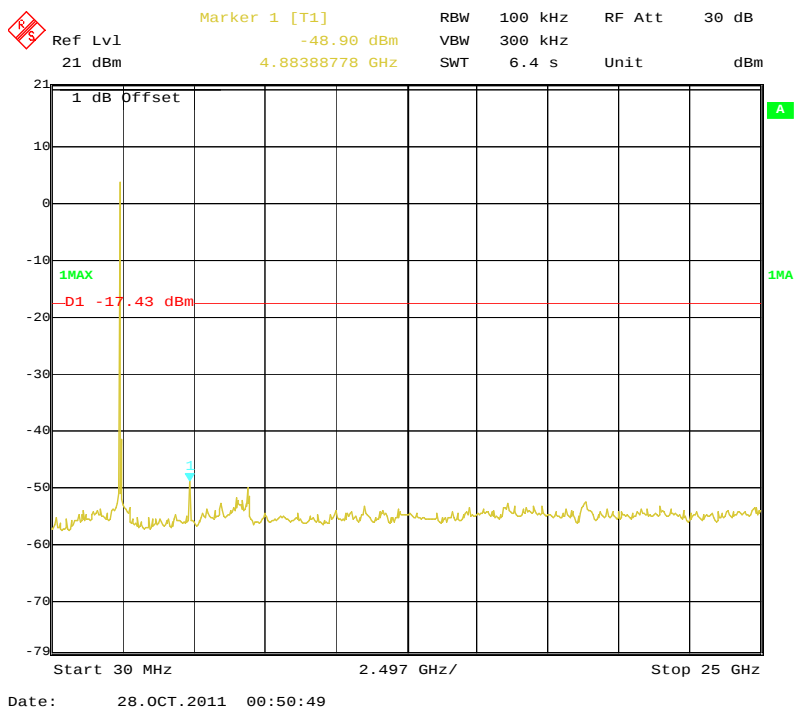


802.11g Low Channel

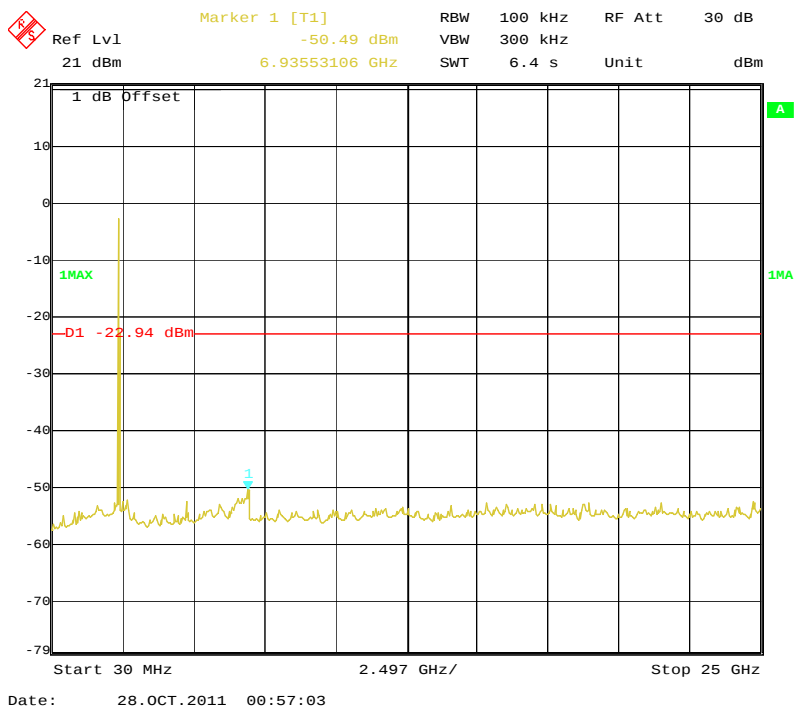

802.11g Middle Channel

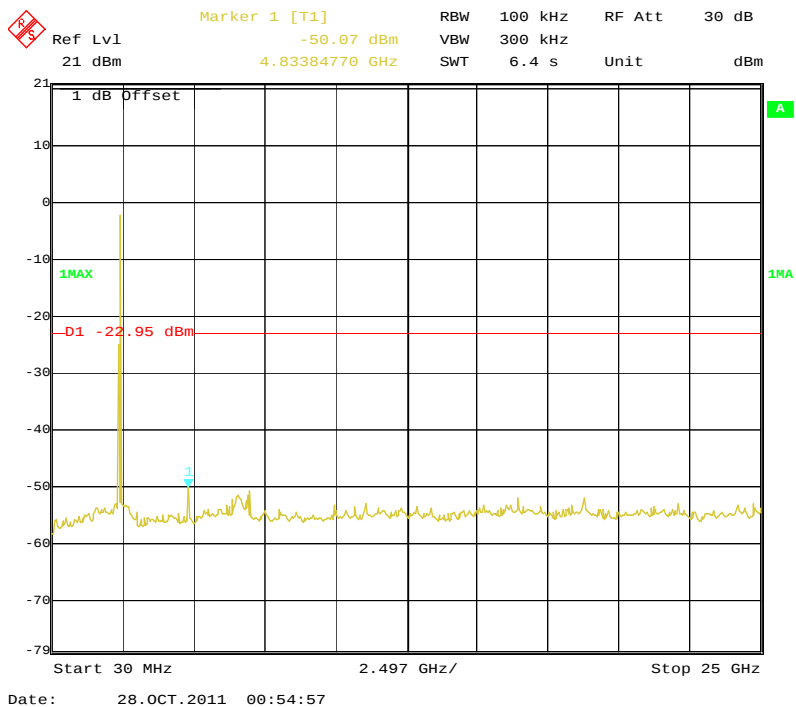

802.11g High Channel

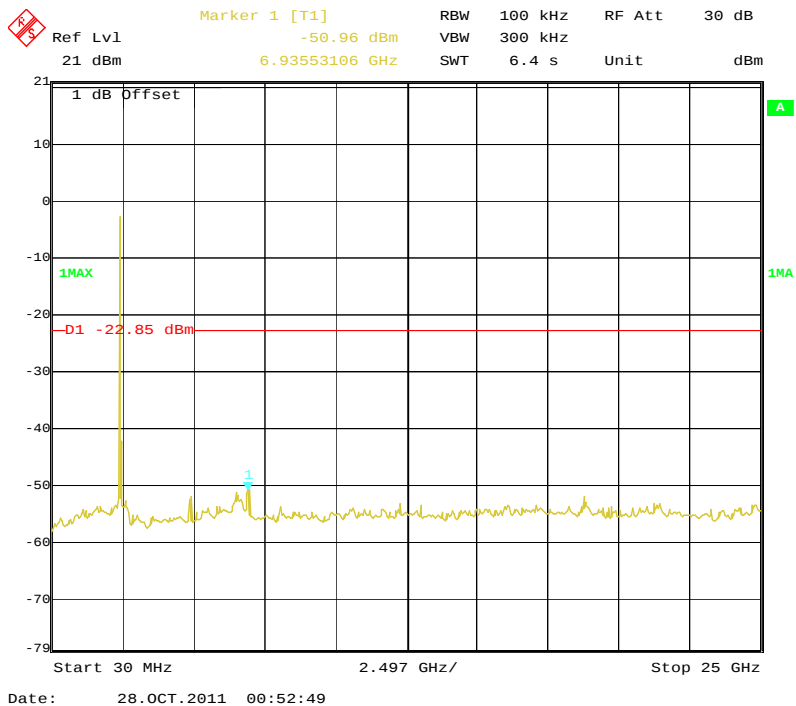

FCC §15.247(a) (2) – 6 dB BANDWIDTH TESTING

Applicable Standard

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

The testing was performed by Jim Huang on 2011-10-26.

Test Result: Pass; please refer to the following tables and plots.


Channel	Frequency (MHz)	Data Rate (Mbps)	6 dB Emission Bandwidth (MHz)	FCC Limit (kHz)
802.11b mode				
Low	2412	1	10.24	> 500
Middle	2437	1	10.20	> 500
High	2462	1	10.24	> 500
802.11g mode				
Low	2412	6	16.64	> 500
Middle	2437	6	16.64	> 500
High	2462	6	16.64	> 500

802.11b Low Channel

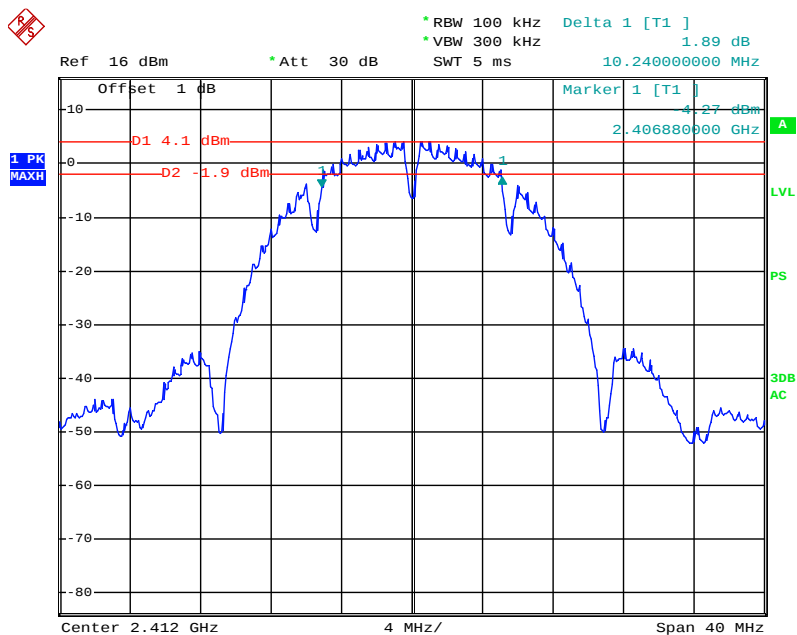


Date: 26.OCT.2011 08:30:08

802.11b Middle Channel

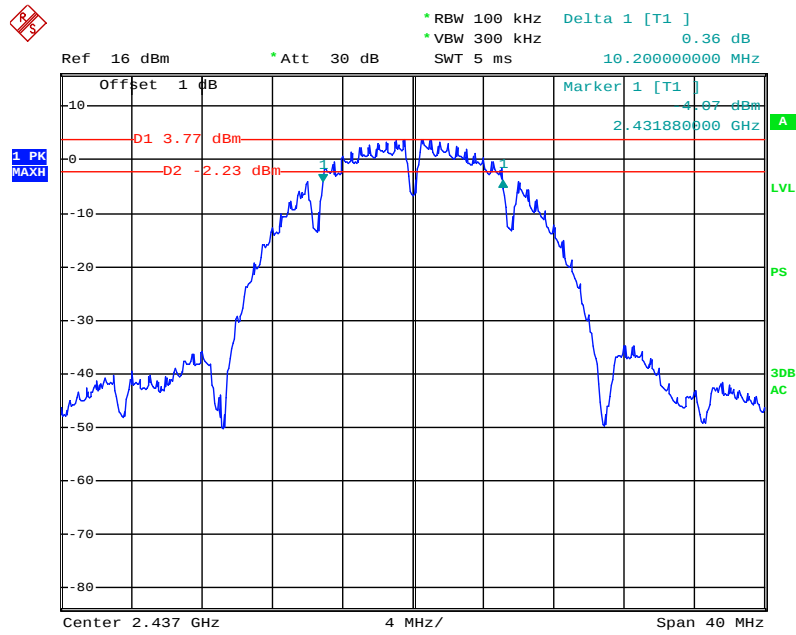


Date: 26.OCT.2011 08:33:49


802.11b High Channel

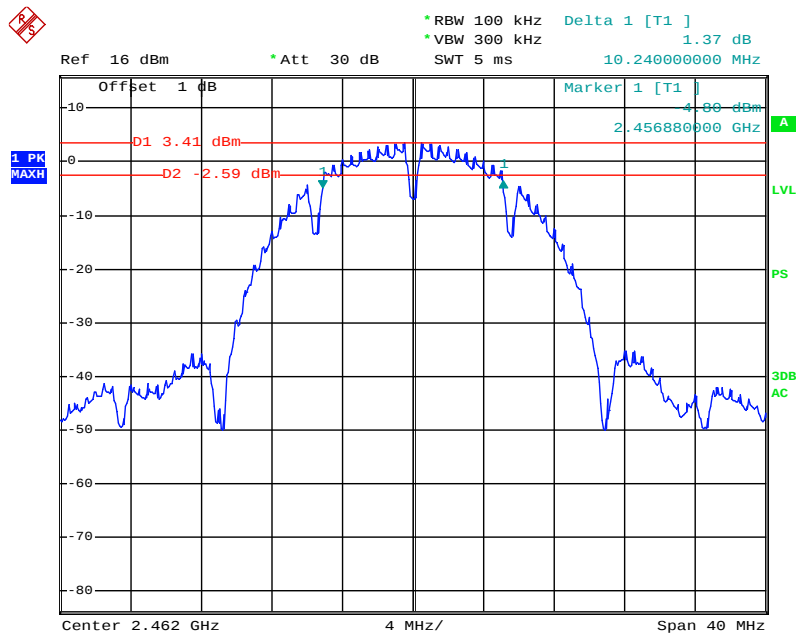

Date: 26.OCT.2011 08:34:51

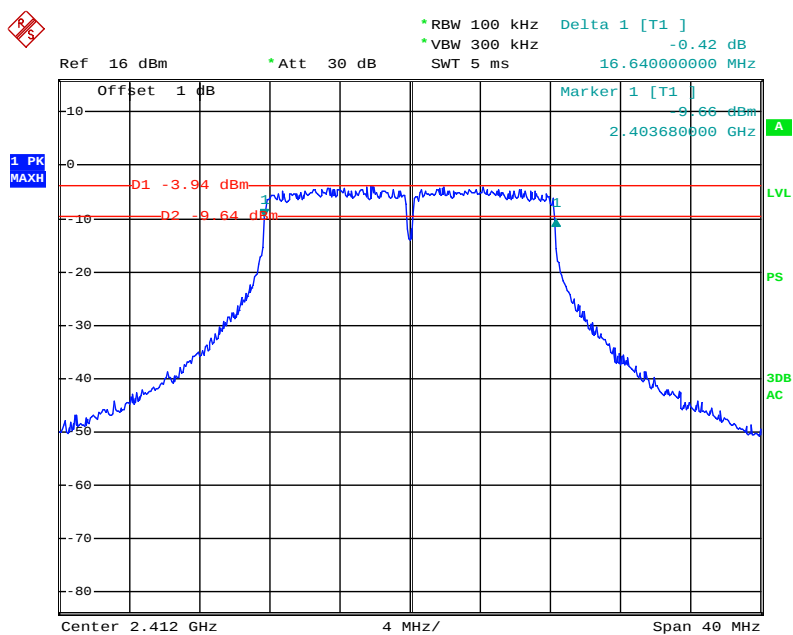
802.11g Low Channel

Date: 26.OCT.2011 08:39:14

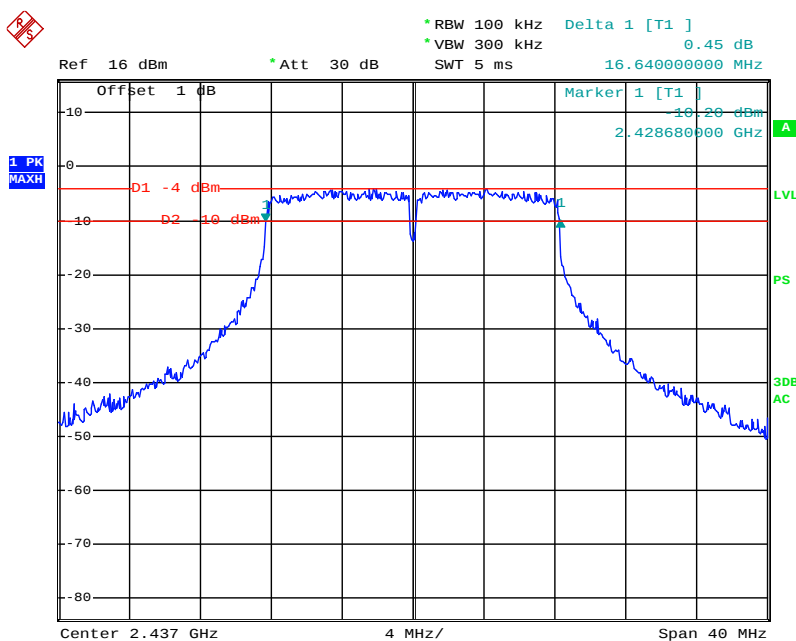802.11g Middle Channel

Date: 26.OCT.2011 08:37:22

802.11g High Channel

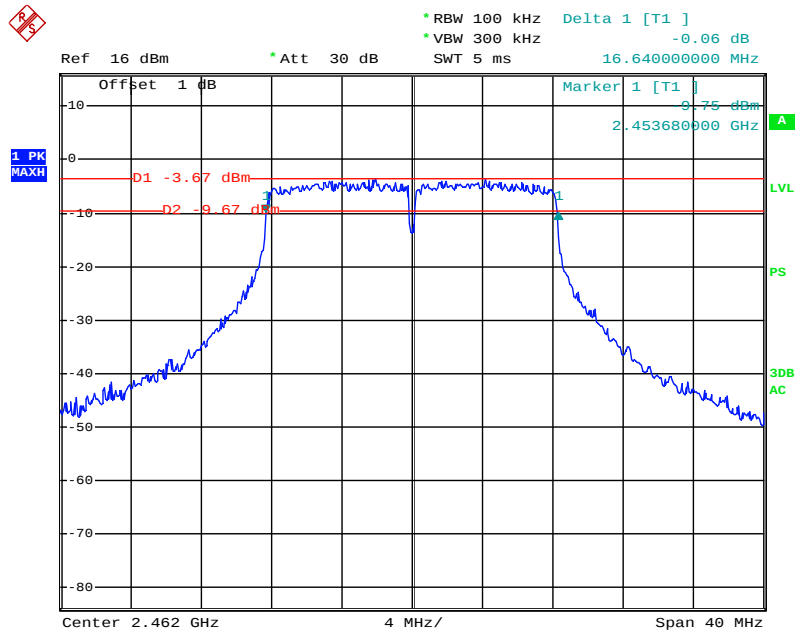

Date: 26.OCT.2011 08:36:34

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions


Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jim Huang on 2011-10-25 to 2011-10-27.

Test Mode: Transmitting


Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Output Power (dBm)	FCC Limit (dBm)	Result
802.11b					
Low	2412	1	14.46	30	Pass
Middle	2437	1	14.60	30	Pass
High	2462	1	14.79	30	Pass
802.11g					
Low	2412	6	11.79	30	Pass
Middle	2437	6	12.32	30	Pass
High	2462	6	12.36	30	Pass

802.11b 99% Occupied Bandwidth, Low Channel

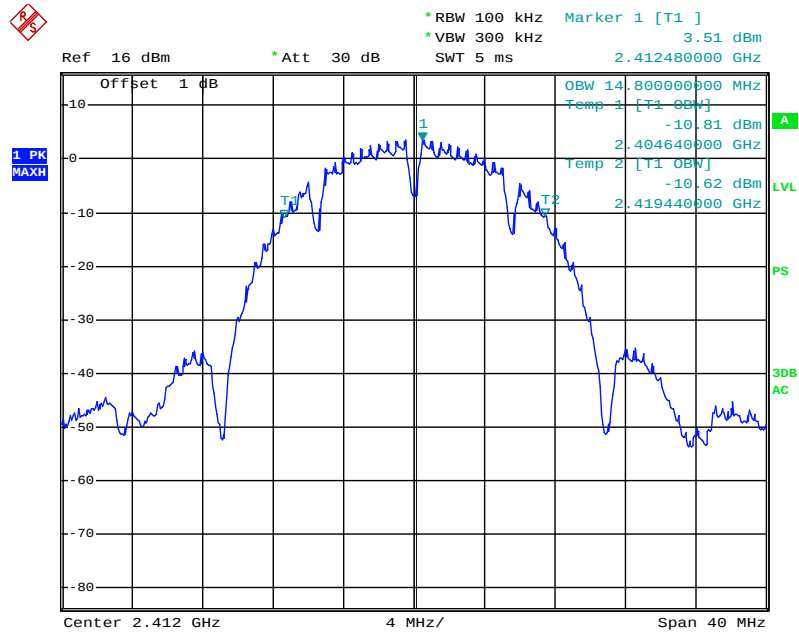


Date: 25.OCT.2011 15:46:48

802.11b RF Output Power, Low Channel

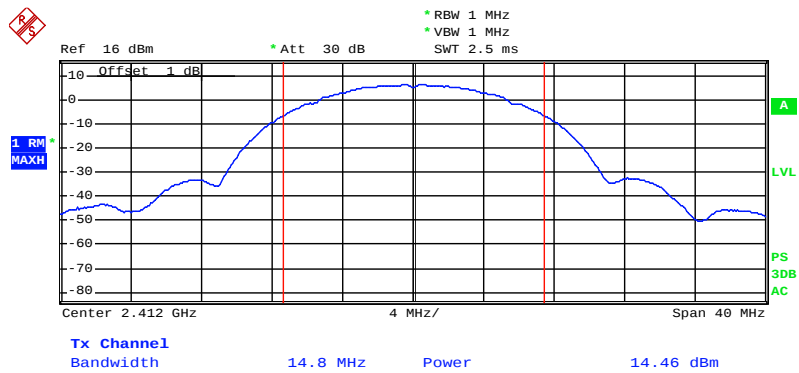


Date: 25.OCT.2011 15:50:24

802.11b 99% Occupied Bandwidth, Middle Channel

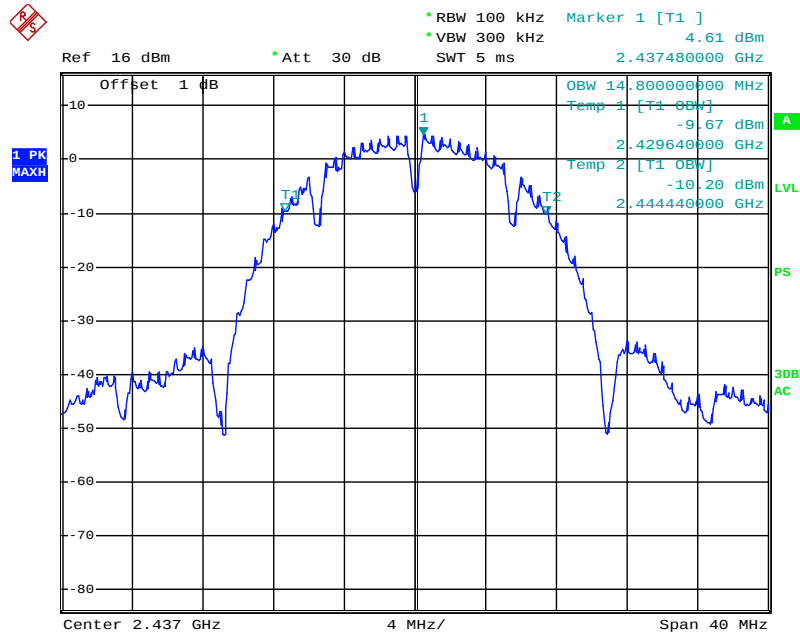


Date: 25.OCT.2011 16:36:06


802.11b RF Output Power, Middle Channel

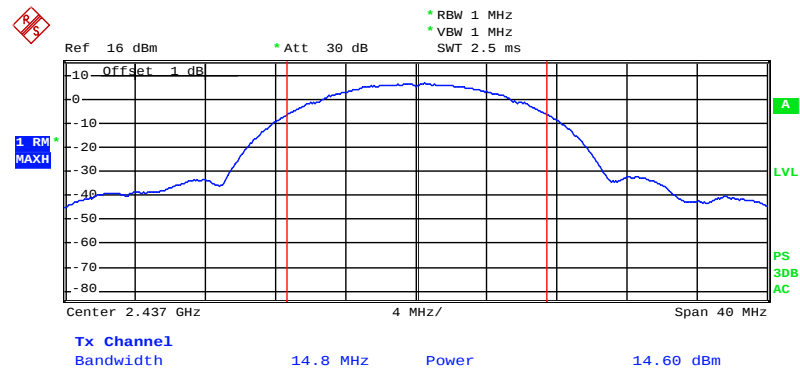

Date: 25.OCT.2011 16:36:50

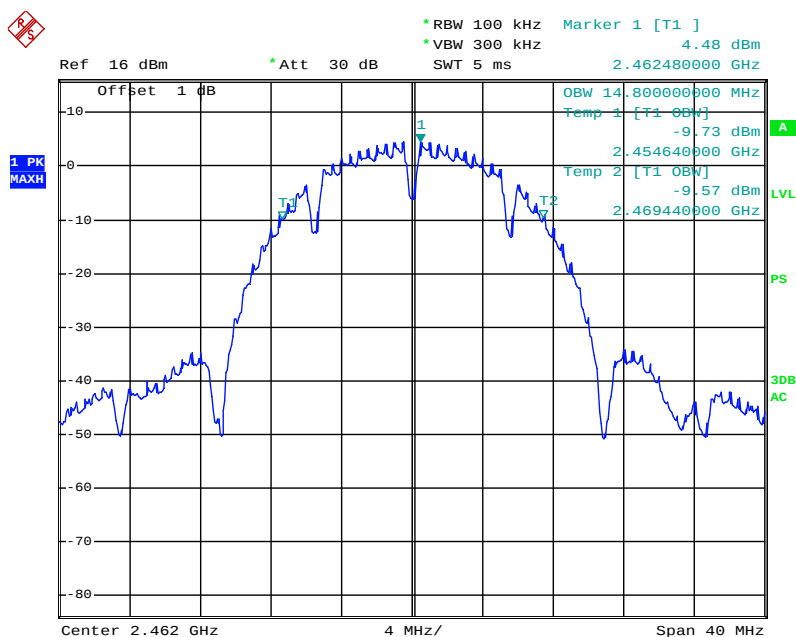802.11b 99% Occupied Bandwidth, High Channel

Date: 25.OCT.2011 16:37:49

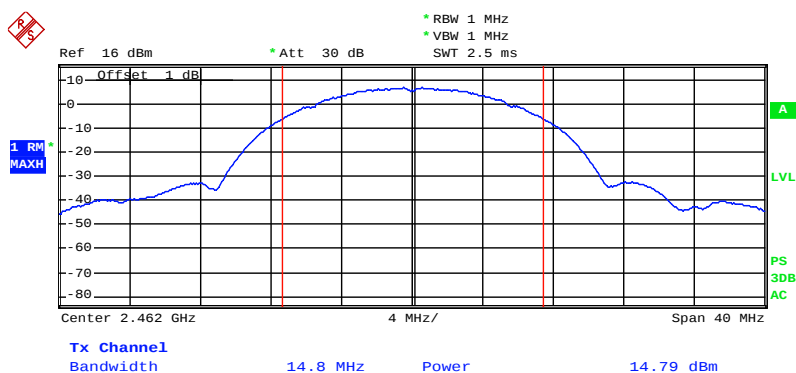802.11b RF Output Power, High Channel

Date: 25.OCT.2011 16:37:21

Ref 22 dBm *Att 40 dB *RBW 100 kHz Marker 1 [T1] -3.73 dBm
 *VBW 300 kHz SWT 5 ms 2.416160000 GHz

Offset 1 dB


1 PK MAXH


GBW 10.400000000 MHz
 Temp 1 [T1 0BW] -8.54 dBm
 2.403760000 GHz
 Temp 2 [T1 0BW] -6.87 dBm
 2.420240000 GHz

3dB AC


Center 2.412 GHz 4 MHz/ Span 40 MHz

802.11g RF Output Power, Low Channel



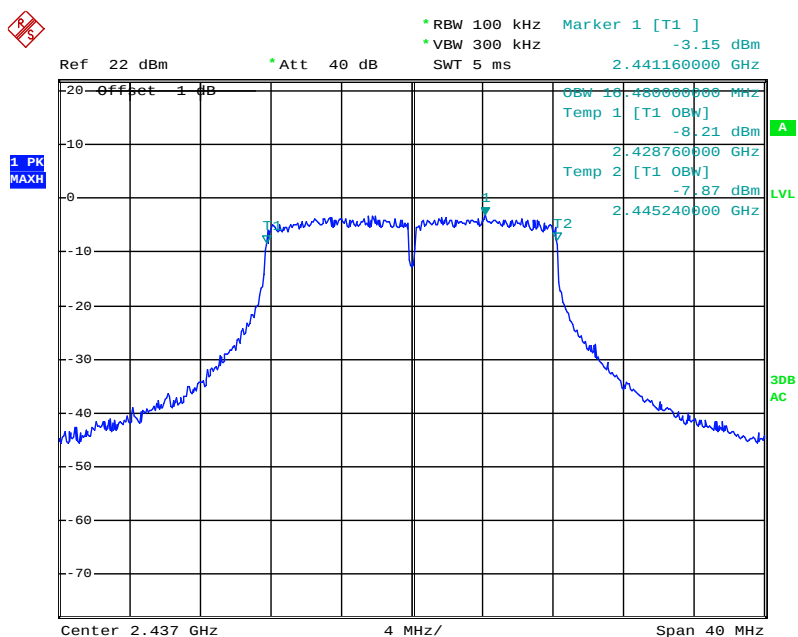
802.11g 99% Occupied Bandwidth, Middle Channel

Date: 27.OCT.2011 10:43:14

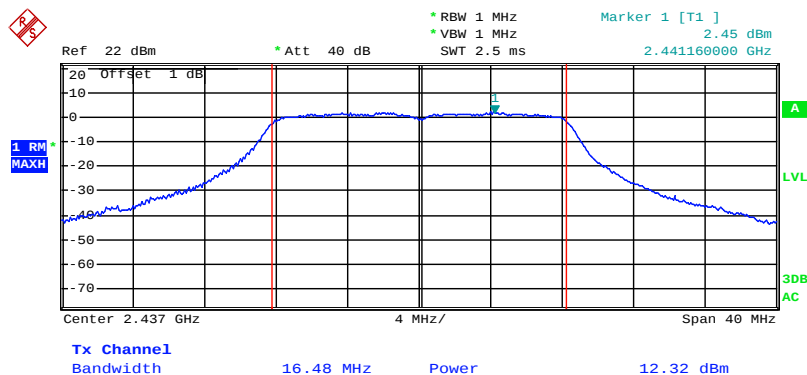802.11g RF Output Power, Middle Channel


Date: 27.OCT.2011 10:43:39

802.11g 99% Occupied Bandwidth, High Channel

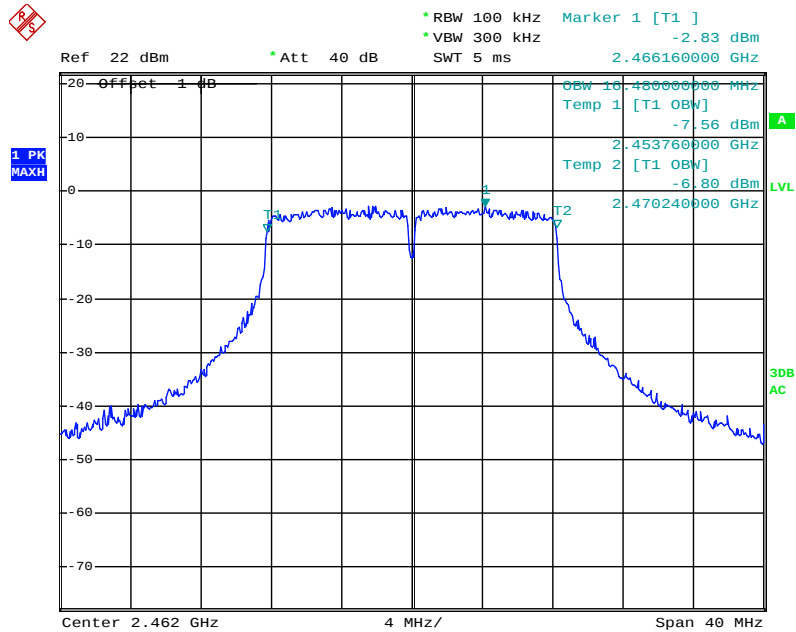

Date: 27.OCT.2011 10:44:18

802.11g RF Output Power, High Channel

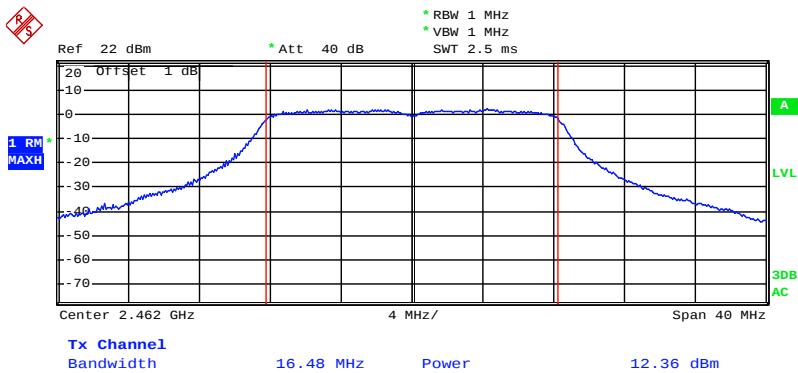

Date: 27.OCT.2011 10:46:04

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW of spectrum analyzer to 1 MHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**


Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jim Huang on 2011-10-26.

Test Result: *Compliance*


Frequency (MHz)	Delta Peak to Band Emission (dBc)	FCC Limit (dBc)	Result
802.11b			
2399.52	38.93	20	Pass
2487.70	52.29	20	Pass
802.11g			
2399.76	31.75	20	Pass
2485.00	44.78	20	Pass

Please refer to following plots.

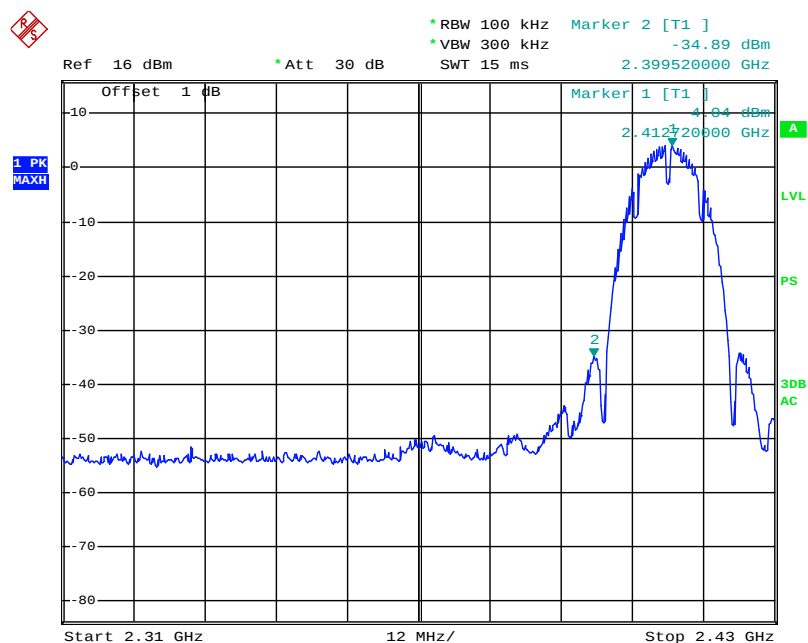802.11b: Band Edge, Left Side


Date: 26.OCT.2011 08:45:40

802.11b: Band Edge, Right Side

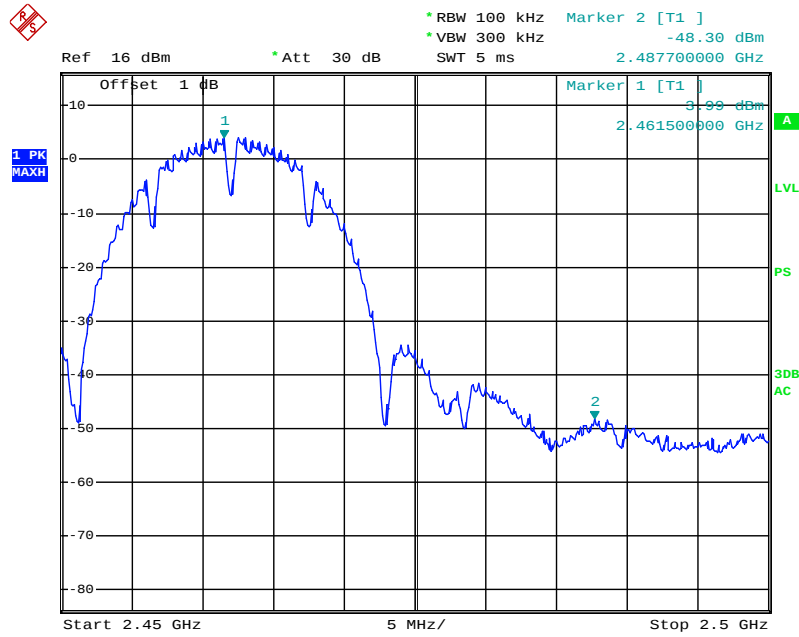


Date: 26.OCT.2011 08:44:43

802.11g: Band Edge, Left Side

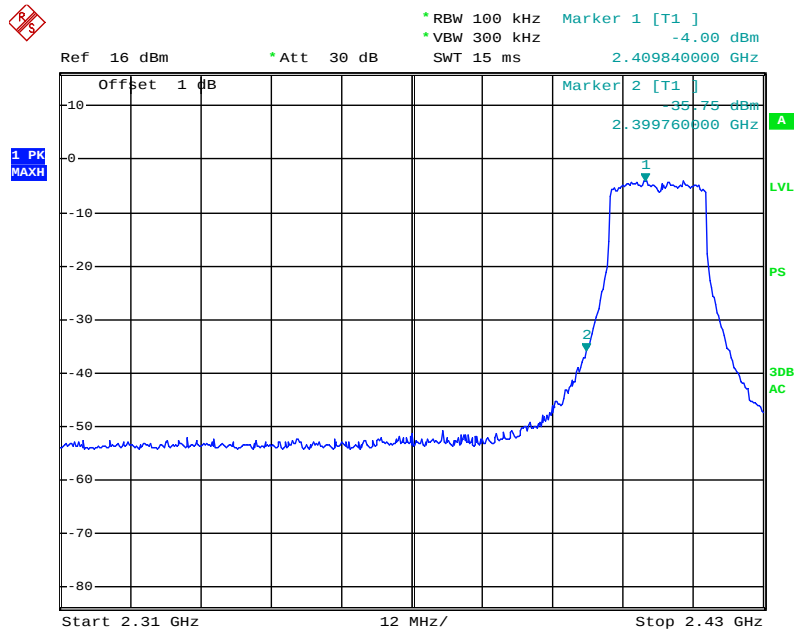

Date: 26.OCT.2011 08:41:28

802.11g: Band Edge, Right Side

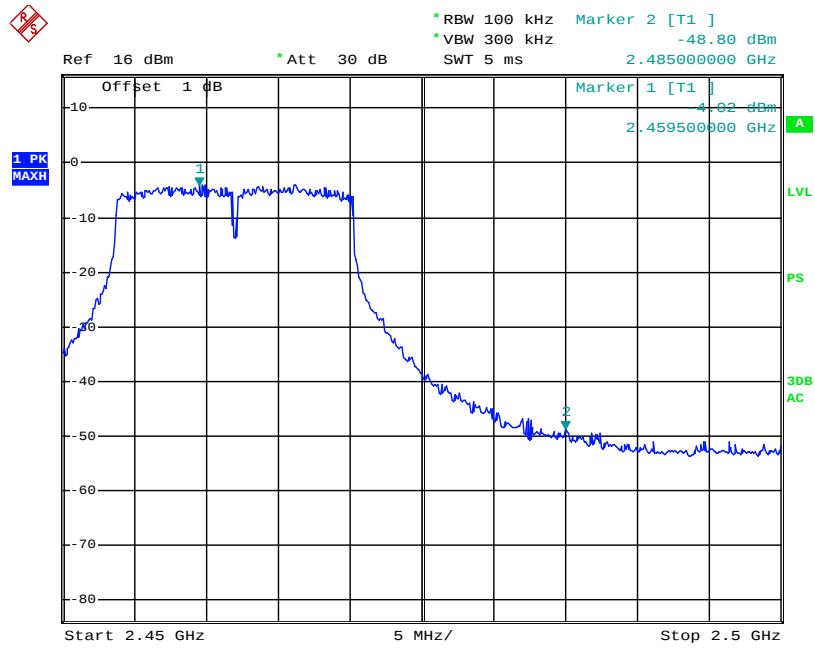

Date: 26.OCT.2011 08:43:12

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Jim Huang on 2011-10-26.

Test Mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	Data Rate (Mbps)	PSD (dBm)	Limit (dBm)	Result
802.11b mode					
Low	2412	1	-15.92	8	Pass
Middle	2437	1	-16.02	8	Pass
High	2462	1	-15.96	8	Pass
802.11g mode					
Low	2412	6	-19.34	8	Pass
Middle	2437	6	-18.96	8	Pass
High	2462	6	-18.62	8	Pass


Power Spectral Density, 802.11b Low Channel

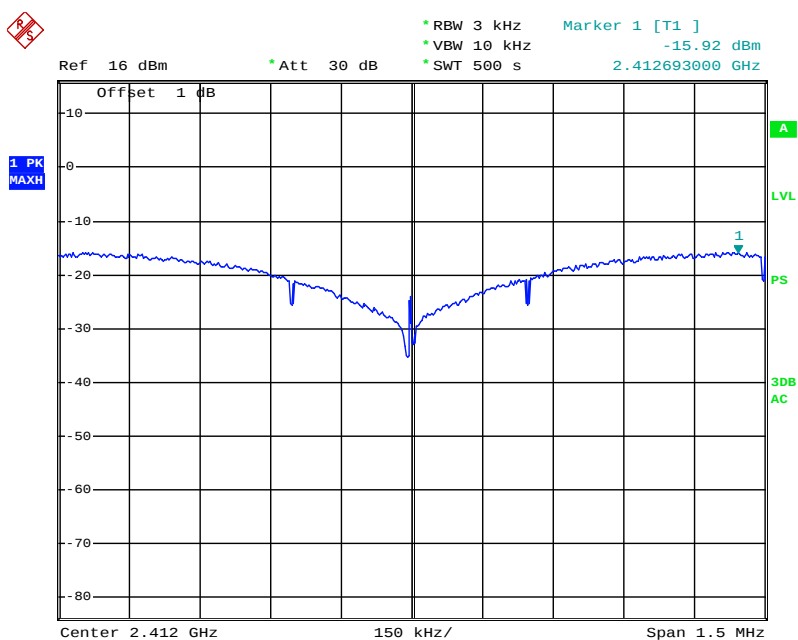


Date: 26.OCT.2011 08:56:18

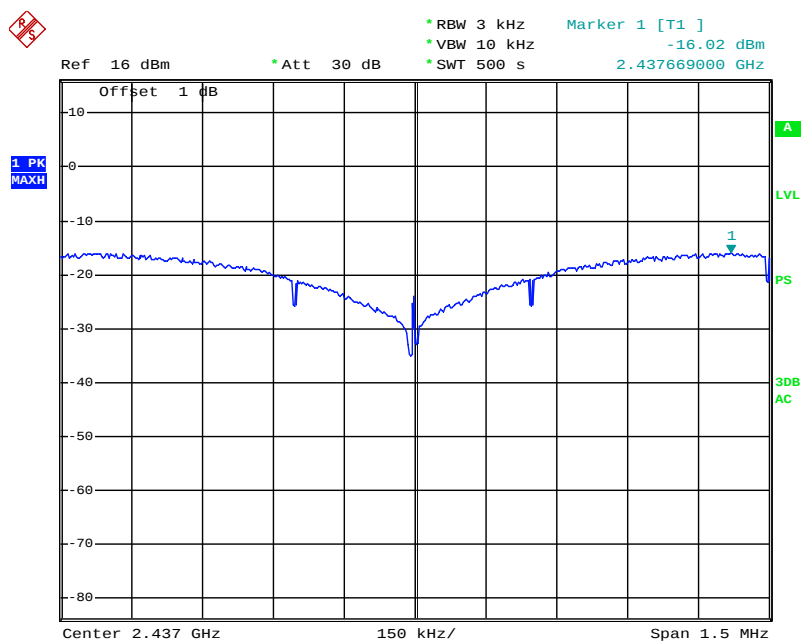Power Spectral Density, 802.11b Middle Channel


Date: 26.OCT.2011 09:08:33

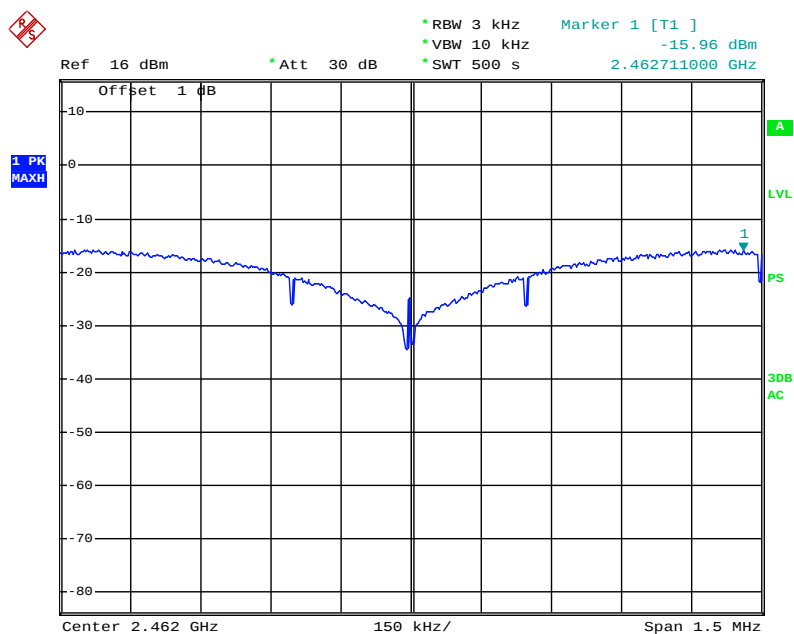Power Spectral Density, 802.11b High Channel

Date: 26.OCT.2011 09:21:26

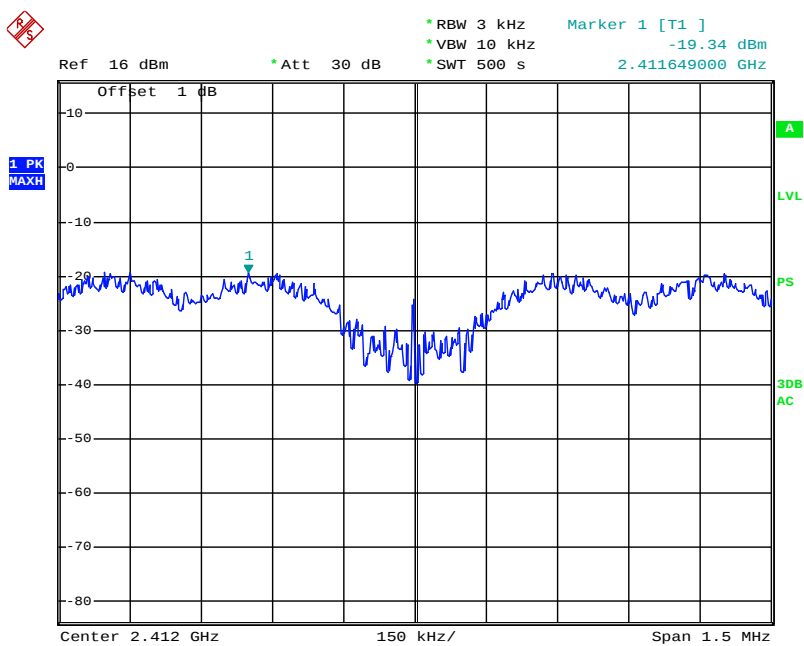
Power Spectral Density, 802.11g Low Channel

Date: 26.OCT.2011 10:02:18

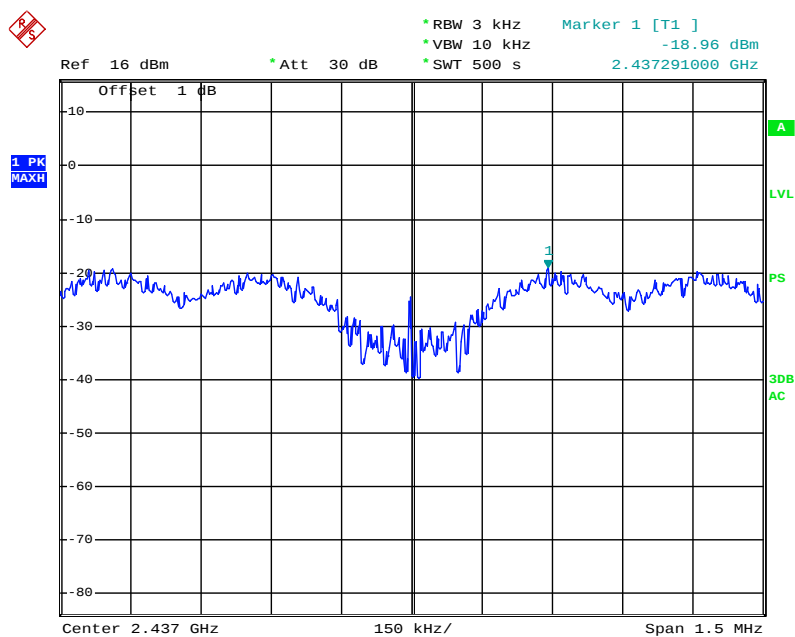Power Spectral Density, 802.11g Middle Channel

Date: 26.OCT.2011 09:46:53

Power Spectral Density, 802.11g High Channel

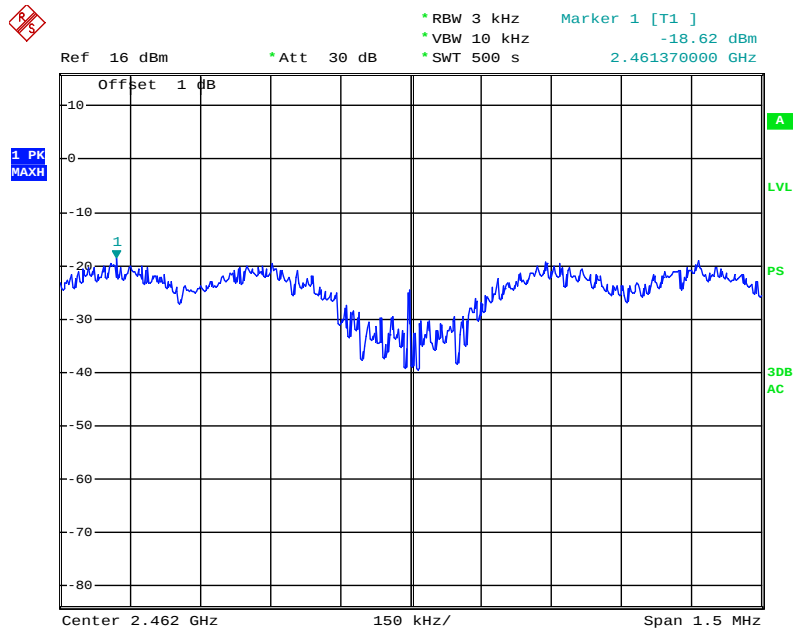

Date: 26.OCT.2011 09:37:27

***** END OF REPORT *****