

Exhibit 5

Test Data of Original

FCC TEST REPORT

FCC ID : A3KM082
 REPORT NO.: EMI98-043
 TEST DATE : MAY/30/1998
 TEST ENGI.: C.C.Wu

TEST PERFORMED BY
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION (PEI-CED)
 EMI-LAB
 P.O.BOX 123
 CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED

TESTED SYSTEM:

1. EUT : 151AX LCD COLOR MONITOR S/N.: --
 FCC ID. : A3KM082
2. COMPUTER: IBM Aptiva 2176-T33 S/N.: 90-A58TZ
 FCC ID. : AN02161V
3. PRINTER : HP 2225C S/N.: 3145502419
 FCC ID. : DSI6XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
 FCC ID. : BFJ9D907-00038
5. MOUSE : IBM M-S34 S/N.: 23-146196
 FCC ID. : DZL211029
6. KEYBOARD: IBM KB-9826 S/N.: K071940
 FCC ID. : E8HKB-5323
7. VIDEO CARD : WINNER 3000L S/N.: 023004001190
 FCC ID. : KJGW3000L
8. CD_ROMO : SONY CDU31A S/N.: --
 FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 9kHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.

60.0Kz MODE(1024X768/75Hz) WAS TESTED.

FLY-IN I/O CABLE WITH FOUR FERRITE CORES(TWO INSIDE) WAS USED
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

EXTRA EARPHONE AND MICPHONE WERE USED DURING TEST.

EXTRA 4 USB CABLES WERE CONNECTED TO DUMMY LOAD WAS USED.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
115.59	33.16	31.96	43.5
136	33.66	33.56	43.5

FCC ID : A3KM082

-- #043 CONT. --

141.79	32.32	33.12	43.5
156.4	33.2	30.8	43.5
163.2	27.79	29.09	43.5
170	28.9	30.7	43.5
183.6	32.36	30.16	43.5
231.2	36.05	35.55	46
238	37.4	37.5	46
244.8	36.1	36.7	46
251.6	37.9	36.3	46
258.4	38	36.7	46
265.2	37.4	37.8	46
271.98	38.38	36.68	46
278.78	37.66	AMBIENT	46
285.58	39.8	AMBIENT	46
292.39	37.94	36.94	46
299.3	36.48	38.98	46
306	31.424	30.024	46
312.78	32.752	31.852	46
319.58	35.18	35.58	46
326.41	36.224	35.624	46
330.82	34.944	37.944	46
333.18	31.592	30.992	46
338.7	34.136	36.536	46
340	36.36	38.56	46
346.8	36.028	36.328	46
353.6	37.9	39.3	46
354.45	35.6	37.8	46
360.4	36.3	34.4	46
367.19	34	33	46
370.2	35.3	33.5	46
374	38.1	37.1	46
378.09	37.208	34.208	46
380.8	33.816	34.116	46
385.96	33.196	32.896	46
387.6	36.468	36.668	46
394.39	38.284	38.284	46
401.19	34.112	33.412	46
408	37.496	38.496	46
414.78	33.78	32.88	46
421.59	36.364	35.664	46
442	35.408	36.008	46
455.6	36.344	35.544	46
462.4	37.688	38.588	46
476	38.832	39.632	46
535.62	34.844	35.444	46
551.37	37.424	36.024	46
567.11	35.808	36.108	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

FCC ID : A3KMO82
-- #043 CONT. --

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESSV 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dB _{uv} /m)	VERTICAL (dB _{uv} /m)	FCC CLASS B LIMIT (dB _{uv} /m)
71.61	25.66	36.86	40
122.39	35.46	33.26	43.5
129.19	33.37	33.17	43.5
133.92	30.64	34.54	43.5
142.8	35.03	33.13	43.5
149.6	35	32.3	43.5
197.2	31.97	30.27	43.5
210.8	33.48	30.38	43.5
217.6	35.14	30.44	46
224.4	37.98	33.48	46
428.4	37.872	39.572	46
472.6	39.552	38.152	46
590.75	39.692	36.292	46
598.38	40.676	40.176	46
630.13	39.6	39.8	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :
FINAL VALUE (dB_{uv}/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dB_{uv}/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NULAP OR ANY ANGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hs
K.J.HSU, NULAP SIGNATORY


TESTED BY:

C.C.Wu
C.C.Wu

MAY/30/1998

REPORT NO: EMI98-043
MODEL NO: SUNNY-15.1

RFI EMISSION LEVEL dB_{uv}/m

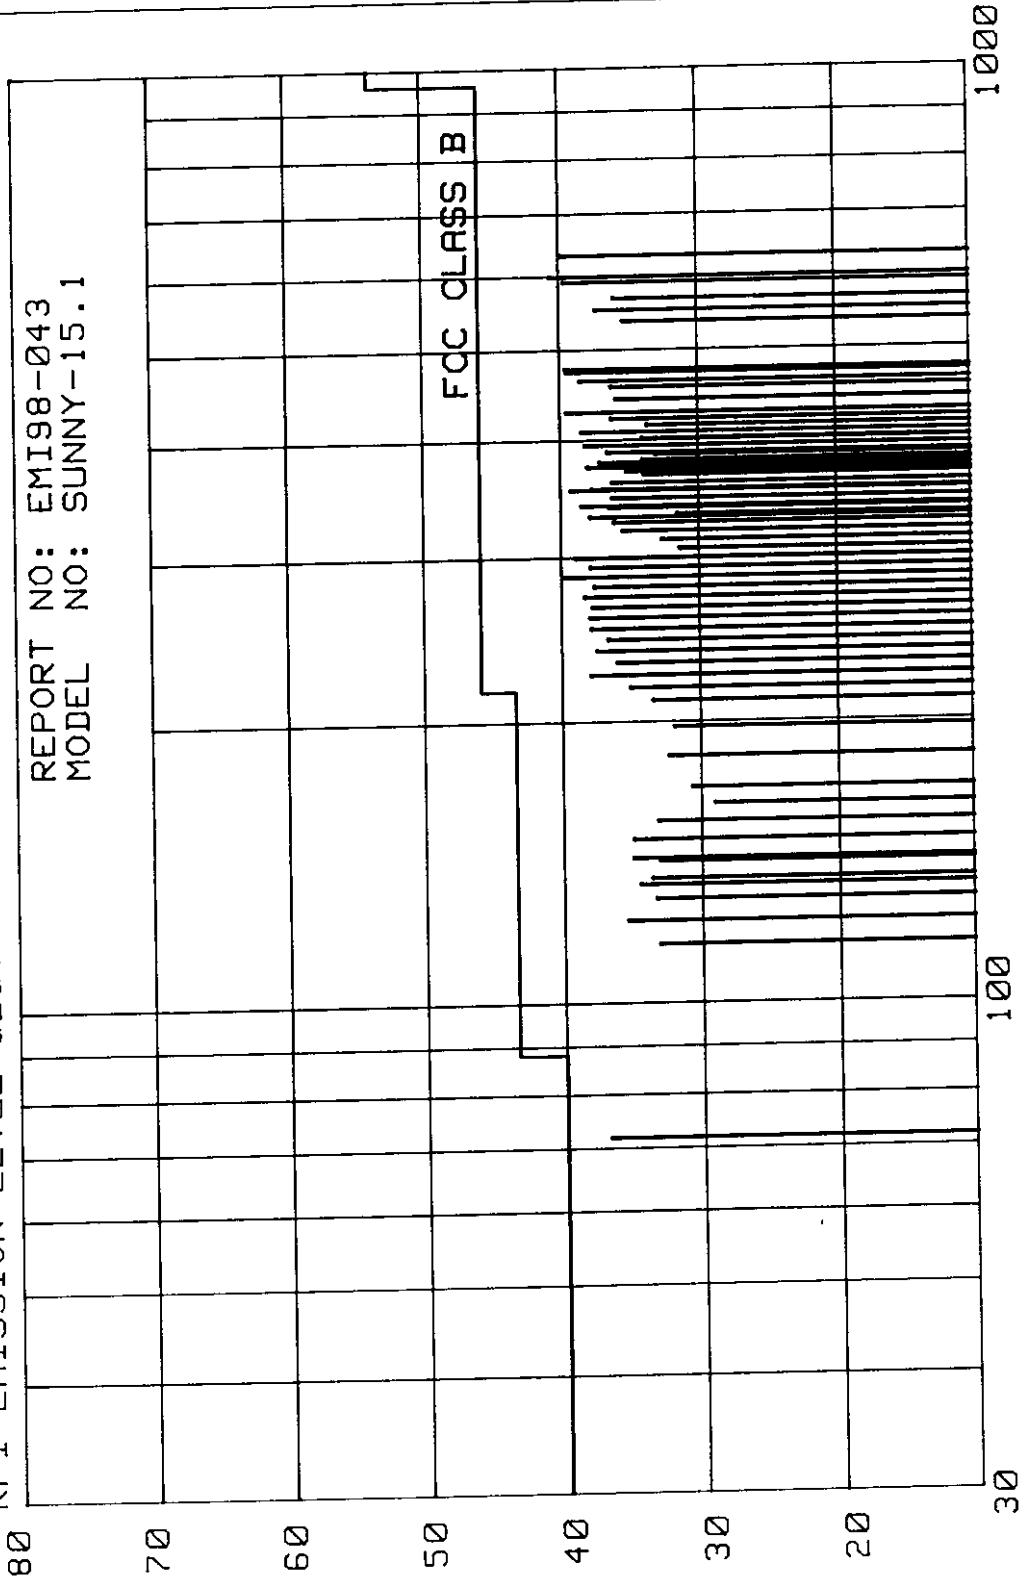


FREQUENCY MHz

A3KM082 RUN 1024X768/75Hz 60kHz MODE 110V
REF 107.0 dB μ V ATTEN 10 dB

h_f
10 dB/

DL
48.0
dB μ V

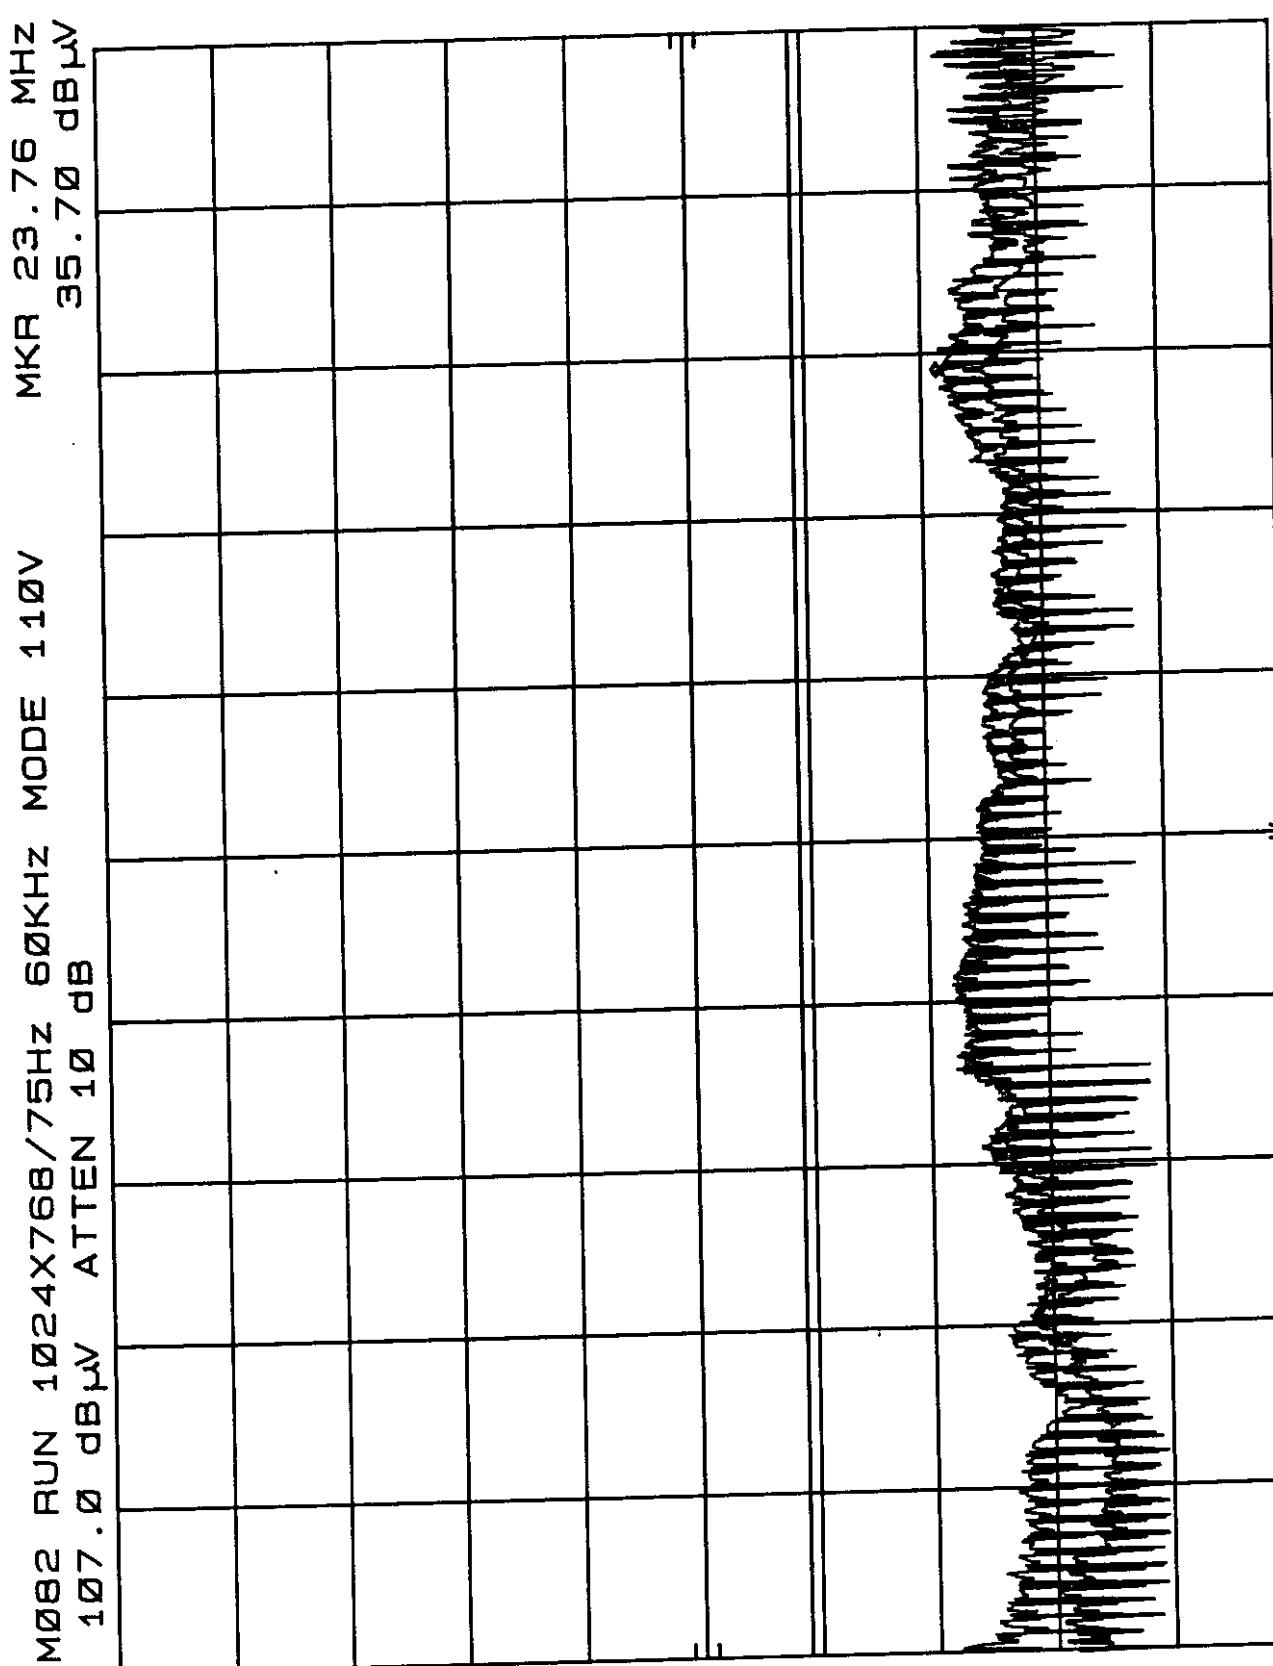


START 450 kHz
RES BW 10 kHz
VSW 10 kHz

STOP 30.00 MHz
SWP 750 msec

MKR 23.76 MHz
35.70 dB μ V

A3KM082 RUN 1024X768/75Hz 60KHz MODE AC220V
REF 107.0 dB μ V ATTEN 10 dB

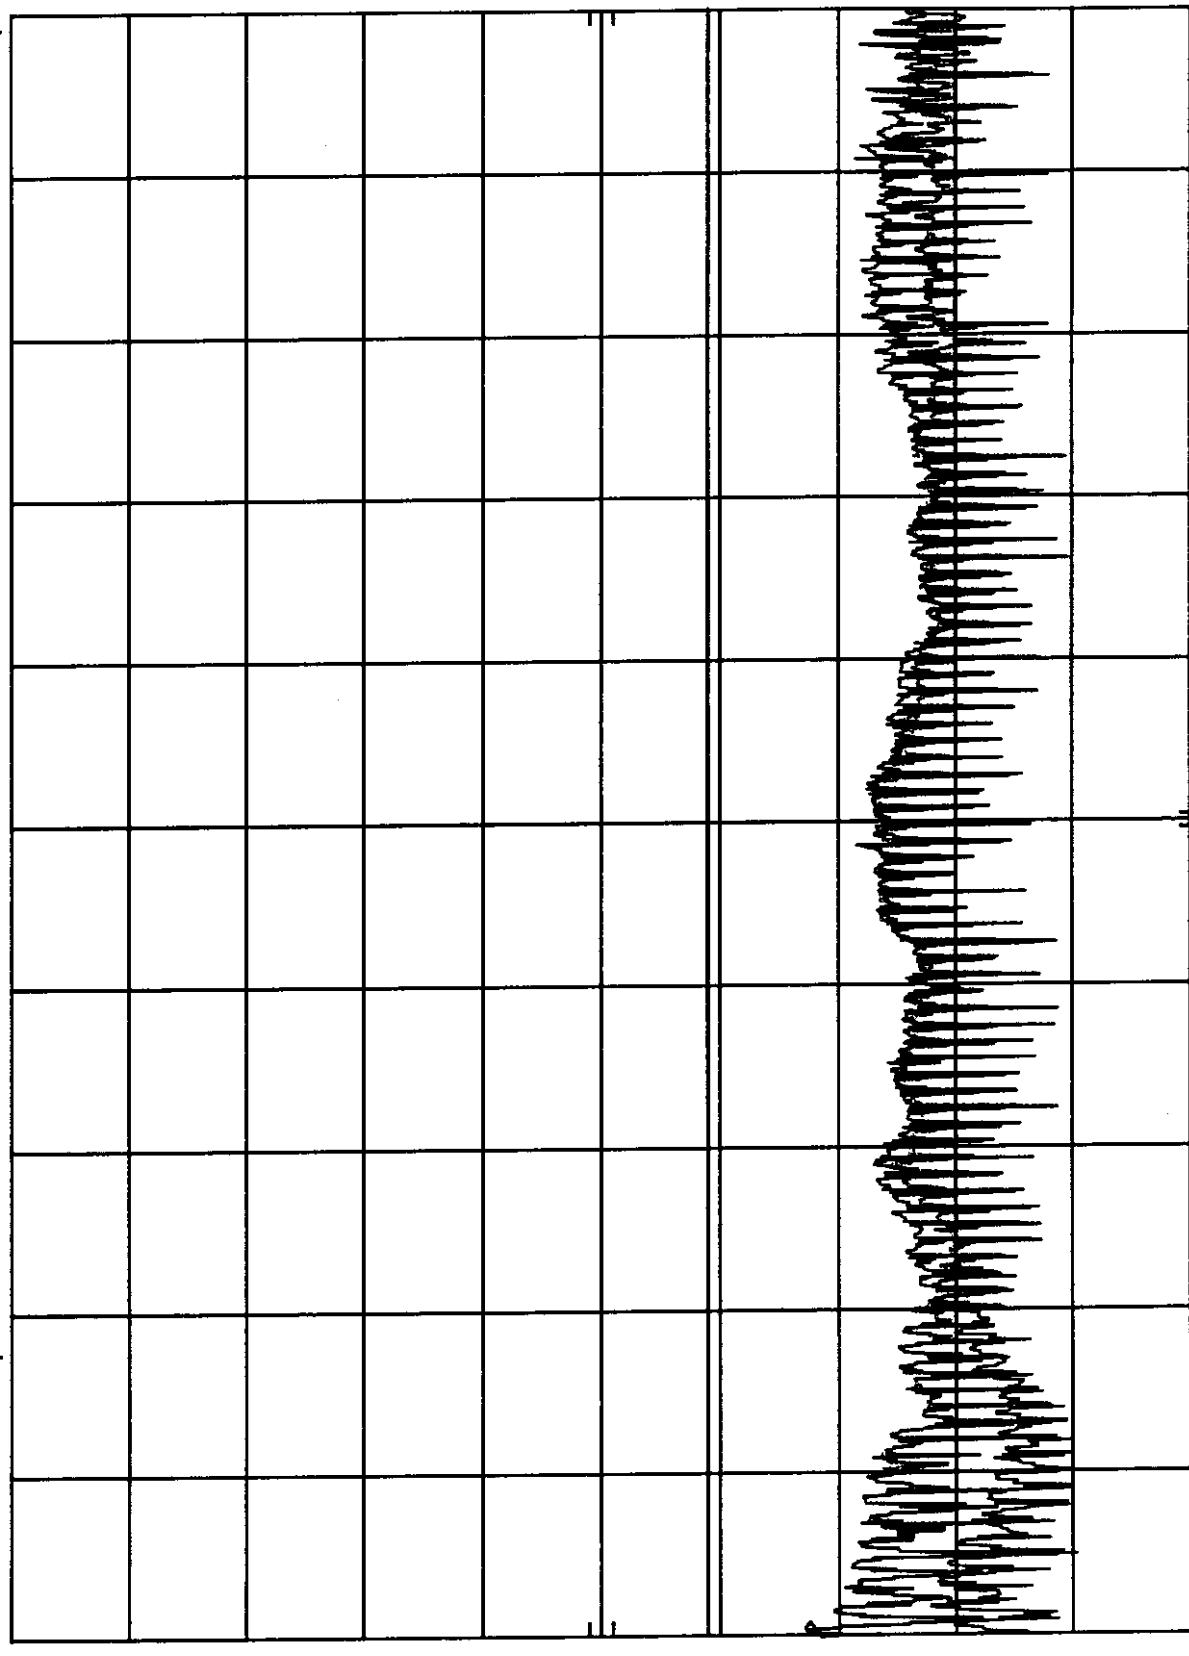

DL 48.0
RES BW 10 kHz

START 450 kHz
RES BW 10 kHz
VBW 10 kHz
STOP 30.00 MHz
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM082
REPORT NO.: EMI98-043A
TEST DATE : JUN/01/1998
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-CED

TESTED SYSTEM:

1. EUT : 151AX LCD COLOR MONITOR S/N.: --
FCC ID. : A3KM082
2. COMPUTER: IBM Aptiva 2176-T33 S/N.: 90-A58TZ
FCC ID. : AN02161V
3. PRINTER : HP 2225C S/N.: 3145502419
FCC ID. : DSI6XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966
FCC ID. : BFJ9D907-00038
5. MOUSE : IBM M-S34 S/N.: 23-146196
FCC ID. : DZL211029
6. KEYBOARD: IBM KB-9826 S/N.: K071940
FCC ID. : E8HKB-5323
7. VIDEO CARD : WINNER 3000L S/N.: 023004001190
FCC ID. : KJGW3000L
8. CD_ROMD : SONY CDU31A S/N.: --
FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.

48.3Kz MODE(1024X768/60Hz) WAS TESTED.

FLY-IN I/O CABLE WITH FOUR FERRITE CORES(TWO INSIDE) WAS USED
UNSHIELDED MAINS CORD WAS USED DURING TEST.

EXTRA EARPHONE AND MICPHONE WERE USED DURING TEST.

EXTRA 4 USB CABLES WERE CONNECTED TO DUMMY LOAD WAS USED.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
110.2	29.3	33.5	43.5
121.8	32.85	31.76	43.5

FCC ID : A3KM082
-- #043A CONT. --

156.72	31.45	30.25	43.5
170	29.6	30.9	43.5
197.35	33.87	AMBIENT	43.5
231.34	36.25	35.65	46
237.96	37.7	36.9	46
265.29	36.7	37.7	46
271.96	39.08	36.98	46
292.67	38.66	36.66	46
303.85	31.616	36.816	46
310.15	33.24	36.74	46
319.24	32.076	36.376	46
325.91	33.524	29.324	46
335.35	34.84	38.74	46
339.87	35.66	39.96	46
346.56	35.028	37.728	46
353.26	37.1	30.5	46
360.72	37.9	36.7	46
367.29	32.9	35	46
373.85	36.2	38.3	46
408	37.396	28.696	46
421.26	34.252	36.852	46
428.71	36.196	38.796	46
441.99	34.108	38.508	46
455.14	34.42	39.02	46
462.56	30.412	36.212	46
476.01	35.652	37.032	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESM 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
71.33	26.18	37.28	40
115.28	33.1	30.6	43.5
116.5	32.52	36.32	43.5
122.72	33.89	35.29	43.5
135.95	28.56	31.96	43.5
149.27	33.69	33.49	43.5
183.26	32.07	27.67	43.5
210.63	33.28	31.28	43.5
218.07	32.44	32.04	46
223.85	34.08	AMBIENT	46
224.71	AMBIENT	38.4	46
251.27	38.05	33.35	46
258.72	41.25	35.75	46
340	32.86	37.86	46
387.27	33.532	38.532	46
394.72	36.62	39.12	46
580.95	34.272	38.672	46

FCC ID : A3KM082

-- #043A CONT. --

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dB_{uv}/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dB_{uv}/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hsu


K.J.HSU, NVLAP SIGNATORY

TESTED BY:

C.C.Wu

C.C.Wu

-- 3 --

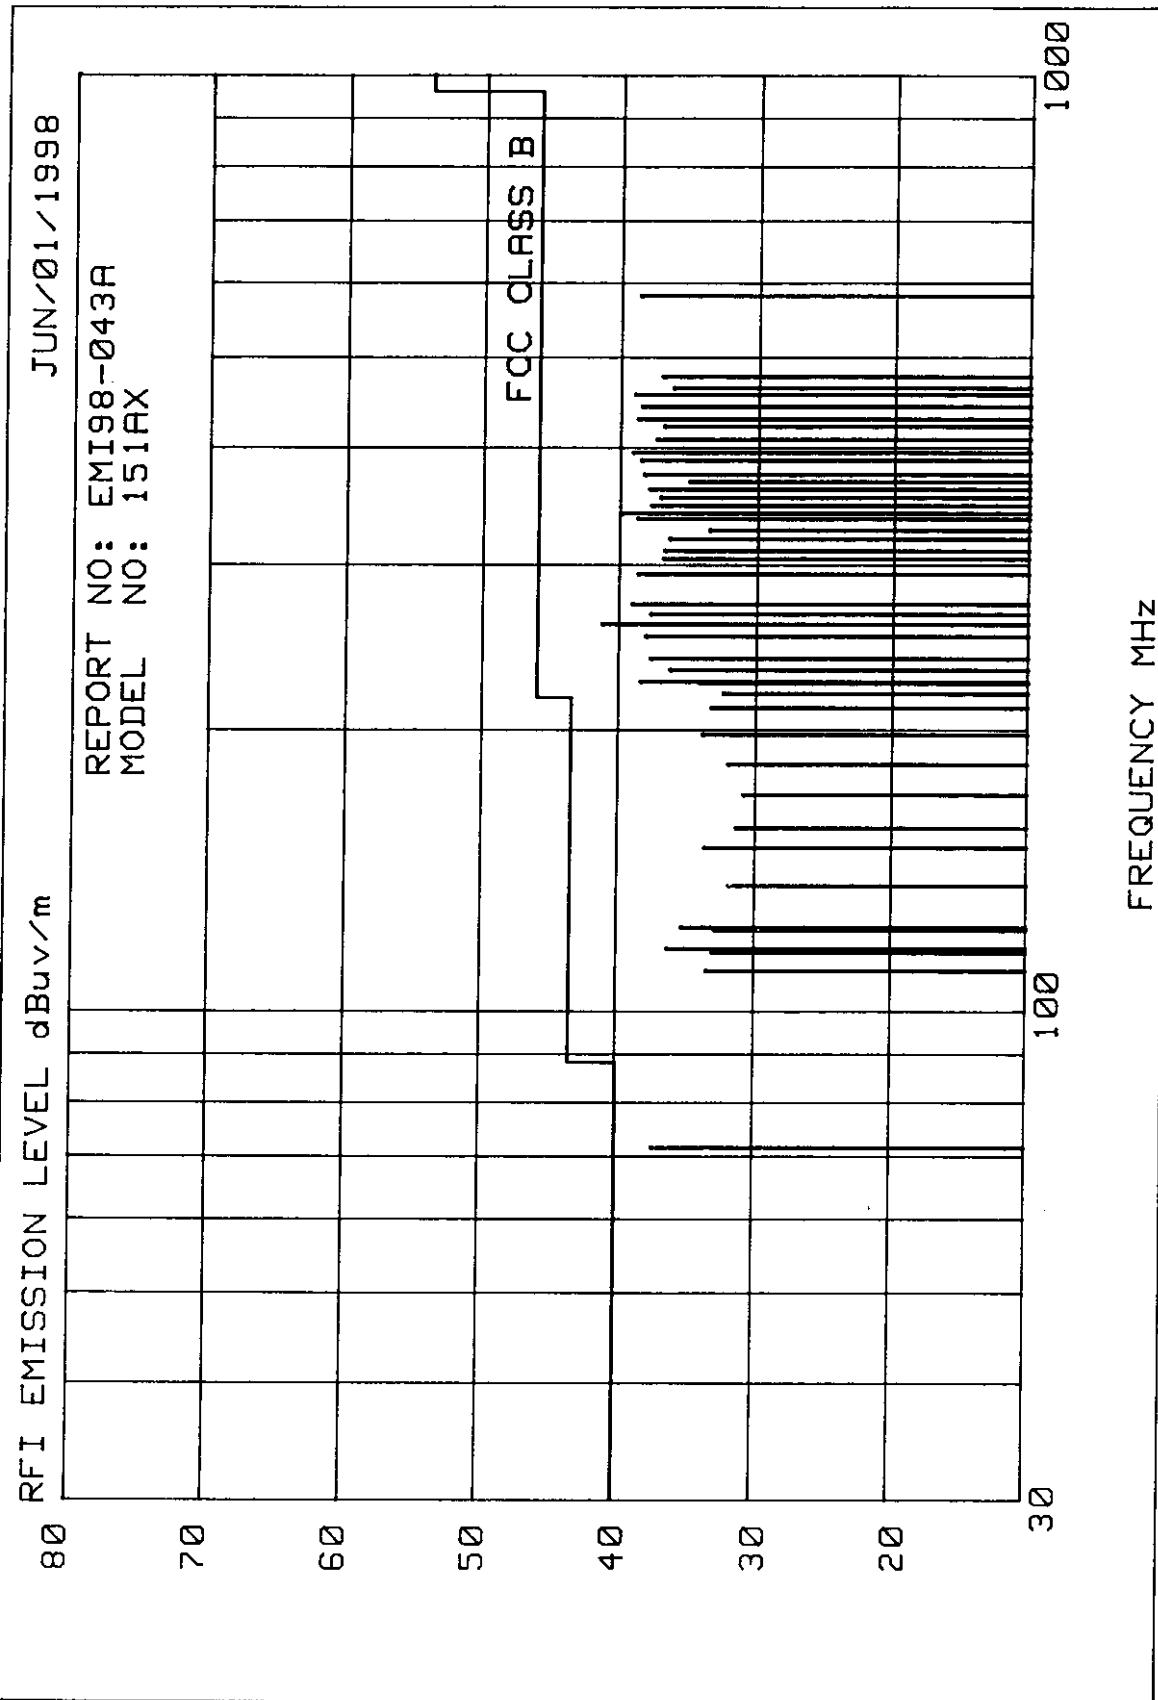


A3KM082 RUN 1024X768/60Hz 48.3kHz MODE AC220V
REF 107.0 dB μ V ATTEN 10 dB

μ V
10 dB /

DL
48.0
dB μ V

39.20 dB μ V

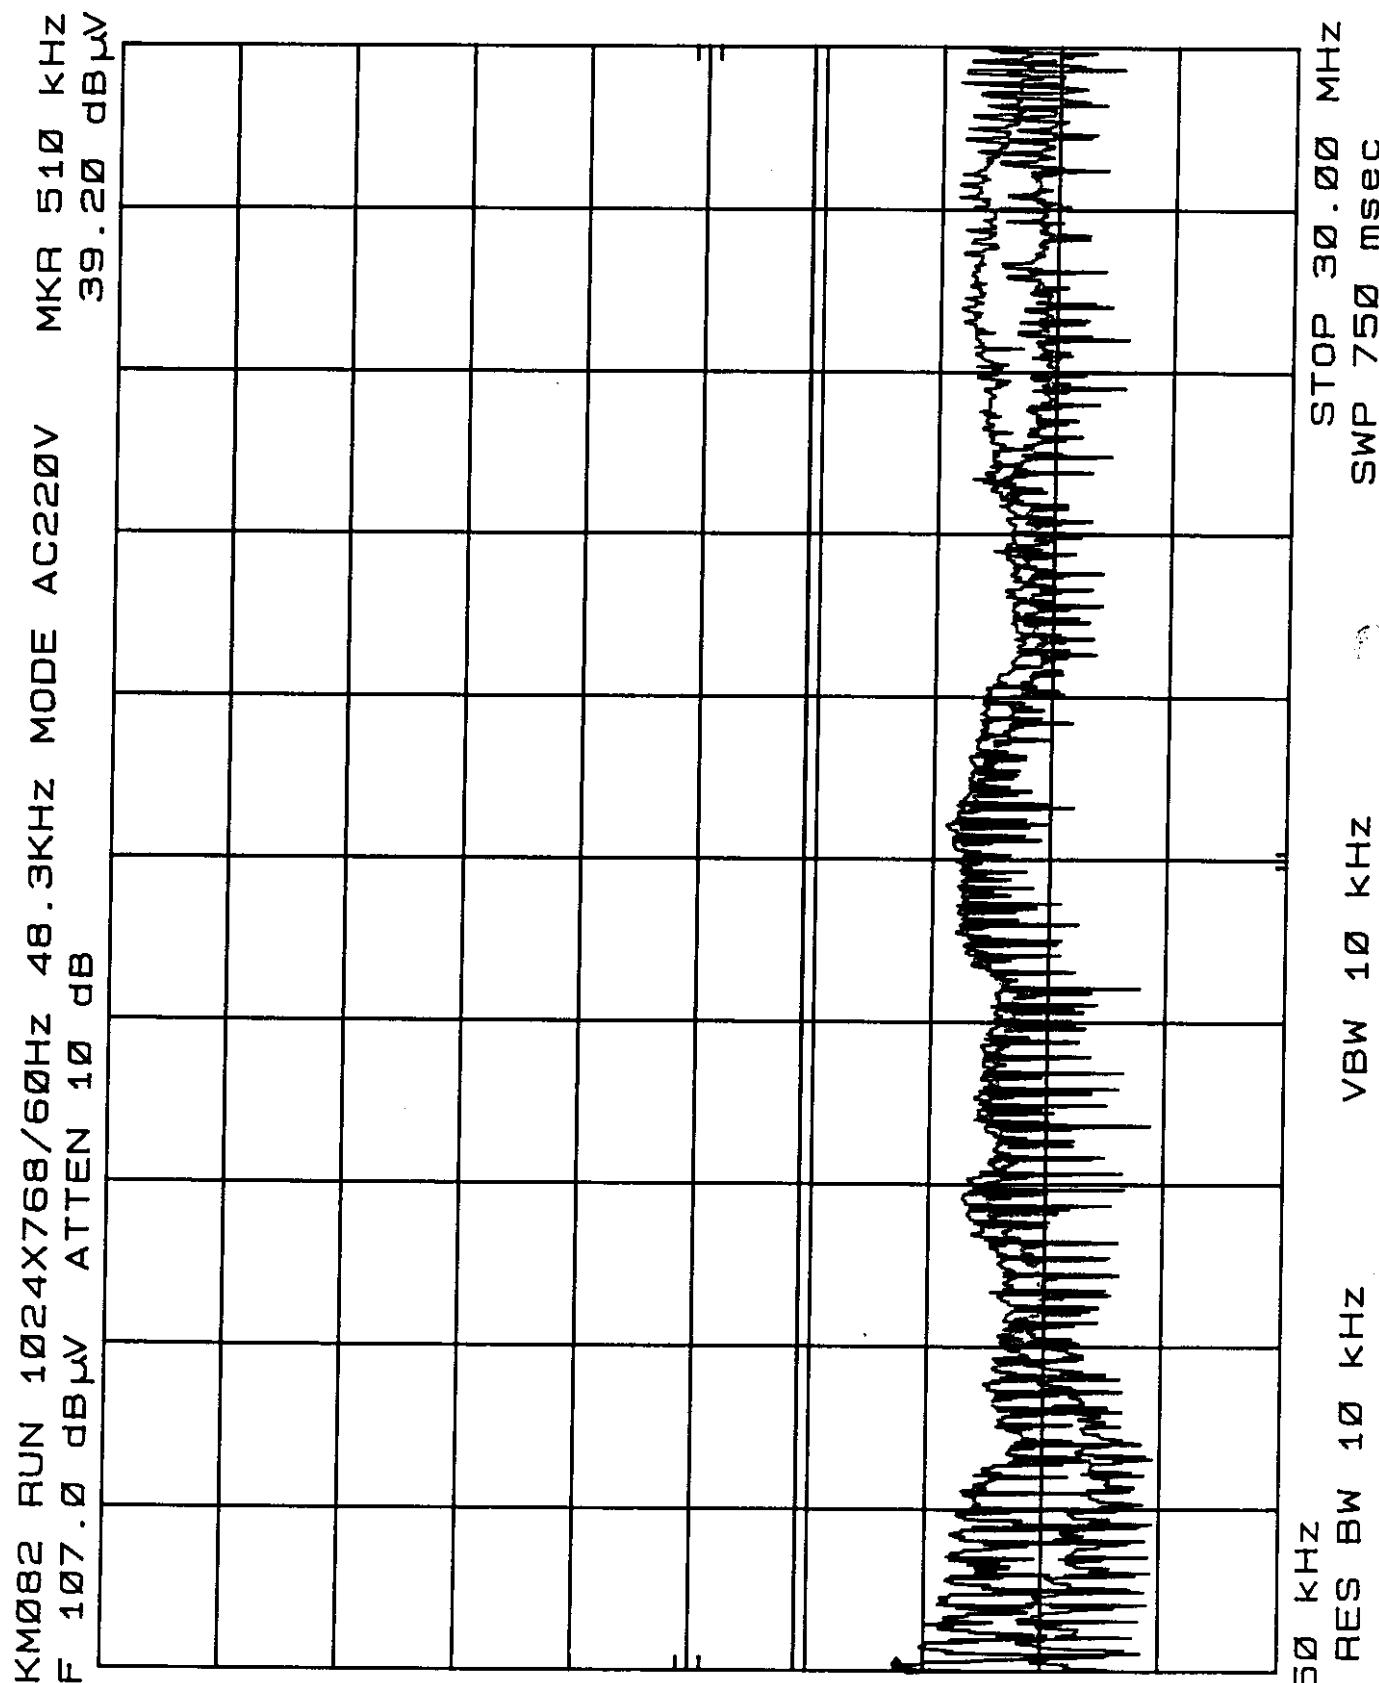


A3KM082 RUN 1024X768/60Hz 48.3kHz MODE AC110V MKR 24.15 MHz

REF 107.0 dB μ V ATTN 10 dB

10 dB/

DL 48.0 dB μ V

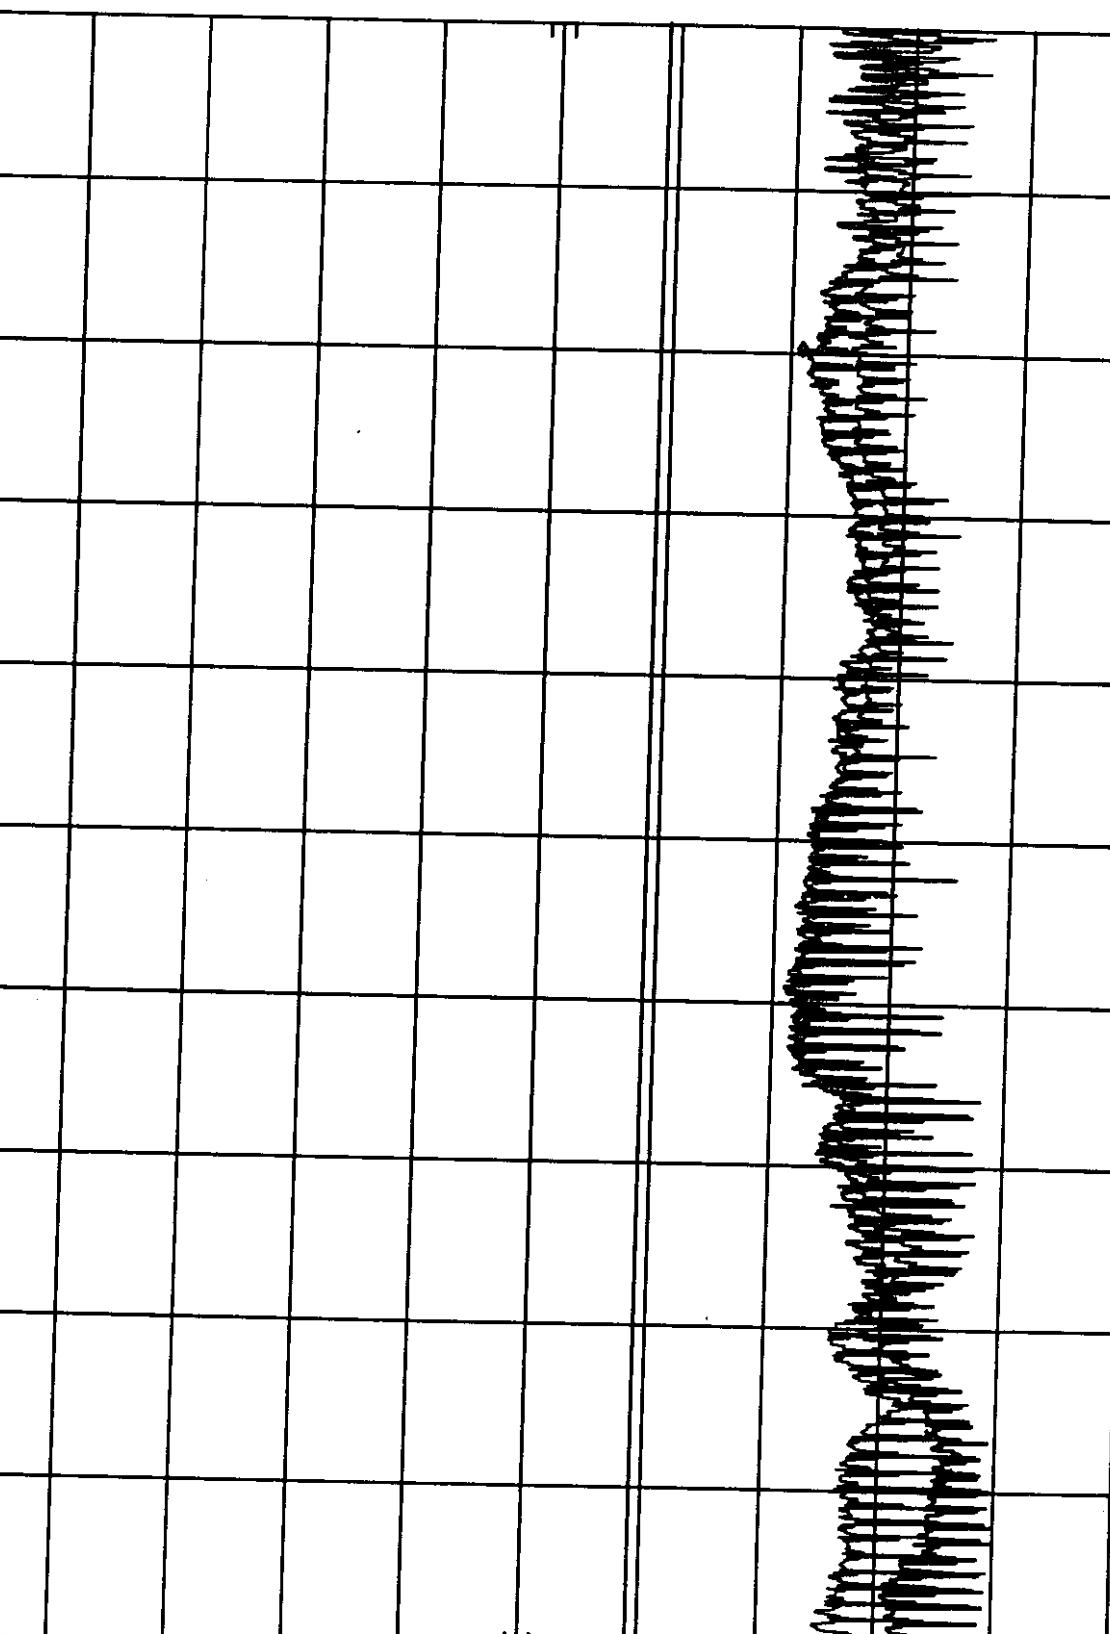

START 450 kHz
RES BW 10 kHz

VBW 10 kHz

STOP 30.00 MHz
SWP 750 msec

Exhibit 6

**Statement of Data Measured
and
Test Data of Modified**

STATEMENT OF DATA MEASURED

1. General Information of EUT

The EUT, 15.1" LCD color monitor :

Model No. : 15L5082Q
 FCC ID : A3KM082
 Brand : PHILIPS

The LCD monitor automatically scans horizontal frequencies between 30KHz and 61KHz, and vertical frequencies between 50Hz and 75Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1024X768 pixels. .

The monitor has 14 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	640 X 350	31.5KHz	70Hz	Non-interlaced
M02	720 X 400	31.5KHz	70Hz	Non-interlaced
M03	640 X 480	31.5KHz	60Hz	Non-interlaced
M04	640 X 480	35.0KHz	67Hz	Non-interlaced
M05	640 X 480	37.9KHz	73Hz	Non-interlaced
M06	640 X 480	37.5KHz	75Hz	Non-interlaced
M07	800 X 600	35.2KHz	56Hz	Non-interlaced
M08	800 X 600	37.9KHz	60Hz	Non-interlaced
M09	800 X 600	48.1KHz	72Hz	Non-interlaced
M10	800 X 600	46.9KHz	75Hz	Non-interlaced
M11	832 X 624	49.7KHz	75Hz	Non-interlaced
M12	1024 X 768	48.3KHz	60Hz	Non-interlaced
M13	1024 X 768	56.5KHz	70Hz	Non-interlaced
M14	1024 X 768	60.0KHz	75Hz	Non-interlaced

2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION
 EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
 P.O. Box 123, Chungli, Taoyuan, Taiwan
 R. O. C.

Tel : 886-3-4549862 Fax : 886-3-4549887
 Internet: ronnie.yang@tw.ccmail.philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipment used for line Conducted and Radiated emissions as following. All equipment were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2808A17338	11/17/1999
RF Preselector	HP85685A	2620A00138	11/17/1999
QP Adapter	HP85650A	2811A01326	11/17/1999
EMI Receiver	HP85460A	3441A00199	8/27/1998
RFI Filter Section	HP85460A	3330A00177	8/27/1998
EMI Receiver	R & S ESVS30	8419977/066	3/22/1999
Biconical Antenna	EMCO 3110B	3222	12/17/1998
Biconical Antenna	EMCO 3110B	3224	12/30/1998
Log-Periodic Antenna	EMCO 3146A	1424	12/29/1998
Log-Periodic Antenna	EMCO 3146A	1425	12/29/1998
LISN	EMCO 3825/2	9311-2153	3/15/1999
LISN	EMCO 3825/2	9311-2154	3/15/1999
Turn Table	EMCO 1060	1068	3/31/1999
Antenna Tower	EMCO 1050	1113	3/31/1999
RF Cable	M17/75-RG214-NE	N/A	3/31/1998
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "15L5082Q" was connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	HP D5052N	FR80627957	B94VECTRAV6MT
2. Keyboard	HP C4735-60101	J7319E0092	FCC Logo
3. Mouse	HP M-S34	LZA73005475	DZL211029
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	USRobotics 268	0002680559278575	CJE-0318
6. Vide Card	METABYTE GIA-3D	10105	I27MM-VS03A
7. CD-ROM	Sony CDU31A	--	KGACDU31A2

The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testing were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

First, pre-scan all modes in screen room then select 2 higher modes (worst case) were tested and reported.

Tested and reported modes as following:

Report No.	Resolution	Frequencies
EMC99-018	1024 X 768	60.0KHz/75Hz
EMC99-018A	1024 X 768	48.3KHz/60Hz

3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test.

- Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.
- Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
- Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
- Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
- Step 5 : Personal computer sends a file of "H" pattern to USRobotics 268 modem.
- Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted. The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dB μ V/m) = Reading (dB μ V) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.



Ronnie Yang - Manager, Safety/Dev. PEI-CED
NVLAP Signatory

FCC TEST REPORT

FCC ID : A3KM082
REPORT NO.: EMI99-018
TEST DATE : APR/19/1999
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
TESTED SYSTEM:

1. EUT : 15L5082Q LCD COLOR MONITOR S/N.: TY9904018
FCC ID. : A3KM082
2. COMPUTER: HP D5052N S/N.: FR80627957
FCC ID. : B94VECTRAVEMT
3. PRINTER : HP 2225C S/N.: 3145S02419
FCC ID. : DSIBXU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
FCC ID. : CJE-0318
5. MOUSE : HP M-S34 S/N.: LZA73005475
FCC ID. : DZL211029
6. KEYBOARD: HP C4735-60101 S/N.: J7319E0092
FCC ID. : FCC L060
7. VIDEO CARD : METABYTE GIA-3D S/N.: 10105
FCC ID. : I27MM-US03A
8. CD_ROMD : SONY CDU31A S/N.: --
FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
ANSI C63.4-1992 ''AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz''

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
60Kz MODE(1024X768/75Hz) WAS TESTED.
FLY-IN I/O CABLE WITH TWO FERRITE CORES(ONE INSIDE) WAS USED
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA EARPHONE WAS USED DURING TEST.
EXTRA USB KEYBOARD,MOUSE AND 2 WIRES WITH DUMMY LOAD WERE USED.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
47.59	29.92	33.02	40
68	22.71	22.71	

FCC ID : A3KM082
-- #018 CONT. --

59.52	26.5	33.8	40
74.8	29	28.4	40
115.6	33.26	29.56	43.5
153.2	32.29	28.99	43.5
176.8	34.21	30.91	43.5
231.2	35.65	33.55	46
238	39.3	36.5	46
244.8	35.2	33.7	46
251.6	39.1	35.3	46
258.4	39.2	37.5	46
265.2	35.8	35.4	46
272	38.38	38.98	46
278.8	36.66	34.66	46
292.4	37.54	35.64	46
299.2	35.98	36.48	46
306	32.924	33.124	46
312.8	30.052	29.552	46
319.6	35.08	33.88	46
326.42	35.024	32.324	46
333.21	32.892	30.292	46
340.01	32.56	34.66	46
346.81	31.728	33.628	46
353.61	33.1	33.6	46
360.41	34.5	36.9	46
367.21	32	33.6	46
374.01	35.6	35.6	46
380.81	31.616	33.316	46
387.61	34.068	39.768	46
394.41	34.784	37.884	46
401.21	32.312	34.112	46
414.8	32.28	34.48	46
421.6	33.764	39.264	46
428.41	34.272	36.672	46
435.2	33.44	35.84	46
455.6	35.144	39.644	46
462.4	36.488	38.988	46
476	35.732	39.132	46
510	34.08	39.58	46
523.6	34.292	34.192	46
544	36.376	36.876	46
557.6	34.692	34.792	46
578	35.036	38.736	46
598.4	35.976	36.076	46
612	38.284	37.484	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

FCC ID : A3KM082

-- #018 CONT. --

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dB _{uv} /m)	VERTICAL (dB _{uv} /m)	FCC CLASS B LIMIT (dB _{uv} /m)
54.39	35.84	36.94	40
61.2	32.73	36.23	40
122.4	32.46	29.16	43.5
129.2	33.37	29.07	43.5
136	35.56	33.86	43.5
142.8	32.23	AMBIENT	43.5
149.6	34.7	28.2	43.5
156.4	34.6	30.2	43.5
170	34.9	28.9	43.5
183.6	33.96	32.96	43.5
190.4	38.2	30.5	43.5
197.2	32.77	29.17	43.5
204	35.7	AMBIENT	43.5
210.8	37.48	30.48	43.5
217.6	40.84	32.54	46
224.4	41.08	33.28	46
408	34.496	39.596	46
442	39.208	42.008	46
680.01	40.12	35.82	46
714.01	36.244	38.544	46
748.01	38.724	38.324	46
782.01	36.812	38.612	46
816.01	41.356	42.356	46
850.01	37.8	37.8	46
911.21	37.644	37.344	46
918.01	41.572	39.472	46
986.01	42.12	41.52	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dB_{uv}/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dB_{uv}/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hs

K. J. HSU, NVLAP SIGNATORY

TESTED BY:


C. C. Wu

C. C. Wu

APR/19/1999

REPORT NO: EMI99-018
MODEL NO: 15L5082Q

RFI EMISSION LEVEL dB_{UV}/m

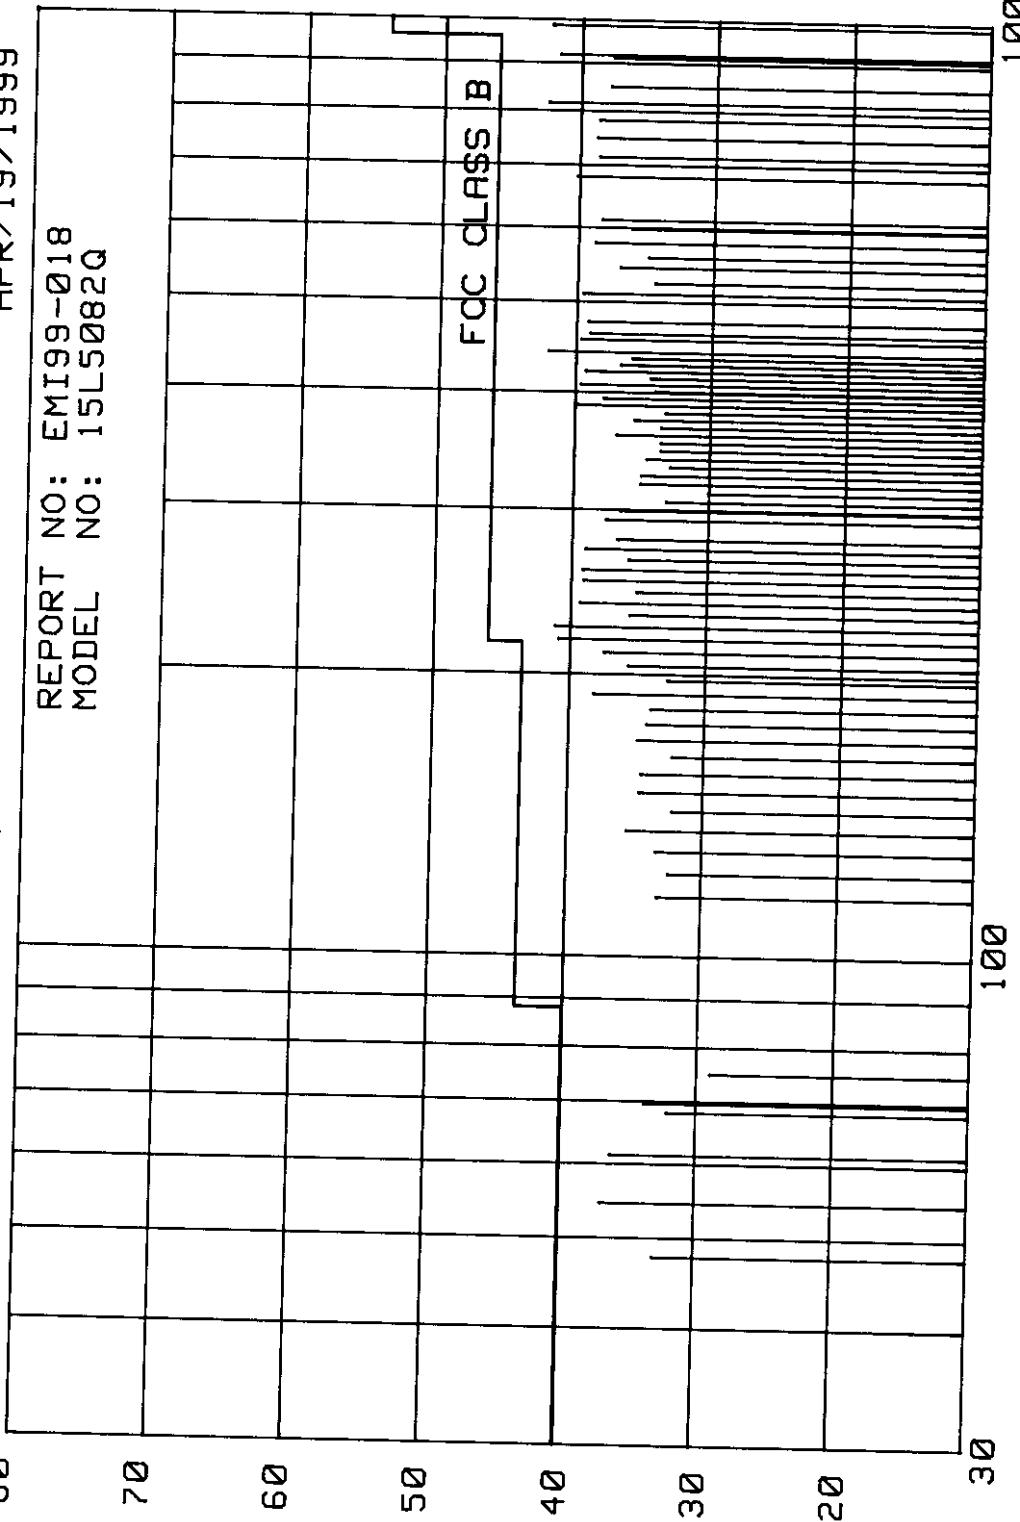

FREQUENCY MHz


1000

100

30

A3KM082 RUN 1024X768/75Hz 60KHz MODE AC110V
REF 107.0 dB μ V ATTEN 10 dB


10 dB/
Hz

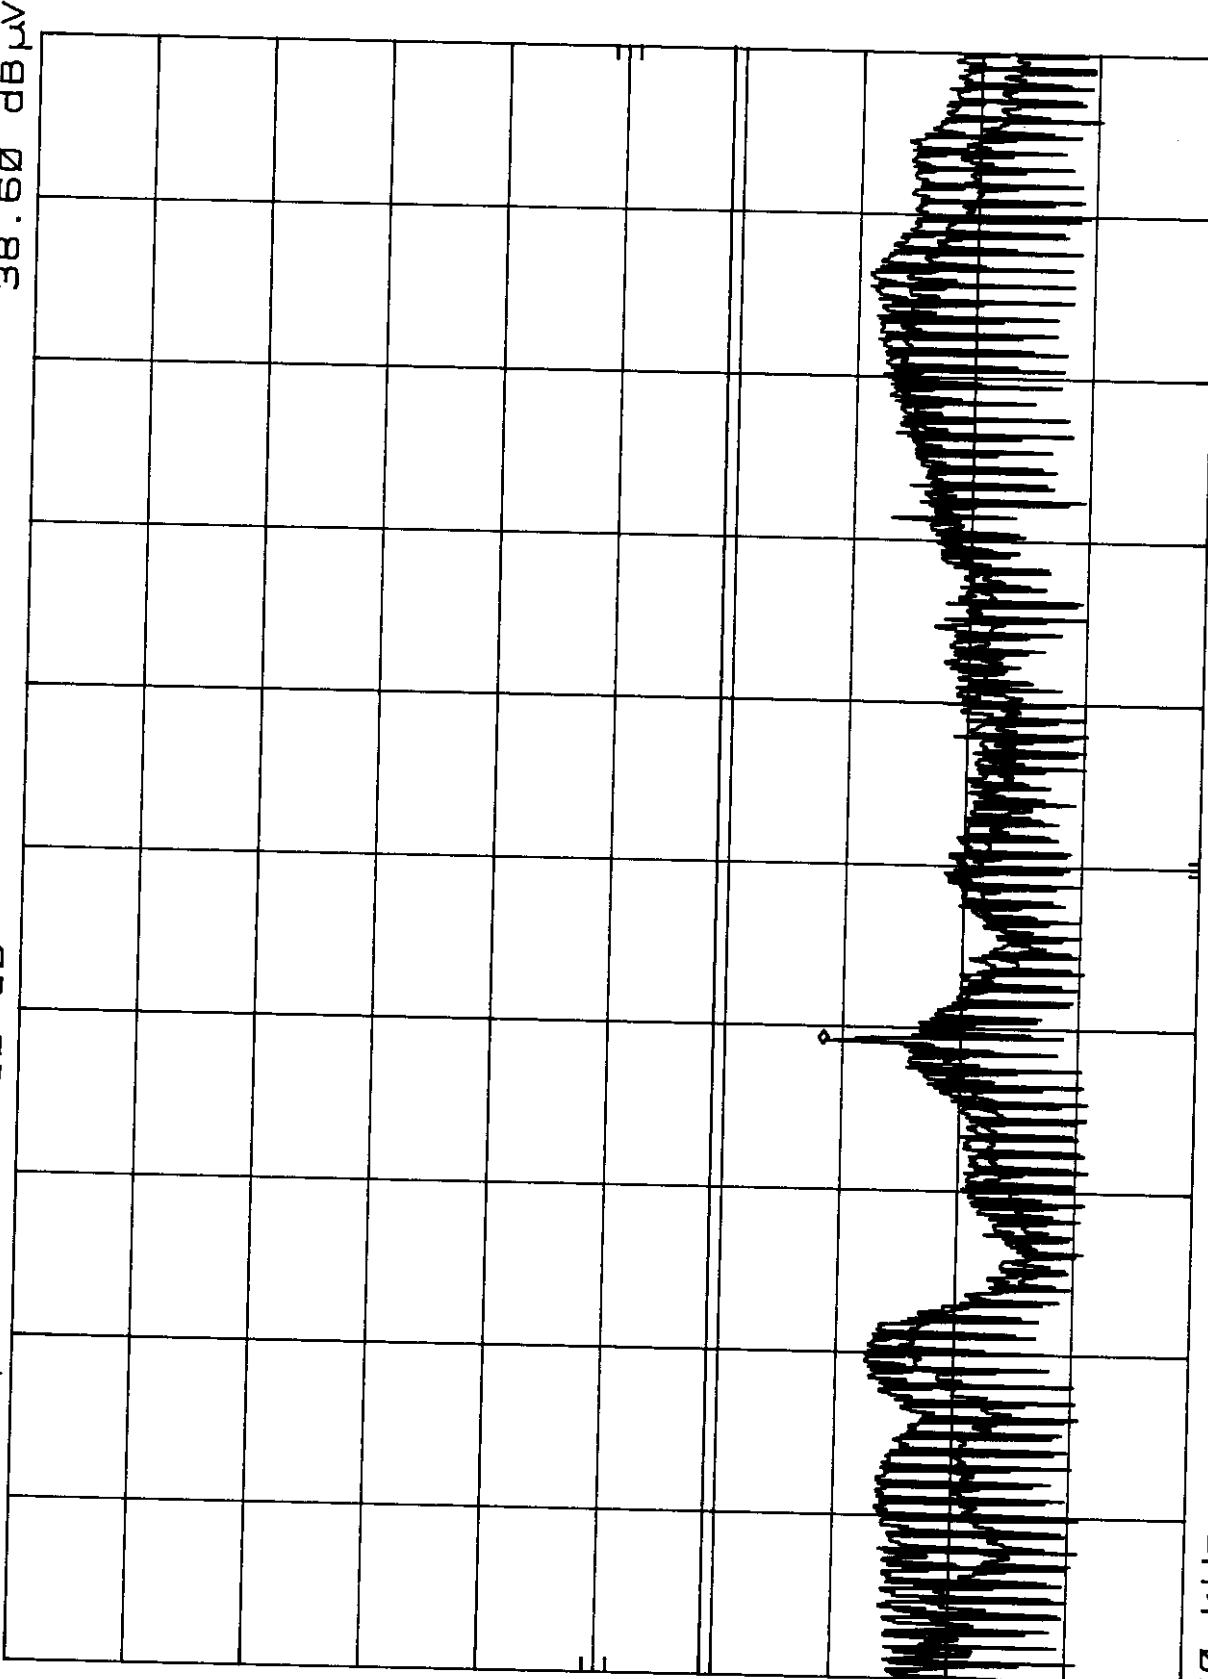

DL
48.0
dB μ V

START 450 kHz
RES BW 10 kHz
STOP 30.00 MHz
SWP 750 msec

MKR 12.03 MHz
38.60 dB μ V

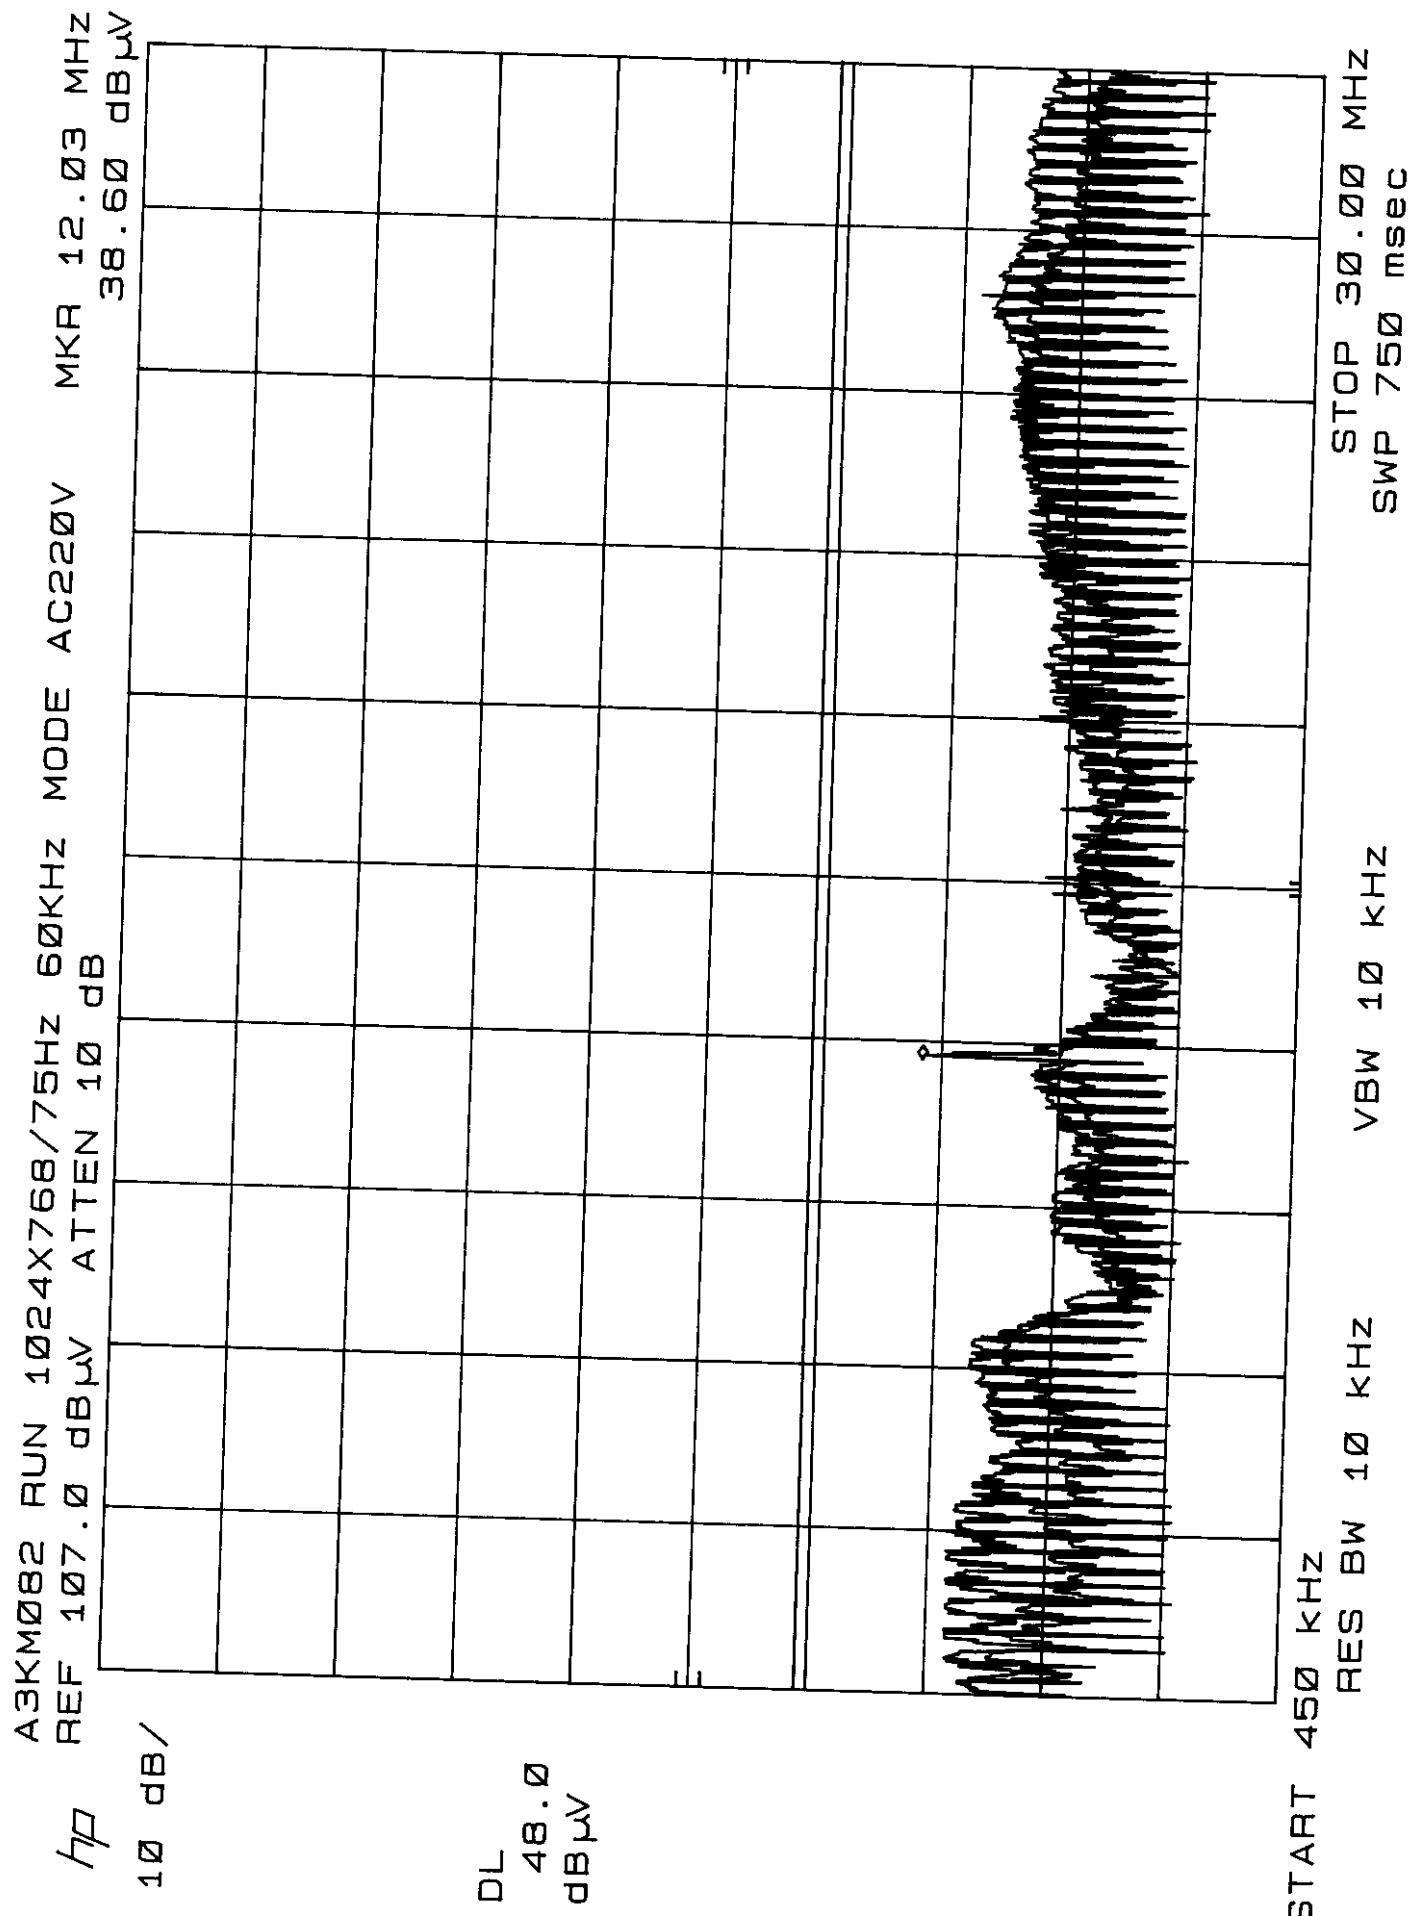

FCC TEST REPORT

FCC ID : A3KM082
REPORT NO.: EMI99-018A
TEST DATE : APR/21/1999
TEST ENGI.: C.C.Wu

TEST PERFORMED BY
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
CONSUMER ELECTRONICS DIVISION (PEI-CED)
EMI-LAB
P.O.BOX 123
CHUNGLI, TAOYUAN, TAIWAN, R.O.C.
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS
TESTED SYSTEM:

1. EUT : 15L5082Q LCD COLOR MONITOR S/N.: TY9904018
FCC ID. : A3KM082
2. COMPUTER: HP D5052N S/N.: FR80627957
FCC ID. : B94VECTRAU6MT
3. PRINTER : HP 2225C S/N.: 3145502419
FCC ID. : DS16XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575
FCC ID. : CJE-0318
5. MOUSE : HP M-S34 S/N.: LZA73005475
FCC ID. : DZL211029
6. KEYBOARD: HP C4735-60101 S/N.: J7319E0092
FCC ID. : FCC LOGO
7. VIDEO CARD : METABYTE GIA-3D S/N.: 10105
FCC ID. : I27MM-VS03A
8. CD_ROMD : SONY CDU31A S/N.: --
FCC ID. : KGACDU31A2

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz",

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.
48.3Kz MODE(1024X768/60Hz) WAS TESTED.
FLY-IN I/O CABLE WITH TWO FERRITE CORES(ONE INSIDE) WAS USED
UNSHIELDED MAINS CORD WAS USED DURING TEST.
EXTRA EARPHONE WAS USED DURING TEST.
EXTRA USB KEYBOARD,MOUSE AND 2 WIRES WITH DUMMY LOAD WERE USED.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
--------------------	------------------------	----------------------	-------------------------------

FCC ID : A3KM082
-- #018A CONT. --

115.6	33.46	30.66	43.5
149.62	30.6	32.7	43.5
156.41	31.2	33.7	43.5
170.01	32.2	30	43.5
183.61	31.26	31.26	43.5
190.41	35	32.9	43.5
231.22	35.95	33.25	46
238.02	36.4	36.3	46
244.82	34.3	33.6	46
251.62	37.2	34.8	46
258.41	37.4	37.6	46
265.21	35.7	35.4	46
272.01	35.58	37.58	46
292.42	38.14	39.64	46
299.22	36.68	37.28	46
306.02	34.924	31.924	46
312.82	31.052	29.452	46
319.62	32.88	32.98	46
326.42	34.324	33.124	46
333.22	32.392	30.492	46
340.02	32.46	34.56	46
353.62	31.5	35.1	46
387.62	33.568	39.168	46
394.42	34.384	38.584	46
401.22	31.312	37.112	46
408.02	33.696	38.096	46
421.62	32.364	36.664	46
428.42	33.272	36.172	46
455.62	34.144	36.444	46
462.42	34.988	38.388	46
476.02	35.532	38.532	46
510.02	35.48	38.38	46
544.01	35.076	36.576	46
578.01	38.736	37.136	46
591.61	33.804	32.304	46
598.41	35.676	35.576	46
612.01	36.284	34.884	46
659.61	37.08	37.78	46
666.41	37.788	37.288	46
680.01	39.22	38.22	46
691.61	40.108	38.708	46
693.61	39.056	38.656	46
714.01	39.344	39.744	46
748.01	38.824	39.924	46
782.02	38.712	39.512	46

ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

FCC ID : A3KM082

-- #018A CONT. --

QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER
20 ~ 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
54.41	34.04	36.74	40
61.21	33.43	35.73	40
122.4	31.46	33.56	43.5
130.09	33.4	36.7	43.5
136.02	31.46	35.66	43.5
197.21	35.57	30.07	43.5
210.81	33.68	30.48	43.5
217.61	37.74	34.14	46
224.42	41.68	35.48	46
374.02	34.1	39.3	46
442.02	39.008	41.808	46
816.01	41.356	42.556	46
836.41	37.576	37.176	46
850.01	38.5	37.6	46
918.02	40.472	38.172	46
931.62	37.884	37.484	46
986.02	40.32	41.92	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS
ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION :

FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN
APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

K. J. Hsu

K. J. HSU, NVLAP SIGNATORY

TESTED BY:

C. C. Wu


C. C. Wu

RFI EMISSION LEVEL dB_{uv}/m

APR/21/1999

REPORT NO: EMI99-018A
MODEL NO: 15L5082Q

FCC CLASS B

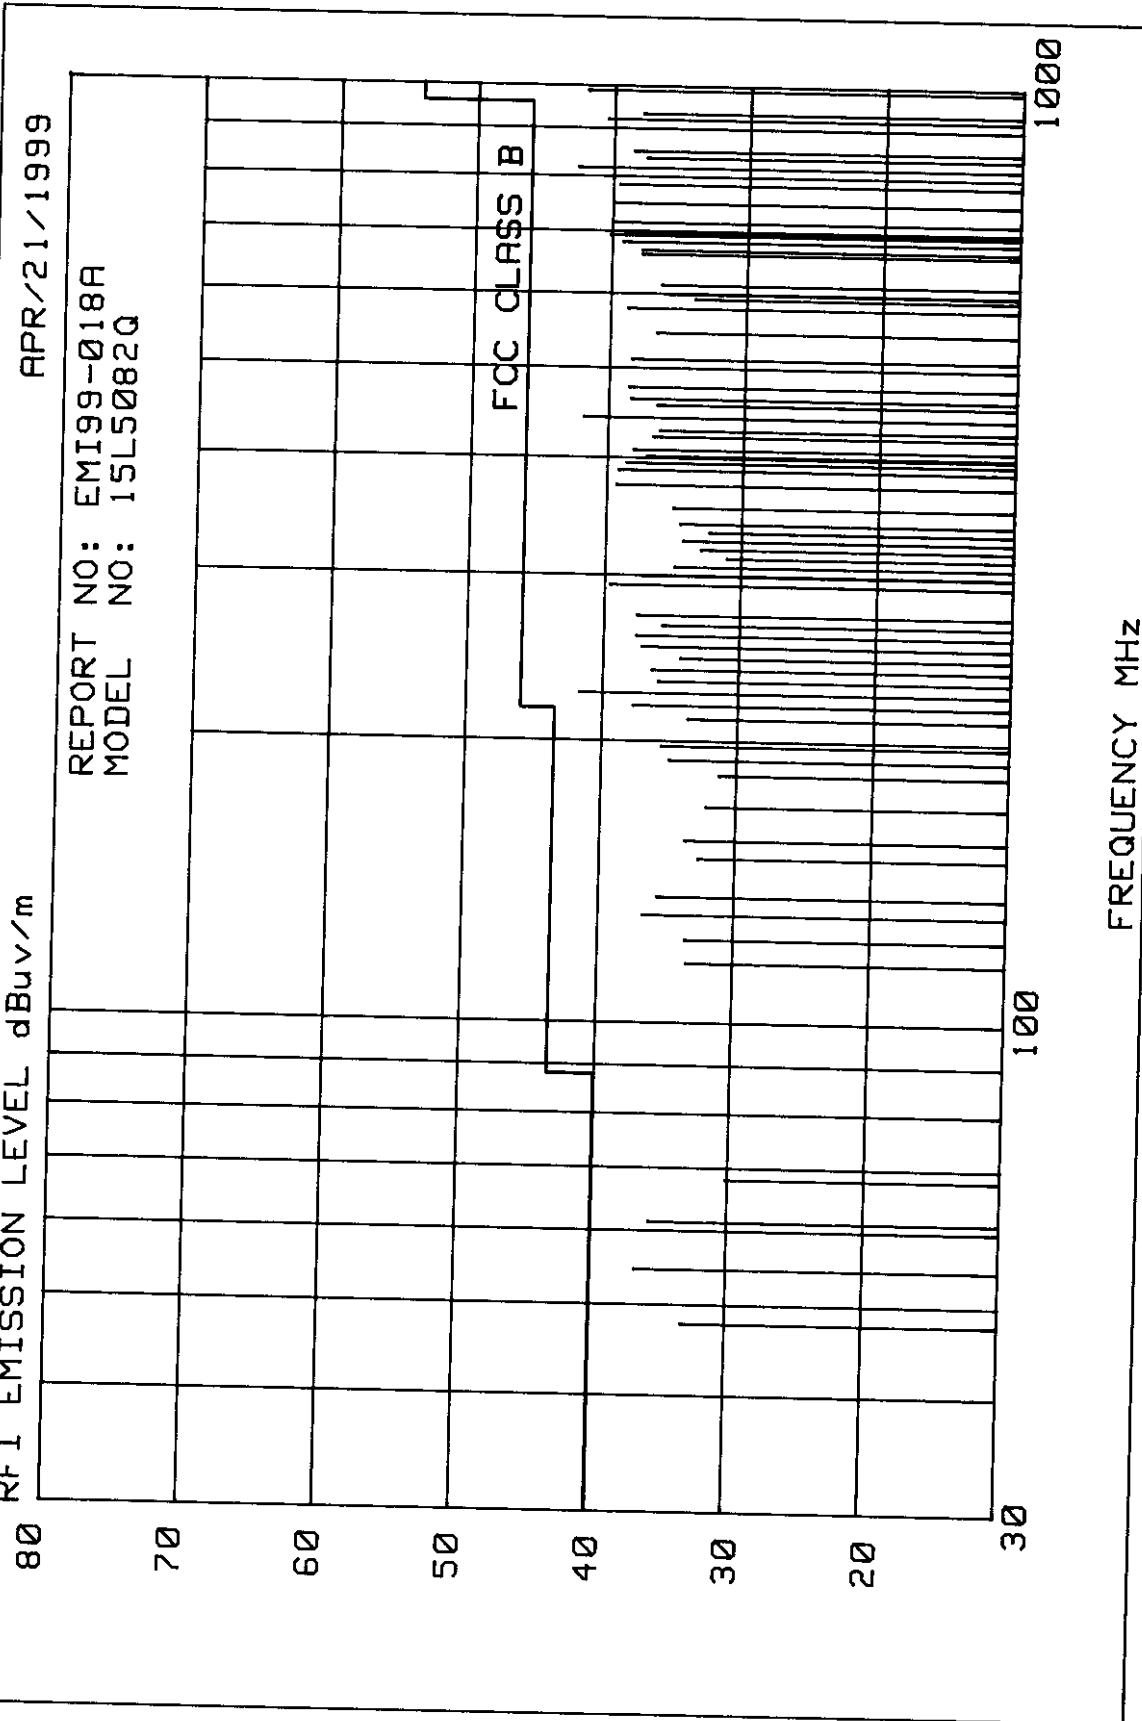


FREQUENCY MHz

1000
100
100
30

A3KM082 RUN 1024X768/60Hz 48.3kHz MODE AC220V MKR 12.03 MHz
REF 107.0 dB μ V ATTEN 10 dB

HP
10 dB/

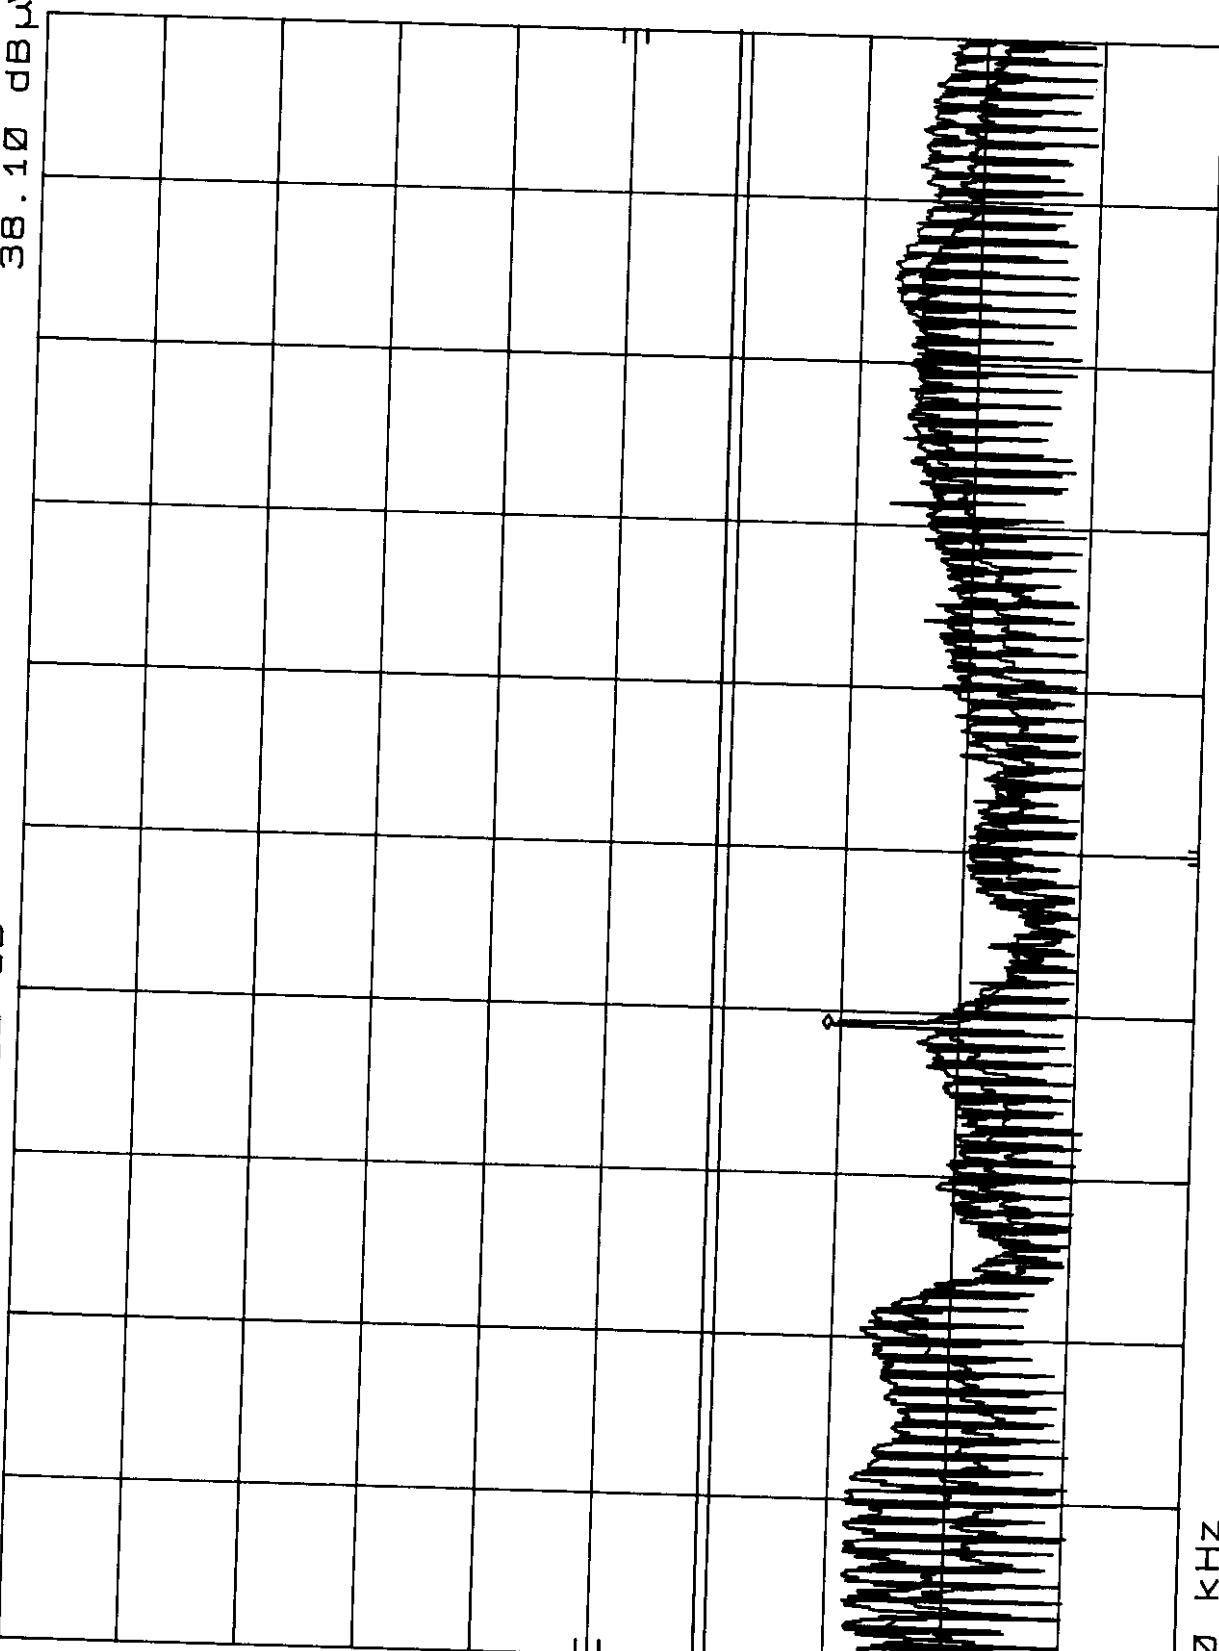

DL
48.0
dB μ V

TART 450 kHz
RES BW 10 kHz
VBW 10 kHz
STOP 30.00 MHz
SWP 750 msec

Exhibit 7

Photographs