



SPORTON International Inc.

No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.
Ph: 886-3-656-9065 / FAX: 886-3-656-9085 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Delta Comnet Pvt. Ltd.
Applicant Address	D 159, Okhla Industrial Area, Phase1, New Delhi-110020, India
FCC ID	A46PTMPLRV1
Manufacturer's company	Delta Comnet Pvt. Ltd.
Manufacturer Address	D 159, Okhla Industrial Area, Phase1, New Delhi-110020, India

Product Name	PTMPLR
Brand Name	Delta
Model Name	PTMPLRV1
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Nov. 01, 2011
Final Test Date	Dec. 28, 2011
Submission Type	Original Equipment



Statement

Test result included is only for the IEEE 802.11g part and IEEE 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units	7
3.8. Table for Parameters of Test Software Setting	7
3.9. Test Configurations	9
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Peak Output Power Measurement.....	15
4.3. Average Output Power Measurement	18
4.4. Power Spectral Density Measurement	21
4.5. 6dB Spectrum Bandwidth Measurement	26
4.6. Radiated Emissions Measurement	31
4.7. Band Edge Emissions Measurement	43
4.8. Antenna Requirements	47
5. LIST OF MEASURING EQUIPMENTS	48
6. TEST LOCATION.....	50
7. TAF CERTIFICATE OF ACCREDITATION	51
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3



History of This Test Report



Report No.: FR1N0127

Certificate No.: CB10101001

1. CERTIFICATE OF COMPLIANCE

Product Name : PTMPLR
Brand Name : Delta
Model Name : PTMPLRV1
Applicant : Delta Comnet Pvt. Ltd.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 01, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that appears to read "Jordan Hsiao".

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	9.96 dB
4.2	15.247(b)(3)	Peak Output Power	Complies	0.10 dB
4.3	-	Average Output Power	-	-
4.4	15.247(e)	Power Spectral Density	Complies	3.39 dB
4.5	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	0.46 dB
4.7	15.247(d)	Band Edge Emissions	Complies	0.25 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	$\pm 8.5 \times 10^{-8}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From POE
Modulation	OFDM for IEEE 802.11a/g
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11g: 11 ; 11a: 5
Channel Band Width (99%)	11g: 16.56 MHz ; 11a: 16.64 MHz
Peak Output Power	<p><Test Mode: P to M></p> <p>11g: 20.47 dBm ; 11a: 17.90 dBm</p> <p><Test Mode: P to P></p> <p>11g: 24.94 dBm ; 11a: 23.78 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3


3.2. Accessories

Power	Brand	Model	Rating
POE	Firepro Wireless	POE-2410A	<p>Input: 100-240VAC, 50/60Hz, 0.7A</p> <p>Output: 24VDC, 1A</p>

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Firepro Wireless	PE-924	Directional Enclosure Antenna	MMCX R/A Plug	15	-
2	Firepro Wireless	PE-958F	Directional Antenna	FUL R/A Plug	-	18

Note: Only Chain 1 could be transmitting/receiving antenna.

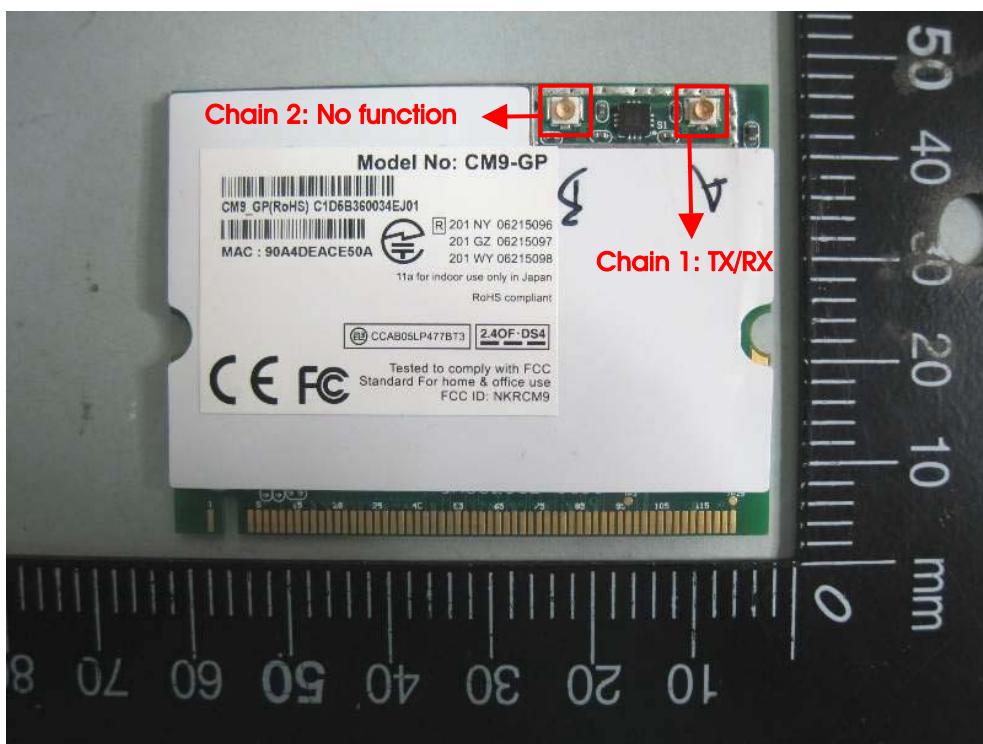

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	Auto	-	-
Peak Output Power				
Average Output Power	11g/BPSK	6 Mbps	1/6/11	1
Power Spectral Density				
6dB Spectrum Bandwidth	11g/BPSK	6 Mbps	1/6/11	1
Radiated Emissions Below 1GHz	CTX	Auto	-	-
Radiated Emissions Above 1GHz	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	11g/BPSK	6 Mbps	1/11	1

For 5GHz Band

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	CTX	Auto	-	-
Peak Output Power				
Average Output Power	11a/BPSK	6 Mbps	149/157/165	2
Power Spectral Density				
6dB Spectrum Bandwidth	11a/BPSK	6 Mbps	149/157/165	2
Radiated Emissions Below 1GHz	CTX	Auto	-	-
Radiated Emissions Above 1GHz	11a/BPSK	6 Mbps	149/157/165	2
Band Edge Emissions	11a/BPSK	6 Mbps	149/157/165	2

The following test modes were performed for all tests:

For Peak Output Power test, Average Output Power test, Power Spectral Density test, 6dB Spectrum Bandwidth test and Band Edge Emissions test:

Mode 1. P to M

Mode 2. P to P

Mode 2 is the highest output power, so it was selected to perform for Radiation test and bandedge test.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	M1330	E2K4965AGNM

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<Test Mode: Mode 1>

For 2.4GHz Band

Power Parameters of IEEE 802.11g

Test Software Version	WINBOX V5.5 on RB411		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	10	9	10

For 5GHz Band

Power Parameters of IEEE 802.11a

Test Software Version	WINBOX V5.5 on RB411		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	7	7	7

<Test Mode: Mode 2>

For 2.4GHz Band

Power Parameters of IEEE 802.11g

Test Software Version	WINBOX V5.5 on RB411		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	11	19	11

For 5GHz Band


Power Parameters of IEEE 802.11a

Test Software Version	WINBOX V5.5 on RB411		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	18	18	17


During the test, "WINBOX V5.5 on RB411" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration

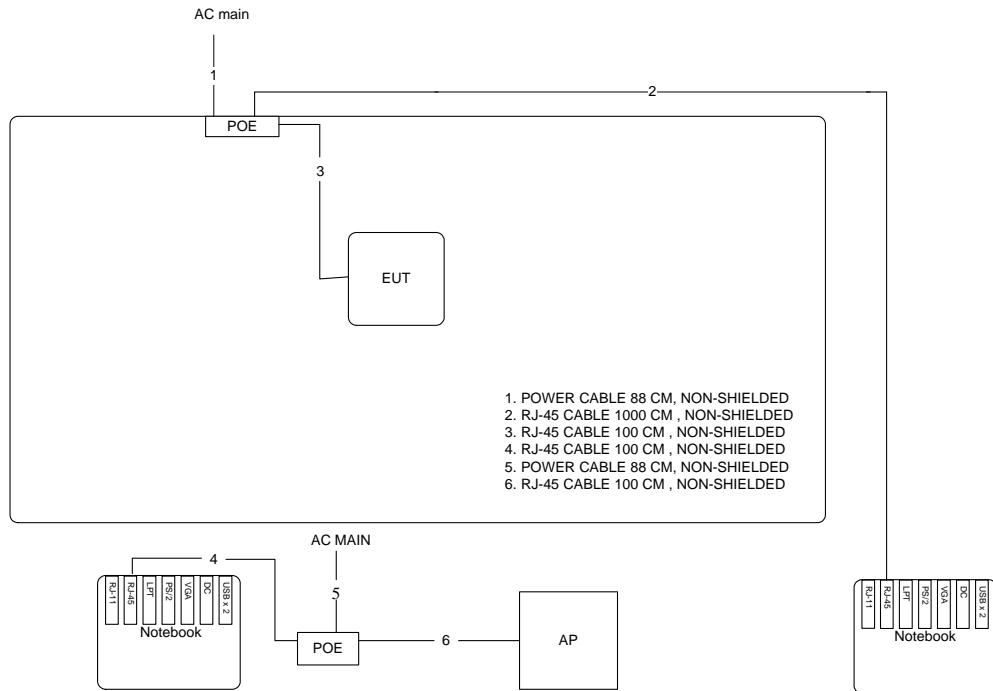

3.9.2. AC Power Line Conduction Emissions Test Configuration

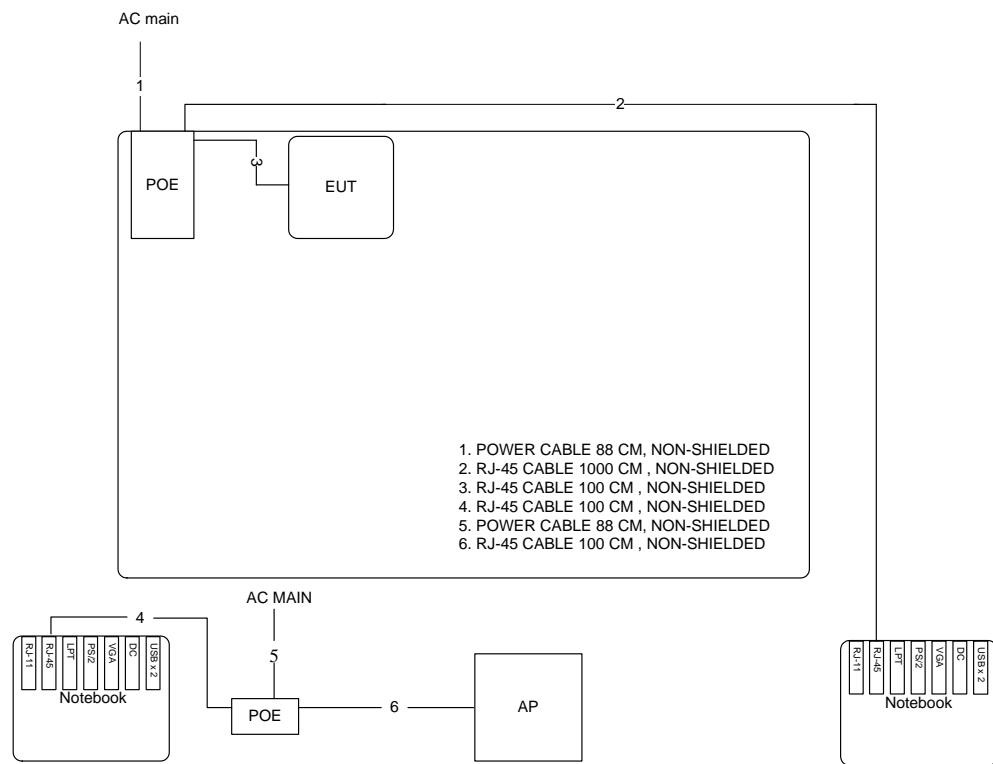

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

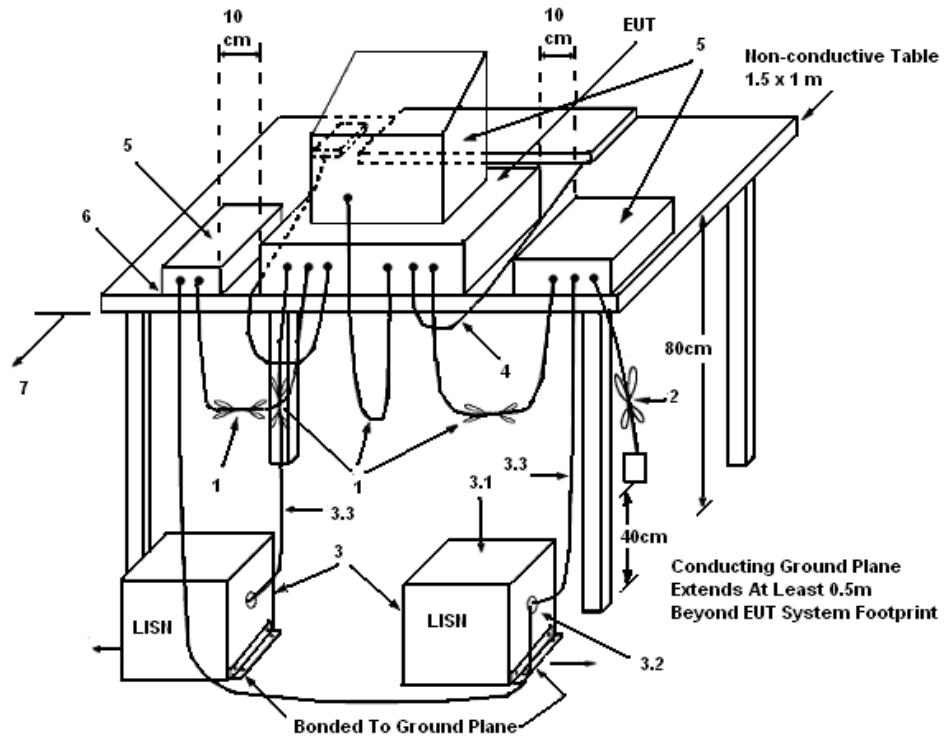

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in $50\ \Omega$. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	26°C	Humidity	64%
Test Engineer	Kane Liu	Phase	Line
Configuration	CTX		

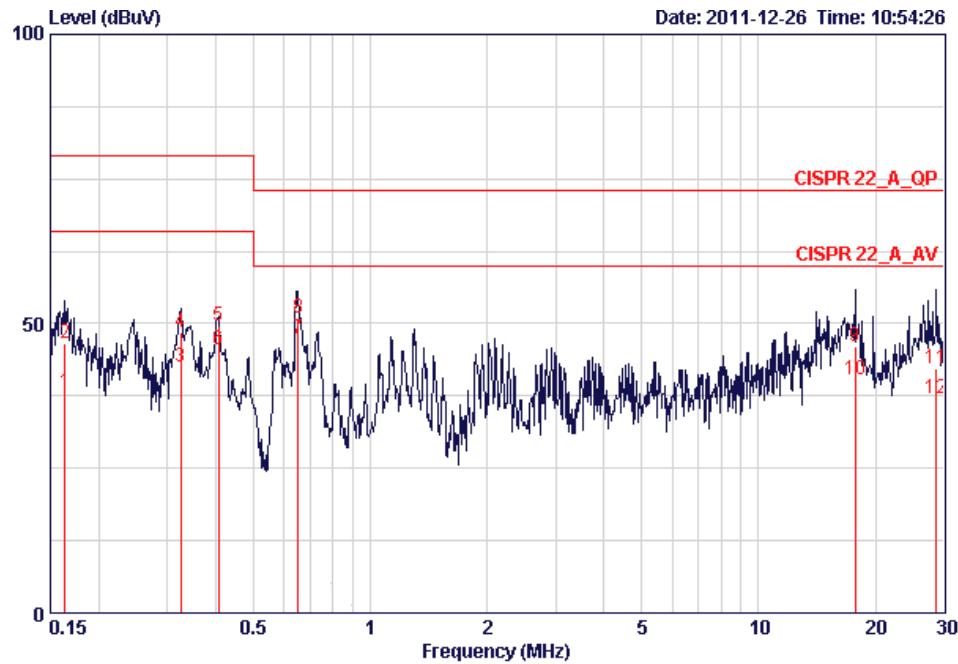

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	dB	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16327	38.05	-27.95	66.00	37.78	0.07	0.20 AVERAGE
2	0.16327	46.54	-32.46	79.00	46.27	0.07	0.20 QP
3	0.32512	42.61	-23.39	66.00	42.37	0.04	0.20 AVERAGE
4	0.32512	48.43	-30.57	79.00	48.19	0.04	0.20 QP
5	0.40615	49.47	-29.53	79.00	49.24	0.03	0.20 QP
6	0.40615	45.48	-20.52	66.00	45.25	0.03	0.20 AVERAGE
7	0.65084	47.46	-12.54	60.00	47.23	0.03	0.20 AVERAGE
8	0.65084	51.05	-21.95	73.00	50.82	0.03	0.20 QP
9	17.755	45.96	-27.04	73.00	44.75	0.71	0.50 QP
10	17.755	40.23	-19.77	60.00	39.02	0.71	0.50 AVERAGE
11	28.755	42.19	-30.81	73.00	40.22	1.37	0.60 QP
12	28.755	36.98	-23.02	60.00	35.01	1.37	0.60 AVERAGE

Temperature	26°C	Humidity	64%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	CTX		

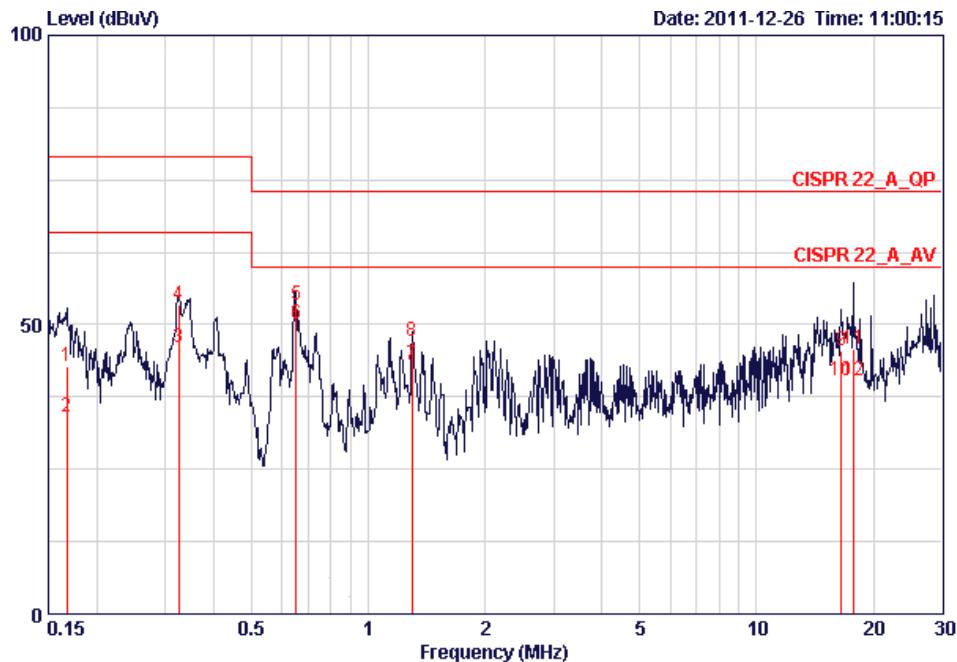

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	dBuV	Level	Factor	dB	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16765	42.70	-36.30	79.00	42.40	0.10	0.20 QP
2	0.16765	34.20	-31.80	66.00	33.90	0.10	0.20 AVERAGE
3	0.32512	46.18	-19.82	66.00	45.91	0.07	0.20 AVERAGE
4	0.32512	53.31	-25.69	79.00	53.04	0.07	0.20 QP
5	0.65084	53.41	-19.59	73.00	53.14	0.07	0.20 QP
6 ^(a)	0.65084	50.04	-9.96	60.00	49.77	0.07	0.20 AVERAGE
7	1.296	43.03	-16.97	60.00	42.82	0.08	0.14 AVERAGE
8	1.296	47.00	-26.00	73.00	46.79	0.08	0.14 QP
9	16.573	45.56	-27.44	73.00	44.47	0.65	0.43 QP
10	16.573	40.36	-19.64	60.00	39.27	0.65	0.43 AVERAGE
11	17.755	45.71	-27.29	73.00	44.51	0.70	0.50 QP
12	17.755	40.22	-19.78	60.00	39.02	0.70	0.50 AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak

4.2.3. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	<input checked="" type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging

4.2.4. Test Setup Layout

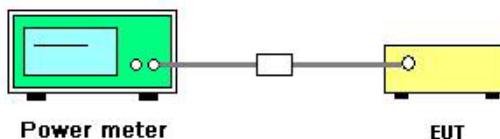

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Peak Output Power

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11g/a
Test Date	Dec. 09, 2011	Test Mode	Mode 1 (P to M)

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.47	21.00	Complies
6	2437 MHz	20.42	21.00	Complies
11	2462 MHz	20.40	21.00	Complies

Configuration IEEE 802.11a / Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	17.90	18.00	Complies
157	5785 MHz	17.25	18.00	Complies
165	5825 MHz	17.56	18.00	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g/a
Test Date	Dec. 28, 2011	Test Mode	Mode 2 (P to P)

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	21.67	27.00	Complies
6	2437 MHz	24.94	27.00	Complies
11	2462 MHz	21.49	27.00	Complies

Configuration IEEE 802.11a / Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	23.78	30.00	Complies
157	5785 MHz	23.61	30.00	Complies
165	5825 MHz	23.21	30.00	Complies

4.3. Average Output Power Measurement

4.3.1. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.3.2. Test Procedures

Spectrum Parameter	Setting
RF Output Power Method	<input checked="" type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (a) power meter method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.2.1 (b) channel integration method
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.1 Method 1 - spectral trace averaging
RF Output Power Method	<input type="checkbox"/> ANSI C63.10 clause 6.10.3.2 Method 2 - zero-span mode with trace averaging

4.3.3. Test Setup Layout

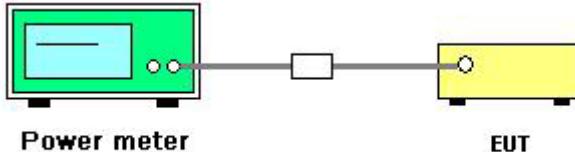

4.3.4. Test Deviation

There is no deviation with the original standard.

4.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

Note: Average output power is only for Maximum Permissible Exposure use.

4.3.6. Test Result of Average Output Power

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11g/a
Test Date	Dec. 09, 2011	Test Mode	Mode 1 (P to M)

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Average Conducted Power (dBm)
1	2412 MHz	10.35
6	2437 MHz	10.27
11	2462 MHz	10.40

Configuration IEEE 802.11a / Ant. 2

Channel	Frequency	Average Conducted Power (dBm)
149	5745 MHz	8.78
157	5785 MHz	8.00
165	5825 MHz	8.44

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g/a
Test Date	Dec. 28, 2011	Test Mode	Mode 2 (P to P)

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Average Conducted Power (dBm)
1	2412 MHz	11.56
6	2437 MHz	19.38
11	2462 MHz	11.58

Configuration IEEE 802.11a / Ant. 2

Channel	Frequency	Average Conducted Power (dBm)
149	5745 MHz	19.29
157	5785 MHz	19.30
165	5825 MHz	18.00

4.4. Power Spectral Density Measurement

4.4.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.

4.4.4. Test Setup Layout

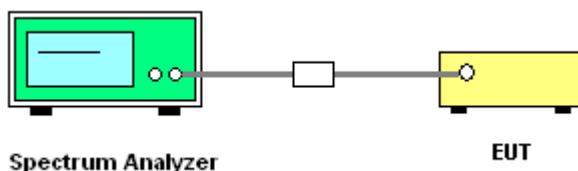

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11g/a
Test Date	Dec. 09, 2011	Test Mode	Mode 1 (P to M)

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-5.81	-1.00	Complies
6	2437 MHz	-4.39	-1.00	Complies
11	2462 MHz	-5.09	-1.00	Complies

Configuration IEEE 802.11a / Ant. 2

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
149	5745 MHz	-7.59	-4.00	Complies
157	5785 MHz	-7.62	-4.00	Complies
165	5825 MHz	-8.00	-4.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g/a
Test Date	Dec. 28, 2011	Test Mode	Mode 2 (P to P)

Configuration IEEE 802.11g / Ant. 1


Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-5.38	5.00	Complies
6	2437 MHz	-5.05	5.00	Complies
11	2462 MHz	-4.23	5.00	Complies

Configuration IEEE 802.11a / Ant. 2


Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
149	5745 MHz	-4.41	8.00	Complies
157	5785 MHz	-6.60	8.00	Complies
165	5825 MHz	-7.35	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

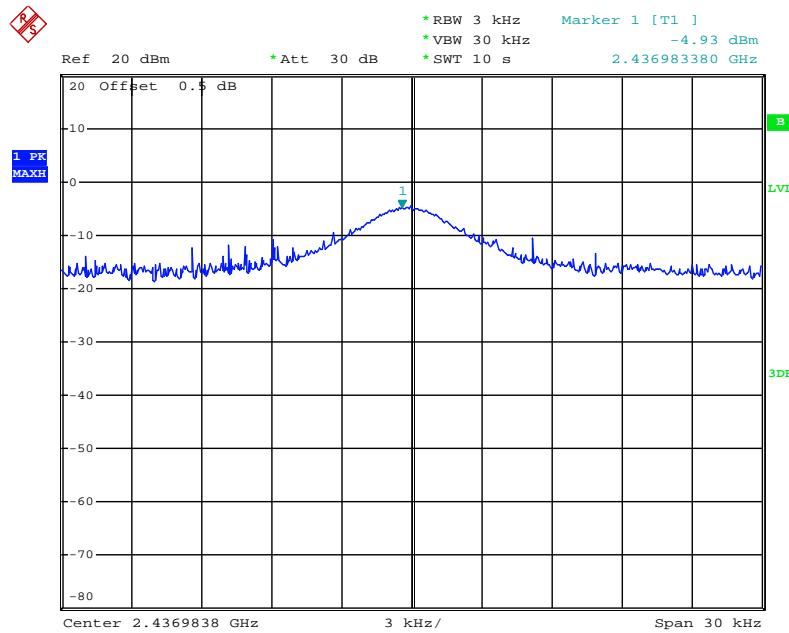Power Density Plot on Configuration IEEE 802.11g / Ant. 1 / Mode 1 (P to M) / 2437 MHz


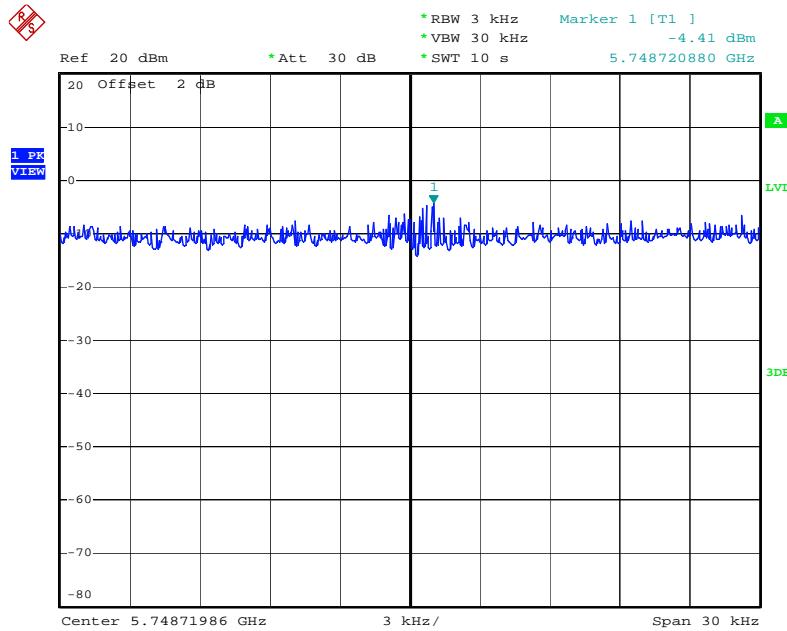
Date: 9.DEC.2011 11:30:43

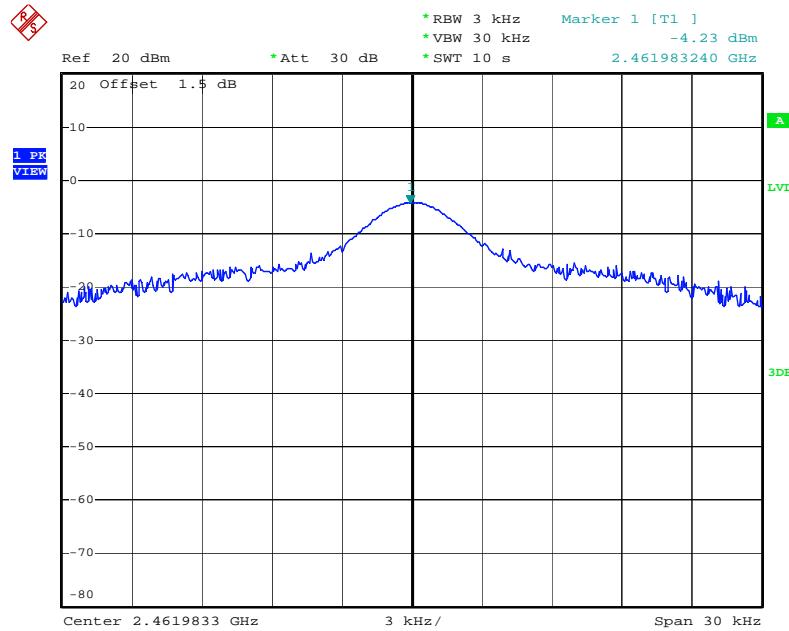Power Density Plot on Configuration IEEE 802.11g / Ant. 1 / Mode 1 (P to P) / 2462 MHz


Date: 28.DEC.2011 16:42:50

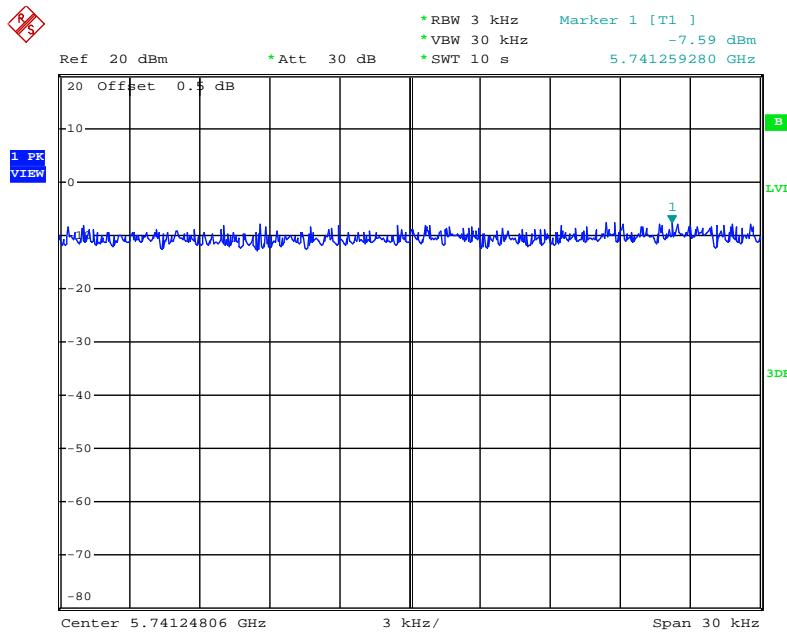Power Density Plot on Configuration IEEE 802.11a / Ant. 2 / Mode 1 (P to M) / 5745 MHz


Date: 9.DEC.2011 12:23:21

Power Density Plot on Configuration IEEE 802.11a / Ant. 2 / Mode 2 (P to P) / 5745 MHz


Date: 28.DEC.2011 17:31:38

4.5. 6dB Spectrum Bandwidth Measurement

4.5.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.5.4. Test Setup Layout

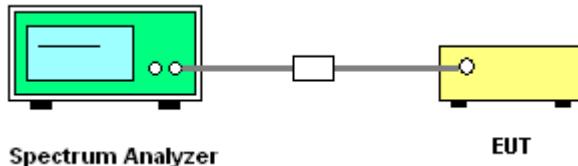

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of 6dB Spectrum Bandwidth

Temperature	26°C	Humidity	60%
Test Engineer	Denis Su	Configurations	IEEE 802.11g/a
Test Date	Dec. 09, 2011	Test Mode	Mode 1 (P to M)

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.44	16.48	500	Complies
6	2437 MHz	16.32	16.56	500	Complies
11	2462 MHz	16.40	16.48	500	Complies

Configuration IEEE 802.11a / Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.40	16.64	500	Complies
157	5785 MHz	16.36	16.64	500	Complies
165	5825 MHz	16.36	16.56	500	Complies

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g/a
Test Date	Dec. 28, 2011	Test Mode	Mode 2 (P to P)

Configuration IEEE 802.11g / Ant. 1

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.48	500	Complies
6	2437 MHz	16.36	16.56	500	Complies
11	2462 MHz	16.36	16.48	500	Complies


Configuration IEEE 802.11a / Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.32	16.60	500	Complies
157	5785 MHz	16.32	16.64	500	Complies
165	5825 MHz	16.56	16.32	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with maximum results was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11g / Ant. 1 / Mode 1 (P to M) / 2437 MHz

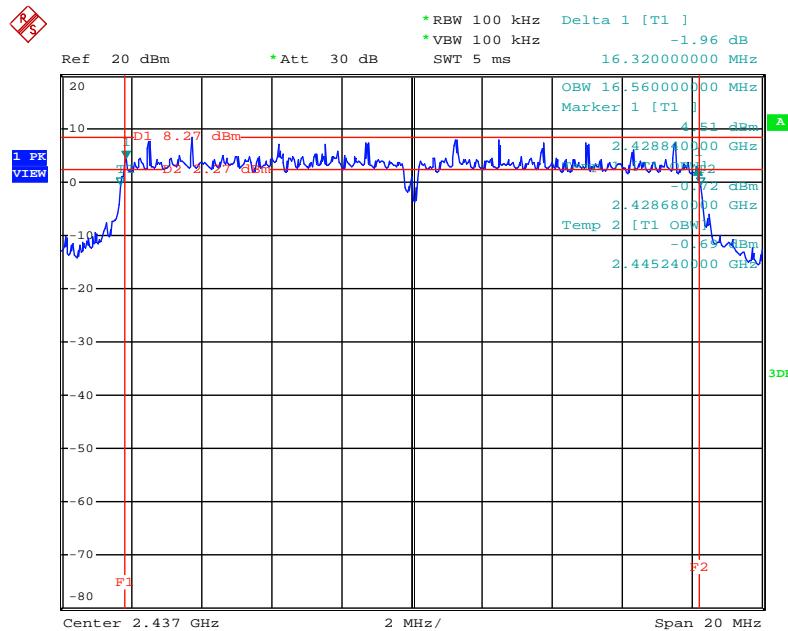


Date: 9.DEC.2011 11:33:38

6 dB Bandwidth Plot on Configuration IEEE 802.11g / Ant. 1 / Mode 2 (P to P) / 2437 MHz

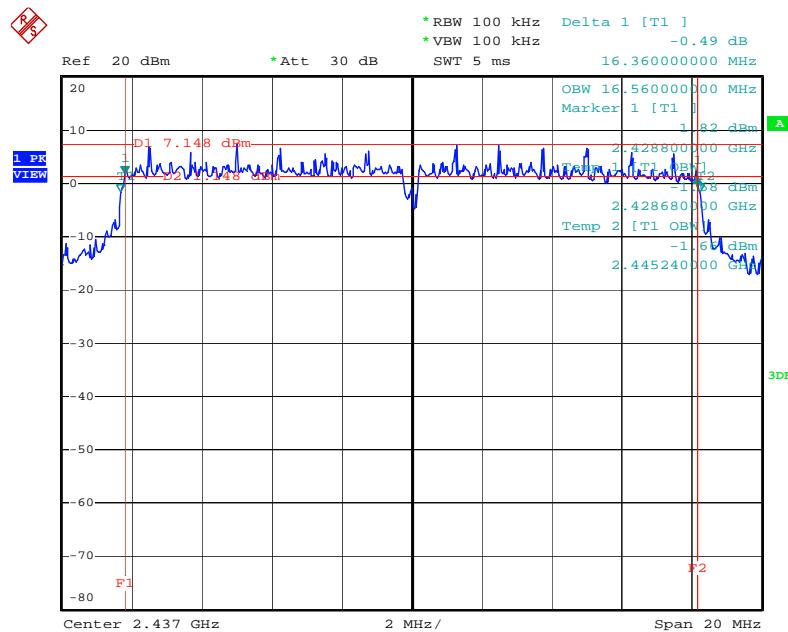


Date: 28.DEC.2011 16:44:10

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 / Mode 1 (P to M) / 5785 MHz

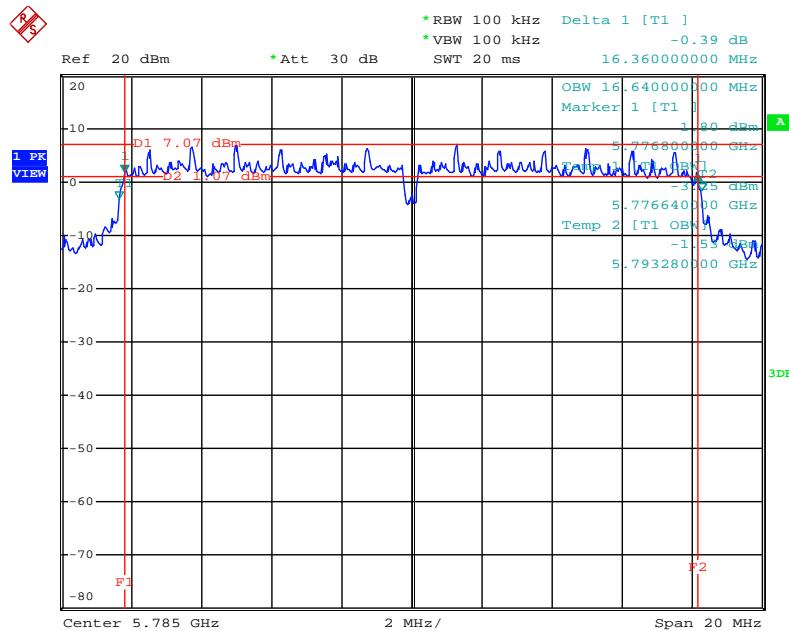

Date: 9.DEC.2011 12:32:08

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 / Mode 2 (P to P) / 5785 MHz

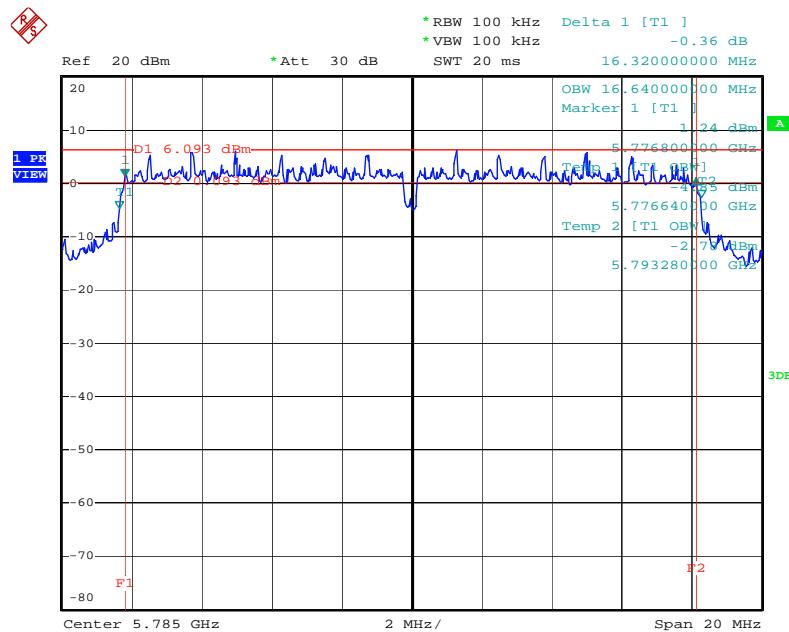

Date: 28.DEC.2011 17:27:38

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

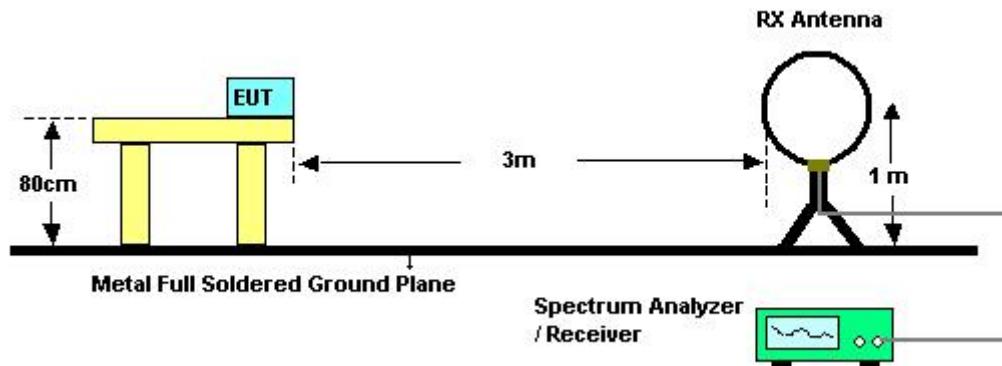

For radiated emissions above 1GHz

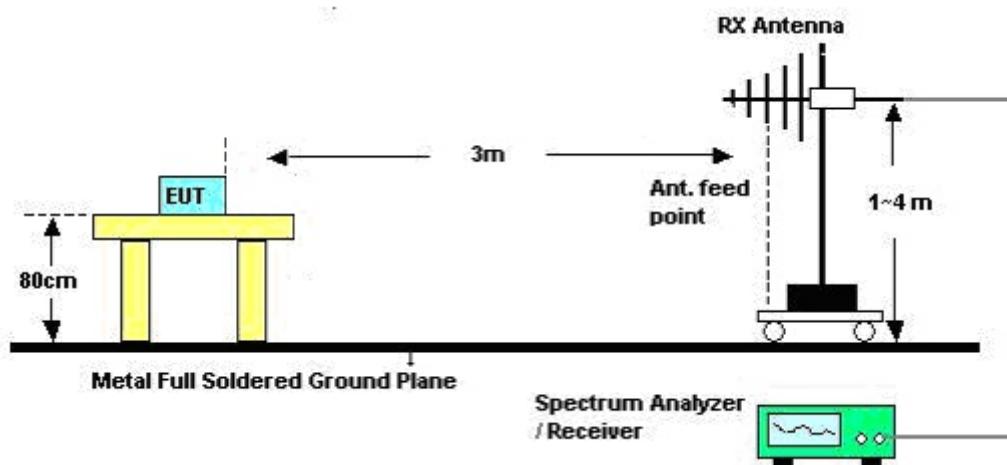

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	CTX
Test Date	Dec. 09, 2011		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	CTX

Horizontal

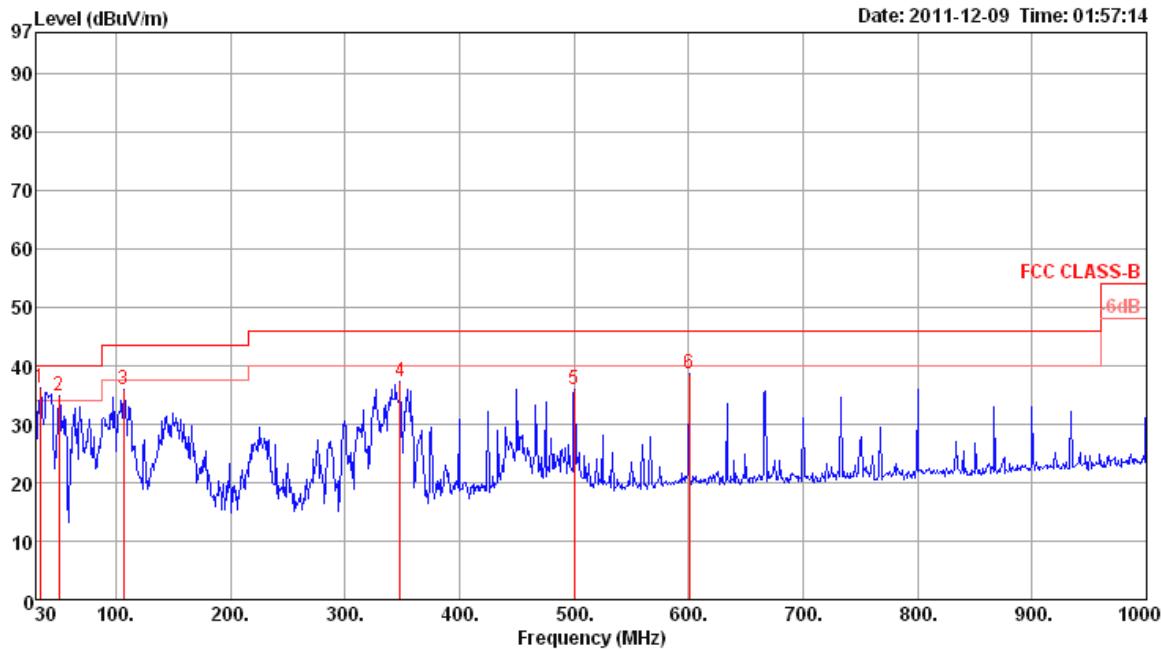

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			cm	deg	
1	33.88	36.34	40.00	-3.66	47.02	0.50	16.62	27.80	Peak	400	0	HORIZONTAL
2	50.37	34.81	40.00	-5.19	53.38	0.70	8.53	27.80	Peak	400	0	HORIZONTAL
3	106.63	35.89	43.50	-7.61	50.76	1.20	11.50	27.57	Peak	400	0	HORIZONTAL
4	348.16	37.27	46.00	-8.73	47.63	2.20	14.67	27.23	Peak	400	0	HORIZONTAL
5	500.45	35.99	46.00	-10.01	43.76	2.70	17.63	28.10	Peak	400	0	HORIZONTAL
6	600.36	38.64	46.00	-7.36	45.07	2.90	18.77	28.10	Peak	400	0	HORIZONTAL

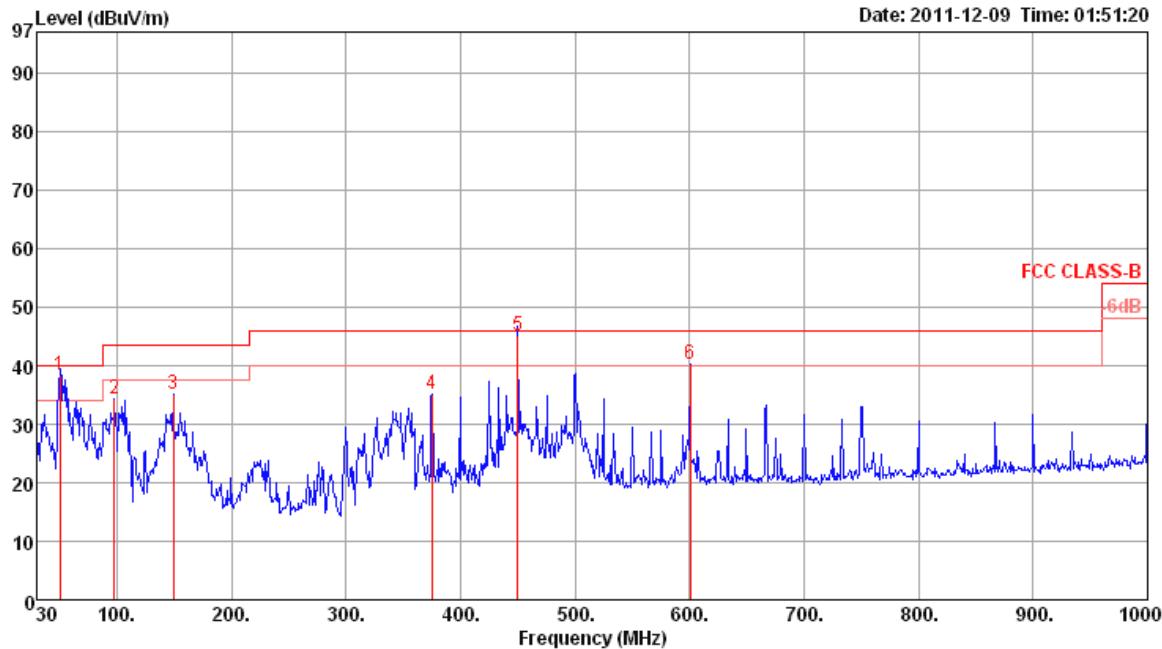Vertical


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	50.37	38.43	40.00	-1.57	57.00	0.70	8.53	27.80 QP	100	358	VERTICAL
2	97.90	34.23	43.50	-9.27	50.09	1.16	10.59	27.61 Peak	400	0	VERTICAL
3	149.31	35.23	43.50	-8.27	49.24	1.45	11.90	27.36 Peak	400	0	VERTICAL
4	375.32	35.21	46.00	-10.79	44.99	2.25	15.40	27.43 Peak	400	0	VERTICAL
5	450.01	45.20	46.00	-0.80	53.61	2.60	16.84	27.85 QP	138	174	VERTICAL
6	600.36	40.39	46.00	-5.61	46.82	2.90	18.77	28.10 Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 1 / Ant. 1
Test Date	Dec. 07, 2011		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				
1	4823.09	46.09	74.00	-27.91	41.67	6.23	33.39	35.20	Peak	100	140	HORIZONTAL
2	4824.82	32.32	54.00	-21.68	27.90	6.23	33.39	35.20	Average	100	140	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m				
1	4824.06	32.90	54.00	-21.10	28.48	6.23	33.39	35.20	Average	126	309	VERTICAL
2	4824.96	46.91	74.00	-27.09	42.49	6.23	33.39	35.20	Peak	126	309	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 6 / Ant. 1
Test Date	Dec. 07, 2011		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	4873.92	36.95	74.00	-37.05	32.38	6.29	33.48	35.20	Peak		100	40	HORIZONTAL
2	4874.42	51.25	74.00	-22.75	46.68	6.29	33.48	35.20	Peak		100	40	HORIZONTAL
3	7310.16	45.23	54.00	-8.77	36.66	7.49	36.51	35.43	Average		124	228	HORIZONTAL
4	7311.78	61.82	74.00	-12.18	53.25	7.49	36.51	35.43	Peak		124	228	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	4873.94	40.19	54.00	-13.81	35.62	6.29	33.48	35.20	Average		110	48	VERTICAL
2	4874.40	54.84	74.00	-19.16	50.27	6.29	33.48	35.20	Peak		110	48	VERTICAL
3	7310.23	46.60	54.00	-7.40	38.03	7.49	36.51	35.43	Average		100	208	VERTICAL
4	7311.11	62.51	74.00	-11.49	53.94	7.49	36.51	35.43	Peak		100	208	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 11 / Ant. 1
Test Date	Dec. 07, 2011		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	4923.06	47.54	74.00	-26.46	42.82	6.34	33.58	35.20	Peak		107	317	HORIZONTAL
2	4924.11	33.23	54.00	-20.77	28.51	6.34	33.58	35.20	Average		107	317	HORIZONTAL
3	7385.59	49.02	74.00	-24.98	40.32	7.55	36.61	35.46	Peak		100	219	HORIZONTAL
4	7386.51	35.20	54.00	-18.80	26.50	7.55	36.61	35.46	Average		100	219	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	4924.00	35.87	54.00	-18.13	31.15	6.34	33.58	35.20	Average		114	320	VERTICAL
2	4924.34	50.22	74.00	-23.78	45.50	6.34	33.58	35.20	Peak		114	320	VERTICAL
3	7386.48	49.49	74.00	-24.51	40.79	7.55	36.61	35.46	Peak		100	177	VERTICAL
4	7386.56	34.98	54.00	-19.02	26.28	7.55	36.61	35.46	Average		100	177	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 149 / Ant. 2
Test Date	Dec. 07, 2011		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	11491.68	49.17	54.00	-4.83	34.82	9.93	39.50	35.08	Average	131	122	HORIZONTAL
2	11491.84	61.28	74.00	-12.72	46.93	9.93	39.50	35.08	Peak	131	122	HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			
1	11491.68	65.49	74.00	-8.51	51.14	9.93	39.50	35.08	Peak	100	180	VERTICAL
2	11492.01	50.79	54.00	-3.21	36.44	9.93	39.50	35.08	Average	100	180	VERTICAL

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 157 / Ant. 2
Test Date	Dec. 07, 2011		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		dB	dB			Loss	Factor	Factor			
1	11570.08	52.07	54.00	-1.93	37.74	9.95	39.47	35.09	Average	129	123 HORIZONTAL
2	11570.40	67.09	74.00	-6.91	52.76	9.95	39.47	35.09	Peak	129	123 HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Remark	Pol/Phase
		dB	dB			Loss	Factor	Factor				
1	11570.00	53.54	54.00	-0.46	39.21	9.95	39.47	35.09	149	170 Average	VERTICAL	
2	11570.56	67.42	74.00	-6.58	53.09	9.95	39.47	35.09	149	170 Peak	VERTICAL	

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 165 / Ant. 2
Test Date	Dec. 07, 2011		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
1	11649.76	51.35	54.00	-2.65	37.00	9.98	39.44	35.07	Average			108	127	HORIZONTAL
2	11652.56	66.06	74.00	-7.94	51.71	9.98	39.44	35.07	Peak			108	127	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m						
1	11649.84	52.56	54.00	-1.44	38.21	9.98	39.44	35.07	Average			130	167	VERTICAL
2	11650.64	67.54	74.00	-6.46	53.19	9.98	39.44	35.07	Peak			130	167	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	60%
Test Engineer	Serway Li	Configurations	IEEE 802.11g CH 1, 6, 11 / Ant. 1
Test Date	Dec. 07, 2011		

Channel 1

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz	dBuV/m	dBuV/m	dB						cm	deg	
1	2389.80	69.99	74.00	-4.01	37.80	4.14	28.05	0.00	Peak	108	0 VERTICAL
2	2390.00	53.41	54.00	-0.59	21.22	4.14	28.05	0.00	Average	108	0 VERTICAL
3	2409.60	113.51				4.14	28.09	0.00	Peak	108	0 VERTICAL
4	2411.80	98.38				4.14	28.09	0.00	Average	108	0 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6


Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz	dBuV/m	dBuV/m	dB						cm	deg	
1	2388.60	69.62	74.00	-4.38	37.43	4.14	28.05	0.00	Peak	133	359 VERTICAL
2	2390.00	53.75	54.00	-0.25	21.56	4.14	28.05	0.00	Average	133	359 VERTICAL
3	2434.20	121.31				4.16	28.18	0.00	Peak	133	359 VERTICAL
4	2436.00	107.67				4.16	28.18	0.00	Average	133	359 VERTICAL
5	2483.50	52.18	54.00	-1.82	19.71	4.21	28.26	0.00	Average	133	359 VERTICAL
6	2484.70	67.84	74.00	-6.16	35.37	4.21	28.26	0.00	Peak	133	359 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.


Channel 11

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m			
MHz	dBuV/m	dBuV/m	dB						cm	deg	
1	2462.00	99.31				4.18	28.22	0.00	Average	128	1 VERTICAL
2	2462.40	111.97				4.18	28.22	0.00	Peak	128	1 VERTICAL
3	2483.50	52.91	54.00	-1.09	20.44	4.21	28.26	0.00	Average	128	1 VERTICAL
4	2483.50	66.60	74.00	-7.40	34.13	4.21	28.26	0.00	Peak	128	1 VERTICAL


Item 1, 2 are the fundamental frequency at 2462 MHz.

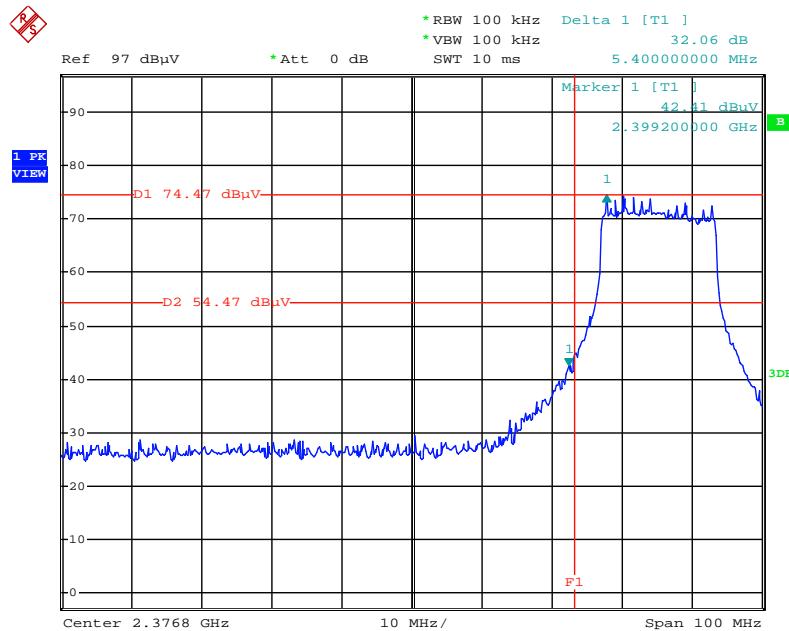For Emission not in Restricted Band
Low Band Edge Plot on Configuration IEEE 802.11g / Ant. 1 / 2412 MHz


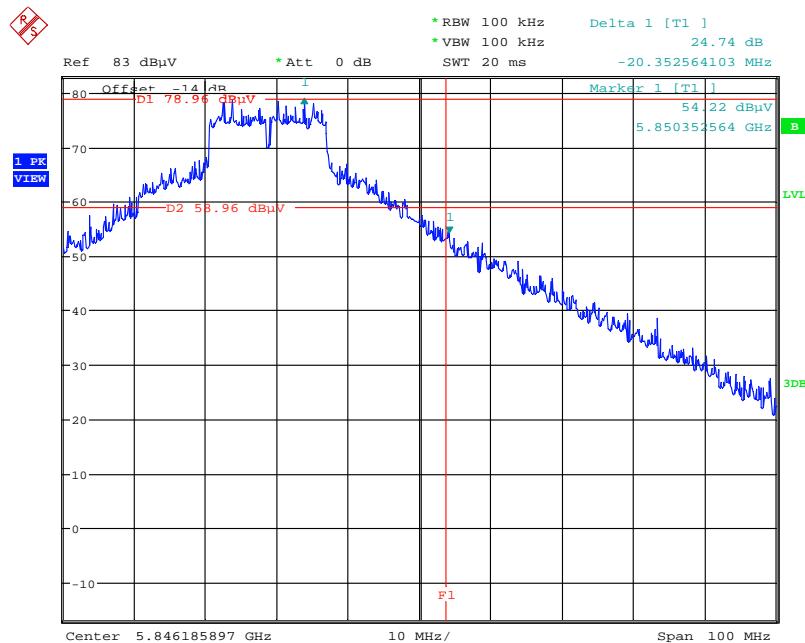
Date: 7.DEC.2011 02:25:45

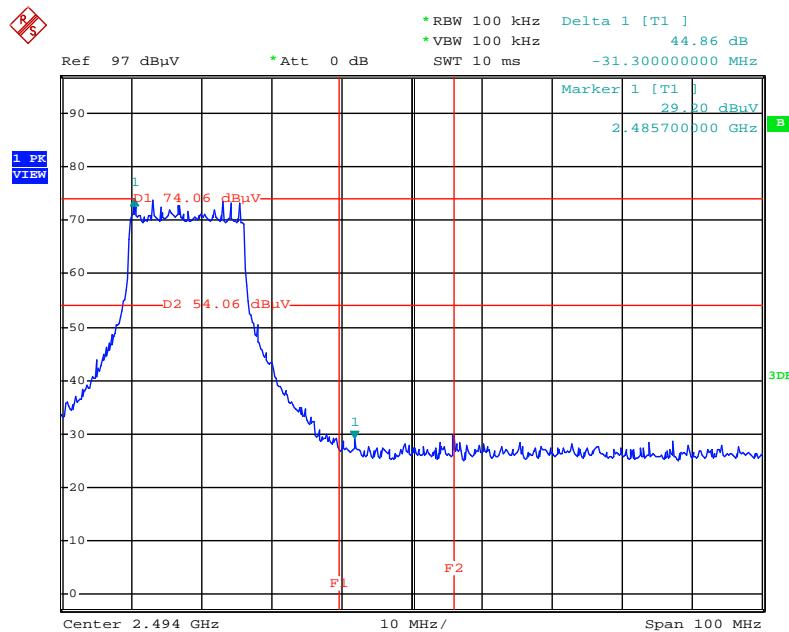High Band Edge Plot on Configuration IEEE 802.11g / Ant. 1 / 2462 MHz


Date: 7.DEC.2011 03:22:02

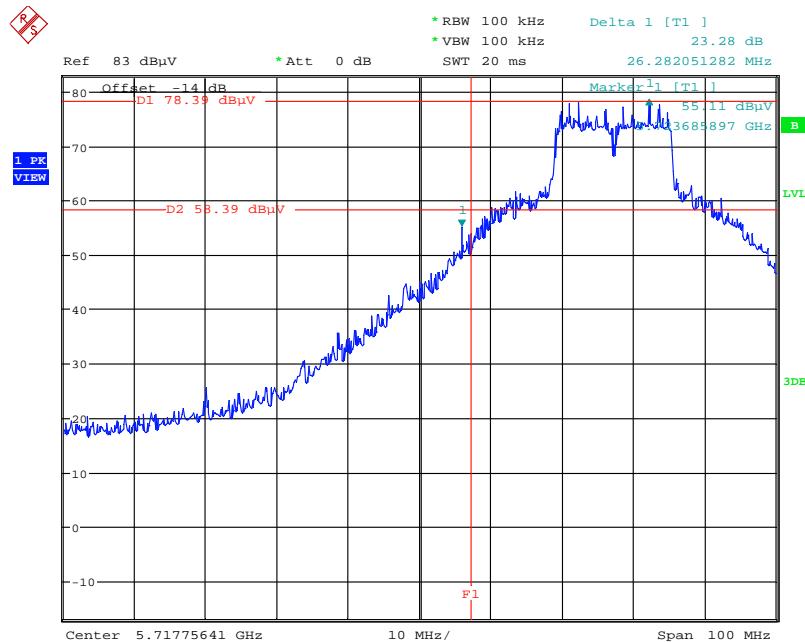Low Band Edge Plot on Configuration IEEE 802.11a / Ant. 2 / 5745 MHz


Date: 7.DEC.2011 10:13:50

High Band Edge Plot on Configuration IEEE 802.11a / Ant. 2 / 5825 MHz


Date: 7.DEC.2011 10:23:54

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Oct. 28, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 16, 2011	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Jan. 04, 2011	Conduction (CO01-CB)
COND Cable	-	Cable	-	0.15MHz~30MHz	Dec. 04, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Oct. 17, 2011	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 22, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP	100304	9kHz ~ 40GHz	Nov. 22, 2011	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 22, 2011	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2011	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV30	101026	9KHz~30GHz	Jul. 27, 2011	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz – 26.5 GHz	Nov. 17, 2011	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 01, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: "*" Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sportun International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix