

### 1 Cover Page

## FCC MPE REPORT

Application No.:	SHEM1402000360RF
Applicant:	Nocs AB
FCC ID:	A48-NS2N
<b>Equipment Under Test (EUT):</b>	
<b>NOTE:</b> The following sample(s) submitted was/were identified on behalf of the client as	
Product Name:	NS2 Air Monitors
Model No.(EUT):	NS2V2
Standards:	FCC Rules 47 CFR §2.1091 KDB447498 D01 General RF Exposure Guidance
Date of Receipt:	February 21, 2014
Date of Test:	February 24, 2014 to March 03, 2014
Date of Issue:	March 04, 2014
Test Result:	<b>Pass*</b>

\* In the configuration tested, the EUT complied with the standards specified above.



Tony Wu  
E&E Section Manager

SGS-CSTC (Shanghai) Co., Ltd.


The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

<b>Revision Record</b>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
00	/	March 04, 2014	/	Original

<b>Authorized for issue by:</b>				
<b>Engineer</b>		Eddy Zong		
		<b>Print Name</b>		
<b>Clerk</b>		Susie Liu		
		<b>Print Name</b>		
<b>Reviewer</b>		Keny Xu		
		<b>Print Name</b>		

### 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 GENERAL INFORMATION .....	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 DETAILS OF E.U.T.....	4
4.4 TEST LOCATION .....	5
4.5 TEST FACILITY .....	5
5 TEST STANDARDS AND LIMITS.....	6
6 MEASUREMENT AND CALCULATION .....	7
6.1 MAXIMUM TRANSMIT POWER.....	7
6.2 MPE CALCULATION.....	8
7 EUT CONSTRUCTIONAL DETAILS.....	8

## 4 General Information

### 4.1 Client Information

Applicant:	Nocs AB
Address of Applicant:	Frejgatan 17, 113 49 Stockholm, Sweden
Manufacturer:	Nocs AB
Address of Manufacturer:	Frejgatan 17, 113 49 Stockholm, Sweden
Factory:	Hansong (Nanjing) Technology Ltd.
Address of Factory:	8th Kangping Road, Jiangning Economy and Technology Development Zone, Nanjing, 211106, China

### 4.2 General Description of E.U.T.

Product Description:	Mobile product
----------------------	----------------

### 4.3 Details of E.U.T.

Operation Frequency:	BT: 2402MHz~2480MHz DTS: 2412MHz-2462MHz
Bluetooth Version:	3.0+EDR
Modulation Technique:	BT: (GFSK, π/4DQPSK, 8DPSK) DTS: 802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
Number of Channel:	BT: 79 DTS: 11
Antenna Type	BT: PCB Antenna DTS: Integral Antenna
Antenna Gain	2 dBi
Power Supply:	AC100-240V 50/60Hz 1.5A
Cable Type:	About 180cm length (2 Wires)
Engineering mode:	Using test software to control EUT working in continuous transmitting, and select channel and modulation type

#### **4.4 Test Location**

All tests were performed at SGS E&E EMC lab

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

#### **4.5 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

- FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

- Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

- VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

## 5 Test Standards and Limits

According to §1.1310 Radiofrequency radiation exposure limits:

The limit for general population/uncontrolled exposures


Frequency	Power density(mW/cm <sup>2</sup> )	Averaging time(minutes)
300MHz~1.5GHz	f/1500	30
1.5GHz~100GHz	1.0	30

## 6 Measurement and Calculation

### 6.1 Maximum transmit power

**EUT Operation:** Test in fixing frequency operating mode at lowest, middle and highest frequency.

**Test Configuration:**

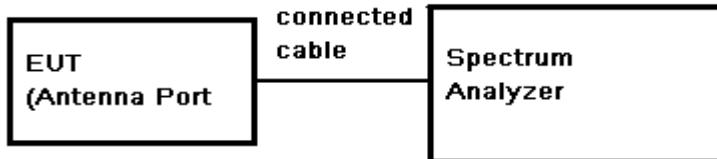

#### Test Data:

For BT:

Test mode	Channel	Reading Peak Power (dBm)	Cable Loss (dB)	Peak Power (dBm)	Peak Power (mW)	Peak Power Limit (dBm)	Result
GFSK	Low	2.14	0.5	2.64	1.84	30	PASS
	Mid	<b>2.55</b>	<b>0.5</b>	<b>3.05</b>	<b>2.02</b>	30	PASS
	High	2.09	0.5	2.59	1.82	30	PASS
π/4DQPSK	Low	0.06	0.5	0.56	1.14	30	PASS
	Mid	0.60	0.5	1.10	1.29	30	PASS
	High	-0.12	0.5	0.38	1.09	30	PASS
8DPSK	Low	-0.24	0.5	0.26	1.06	30	PASS
	Mid	0.82	0.5	1.32	1.36	30	PASS
	High	0.19	0.5	0.69	1.17	30	PASS

For DTS:

Test mode	Channel	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)	Output Peak Power (mW)	Peak Power Limit (dBm)	Result
802.11b	Low	19.02	0.5	19.52	89.54	30	PASS
	Mid	19.46	0.5	19.96	99.08	30	PASS
	High	19.21	0.5	19.71	93.54	30	PASS
802.11g	Low	19.85	0.5	20.35	108.39	30	PASS
	Mid	<b>20.32</b>	<b>0.5</b>	<b>20.82</b>	<b>120.78</b>	30	PASS
	High	20.27	0.5	20.77	119.40	30	PASS

## 6.2 MPE Calculation

According to the formula  $S = \frac{PG}{4R^2\pi}$ , we can calculate S which is MPE.

Note:

- 1) P (Watts) = Power Input to antenna =  $10^{\frac{dBm}{10}} / 1000$
- 2) G (Antenna gain in numeric) =  $10^{\frac{Antenna\ gain\ in\ dBi}{10}}$
- 3) R = distance to the center of radiation of antenna (in meter) = 20cm
- 4) MPE limit = 1mW/cm<sup>2</sup>

For BT:

The Max Conducted Peak Output Power is 3.05dBm(2.02mW) in middle channel of GFSK;

The best case gain of the antenna is 2dBi. 2dB logarithmic terms convert to numeric result is nearly 1.58

$$So, S = \frac{PG}{4R^2\pi} = \frac{2.02 \times 1.58}{4 \times 400 \times 3.14} = 0.00064 \text{ mW/cm}^2 < 1\text{mW/cm}^2$$

For DTS:

The Max Conducted Peak Output Power is 20.82dBm(120.78mW) in middle channel of 802.11g;

The best case gain of the antenna is 2dBi. 2dB logarithmic terms convert to numeric result is nearly 1.58

$$So, S = \frac{PG}{4R^2\pi} = \frac{120.78 \times 1.58}{4 \times 400 \times 3.14} = 0.0381 \text{ mW/cm}^2 < 1\text{mW/cm}^2$$

The BT and the DTS modules can't simultaneous transmitting at frequency 2.4GHz band, according to the KDB447498 D01 section 7.2 determine the device is exclusion from SAR test.

## 7 EUT Constructional Details

Refer to the < NS2V2 \_External Photos -FCC> & < NS2V2 \_Internal Photos-FCC>.

**--End of the Report--**