



EMC TEST REPORT

Report No.: SET2022-08899

Product Name: Fingertip Oximeter

FCC ID: A49POD-1W

Model No. : POD-1W, POD-2W, S5W

Applicant: Shenzhen Creative Industry Co., Ltd.

Address: Floor 5, BLD 9, Baiwangxin High-Tech Industrial Park, Songbai Road, Xili Street, Nanshan District, 518110 Shenzhen, PEOPLE'S REPUBLIC OF CHINA

Received Date: 2022.07.04

Dates of Testing: 2022.07.04—2022.07.13

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name Fingertip Oximeter

Model No. POD-1W, POD-2W, S5W

Trade name NA

Brand Name NA

Applicant Shenzhen Creative Industry Co., Ltd.

Applicant Address Floor 5, BLD 9, Baiwangxin High-Tech Industrial Park, Songbai Road, Xili Street, Nanshan District, 518110 Shenzhen, PEOPLE'S REPUBLIC OF CHINA

Manufacturer Shenzhen Creative Industry Co., Ltd.

Manufacturer Address Floor 5, BLD 9, Baiwangxin High-Tech Industrial Park, Songbai Road, Xili Street, Nanshan District, 518110 Shenzhen, PEOPLE'S REPUBLIC OF CHINA

Test Standards 47 CFR Part 15 Subpart B

Test Result PASS

Tested by Ruihong Xie

Ruihong Xie Test Engineer 2022.07.13

Reviewed by Chris You

Chris You Senior Engineer 2022.07.13

Approved by Shuangwen Zhang

2022.07.13

Shuangwen Zhang, Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 EUT Description	4
1.2 Test Standards and Results	5
1.3 Facilities and Accreditations.....	6
1.3.1 Facilities	6
1.3.2 Test Environment Conditions.....	6
1.3.3 Measurement Uncertainty	6
2. TEST CONDITIONS SETTING	7
2.1 Test Peripherals	7
2.2 Test Mode	7
2.3 Test Setup and Equipments List.....	8
2.3.1 Radiated Emission.....	8
3. 47 CFR PART 15B REQUIREMENTS	10
3.1 Radiated Emission	10
3.1.1 Requirement	10
3.1.2 Test Description	11
3.1.3 Test Result.....	11

Change History		
Issue	Date	Reason for change
1.0	2022.07.13	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Fingertip Oximeter

Trade Name.....: N/A

Brand Name.....: N/A

Hardware Version..... : V1.0

Software Version : N/A

Power supply..... : Battery

Brand Name: PKCELL

Model No.: LR03

Capacitance: 650mAh

Rated Voltage: 1.5V

Manufacturer : SHENZHEN PKCELL BATTERY CO.,LTD

Note1:The EUT is a Fingertip Oximeter;

Note2 :For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2018	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.

1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 20th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	$U_c = 3.2 \text{ dB (k=2)}$
Uncertainty of Radiated Emission: (30MHz~1GHz)	$U_c = 5.8 \text{ dB (k=2)}$
Uncertainty of Radiated Emission: (1~6GHz)	$U_c = 5.1 \text{ dB (k=2)}$
Uncertainty of Radiated Emission: (6~18GHz)	$U_c = 5.5 \text{ dB (k=2)}$

2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	N/A

Support Cable:

Description	Shield Type	Ferrite Core	Length
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup1: EUT+ Battery

Setup2: RX+ Battery


Note: only worst-case mode setup 1 mode data provide at the report

2.3 Test Setup and Equipments List


2.3.1 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

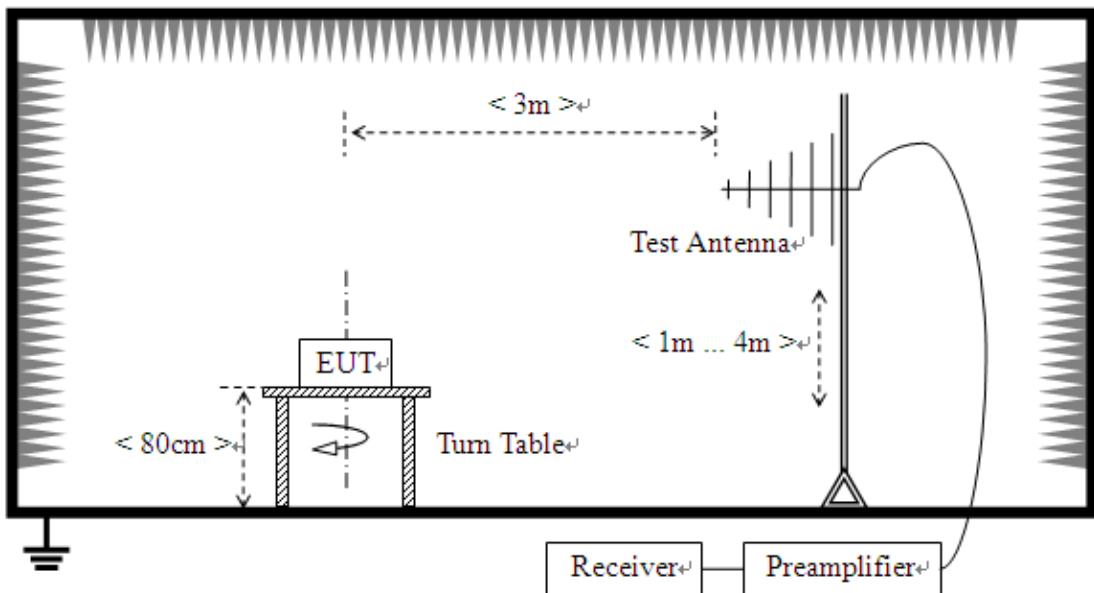

- 2) For radiated emissions above 1GHz

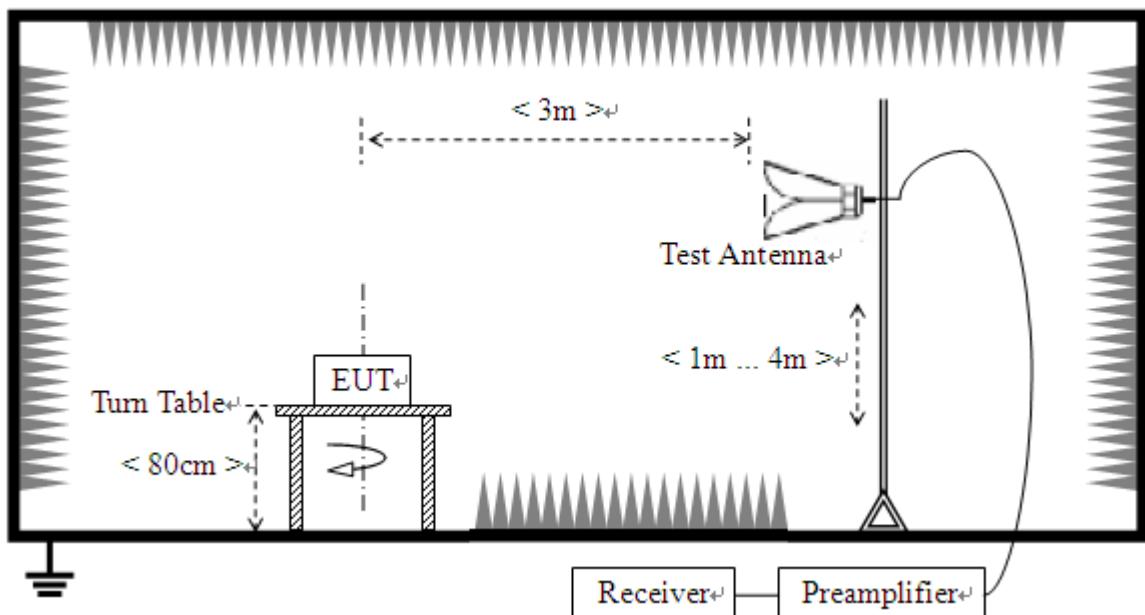

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2022.05.23	2023.04.17
Broadband Ant.	2786	ETC	A150402239	2021.09.16	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2021.08.12	2022.08.06
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2021.08.02	2022.07.22
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.03.25	2023.03.24

3. 47 CFR PART 15B REQUIREMENTS

3.1 Radiated Emission

3.1.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	µV/m	Dist	(uV/m)	(dBuV/m)
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.

For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by 20log Emission Level(uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as $Ld1 = L1 = 30uV/m * (10)^2 = 100 * 30uV/m$.

3.1.2 Test Description

See section 2.3.2 of this report.


3.1.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


A.Radiation disturbances, antenna polarization:Vertical,Setup1

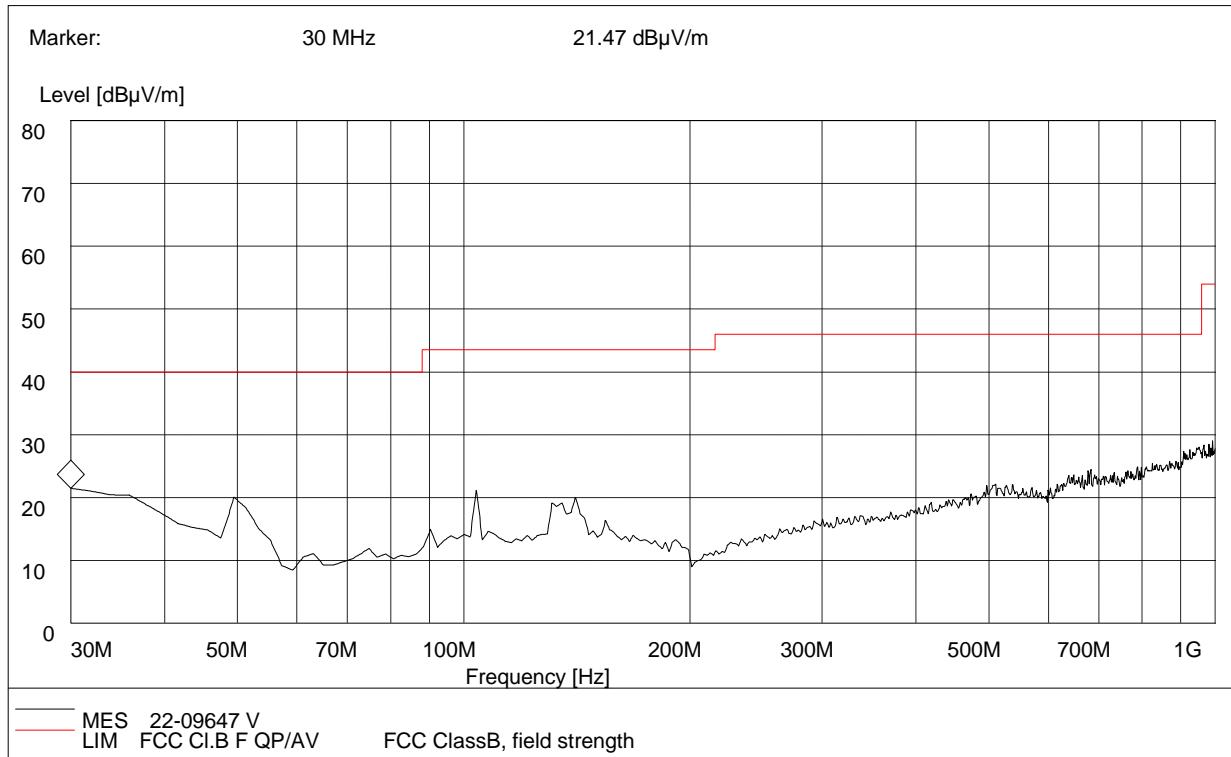

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	20.13	120.000	144	40.00	19.87	Vertical	0.2	26.1	Pass
48.43	19.23	120.000	109	40.00	20.77	Vertical	0.2	26.1	Pass
102.19	21.17	120.000	114	43.50	22.33	Vertical	0.3	26.3	Pass
140.84	19.97	120.000	128	43.50	23.53	Vertical	0.3	26.4	Pass
506.29	21.92	120.000	129	46.00	24.08	Vertical	0.4	27.1	Pass
683.35	23.60	120.000	147	46.00	22.40	Vertical	0.4	27.2	Pass


B.Radiation disturbances, antenna polarization: Horizontal,Setup1

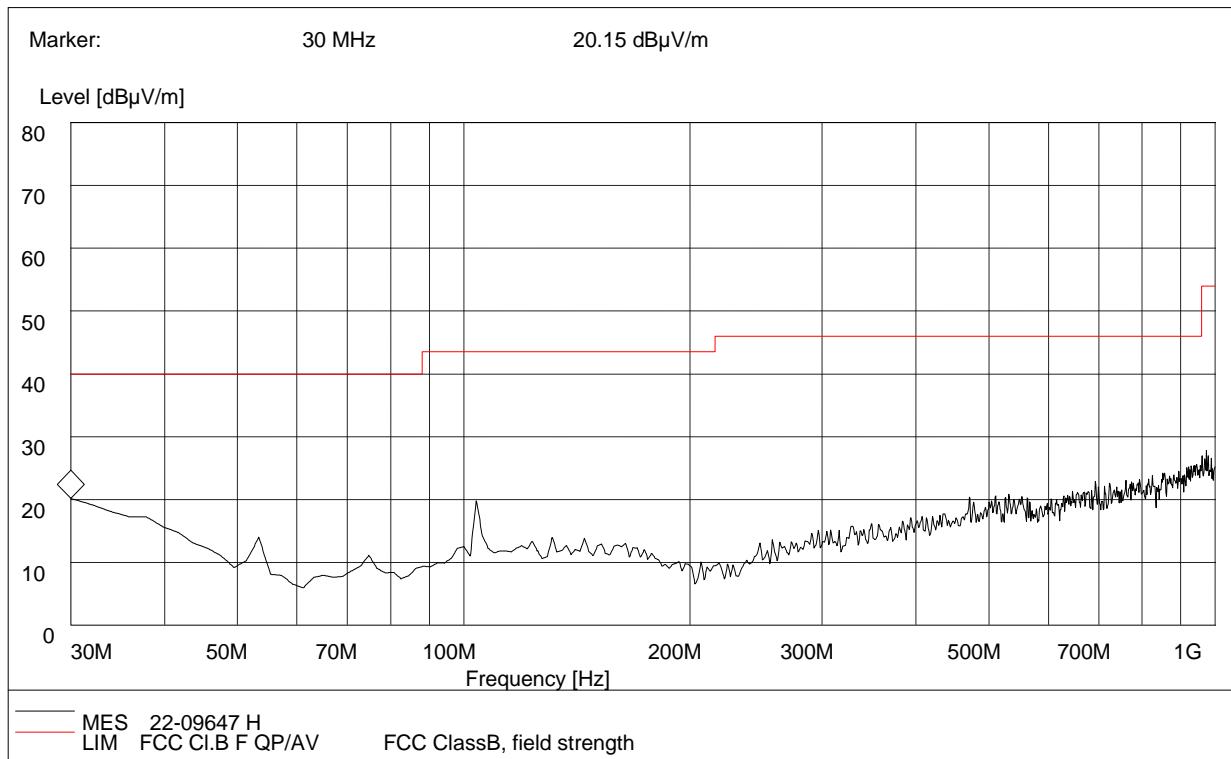

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	20.60	120.000	144	40.0	19.40	Horizontal	0.2	26.2	Pass
53.25	12.57	120.000	109	40.0	27.43	Horizontal	0.3	26.4	Pass
102.67	19.50	120.000	136	43.5	24.00	Horizontal	0.4	26.7	Pass
144.82	13.70	120.000	144	43.5	29.80	Horizontal	0.5	26.9	Pass
471.43	20.23	120.000	127	46.0	25.77	Horizontal	0.6	27.4	Pass
692.50	21.64	120.000	114	46.0	24.36	Horizontal	0.6	27.6	Pass


A.Radiation disturbances, antenna polarization: Horizontal,Setup1

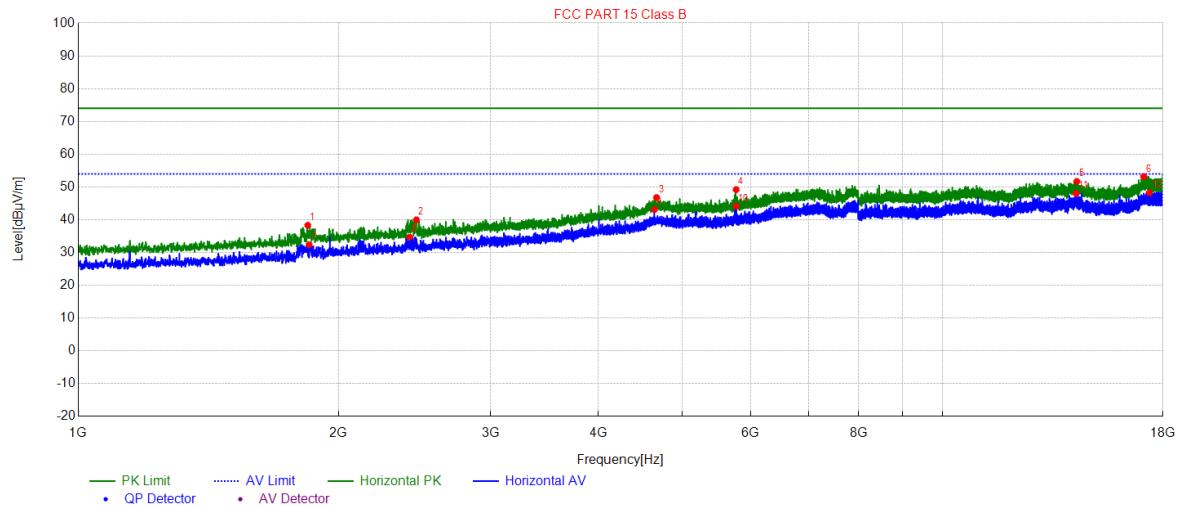

(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin[dB μV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1843.24	38.31	-12.55	74.00	35.69	PK	124	190	Horizontal
2	2462.07	39.98	-10.40	74.00	34.02	PK	118	317	Horizontal
3	4668.78	46.76	-1.22	74.00	27.24	PK	209	59	Horizontal
4	5772.13	49.21	-0.38	74.00	24.79	PK	134	174	Horizontal
5	14308.2	51.69	9.83	74.00	22.31	PK	132	213	Horizontal
6	17098.9	53.13	11.89	74.00	20.87	PK	106	235	Horizontal
7	1850.04	32.41	-12.51	54.00	21.59	AV	122	263	Horizontal
8	2417.87	34.71	-10.58	54.00	19.29	AV	189	176	Horizontal
9	4642.43	43.13	-1.34	54.00	10.87	AV	169	124	Horizontal
10	5772.13	44.12	-0.38	54.00	9.88	AV	155	170	Horizontal
11	14276.8	48.03	9.78	54.00	5.97	AV	162	57	Horizontal
12	17359.9	48.27	12.24	54.00	5.73	AV	160	219	Horizontal

B.Radiation disturbances, antenna polarization: Vertical,Setup1

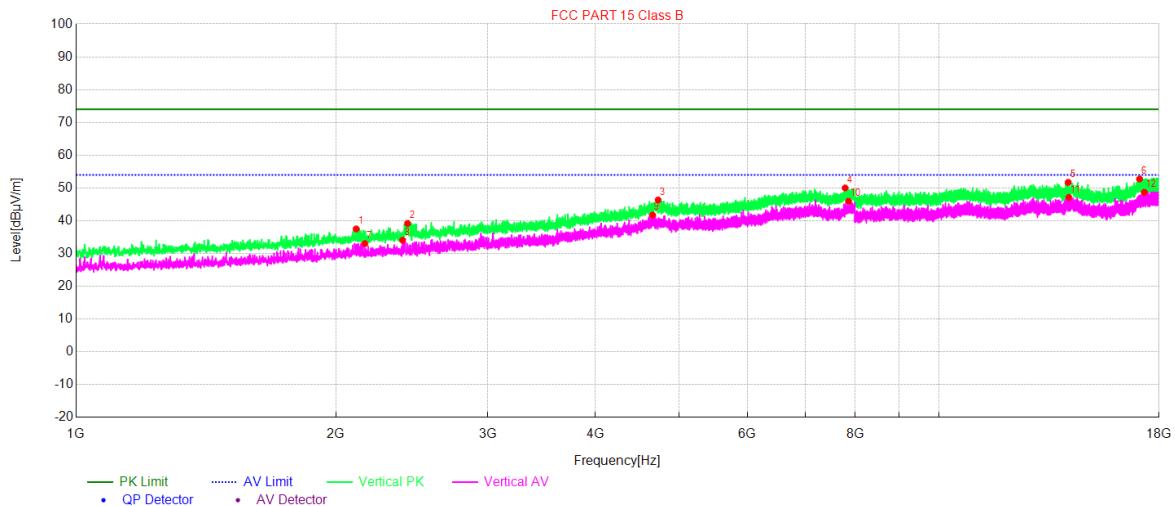

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin[dB μV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	2111.85	37.51	-11.59	74.00	36.49	PK	108	143	Vertical
2	2422.12	39.19	-10.57	74.00	34.81	PK	114	194	Vertical
3	4727.43	46.35	-1.02	74.00	27.65	PK	121	38	Vertical
4	7787.58	50.01	3.80	74.00	23.99	PK	109	202	Vertical
5	14121.2	51.71	9.33	74.00	22.29	PK	114	195	Vertical
6	17084.5	52.75	11.84	74.00	21.25	PK	120	96	Vertical
7	2161.15	33.03	-11.42	54.00	20.97	AV	117	47	Vertical
8	2390.66	34.07	-10.69	54.00	19.93	AV	109	155	Vertical
9	4657.73	41.76	-1.27	54.00	12.24	AV	116	246	Vertical
10	7858.14	45.94	4.04	54.00	8.06	AV	113	79	Vertical
11	14145.9	47.14	9.36	54.00	6.86	AV	130	110	Vertical
12	17305.5	48.66	12.12	54.00	5.34	AV	114	87	Vertical

-----End of Report-----