

# FCC Radio Test Report

## FCC ID: A4C-10009A

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1605099  
**Equipment** : OverDryve 7  
**Test Model** : OD7  
**Applicant** : RM Acquisition, LLC  
**Address** : 9855 Woods Drive Skokie, IL 60077 USA

**Date of Receipt** : May 20, 2016  
**Date of Test** : May 20, 2016 ~ Jun. 01, 2016  
**Issued Date** : Jun. 03, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Rush Kao  
(Rush Kao)

**Technical Manager** : Jeff Yang  
(Jeff Yang)

**Authorized Signatory** : Andy Chiu  
(Andy Chiu)

**B T L I N C .**

B1, No.37, Lane 365, Yang Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.  
TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331

## Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
<b>1 . CERTIFICATION</b>	<b>7</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>8</b>
<b>2.1 TEST FACILITY</b>	<b>8</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>9</b>
<b>3 . GENERAL INFORMATION</b>	<b>10</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>10</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>12</b>
<b>3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	<b>12</b>
<b>3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>13</b>
<b>3.5 DESCRIPTION OF SUPPORT UNITS</b>	<b>14</b>
<b>4 . EMC EMISSION TEST</b>	<b>15</b>
<b>4.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>15</b>
<b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>15</b>
<b>4.1.2 TEST PROCEDURE</b>	<b>15</b>
<b>4.1.3 DEVIATION FROM TEST STANDARD</b>	<b>15</b>
<b>4.1.4 TEST SETUP</b>	<b>16</b>
<b>4.1.5 EUT OPERATING CONDITIONS</b>	<b>16</b>
<b>4.1.6 EUT TEST CONDITIONS</b>	<b>16</b>
<b>4.1.7 TEST RESULTS</b>	<b>16</b>
<b>4.2 RADIATED EMISSION MEASUREMENT</b>	<b>17</b>
<b>4.2.1 RADIATED EMISSION LIMITS</b>	<b>17</b>
<b>4.2.2 TEST PROCEDURE</b>	<b>18</b>
<b>4.2.3 DEVIATION FROM TEST STANDARD</b>	<b>18</b>
<b>4.2.4 TEST SETUP</b>	<b>19</b>
<b>4.2.5 EUT OPERATING CONDITIONS</b>	<b>20</b>
<b>4.2.6 EUT TEST CONDITIONS</b>	<b>20</b>
<b>4.2.7 TEST RESULTS (9KHZ TO 30MHZ)</b>	<b>20</b>
<b>4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)</b>	<b>21</b>
<b>4.2.9 TEST RESULTS (ABOVE 1000 MHZ)</b>	<b>21</b>
<b>5 . NUMBER OF HOPPING CHANNEL</b>	<b>22</b>
<b>5.1 APPLIED PROCEDURES</b>	<b>22</b>
<b>5.1.1 TEST PROCEDURE</b>	<b>22</b>
<b>5.1.2 DEVIATION FROM STANDARD</b>	<b>22</b>
<b>5.1.3 TEST SETUP</b>	<b>22</b>
<b>5.1.4 EUT OPERATION CONDITIONS</b>	<b>22</b>
<b>5.1.5 EUT TEST CONDITIONS</b>	<b>22</b>
<b>5.1.6 TEST RESULTS</b>	<b>22</b>

Table of Contents	Page
<b>6 . AVERAGE TIME OF OCCUPANCY</b>	<b>23</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>23</b>
<b>6.1.1 TEST PROCEDURE</b>	23
<b>6.1.2 DEVIATION FROM STANDARD</b>	23
<b>6.1.3 TEST SETUP</b>	23
<b>6.1.4 EUT OPERATION CONDITIONS</b>	24
<b>6.1.5 EUT TEST CONDITIONS</b>	24
<b>6.1.6 TEST RESULTS</b>	24
<b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>25</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>25</b>
<b>7.1.1 TEST PROCEDURE</b>	25
<b>7.1.2 DEVIATION FROM STANDARD</b>	25
<b>7.1.3 TEST SETUP</b>	25
<b>7.1.4 EUT TEST CONDITIONS</b>	25
<b>7.1.5 TEST RESULTS</b>	25
<b>8 . BANDWIDTH TEST</b>	<b>26</b>
<b>8.1 APPLIED PROCEDURES</b>	<b>26</b>
<b>8.1.1 TEST PROCEDURE</b>	26
<b>8.1.2 DEVIATION FROM STANDARD</b>	26
<b>8.1.3 TEST SETUP</b>	26
<b>8.1.4 EUT OPERATION CONDITIONS</b>	26
<b>8.1.5 EUT TEST CONDITIONS</b>	26
<b>8.1.6 TEST RESULTS</b>	26
<b>9 . PEAK OUTPUT POWER TEST</b>	<b>27</b>
<b>9.1 APPLIED PROCEDURES / LIMIT</b>	<b>27</b>
<b>9.1.1 TEST PROCEDURE</b>	27
<b>9.1.2 DEVIATION FROM STANDARD</b>	27
<b>9.1.3 TEST SETUP</b>	27
<b>9.1.4 EUT OPERATION CONDITIONS</b>	27
<b>9.1.5 EUT TEST CONDITIONS</b>	27
<b>9.1.6 TEST RESULTS</b>	27
<b>10 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>28</b>
<b>10.1 APPLIED PROCEDURES / LIMIT</b>	<b>28</b>
<b>10.1.1 TEST PROCEDURE</b>	28
<b>10.1.2 DEVIATION FROM STANDARD</b>	28
<b>10.1.3 TEST SETUP</b>	28
<b>10.1.4 EUT OPERATION CONDITIONS</b>	28
<b>10.1.5 EUT TEST CONDITIONS</b>	28
<b>10.1.6 TEST RESULTS</b>	28
<b>11 . MEASUREMENT INSTRUMENTS LIST</b>	<b>29</b>

Table of Contents	Page
<b>12 . EUT TEST PHOTO</b>	<b>31</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>36</b>
<b>ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)</b>	<b>39</b>
<b>ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>44</b>
<b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>49</b>
<b>ATTACHMENT E - NUMBER OF HOPPING CHANNEL</b>	<b>74</b>
<b>ATTACHMENT F - AVERAGE TIME OF OCCUPANCY</b>	<b>76</b>
<b>ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>89</b>
<b>ATTACHMENT H - BANDWIDTH</b>	<b>94</b>
<b>ATTACHMENT I - PEAK OUTPUT POWER</b>	<b>99</b>
<b>ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>104</b>

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCP-3-1605099	Original Issue.	Jun. 03, 2016

## 1. CERTIFICATION

Equipment : OverDryve 7  
Brand Name : RAND McNALLY  
Test Model : OD7  
Applicant : RM Acquisition, LLC  
Manufacturer : RM Acquisition, LLC  
Address : 9855 Woods Drive Skokie, IL 60077 USA  
Date of Test : May 20, 2016 ~ Jun. 01, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-3-1605099) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**Test results included in this report is only for the Bluetooth EDR part.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): 47 CFR Part 15, Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	Hopping Channel Separation	PASS	
15.247 (b)(1)	Peak Output Power	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205	Restricted Bands	PASS	
15.203	Antenna Requirement	PASS	

Note:

(1)" N/A" denotes test is not applicable in this test report

### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

#### Conducted emission Test:

**C05:** (VCCI RN: C-4742; FCC RN:949005; FCC DN:TW1082)  
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

#### Radiated emission Test (Below 1GHz):

**CB11:** (VCCI RN: R-4260; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)  
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

#### Radiated emission Test (Above 1GHz):

**CB11:** (VCCI RN: G-868; FCC RN:949005; FCC DN:TW1082; IC Assigned Code:20088)  
No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{cisp}}^r$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	$U$ , (dB)
C05	CISPR	150 kHz~30MHz	2.04

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	$U$ , (dB)
CB11 (3m)	CISPR	9kHz ~ 150kHz	4.00
		150kHz ~ 30MHz	4.00

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ , (dB)
CB11 (3m)	CISPR	30 MHz ~ 200 MHz	V	3.06
		30 MHz ~ 200 MHz	H	2.58
		200 MHz ~ 1, 000 MHz	V	3.50
		200 MHz ~ 1, 000 MHz	H	3.10

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ , (dB)
CB11 (3m)	CISPR	1GHz ~ 6GHz	V	4.14
		1GHz ~ 6GHz	H	4.14

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ , (dB)
CB11 (1m)	CISPR	6GHz ~ 18GHz	V	5.34
		6GHz ~ 18GHz	H	5.34

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{\text{lab}}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{\text{CISPR}}$ , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our  $U_{\text{lab}}$  values are smaller than  $U_{\text{CISPR}}$ .

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	OverDryve 7		
Brand Name	RAND McNALLY		
Test Model	OD7		
Model Difference	N/A		
EUT Power Rating	I/P: DC 5V		
Power Adapter Manufacturer	Chicony	Model	W12-010N3A
	DVE	Model	DDA-18A-05 053350
Power Adapter Power Rating	For W12-010N3A I/P: AC 100-240V 50/60Hz 0.3A O/P: DC 5V 2A		
	For DDA-18A-05 053350 I/P: DC 12/24V 2A O/P: DC 5.3V 3.5A		
Battery Pack Manufacturer	McNair New Power	Model	MLP4110172
Product Description	Operation Frequency		2402~2480 MHz
	Modulation Technology		GFSK(1Mbps) $\pi/4$ -DQPSK(2Mbps)
	Bit Rate of Transmitter		8-DPSK(3Mbps)
	Output Power (Max.)		-2.19 dBm(1Mbps) -2.79 dBm(3Mbps)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3 Table for Filed Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	JIENG TAI	AH-JT-1575Y2211	PIFA	iPEX	1.67	TX/RX

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode <b>Note (1)</b>
Mode 2	Bluetooth <b>Note (3)</b>

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 2	Bluetooth <b>Note (3)</b>

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode <b>Note (1)</b>

**Note:**

- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.
- (3) The EUT includes two power sources: Adapter and Smart Mount + Adapter. Power source Adapter is the worst mode for all test items.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING



During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

1 Mbps

Test Software Version	Ampak RF Test Tool.VER:5.4		
Frequency (MHz)	2402	2441	2480
Parameters	DEF	DEF	DEF

3 Mbps

Test Software Version	Ampak RF Test Tool.VER:5.4		
Frequency (MHz)	2402	2441	2480
Parameters	DEF	DEF	DEF

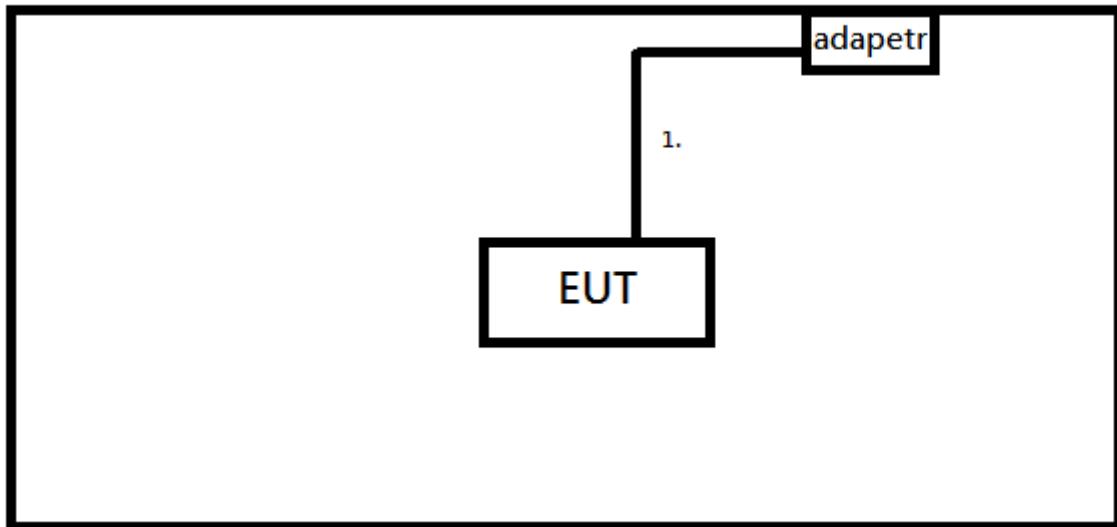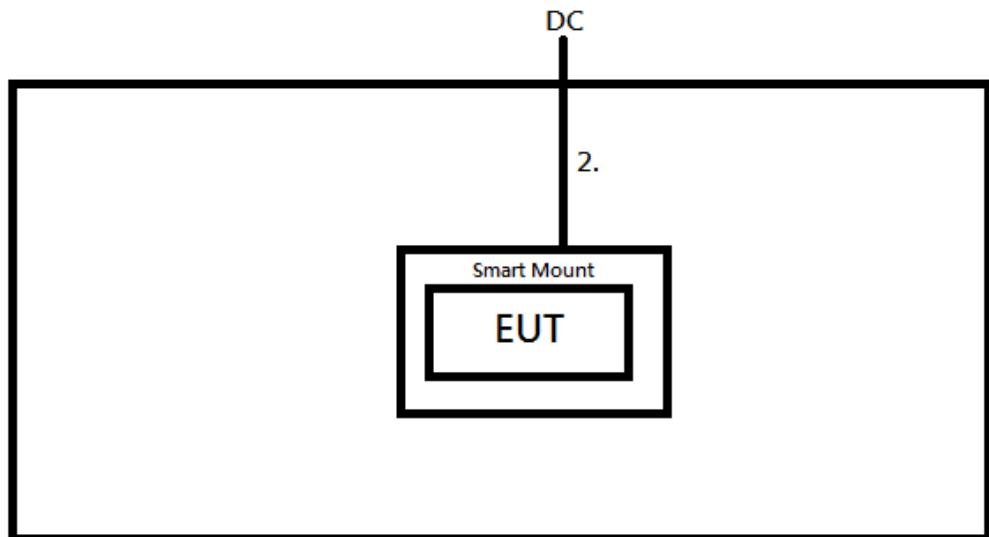**3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED****Power source: Adapter****Power source: Smart Mount + Adapter**

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	0.8m	USB Cable
2	NO	NO	2m	DC Adapter

**Note:**

(1) The support equipment was authorized by Declaration of Conformity (DOC).

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " \* " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

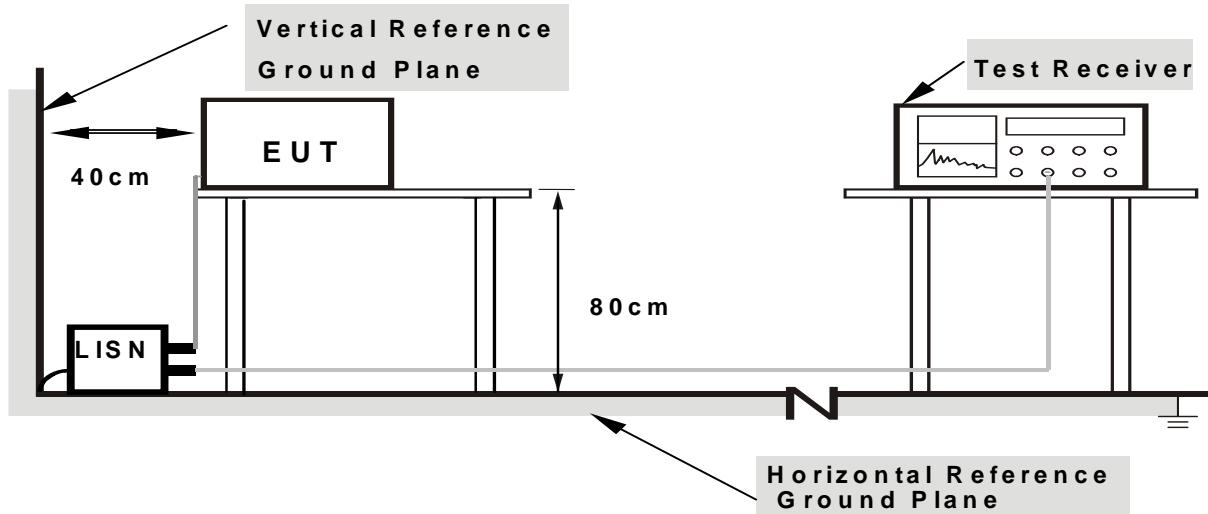

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

In case the emission fall within the restricted band specified on 15.205(a) then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>B</sub>uV/m) = 20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

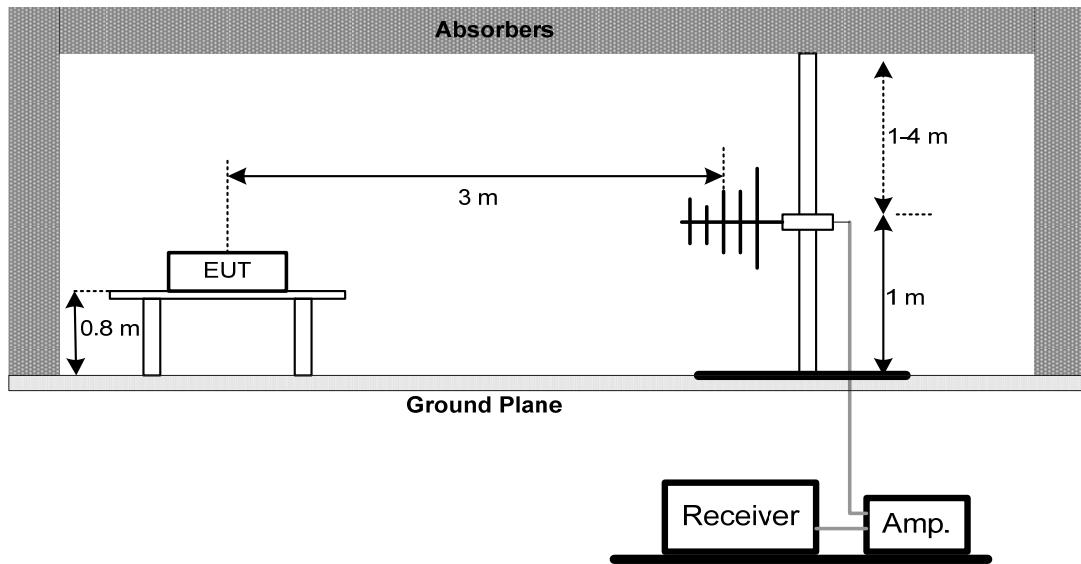

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

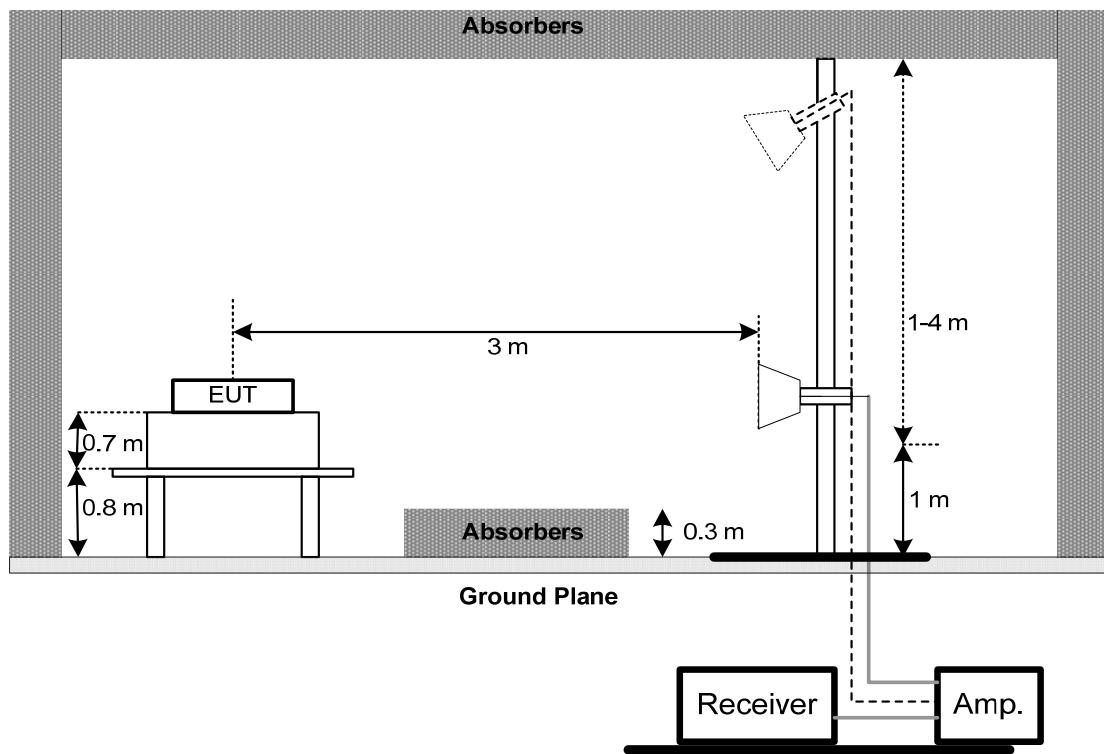

(C) For radiated emissions below 30MHz

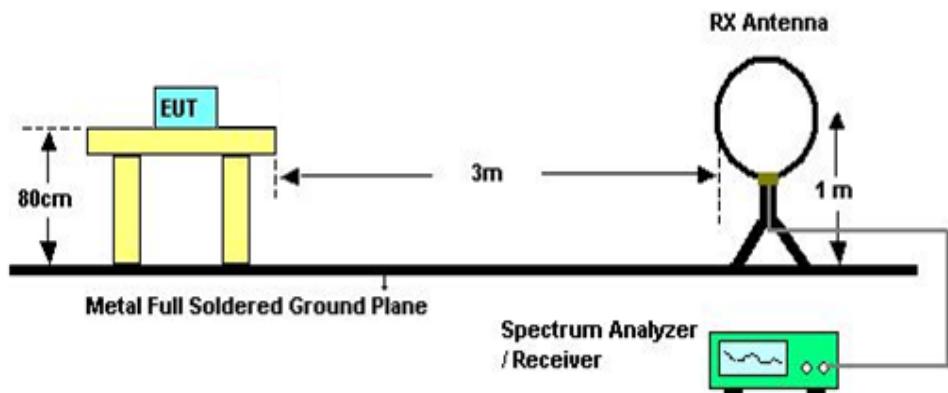

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 45%

Test Voltage: AC 120V/60Hz

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)**

Please refer to the Attachment C.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

#### **4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (2) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (3) EUT Orthogonal Axis:  
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (4) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (5) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. NUMBER OF HOPPING CHANNEL

### 5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 60%

Test Voltage: AC 120V/60Hz

#### 5.1.6 TEST RESULTS

Please refer to the Attachment E

## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### **6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **6.1.5 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 60%

Test Voltage: AC 120V/60Hz

#### **6.1.6 TEST RESULTS**

Please refer to the Attachment F

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 7.1.1 TEST PROCEDURE

- The EUT must have its hopping function enabled
- Span = wide enough to capture the peaks of two adjacent channels  
Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span  
Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
Sweep = Auto  
Detector function = Peak  
Trace = Max Hold

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

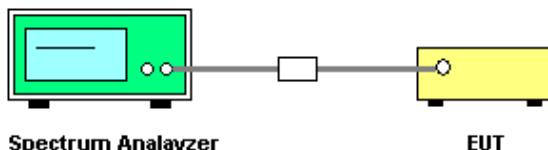

#### 7.1.4 EUT TEST CONDITIONS

Temperature: 25°C  
Relative Humidity: 60%  
Test Voltage: AC 120V/60Hz

#### 7.1.5 TEST RESULTS

Please refer to the Attachment G

## 8. BANDWIDTH TEST

### 8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 60%

Test Voltage: AC 120V/60Hz

#### 8.1.6 TEST RESULTS

Please refer to the Attachment H

## 9. PEAK OUTPUT POWER TEST

### 9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	1 Watt or 30dBm	2400-2483.5	PASS

#### 9.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

#### 9.1.2 DEVIATION FROM STANDARD

No deviation.

#### 9.1.3 TEST SETUP



#### 9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 9.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 60%

Test Voltage: AC 120V/60Hz

#### 9.1.6 TEST RESULTS

Please refer to the Attachment I

## 10. ANTENNA CONDUCTED SPURIOUS EMISSION

### 10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

#### 10.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- c. Offset=antenna gain+cable loss

#### 10.1.2 DEVIATION FROM STANDARD

No deviation.

#### 10.1.3 TEST SETUP



#### 10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 10.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 60%

Test Voltage: AC 120V/60Hz

#### 10.1.6 TEST RESULTS

Please refer to the Attachment J

## 11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 26, 2017
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2016
4	Power Dividers	HP	11636A	8103	May 03, 2017
5	Measurement Software	EZ	EZ_EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB9168-35 2	9168-352	Jul. 30, 2016
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 19, 2017
3	Horn Antenna	Schwarzbeck	BBHA 9120	9120D-1333	May 19, 2017
4	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 16, 2016
5	Pre-Amplifier	Agilent	8449B	3008A01714	Apr. 13, 2017
6	Test Cable	LMR	LMR-400	01(10M)	May 11, 2017
7	Test Cable	LMR	LMR-400	01(3M)	May 11, 2017
8	Test Cable	Harbour industries	27478LL142	1M	May 12, 2017
9	Test Cable	Harbour industries	27478LL142	3M	May 12, 2017
10	Test Cable	AISI	S104-SMAP-1	8M	May 12, 2017
11	Spectrum Analyzer	Agilent	N9020A	MY51160196	Aug. 02, 2016
12	EMI Test Receiver	R&S	ESCI	100080	May 12, 2017
13	Measurement Software	Farad	EZ_EMC (Version NB-03A)	N/A	N/A
14	Loop Ant	EMCO	6502	42960	Nov. 15, 2016

**Number of Hopping Channel**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

**Average Time of Occupancy**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

**Hopping Channel Separation Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

**Bandwidth**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

**Peak Output Power**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

**Antenna Conducted Spurious Emission**


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 17, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.

## 12. EUT TEST PHOTO



### Conducted Measurement Photos With Adapter\_W12-010N3A

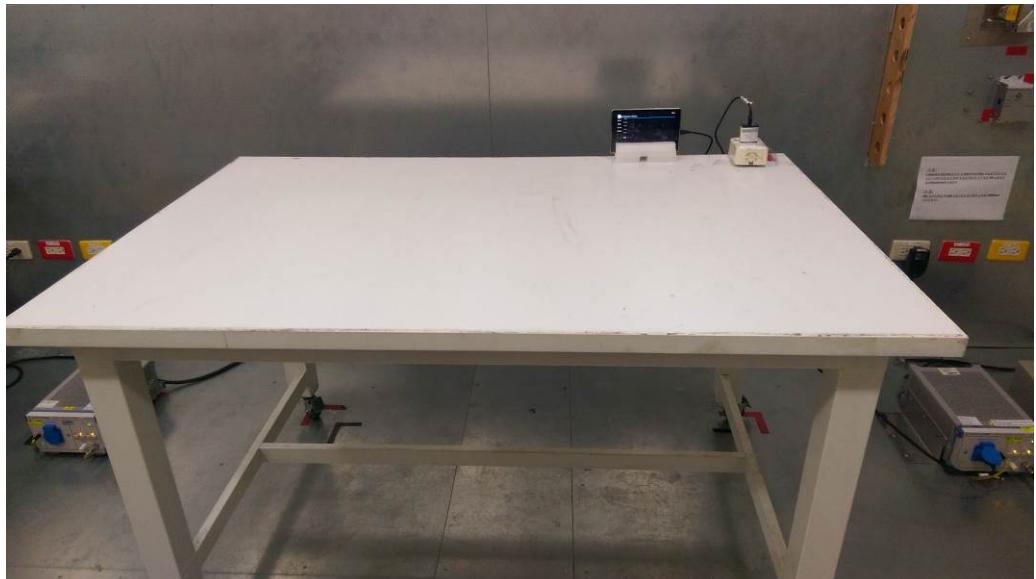


**Radiated Measurement Photos**  
**9KHz to 30MHz**  
**With Adapter\_W12-010N3A**

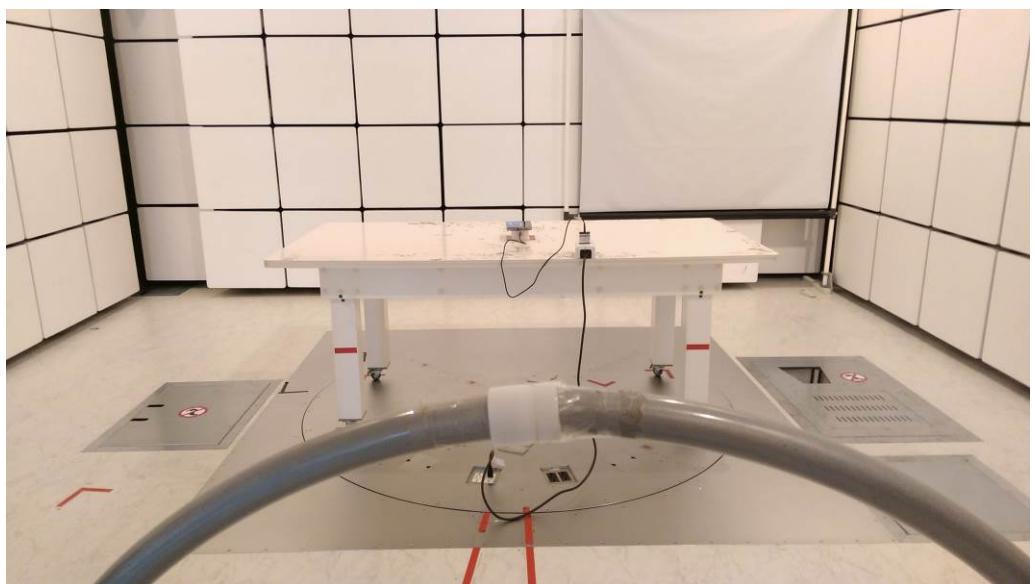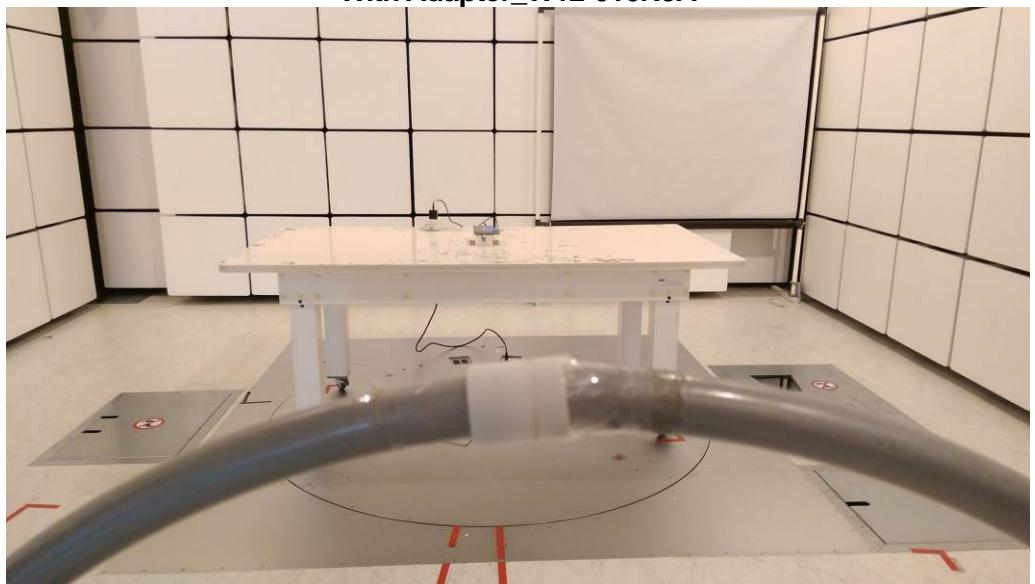

**Radiated Measurement Photos**  
**30MHz to 1000MHz**  
**With Adapter\_W12-010N3A**

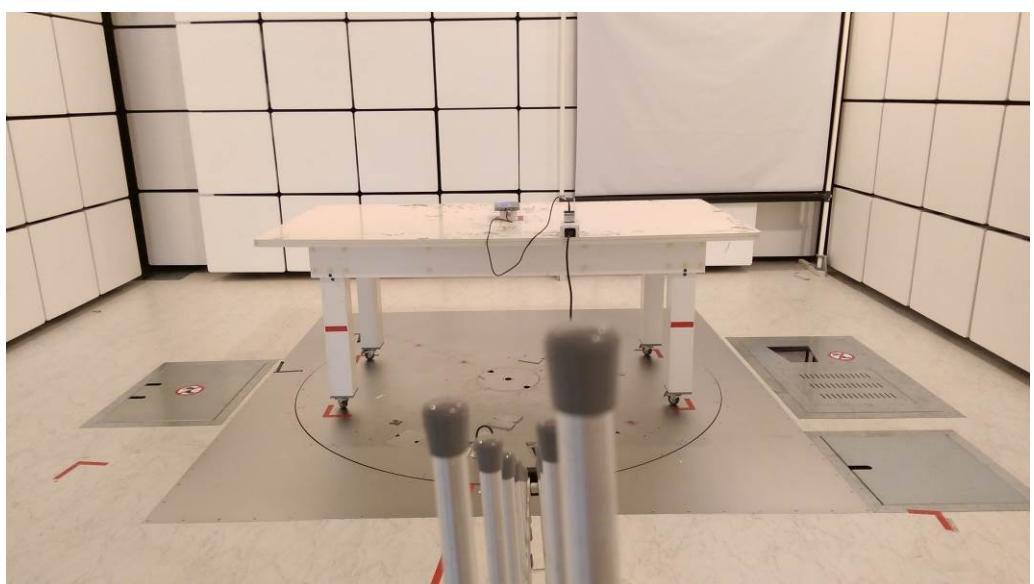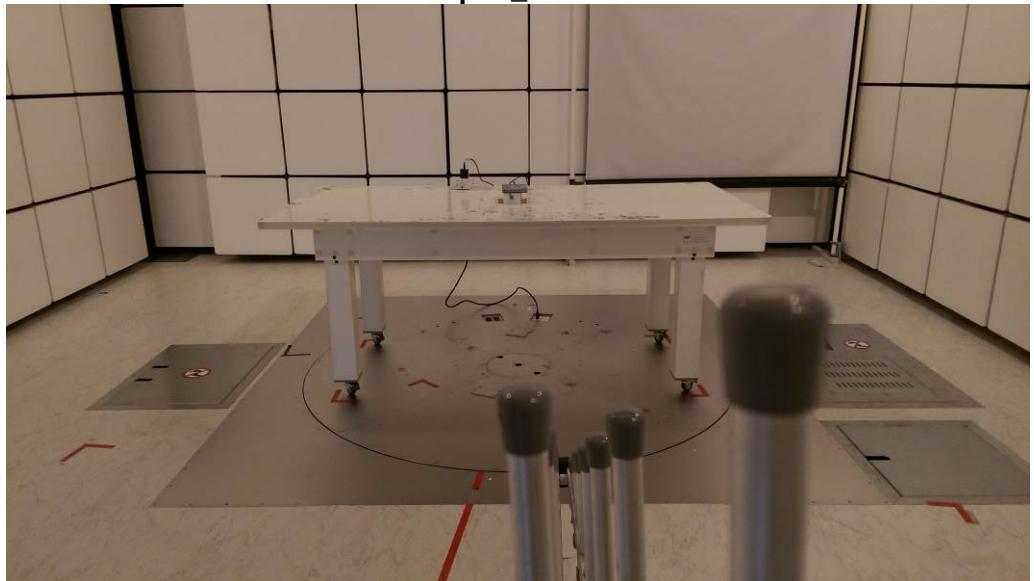

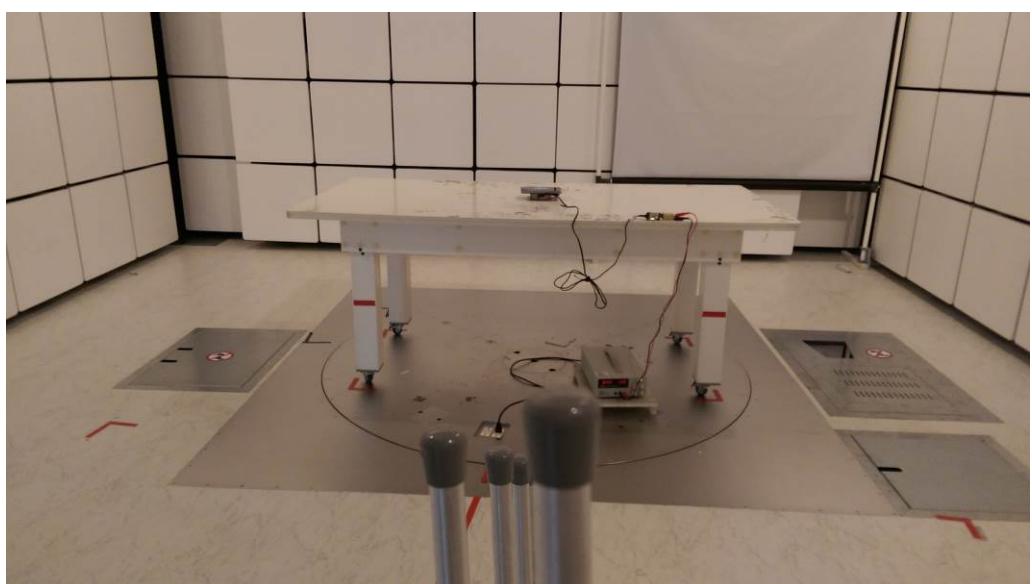**Radiated Measurement Photos****30MHz to 1000MHz****With Smart Mount + Adapter\_DDA-18A-05 053350**


**Radiated Measurement Photos  
Above 1000MHz  
With Adapter\_W12-010N3A**



## ATTACHMENT A - CONDUCTED EMISSION

Test Mode: Bluetooth


## Line

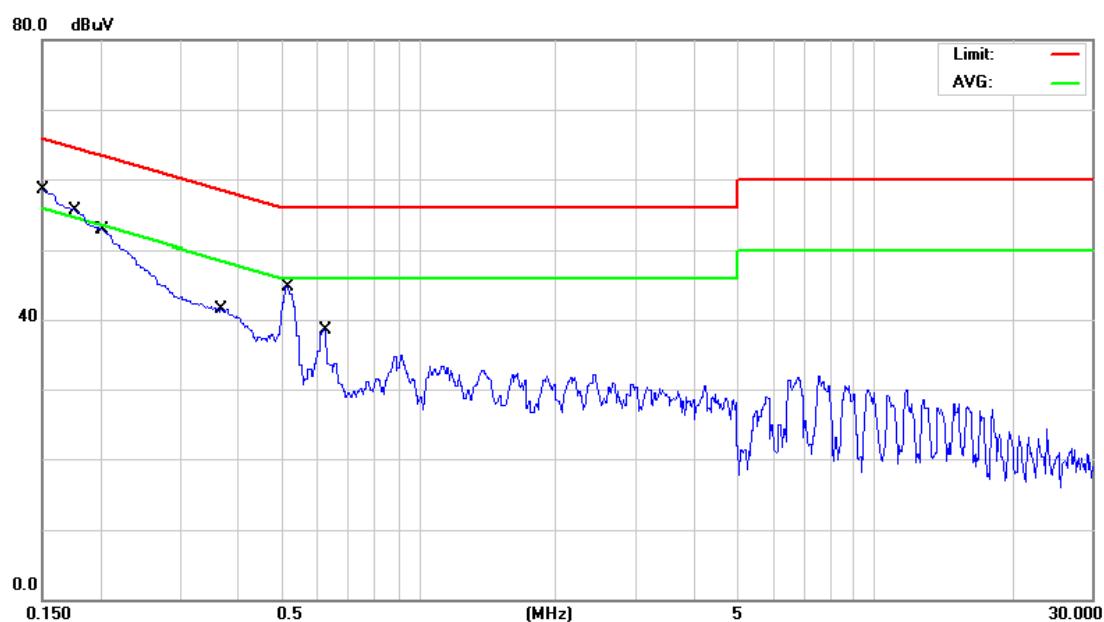

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	
1	*	0.1521	41.40	9.68	51.08	65.88	-14.80	QP
2		0.1521	23.00	9.68	32.68	55.88	-23.20	AVG
3		0.1780	34.20	9.68	43.88	64.57	-20.69	QP
4		0.1780	15.10	9.68	24.78	54.57	-29.79	AVG
5		0.2046	35.60	9.68	45.28	63.42	-18.14	QP
6		0.2046	18.90	9.68	28.58	53.42	-24.84	AVG
7		0.3677	20.60	9.68	30.28	58.55	-28.27	QP
8		0.3677	7.00	9.68	16.68	48.55	-31.87	AVG
9		0.5180	29.70	9.69	39.39	56.00	-16.61	QP
10		0.5180	19.80	9.69	29.49	46.00	-16.51	AVG
11		0.6260	18.91	9.69	28.60	56.00	-27.40	QP
12		0.6260	6.71	9.69	16.40	46.00	-29.60	AVG

Test Mode: Bluetooth

## Neutral

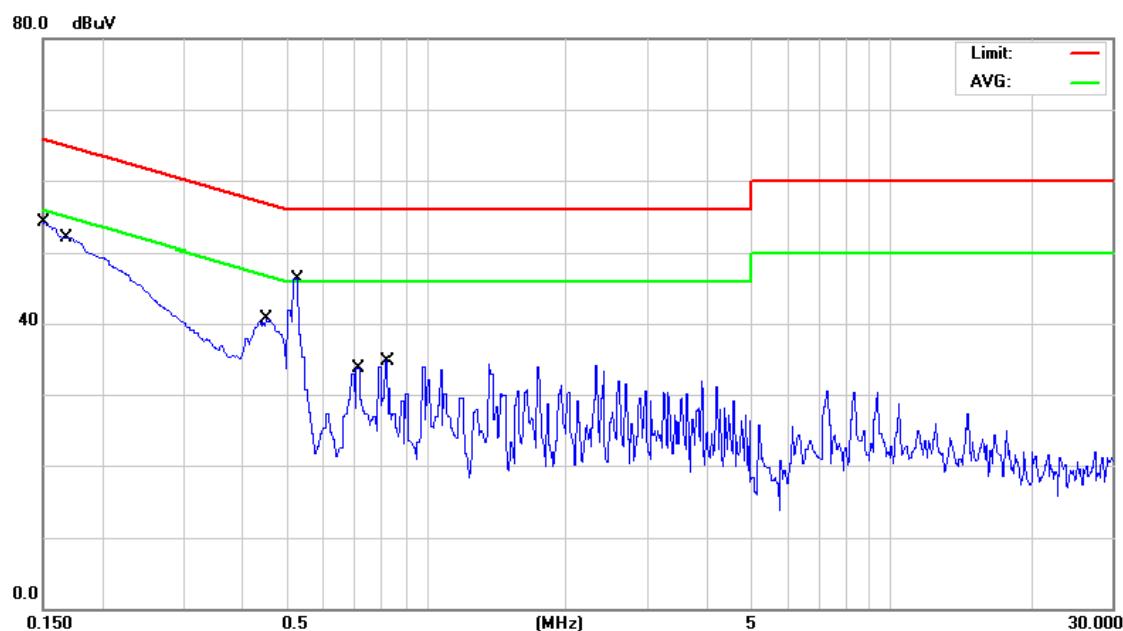


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1507	37.00	9.69	46.69	65.96	-19.27	QP	
2		0.1507	17.70	9.69	27.39	55.96	-28.57	AVG	
3		0.1703	36.40	9.69	46.09	64.94	-18.85	QP	
4		0.1703	17.30	9.69	26.99	54.94	-27.95	AVG	
5		0.4524	21.90	9.69	31.59	56.83	-25.24	QP	
6		0.4524	11.70	9.69	21.39	46.83	-25.44	AVG	
7		0.5270	30.90	9.69	40.59	56.00	-15.41	QP	
8	*	0.5270	21.40	9.69	31.09	46.00	-14.91	AVG	
9		0.7160	17.30	9.71	27.01	56.00	-28.99	QP	
10		0.7160	7.90	9.71	17.61	46.00	-28.39	AVG	
11		0.8240	16.20	9.71	25.91	56.00	-30.09	QP	
12		0.8240	6.30	9.71	16.01	46.00	-29.99	AVG	

**ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)**

Test Mode: TX\_Adapter\_W12-010N3A

## OPEN

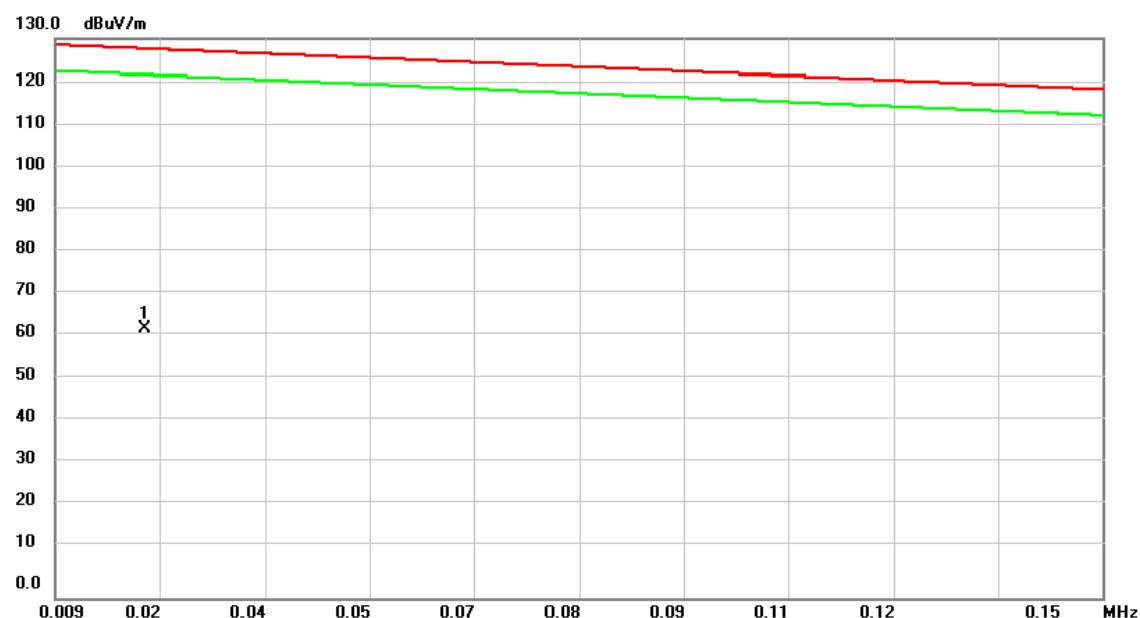


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	*	0.0212	45.16	17.42	62.58	127.64	-65.06

peak

Test Mode: TX\_Adapter\_W12-010N3A


**OPEN**

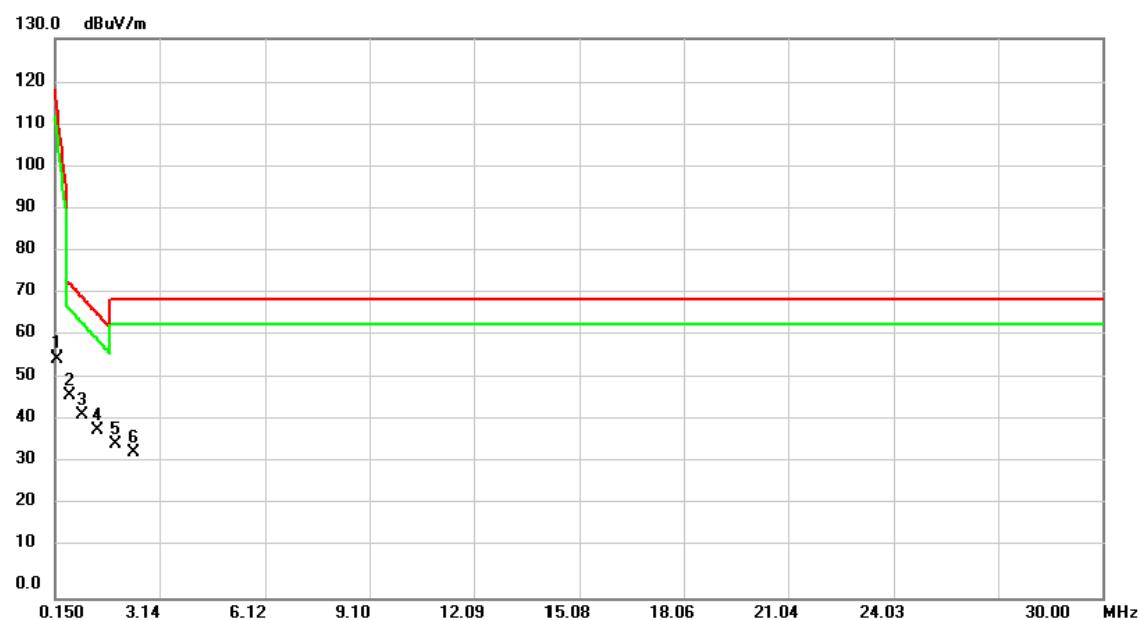

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		0.2096	43.96	11.94	55.90	114.04	-58.14	peak	
2	*	0.5675	35.40	11.83	47.23	73.11	-25.88	peak	
3		0.9261	30.79	11.97	42.76	69.91	-27.15	peak	
4		1.3440	27.36	11.85	39.21	66.19	-26.98	peak	
5		1.8810	24.44	11.60	36.04	69.54	-33.50	peak	
6		2.3887	22.56	11.38	33.94	69.54	-35.60	peak	

Test Mode: TX\_Adapter\_W12-010N3A


CLOSE

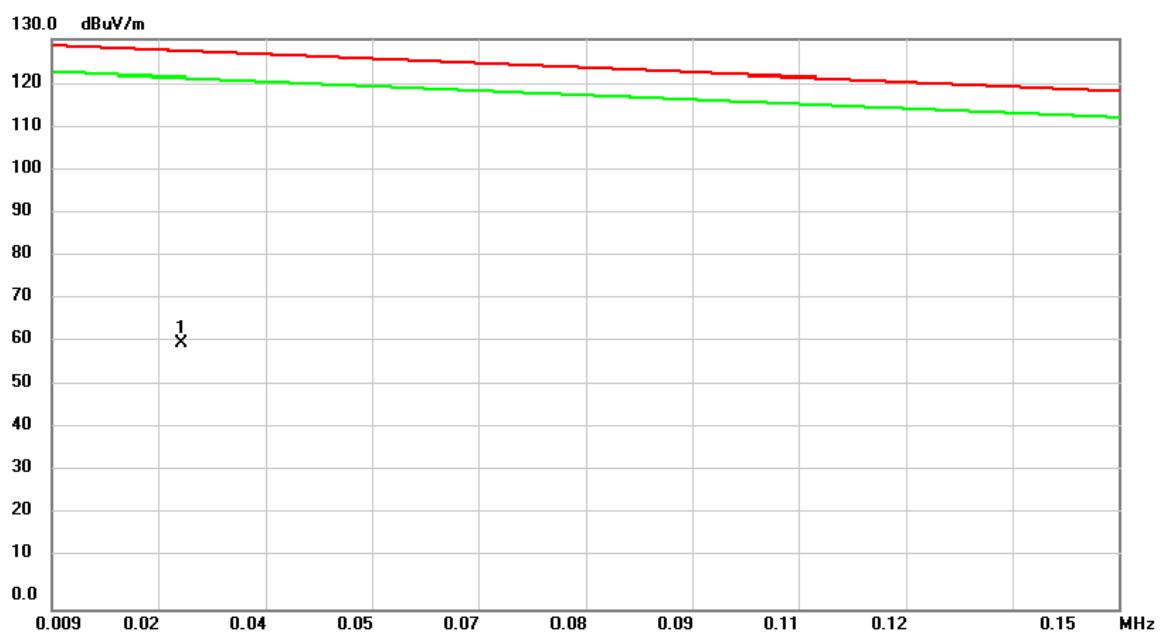

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0262	44.44	16.04	60.48	127.28	-66.80	peak

Test Mode: TX\_Adapter\_W12-010N3A

CLOSE

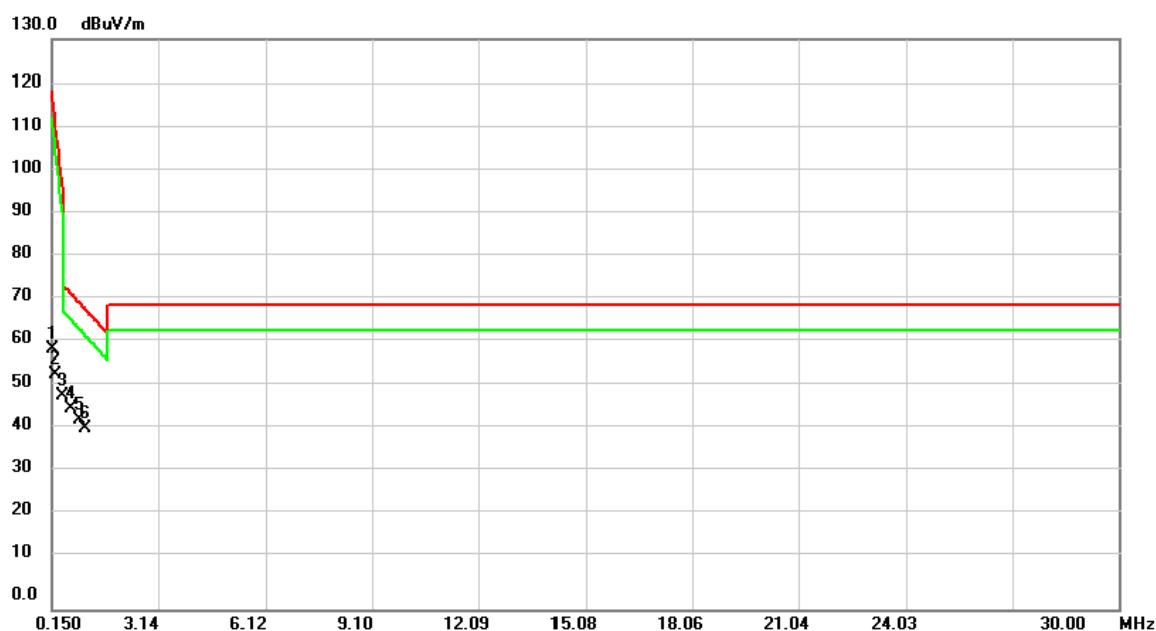


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.1500	47.16	12.03	59.19	118.34	-59.15	peak	
2		0.2691	42.03	11.85	53.88	109.75	-55.87	peak	
3		0.4485	37.06	11.80	48.86	96.80	-47.94	peak	
4	*	0.6873	34.17	11.87	46.04	72.04	-26.00	peak	
5		0.9261	31.48	11.97	43.45	69.91	-26.46	peak	
6		1.1050	29.36	11.95	41.31	68.32	-27.01	peak	

**ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)**


Test Mode: TX\_Adapter\_W12-010N3A

### Vertical

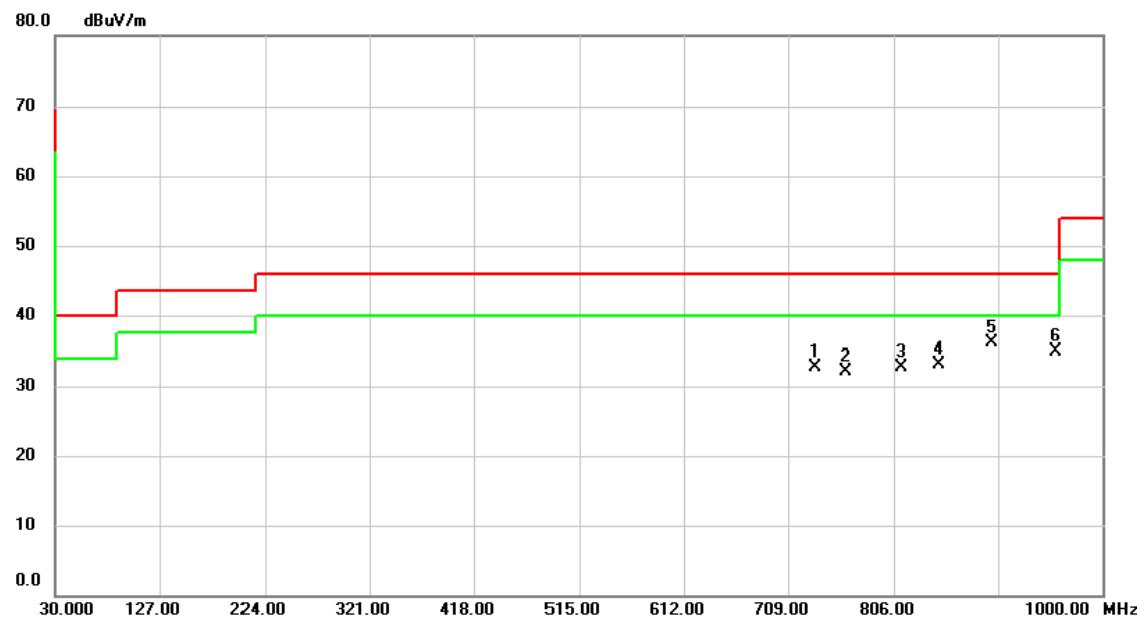


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		734.2200	30.61	2.01	32.62	46.00	-13.38	peak	
2		762.3500	29.67	2.46	32.13	46.00	-13.87	peak	
3		812.7900	29.73	3.06	32.79	46.00	-13.21	peak	
4		847.7100	29.50	3.56	33.06	46.00	-12.94	peak	
5	*	897.1800	31.47	4.55	36.02	46.00	-9.98	peak	
6		956.3500	29.33	5.57	34.90	46.00	-11.10	peak	

Test Mode: TX\_Adapter\_W12-010N3A

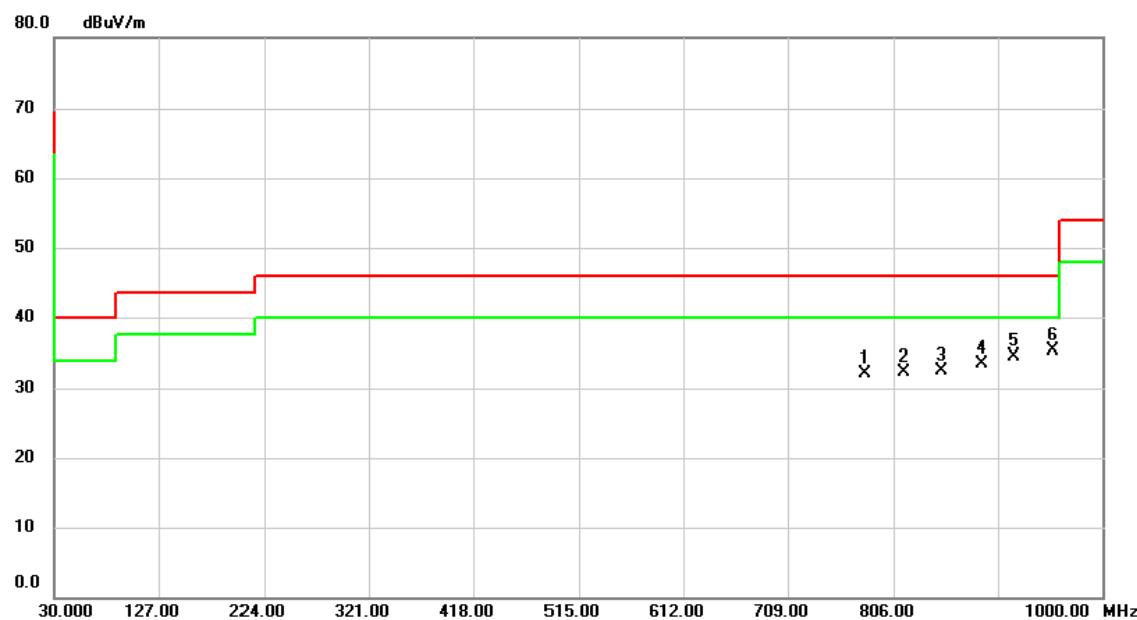**Horizontal**


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		778.8400	29.53	2.65	32.18	46.00	-13.82	peak	
2		815.7000	29.23	3.11	32.34	46.00	-13.66	peak	
3		850.6200	28.90	3.61	32.51	46.00	-13.49	peak	
4		887.4800	29.18	4.36	33.54	46.00	-12.46	peak	
5		917.5500	29.64	4.91	34.55	46.00	-11.45	peak	
6	*	954.4100	29.71	5.55	35.26	46.00	-10.74	peak	

Test Mode: TX\_Smart Mount + Adapter\_ DDA-18A-05 053350

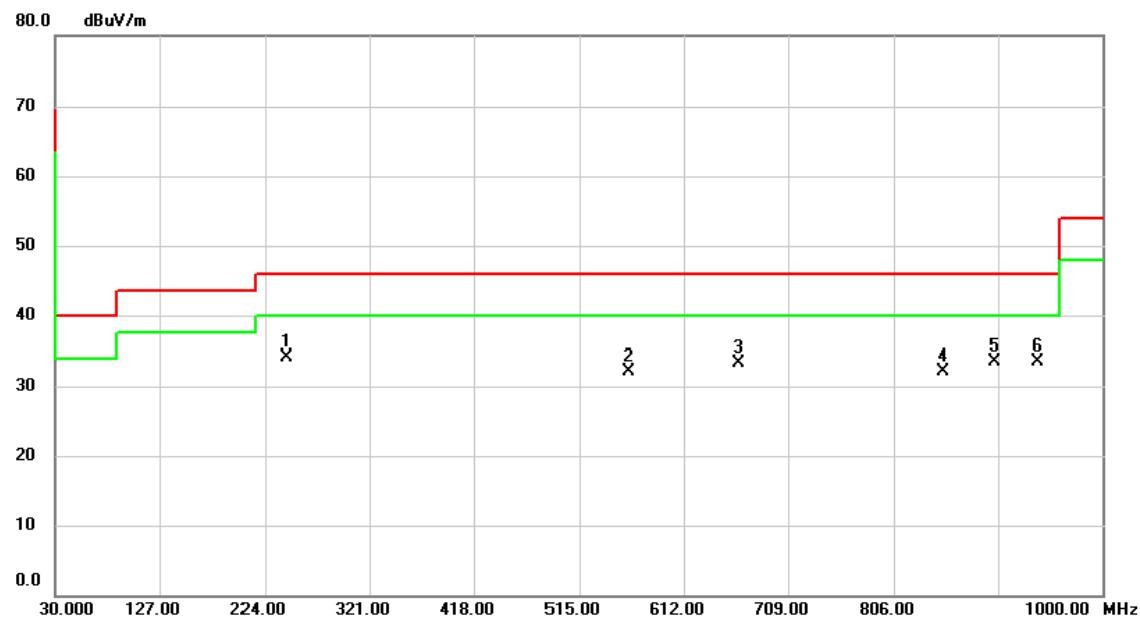**Vertical**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	244.3700	43.53	-9.33	34.20	46.00	-11.80	peak
2		560.5900	33.30	-1.26	32.04	46.00	-13.96	peak
3		663.4100	32.75	0.48	33.23	46.00	-12.77	peak
4		851.5900	28.42	3.63	32.05	46.00	-13.95	peak
5		900.0900	28.97	4.61	33.58	46.00	-12.42	peak
6		939.8600	28.22	5.31	33.53	46.00	-12.47	peak


Test Mode: TX\_Smart Mount + Adapter\_ DDA-18A-05 053350

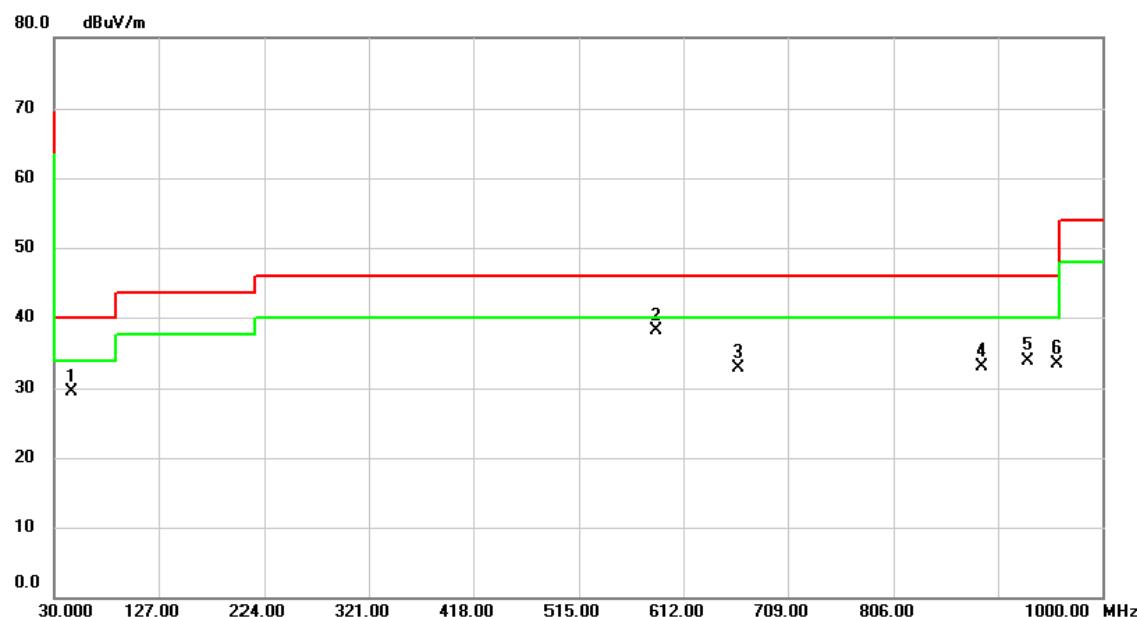**Horizontal**

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		46.4900	37.74	-8.25	29.49	40.00	-10.51	peak	
2	*	586.7800	38.60	-0.57	38.03	46.00	-7.97	peak	
3		663.4100	32.39	0.48	32.87	46.00	-13.13	peak	
4		888.4500	28.70	4.38	33.08	46.00	-12.92	peak	
5		930.1600	28.81	5.14	33.95	46.00	-12.05	peak	
6		958.2900	27.88	5.60	33.48	46.00	-12.52	peak	

## ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)


Orthogonal Axis :	X
Test Mode :	TX 2402MHz _ CH00 _ 1Mbps

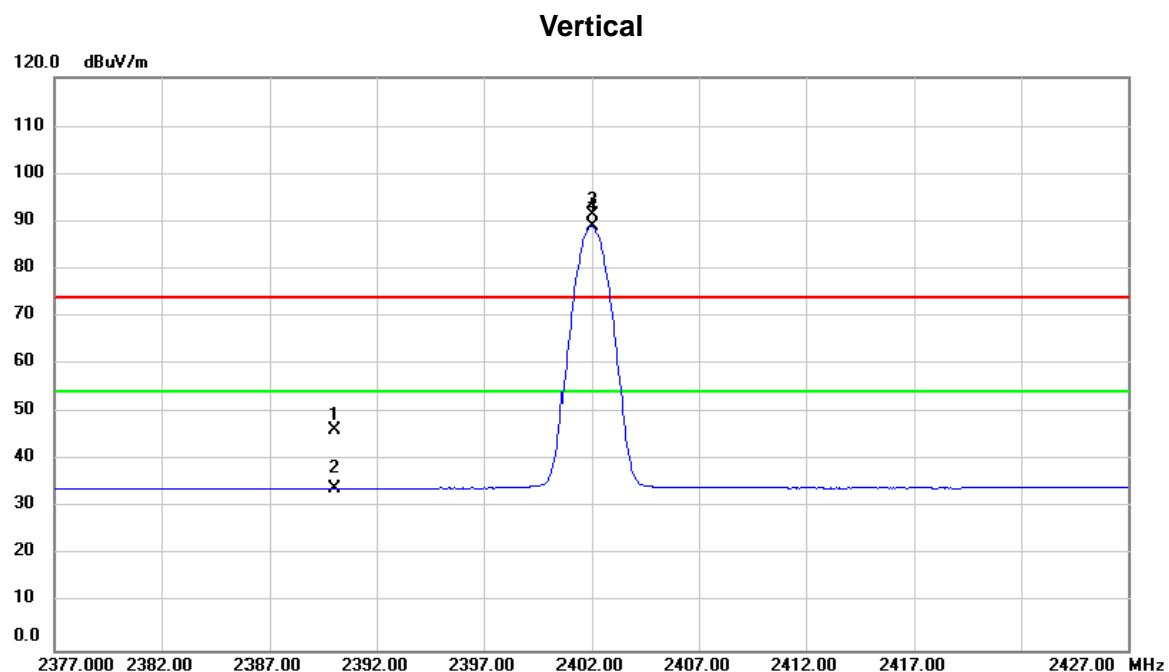

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	14.69	31.70	46.39	74.00	-27.61	peak	
2		2390.000	2.32	31.70	34.02	54.00	-19.98	AVG	
3	X	2402.000	59.54	31.76	91.30	74.00	17.30	peak	No Limit
4	*	2402.000	57.20	31.76	88.96	54.00	34.96	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_1Mbps


### Vertical

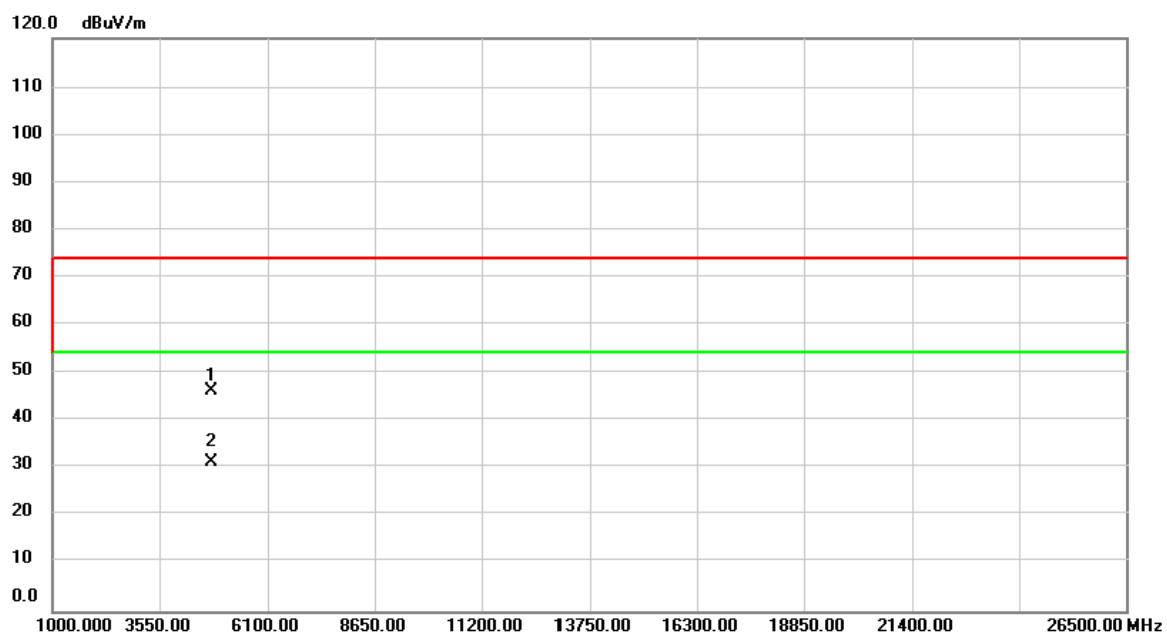

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	56.86	-10.51	46.35	74.00	-27.65	peak	
2	*	4804.000	41.95	-10.51	31.44	54.00	-22.56	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_1Mbps


### Horizontal

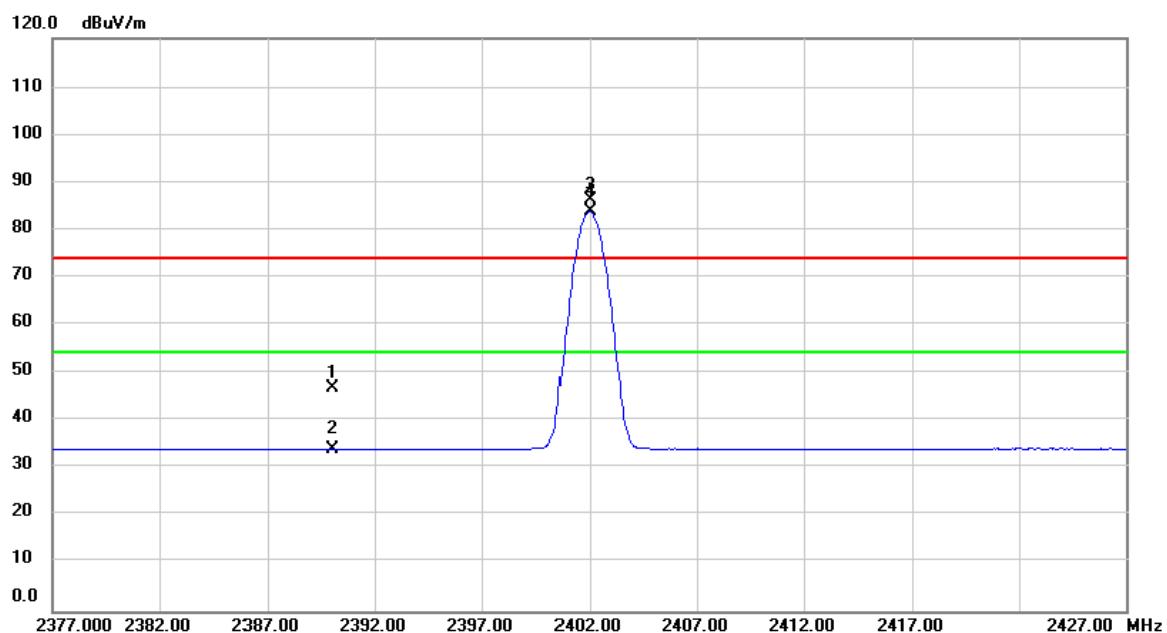

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	15.38	31.70	47.08	74.00	-26.92	peak	
2		2390.000	2.33	31.70	34.03	54.00	-19.97	AVG	
3	X	2402.000	54.45	31.76	86.21	74.00	12.21	peak	No Limit
4	*	2402.000	52.05	31.76	83.81	54.00	29.81	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_1Mbps

### Horizontal

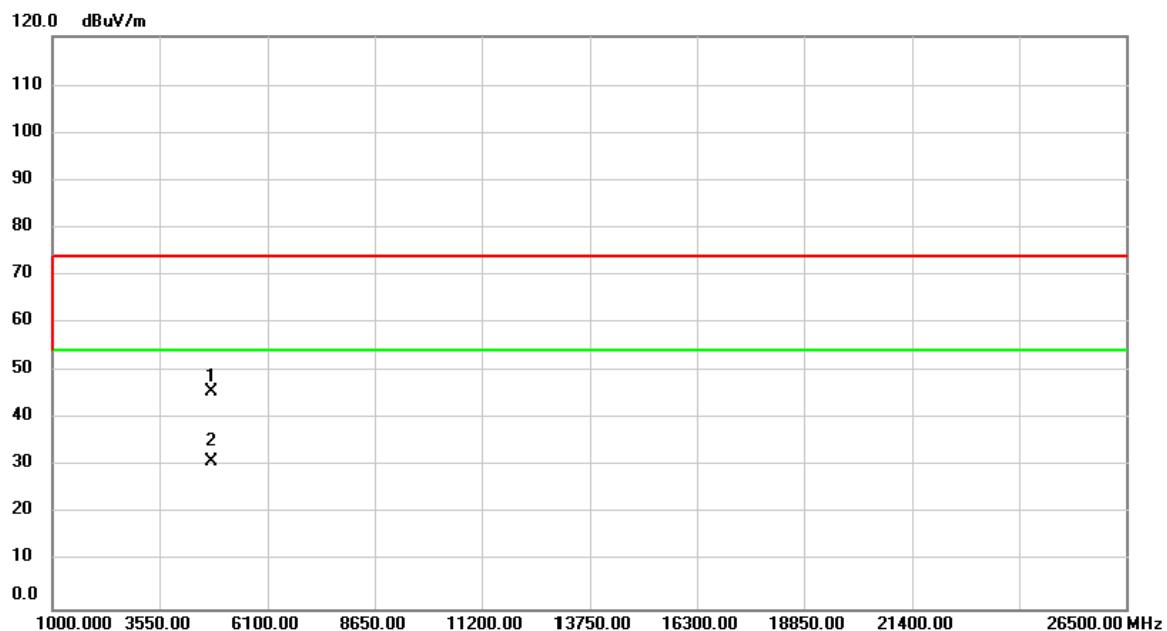


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	56.33	-10.51	45.82	74.00	-28.18	peak	
2	*	4804.000	41.63	-10.51	31.12	54.00	-22.88	AVG	

Orthogonal Axis : X

Test Mode : TX 2441MHz \_CH39\_1Mbps


## Vertical

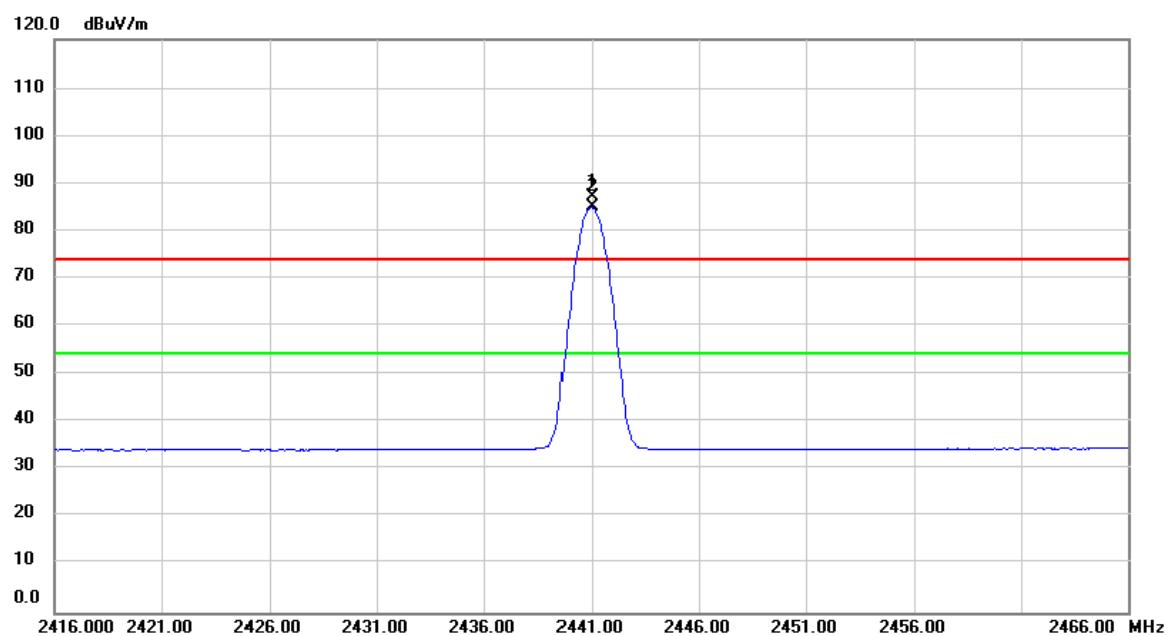

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1	X	2441.000	55.36	31.90	87.26	74.00	13.26	peak	No Limit
2	*	2441.000	53.04	31.90	84.94	54.00	30.94	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2441MHz _CH39_1Mbps


### Vertical

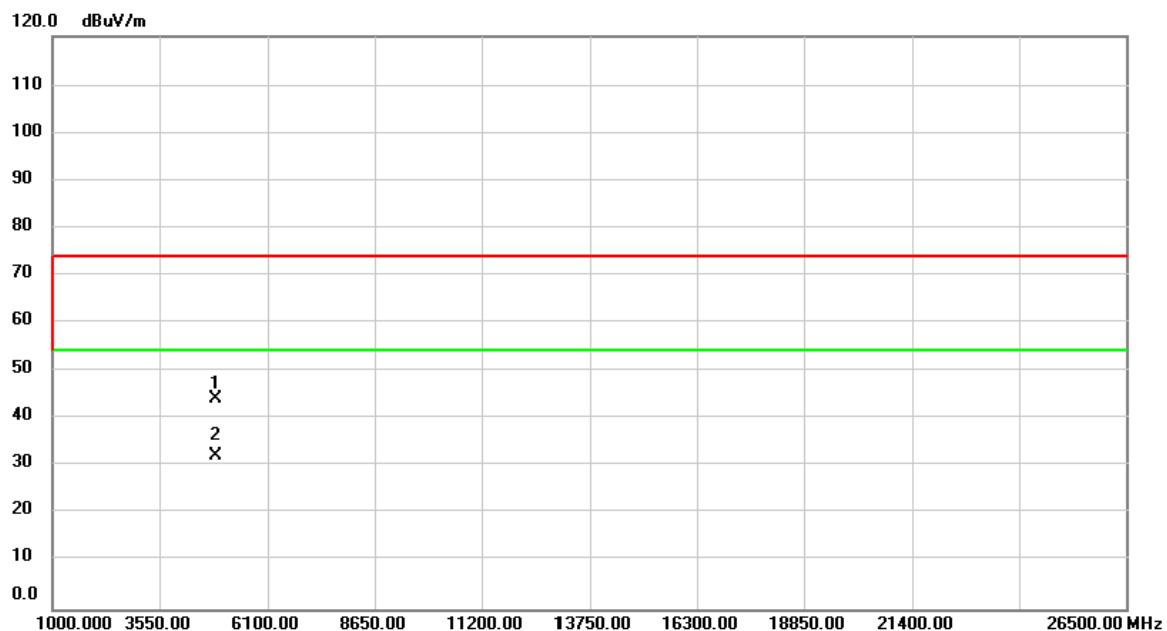

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dB <sub>uV</sub>	dB	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB		
1		4882.000	54.51	-10.39	44.12	74.00	-29.88	peak	
2	*	4882.000	42.65	-10.39	32.26	54.00	-21.74	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2441MHz _CH39_1Mbps


### Horizontal

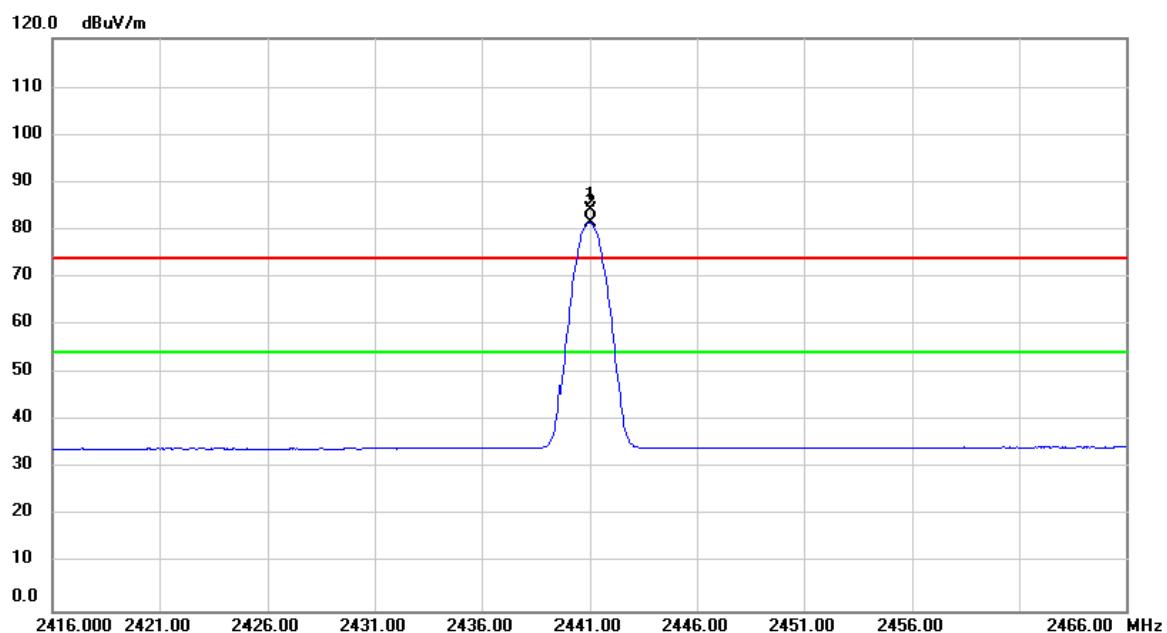

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1	X	2441.000	52.18	31.90	84.08	74.00	10.08	peak	No Limit
2	*	2441.000	49.66	31.90	81.56	54.00	27.56	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2441MHz _CH39_1Mbps

### Horizontal

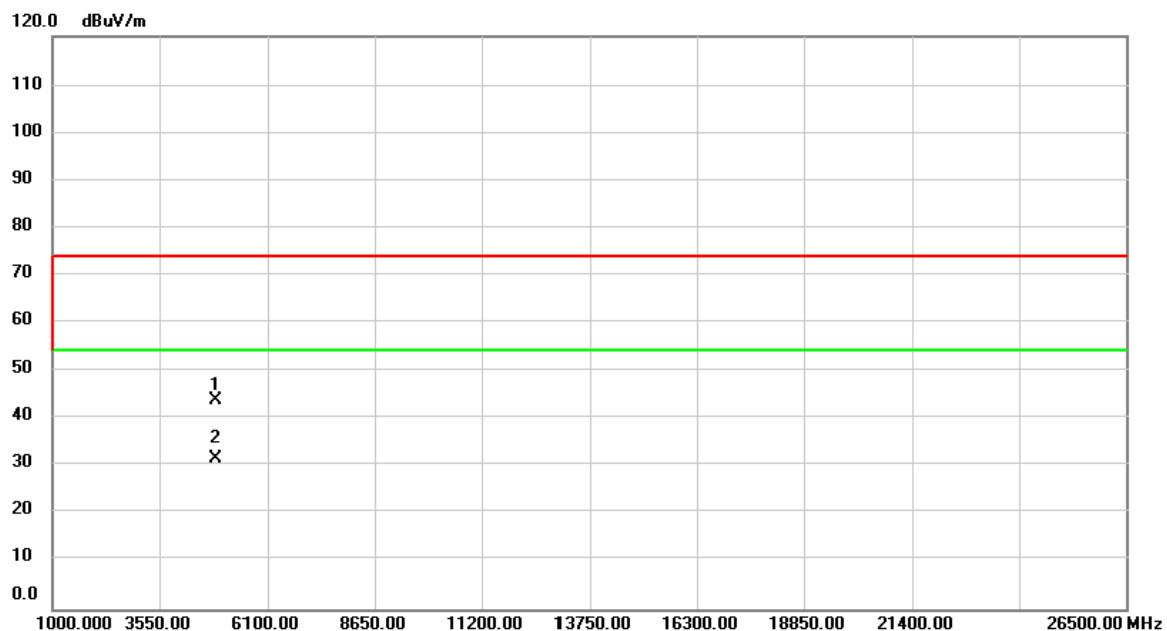


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4882.000	54.22	-10.39	43.83	74.00	-30.17	peak	
2	*	4882.000	42.05	-10.39	31.66	54.00	-22.34	AVG	

Orthogonal Axis : X

Test Mode : TX 2480MHz \_CH78\_1Mbps


## Vertical

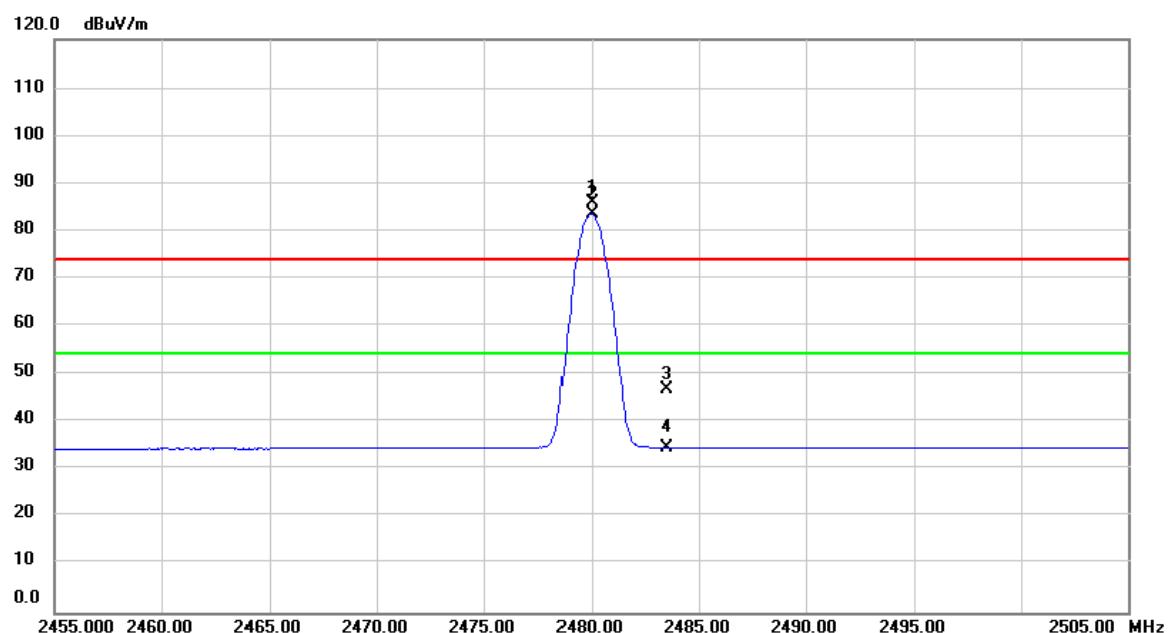

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2480.000	53.95	32.05	86.00	74.00	12.00	peak	No Limit
2	*	2480.000	51.51	32.05	83.56	54.00	29.56	AVG	No Limit
3		2483.500	15.04	32.06	47.10	74.00	-26.90	peak	
4		2483.500	2.67	32.06	34.73	54.00	-19.27	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH78_1Mbps


### Vertical

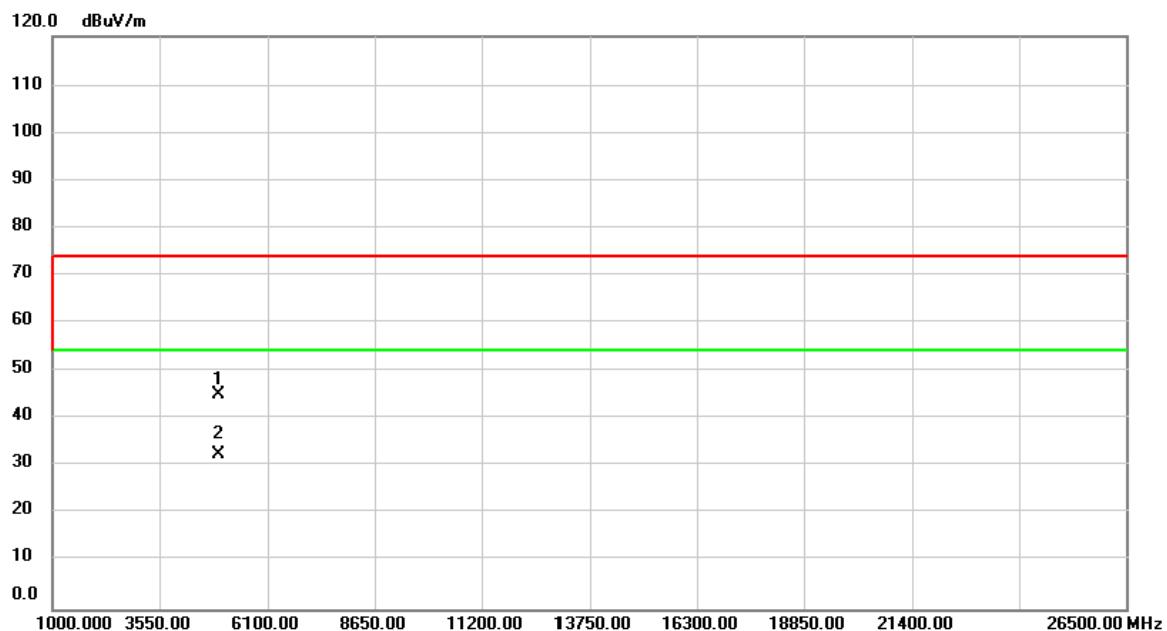

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dB <sub>uV</sub>	dB	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB		
1		4960.000	55.55	-10.26	45.29	74.00	-28.71	peak	
2	*	4960.000	42.83	-10.26	32.57	54.00	-21.43	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH78_1Mbps


### Horizontal

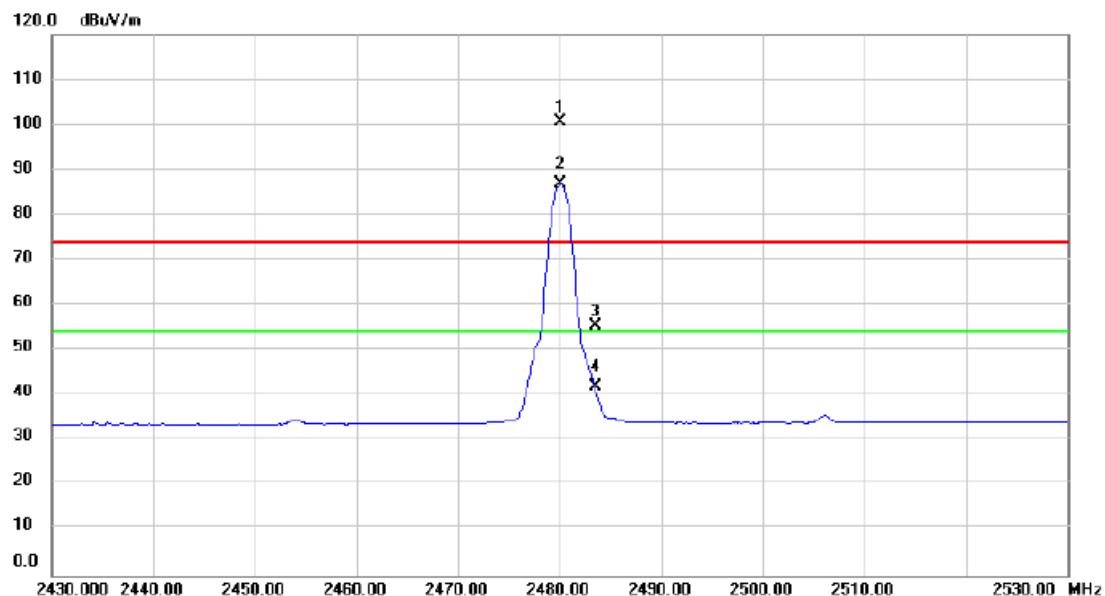

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	X	2480.100	69.21	31.57	100.78	74.00	26.78	peak
2	*	2480.100	55.28	31.57	86.85	54.00	32.85	AVG
3		2483.500	23.70	31.59	55.29	74.00	-18.71	peak
4		2483.500	10.26	31.59	41.85	54.00	-12.15	AVG


Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH78_1Mbps

### Horizontal

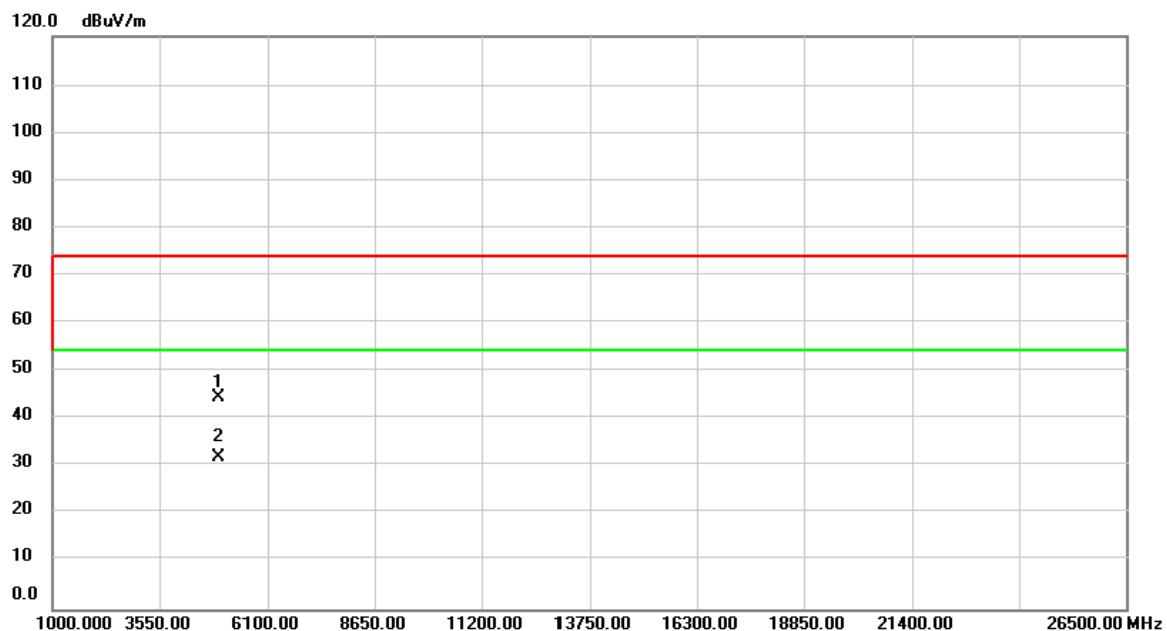

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	54.86	-10.26	44.60	74.00	-29.40	peak	
2	*	4960.000	42.10	-10.26	31.84	54.00	-22.16	AVG	


Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_3Mbps

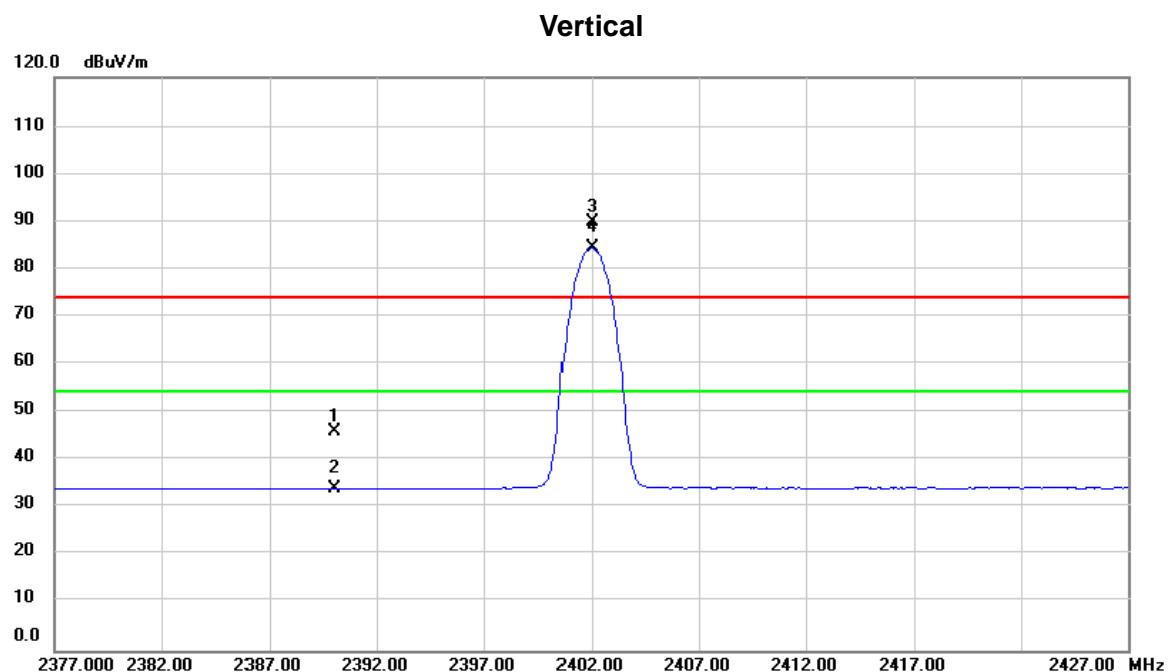

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	14.25	31.70	45.95	74.00	-28.05	peak	
2		2390.000	2.39	31.70	34.09	54.00	-19.91	AVG	
3	X	2402.000	57.96	31.76	89.72	74.00	15.72	peak	No Limit
4	*	2402.000	52.59	31.76	84.35	54.00	30.35	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_3Mbps


### Vertical

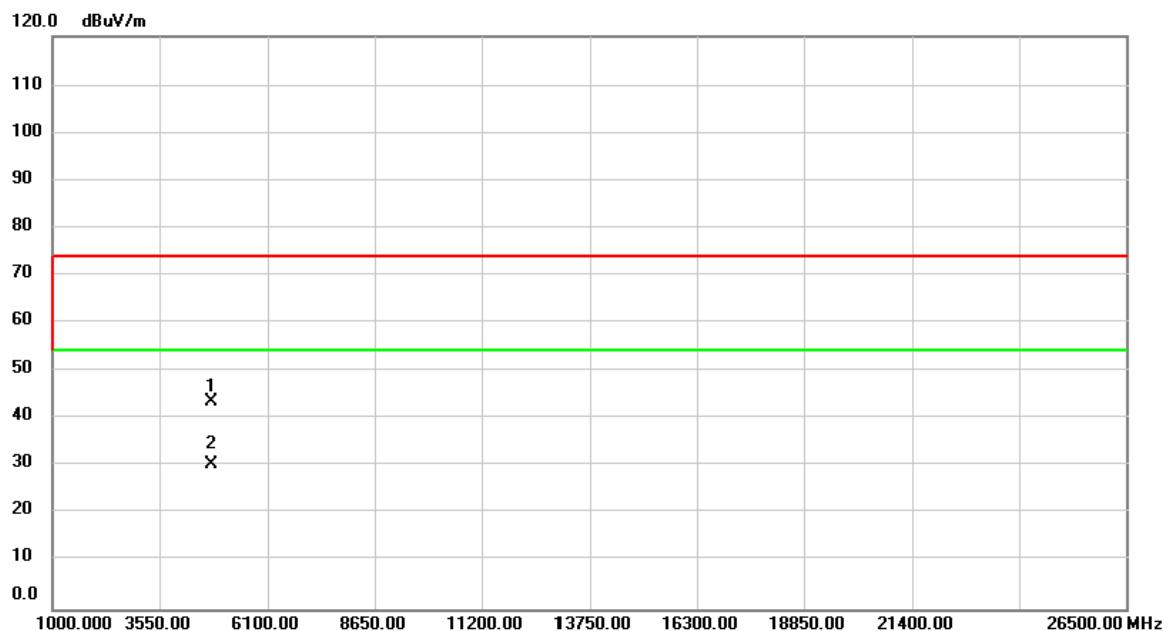

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	54.19	-10.51	43.68	74.00	-30.32	peak	
2	*	4804.000	40.89	-10.51	30.38	54.00	-23.62	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_3Mbps


### Horizontal

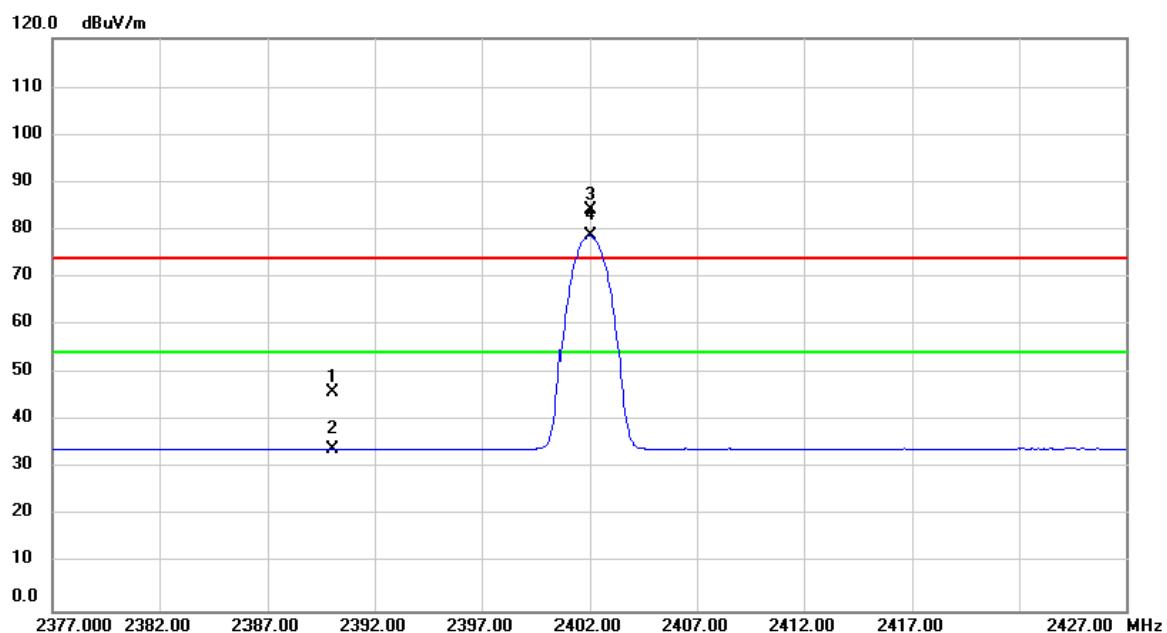

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	14.37	31.70	46.07	74.00	-27.93	peak	
2		2390.000	2.31	31.70	34.01	54.00	-19.99	AVG	
3	X	2402.000	52.47	31.76	84.23	74.00	10.23	peak	No Limit
4	*	2402.000	46.94	31.76	78.70	54.00	24.70	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX 2402MHz _CH00_3Mbps

### Horizontal

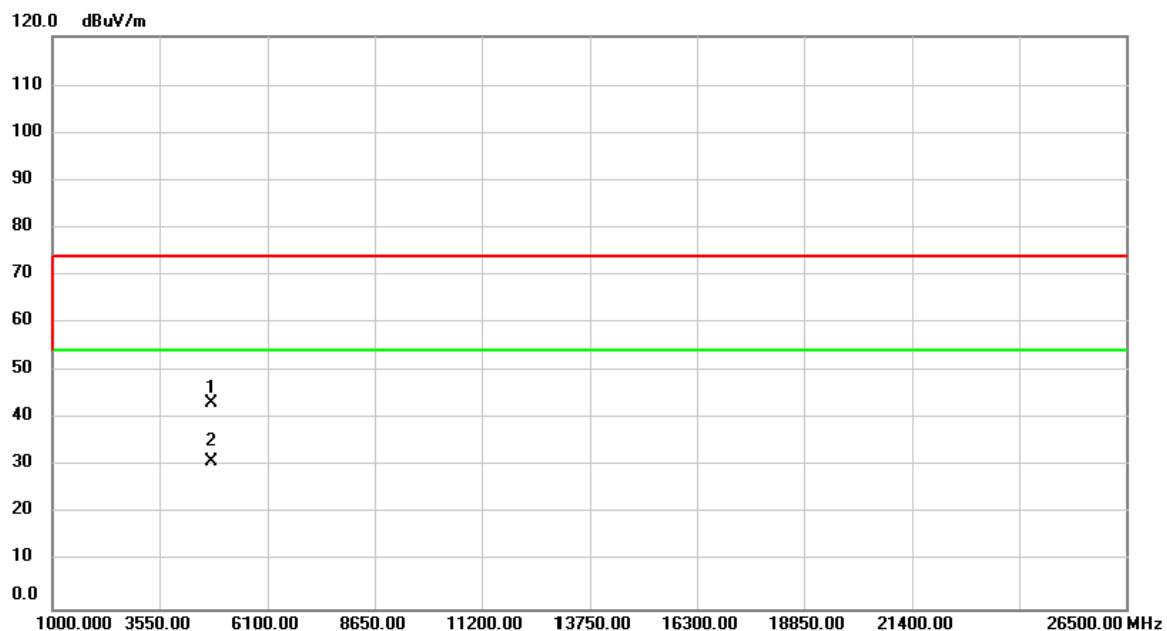

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	53.83	-10.51	43.32	74.00	-30.68	peak	
2	*	4804.000	41.44	-10.51	30.93	54.00	-23.07	AVG	


Orthogonal Axis :	X
Test Mode :	TX 2441MHz _CH39_3Mbps

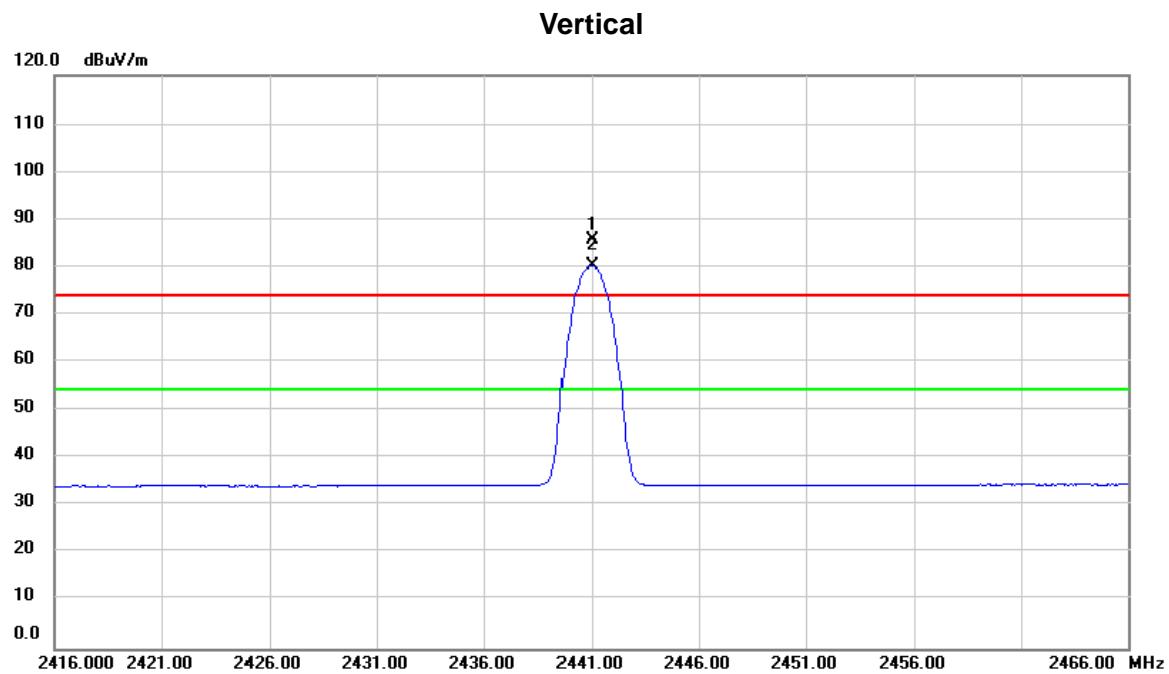

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
							MHz	dBuV	dB
1	X	2441.000	53.72	31.90	85.62	74.00	11.62	peak	No Limit
2	*	2441.000	48.33	31.90	80.23	54.00	26.23	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2441MHz _CH39_3Mbps


### Vertical

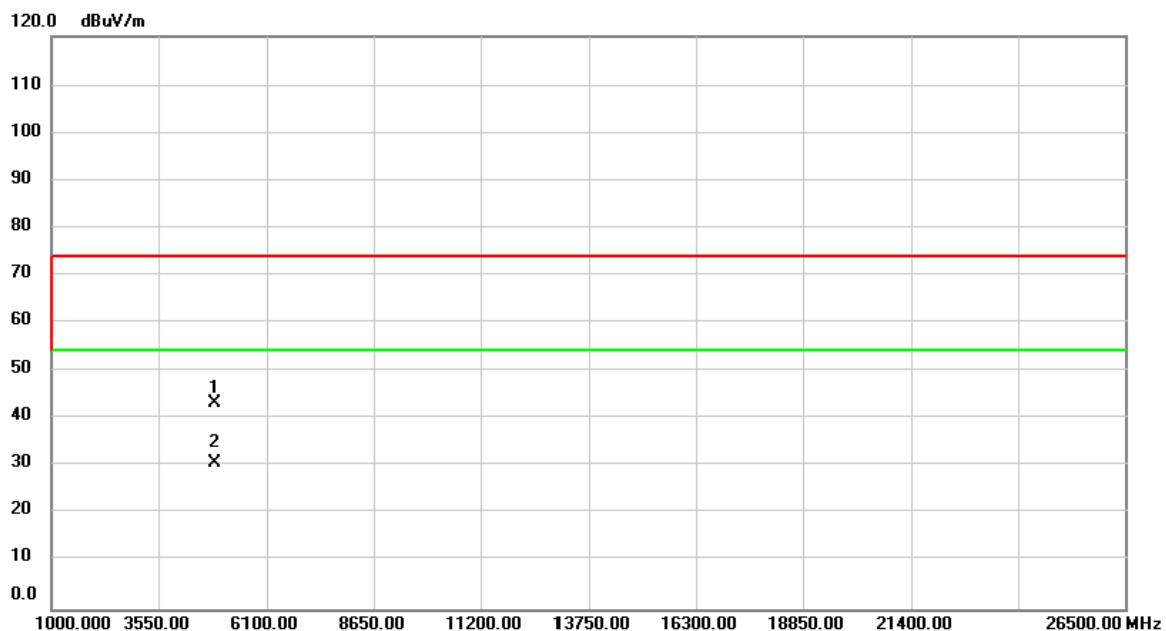

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dB <sub>uV</sub>	dB	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB		
1		4882.000	53.69	-10.39	43.30	74.00	-30.70	peak	
2	*	4882.000	41.18	-10.39	30.79	54.00	-23.21	Avg	

Orthogonal Axis :	X
Test Mode :	TX 2441MHz _CH39_3Mbps


### Horizontal

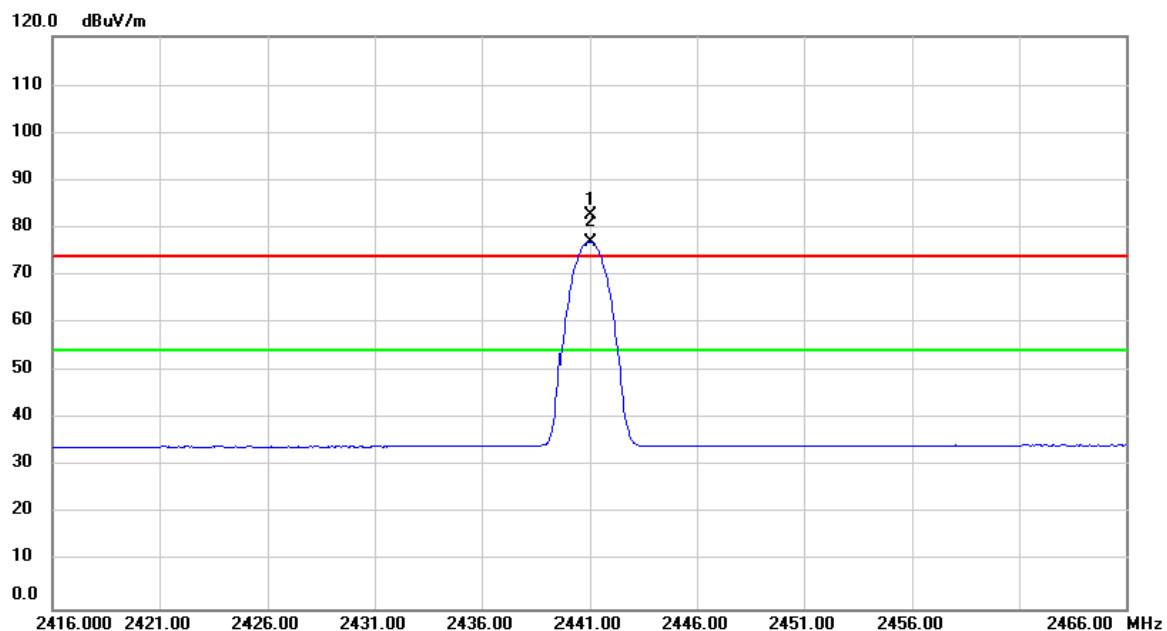

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1	X	2441.000	50.64	31.90	82.54	74.00	8.54	peak	No Limit
2	*	2441.000	45.13	31.90	77.03	54.00	23.03	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2441MHz _CH39_3Mbps


### Horizontal

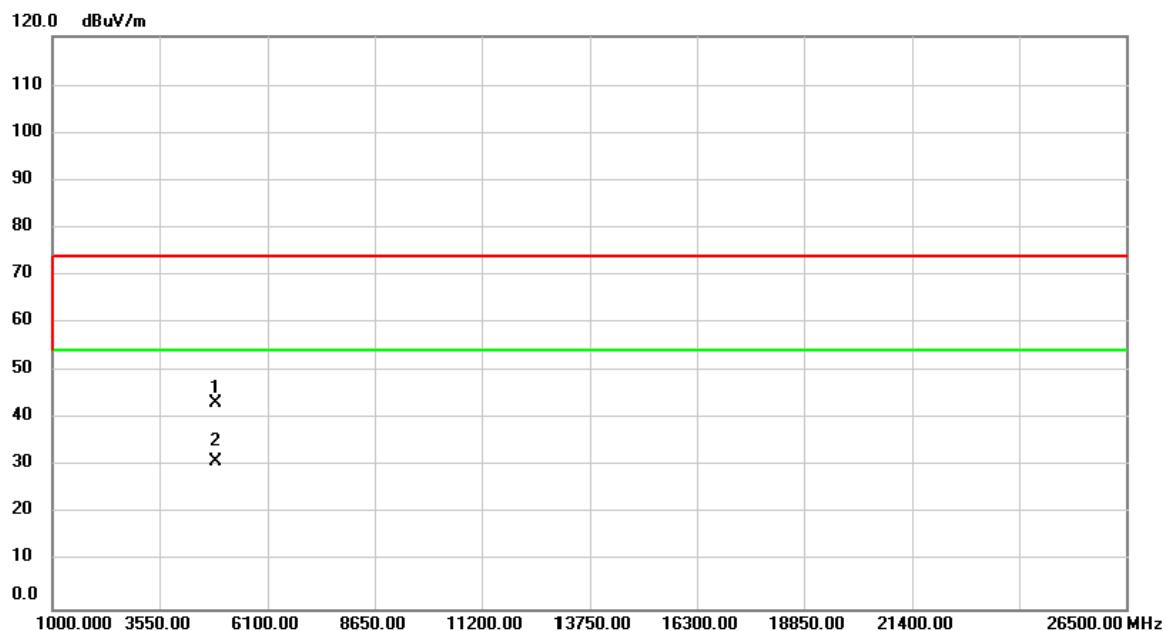

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4882.000	53.72	-10.39	43.33	74.00	-30.67	peak	
2	*	4882.000	41.30	-10.39	30.91	54.00	-23.09	Avg	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH78_3Mbps


### Vertical

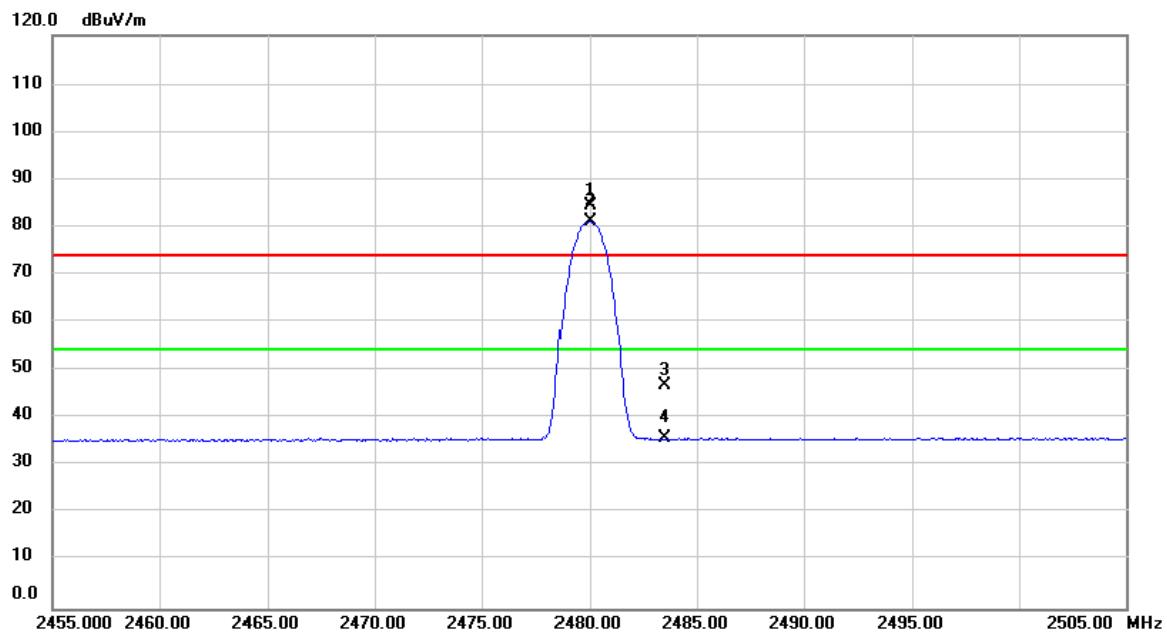

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	X	2480.000	52.45	32.05	84.50	74.00	10.50	peak	No Limit
2	*	2480.000	49.00	32.05	81.05	54.00	27.05	AVG	No Limit
3		2483.500	15.00	32.06	47.06	74.00	-26.94	peak	
4		2483.500	3.69	32.06	35.75	54.00	-18.25	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH78_3Mbps


### Vertical

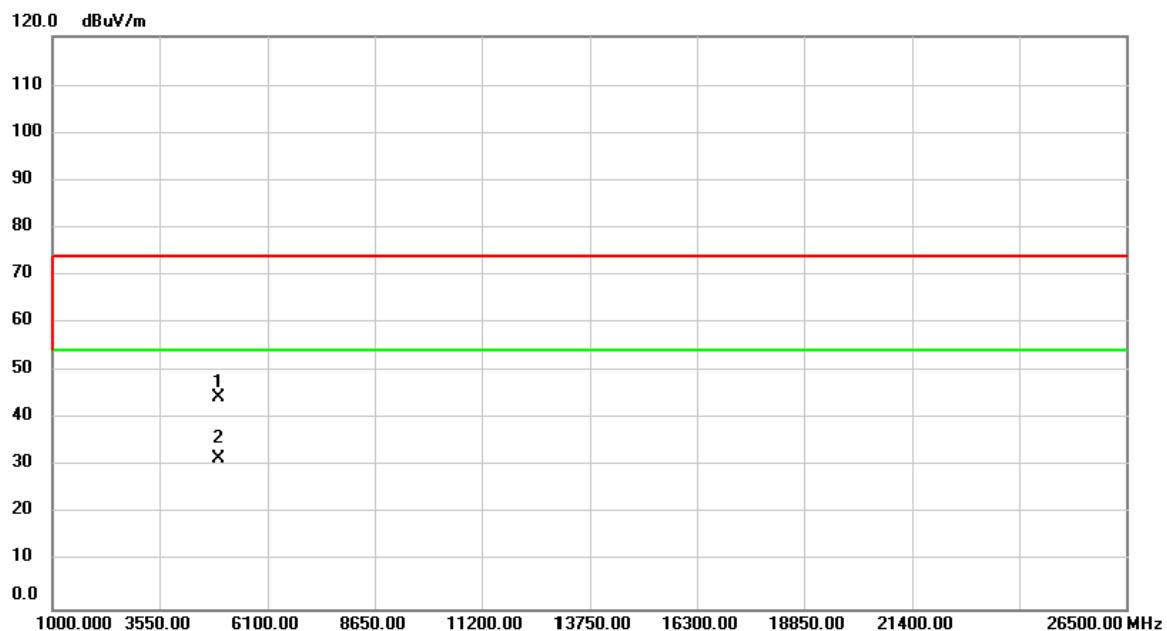

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	54.91	-10.26	44.65	74.00	-29.35	peak	
2	*	4960.000	42.01	-10.26	31.75	54.00	-22.25	Avg	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH78_3Mbps


### Horizontal

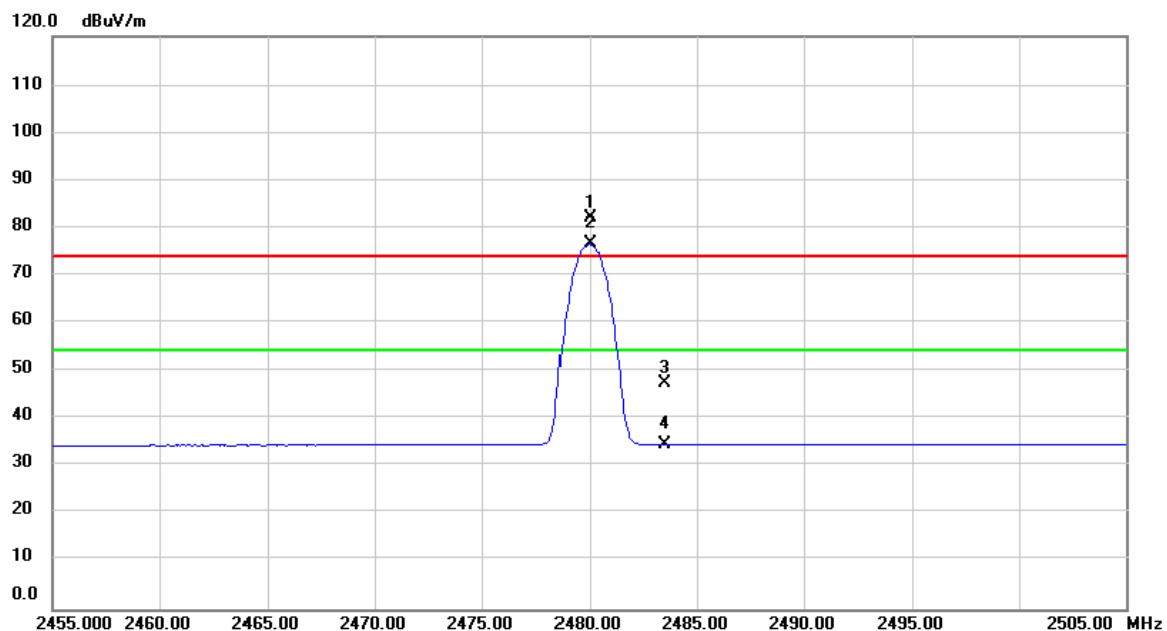

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2480.000	50.04	32.05	82.09	74.00	8.09	peak	No Limit
2	*	2480.000	44.48	32.05	76.53	54.00	22.53	AVG	No Limit
3		2483.500	15.53	32.06	47.59	74.00	-26.41	peak	
4		2483.500	2.65	32.06	34.71	54.00	-19.29	AVG	

Orthogonal Axis :	X
Test Mode :	TX 2480MHz _CH78_3Mbps

### Horizontal

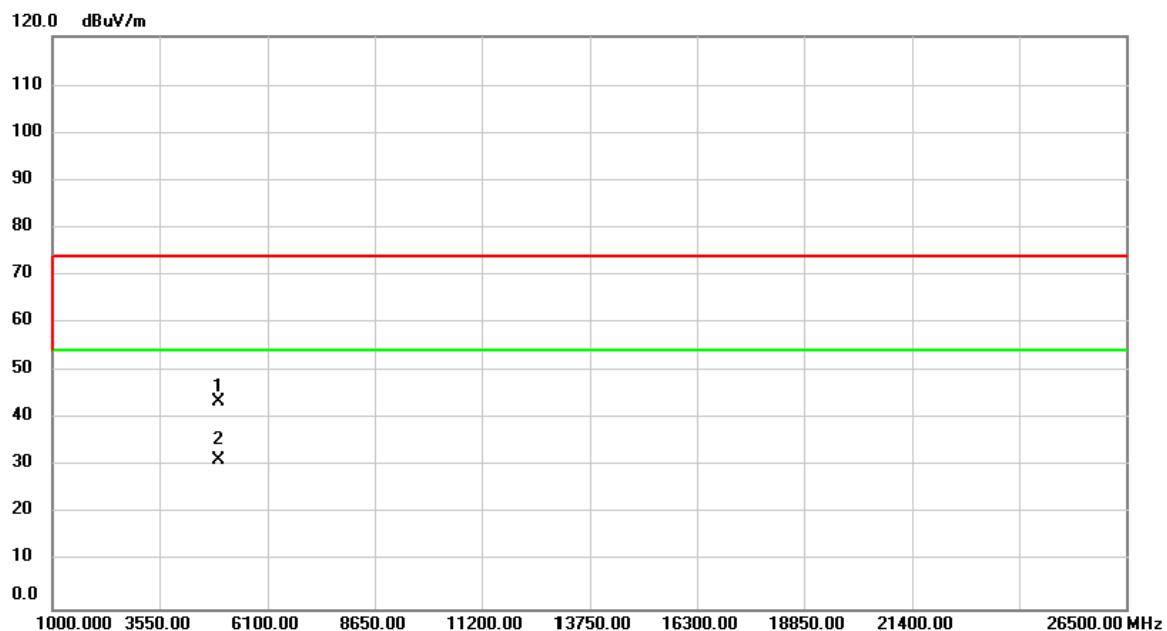

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	54.03	-10.26	43.77	74.00	-30.23	peak	
2	*	4960.000	41.59	-10.26	31.33	54.00	-22.67	AVG	


## ATTACHMENT E - NUMBER OF HOPPING CHANNEL

Test Mode

## Hopping Mode\_1Mbps

### Number of Hopping Channel

79

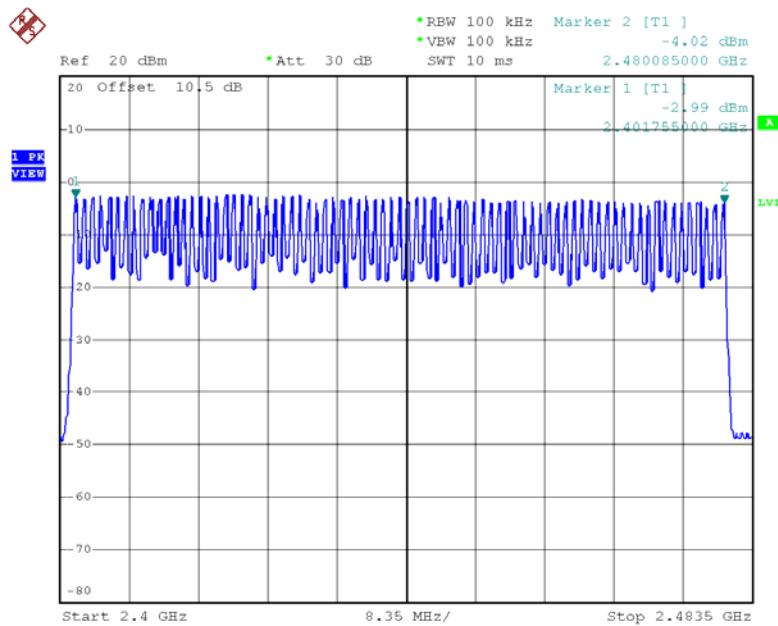


Date: 16.MAY.2016 12:01:11

# Test Mode

## Hopping Mode\_3Mbps

## Number of Hopping Channel

79

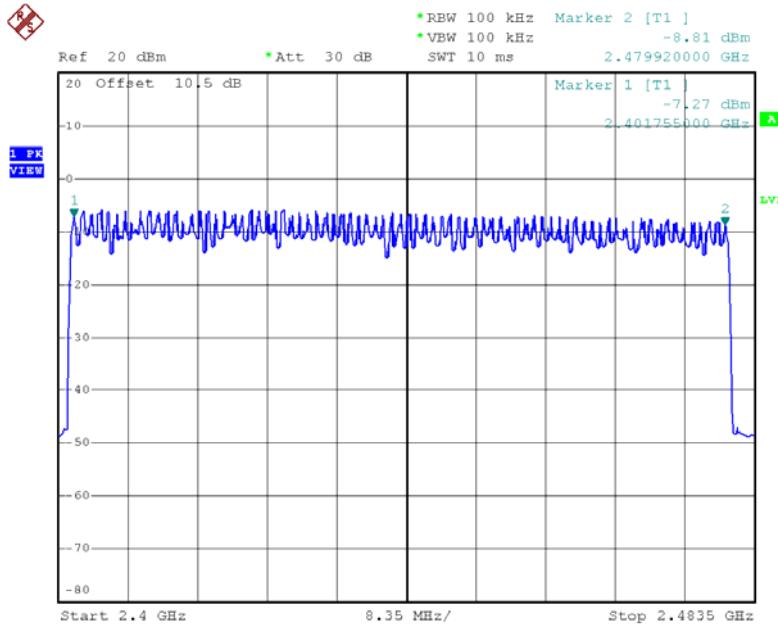


Date: 16.MAY.2016 14:16:10

## ATTACHMENT F - AVERAGE TIME OF OCCUPANCY

Test Mode :	TX Mode_1Mbps
-------------	---------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	3.0000	0.3200	0.4000	Complies
DH3	2402	1.7400	0.2784	0.4000	Complies
DH1	2402	0.3450	0.1104	0.4000	Complies
DH5	2441	3.0000	0.3200	0.4000	Complies
DH3	2441	1.7400	0.2784	0.4000	Complies
DH1	2441	0.3450	0.1104	0.4000	Complies
DH5	2480	3.0000	0.3200	0.4000	Complies
DH3	2480	1.7600	0.2816	0.4000	Complies
DH1	2480	0.3400	0.1088	0.4000	Complies

## CH00-DH5

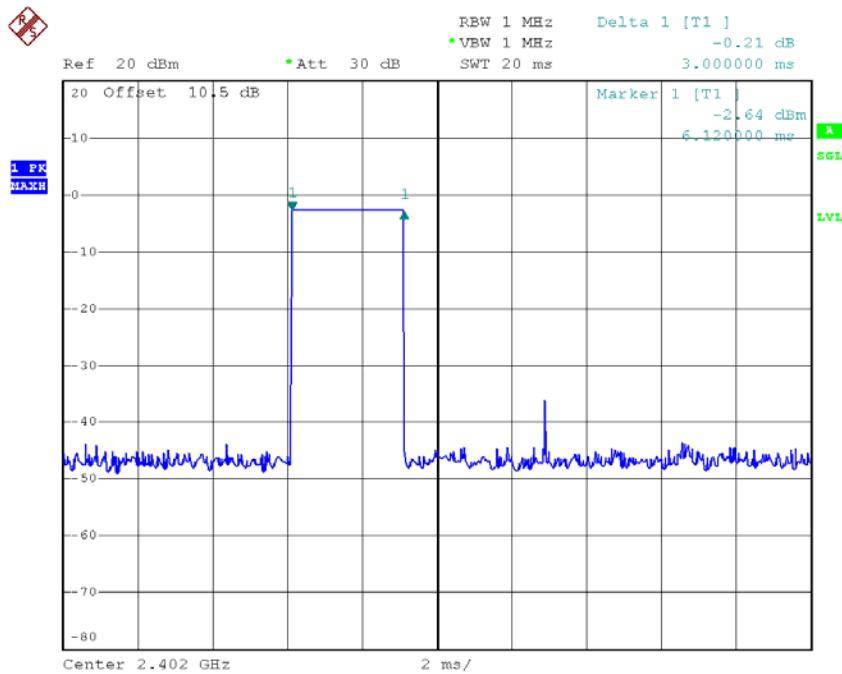


Date: 16.MAY.2016 13:09:38

## CH00-DH3

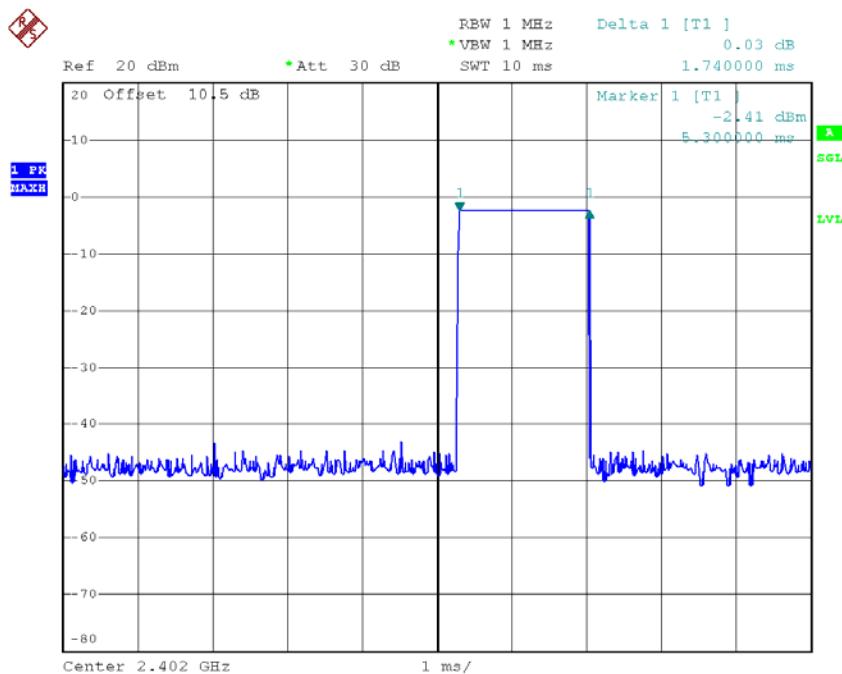


Date: 16.MAY.2016 13:29:05

## CH00-DH1

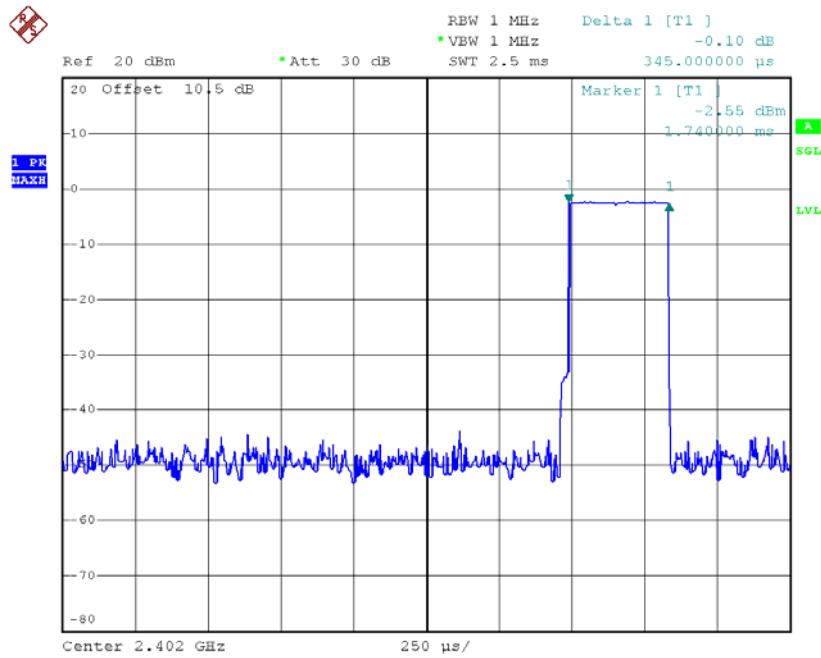


Date: 16.MAY.2016 11:58:53

## CH39-DH5

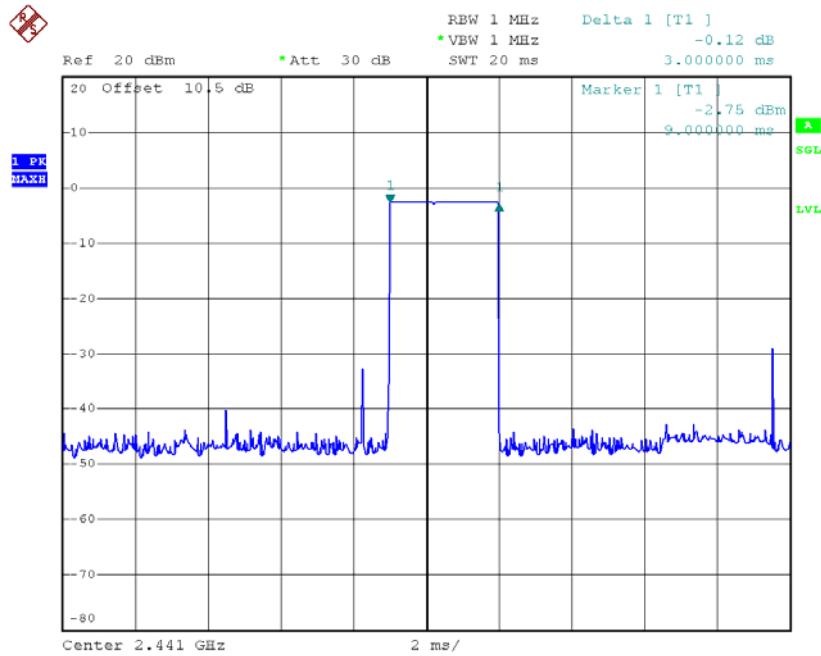


Date: 16.MAY.2016 13:10:35

## CH39-DH3

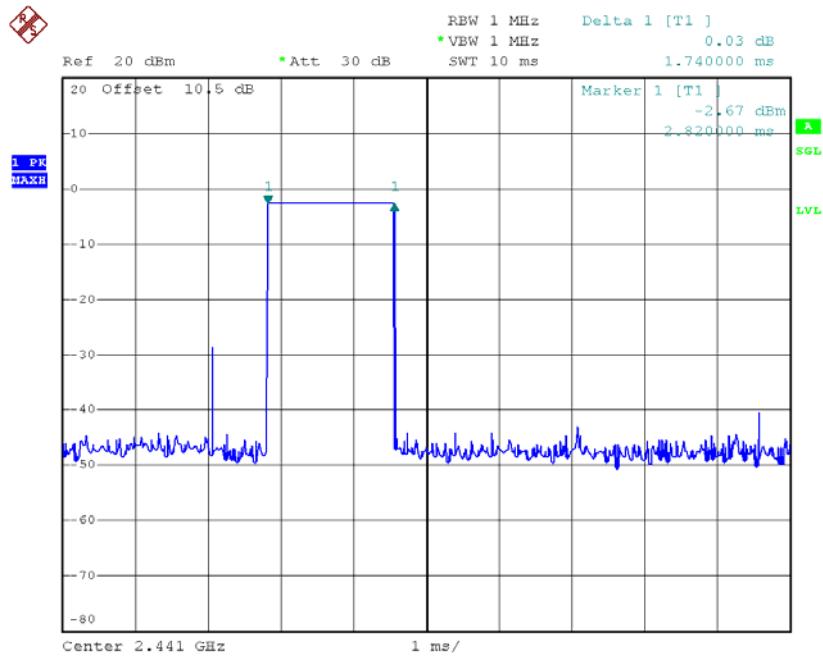


Date: 16.MAY.2016 13:29:59

## CH39-DH1

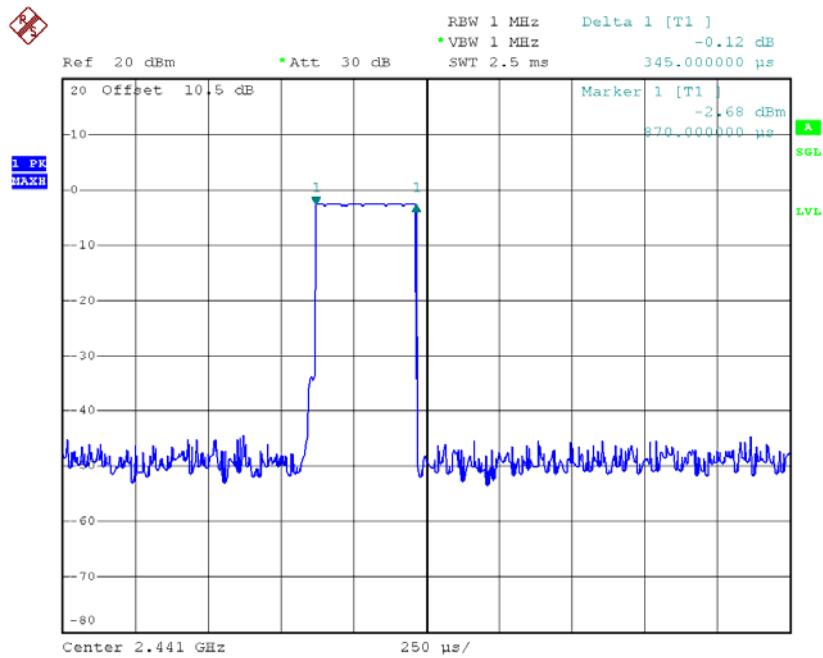


Date: 16.MAY.2016 11:59:11

## CH78-DH5

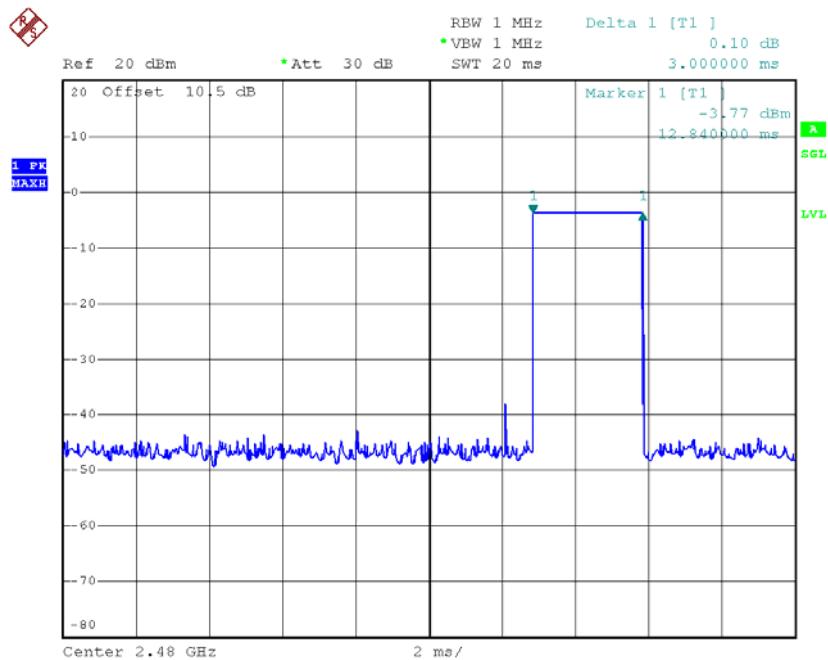


Date: 16.MAY.2016 13:12:23

## CH78-DH3

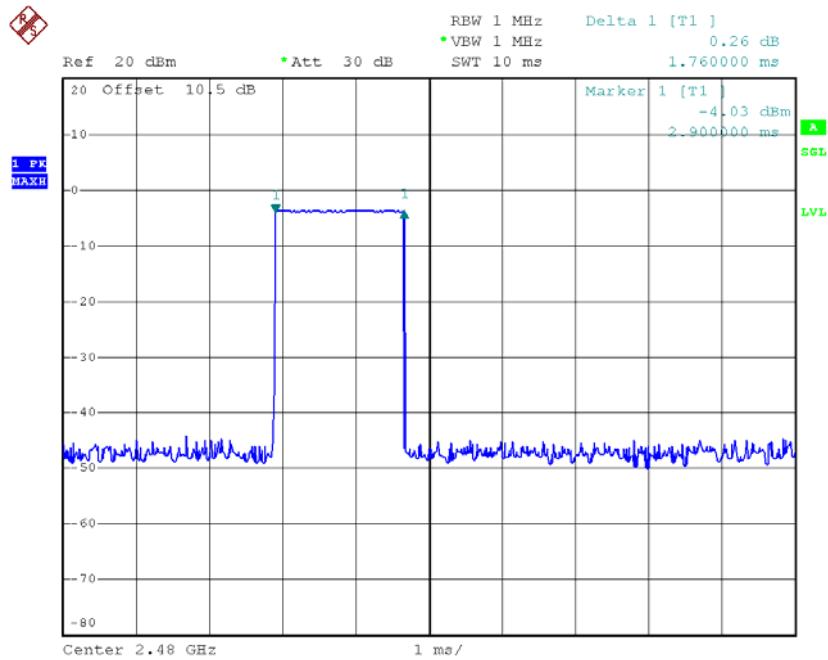

Date: 16.MAY.2016 13:37:34

## CH78-DH1

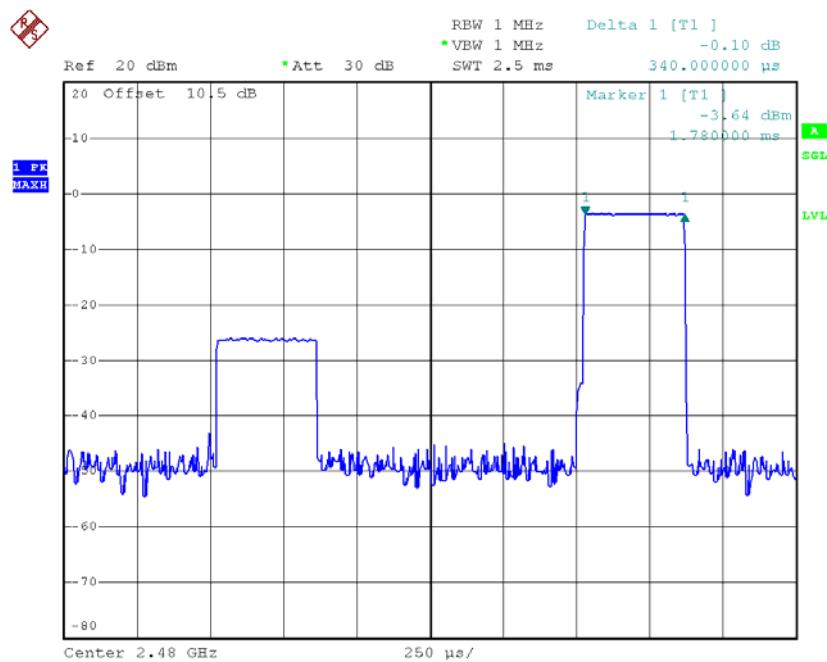


Date: 16.MAY.2016 11:59:22

Test Mode :	TX Mode_3Mbps
-------------	---------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Complies
DH3	2402	1.6400	0.2624	0.4000	Complies
DH1	2402	0.3950	0.1264	0.4000	Complies
DH5	2441	2.8800	0.3072	0.4000	Complies
DH3	2441	1.6600	0.2656	0.4000	Complies
DH1	2441	0.3900	0.1248	0.4000	Complies
DH5	2480	2.8800	0.3072	0.4000	Complies
DH3	2480	1.6400	0.2624	0.4000	Complies
DH1	2480	0.3900	0.1248	0.4000	Complies

## CH00-DH5

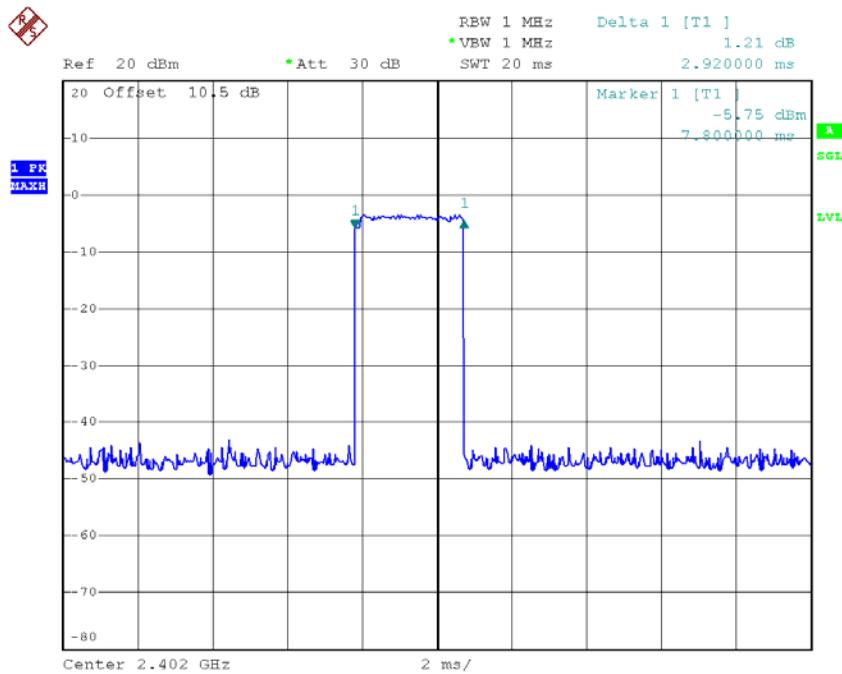


Date: 16.MAY.2016 14:23:44

## CH00-DH3

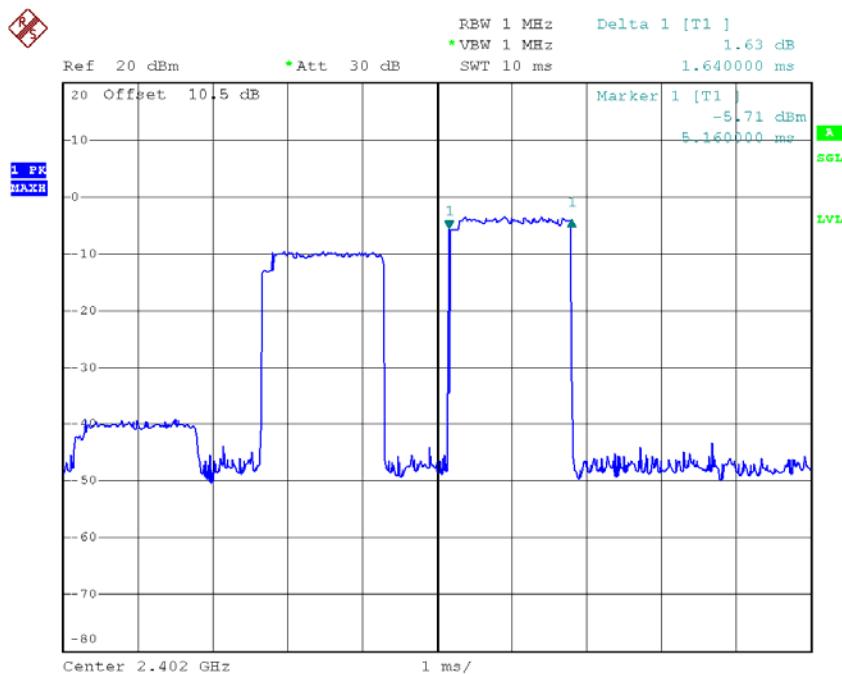


Date: 16.MAY.2016 14:21:14

## CH00-DH1

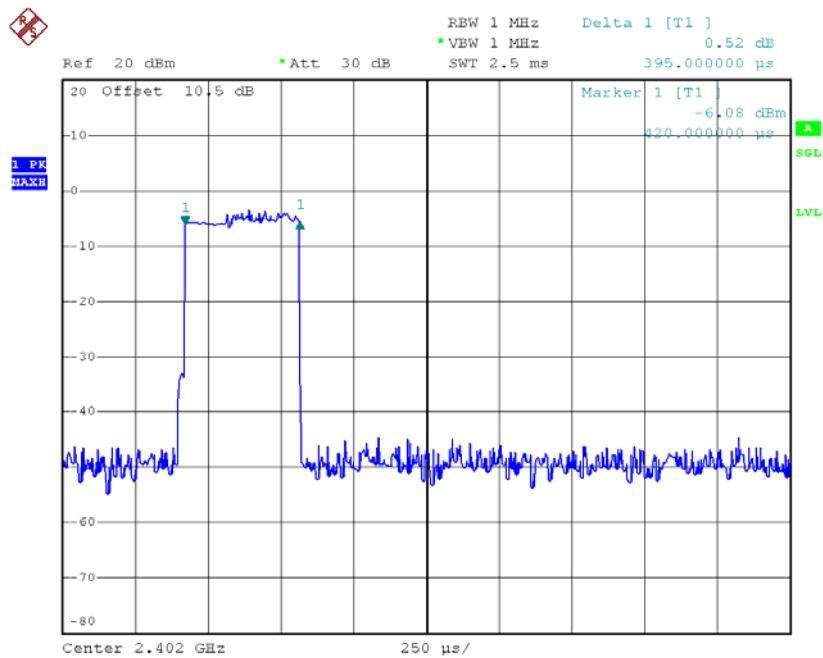


Date: 16.MAY.2016 14:07:56

## CH39-DH5

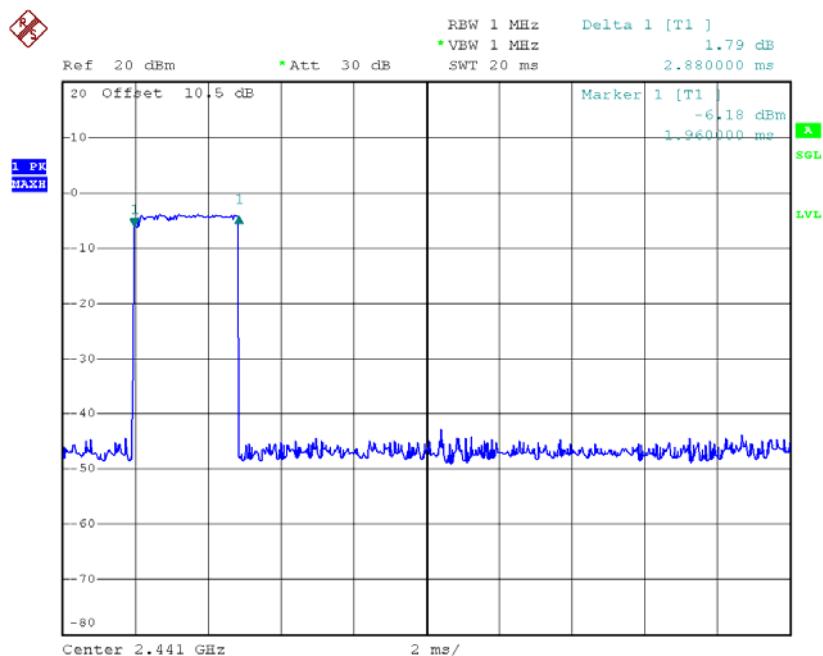


Date: 16.MAY.2016 14:24:26

## CH39-DH3

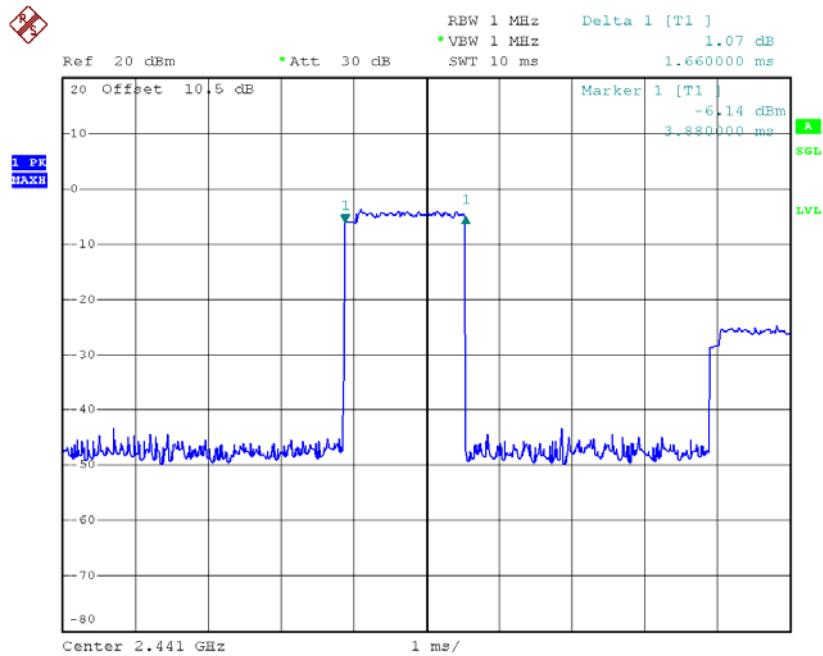


Date: 16.MAY.2016 14:21:43

## CH39-DH1

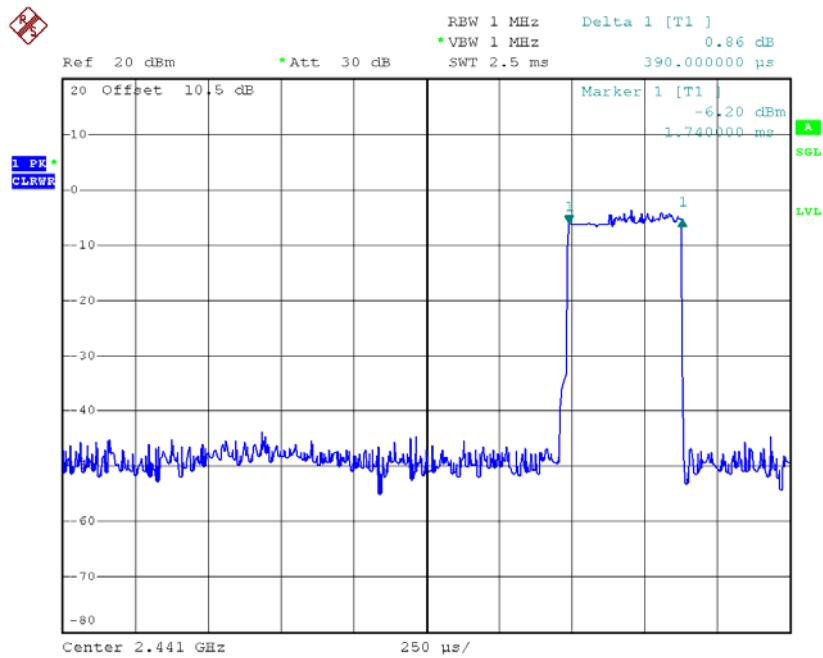


Date: 16.MAY.2016 14:08:08

## CH78-DH5

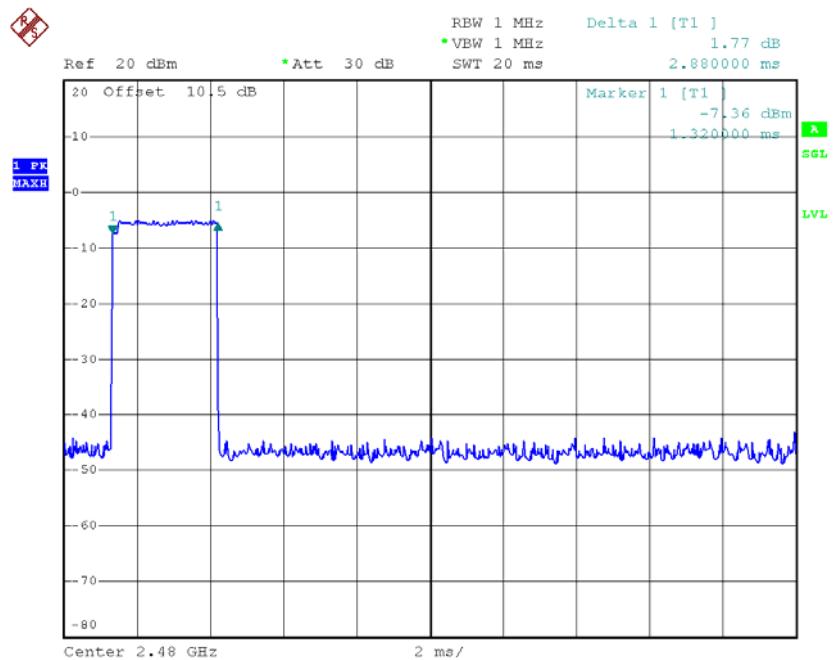


Date: 16.MAY.2016 14:24:59

## CH78-DH3

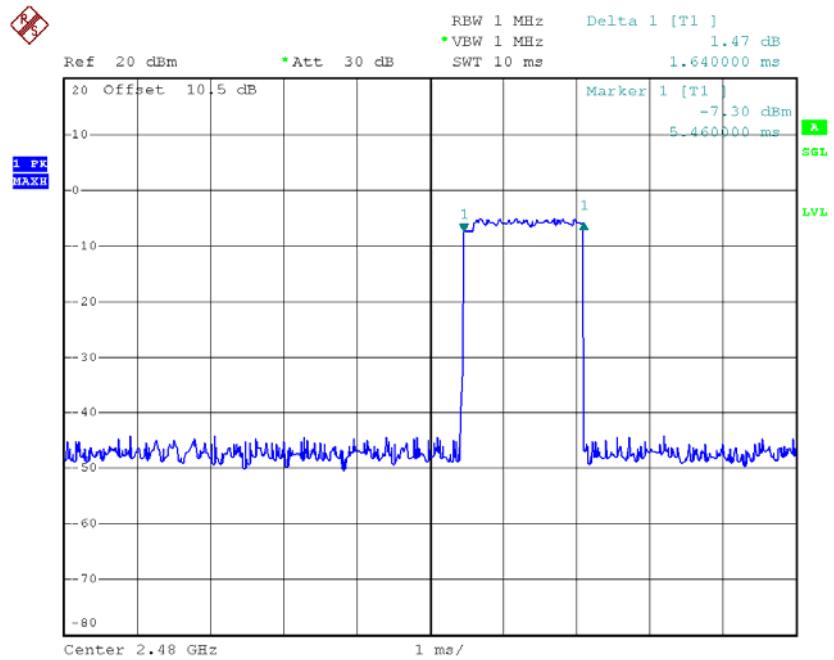

Date: 16.MAY.2016 14:22:26

## CH78-DH1

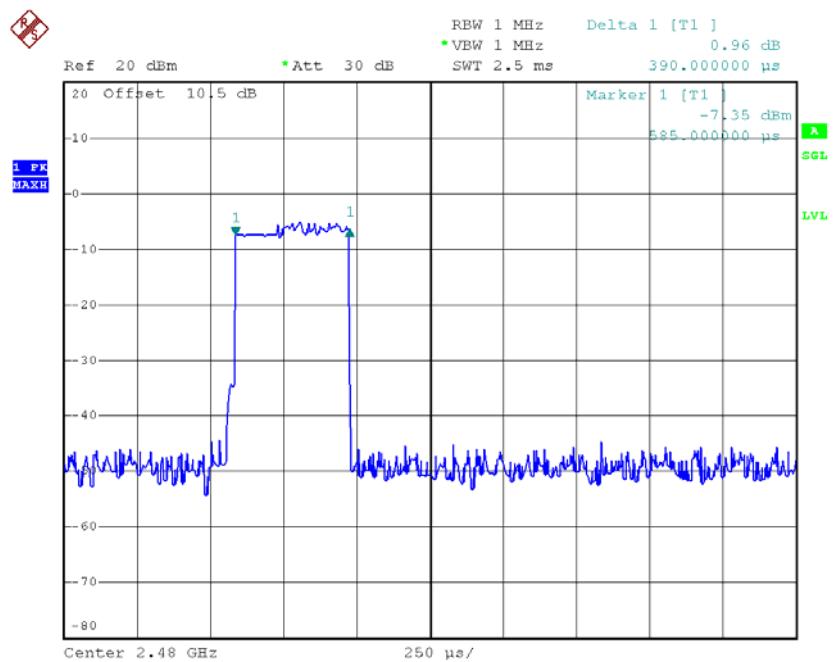


Date: 16.MAY.2016 14:26:25

## **ATTACHMENT G - HOPPING CHANNEL SEPARATION MEASUREMENT**


Test Mode : Hopping on \_1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	0.996	0.627	Complies
2441	1.002	0.639	Complies
2480	1.002	0.623	Complies

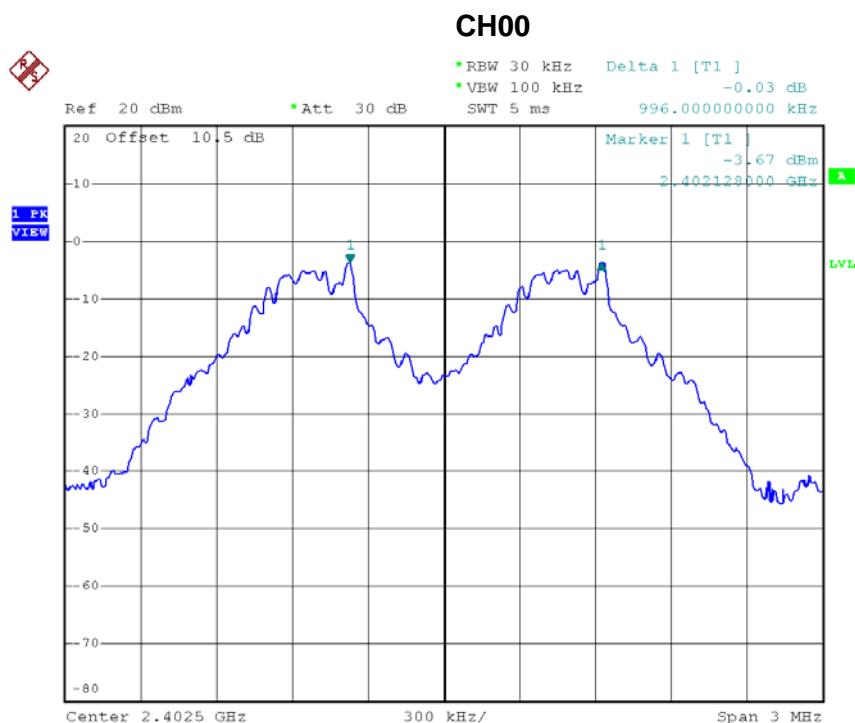


Date: 16.MAY.2016 11:51:01

## CH39

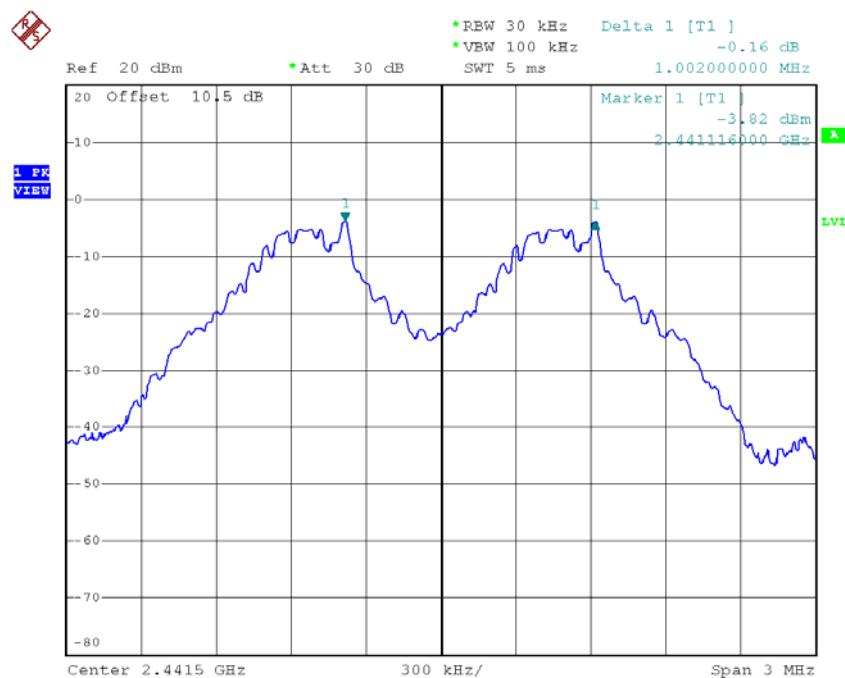

Date: 16.MAY.2016 11:52:31


## CH78

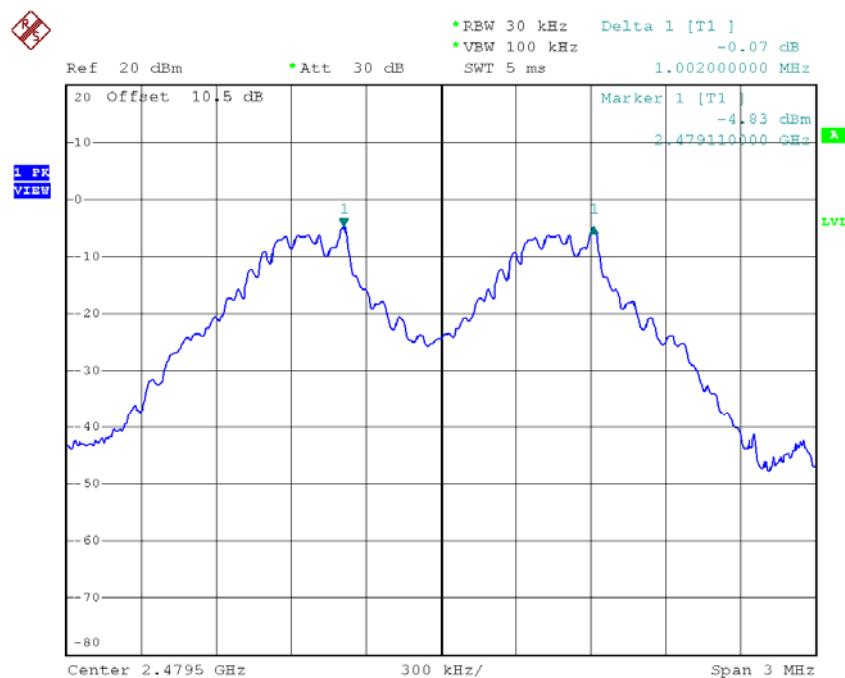

Date: 16.MAY.2016 11:53:54


Test Mode : Hopping on \_3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.002	0.869	Complies
2441	1.002	0.875	Complies
2480	1.002	0.895	Complies

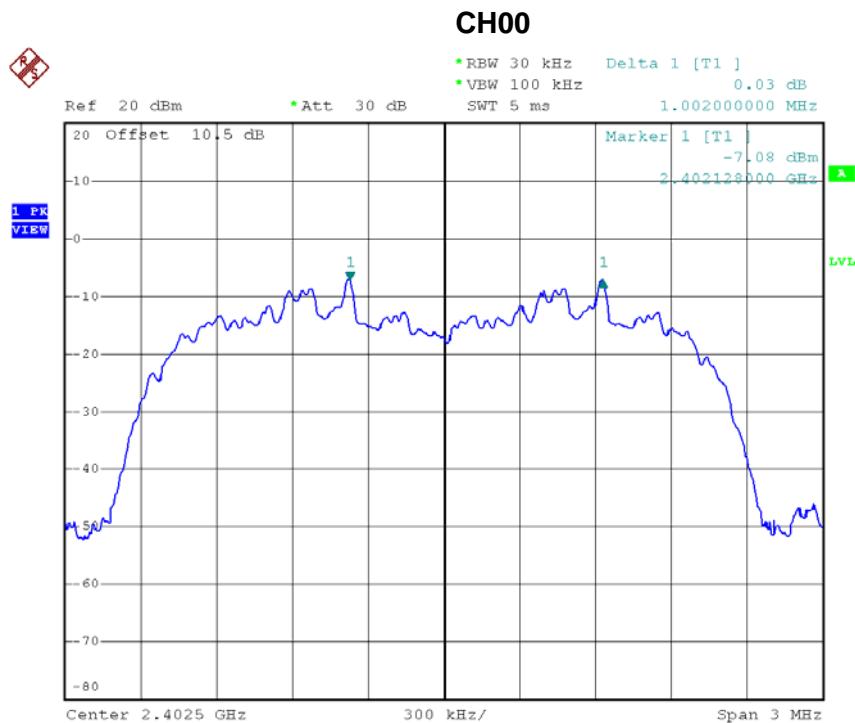


Date: 16.MAY.2016 13:44:02

## CH39

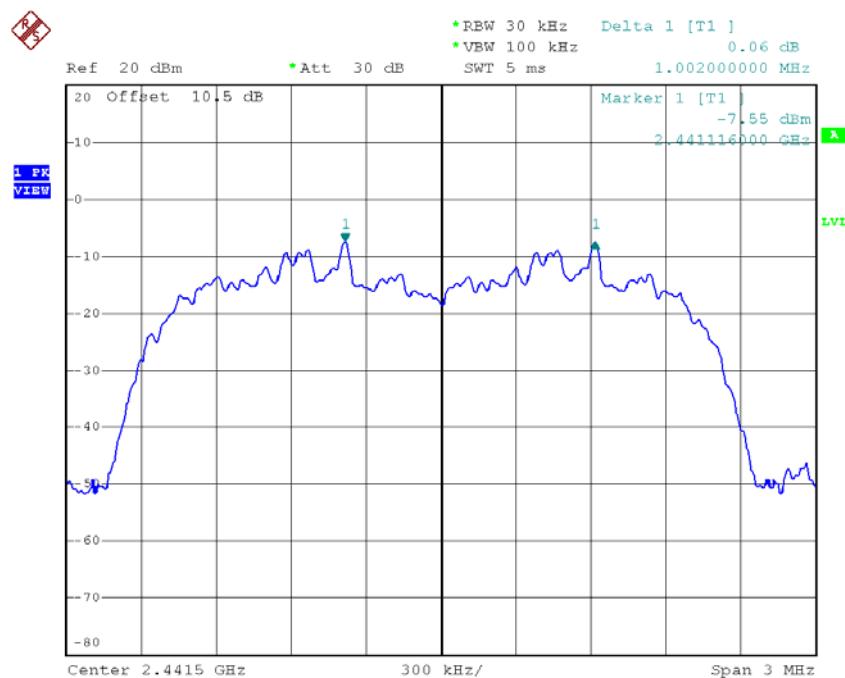

Date: 16.MAY.2016 13:45:25

## CH78

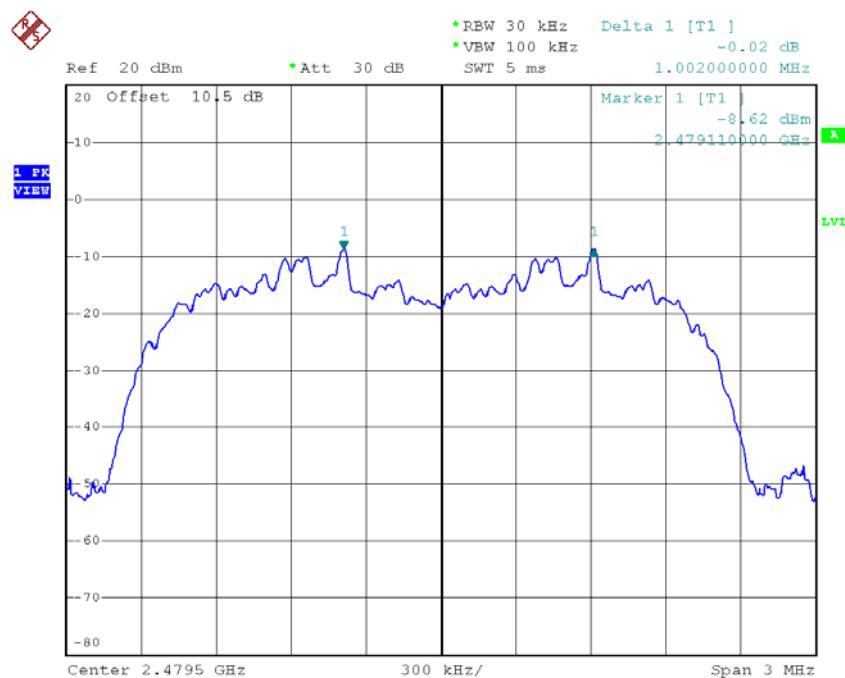


Date: 16.MAY.2016 13:47:06

**ATTACHMENT H - BANDWIDTH**


Test Mode : TX Mode \_1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.940	0.856	Complies
2441	0.958	0.884	Complies
2480	0.934	0.872	Complies

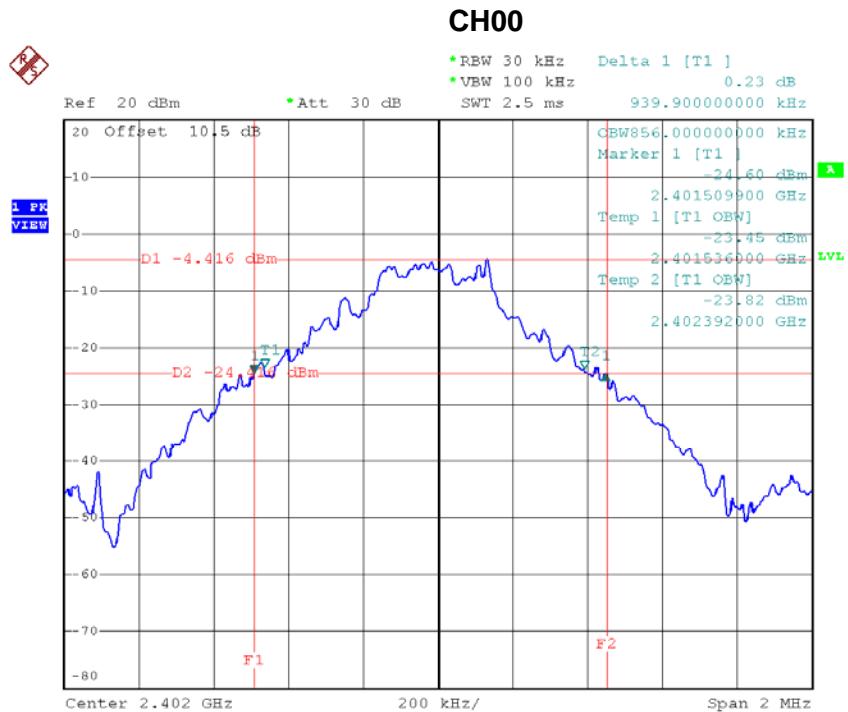


Date: 16.MAY.2016 11:55:13

## CH39

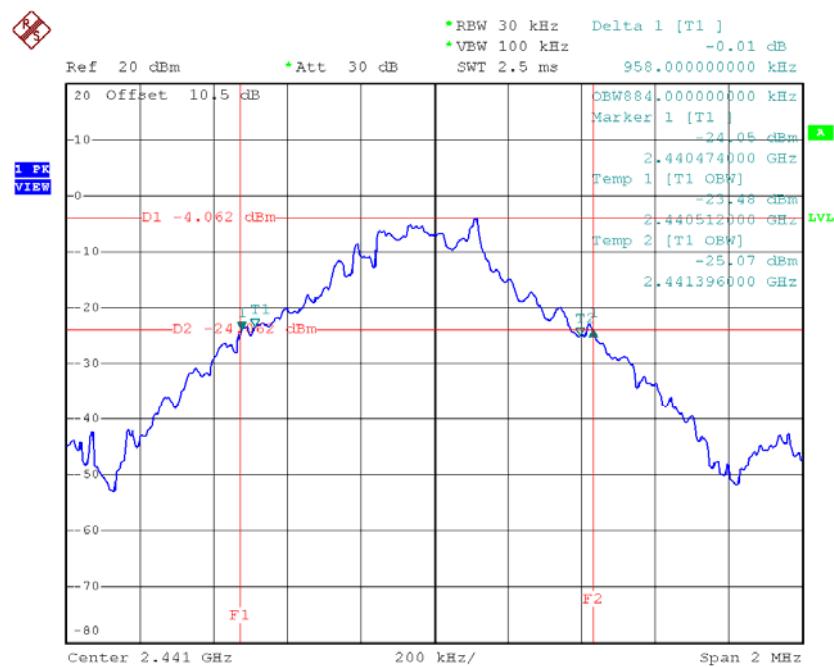

Date: 16.MAY.2016 11:56:33

## CH78

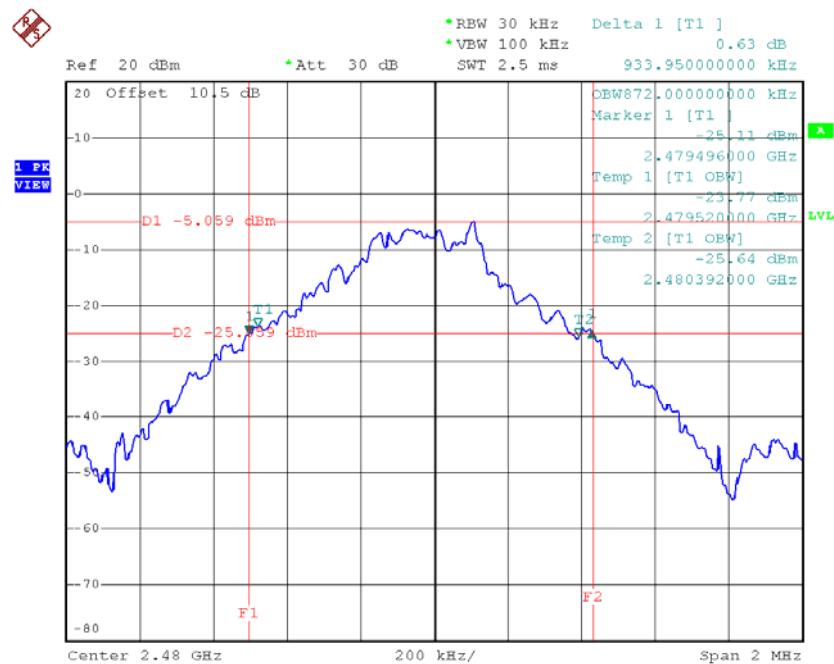


Date: 16.MAY.2016 11:57:55

Test Mode : TX Mode \_3Mbps


Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.304	1.212	Complies
2441	1.312	1.204	Complies
2480	1.342	1.212	Complies

### CH00

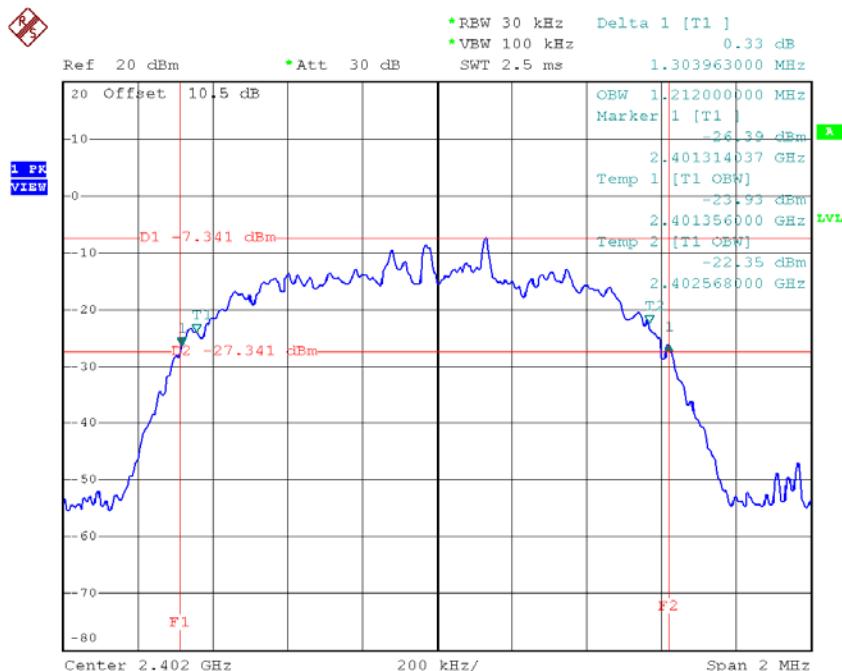


Date: 16.MAY.2016 13:48:16

## CH39

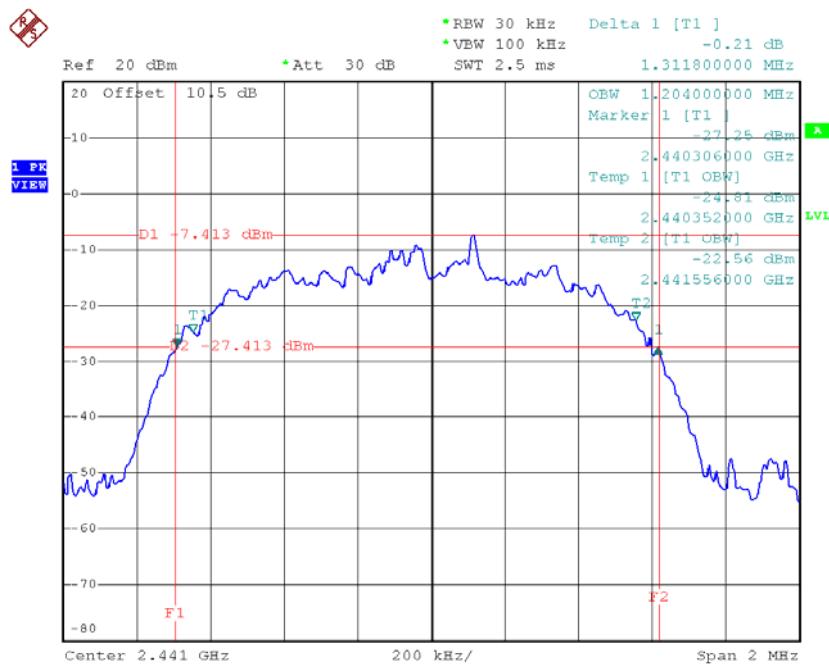

Date: 16.MAY.2016 13:51:59

## CH78

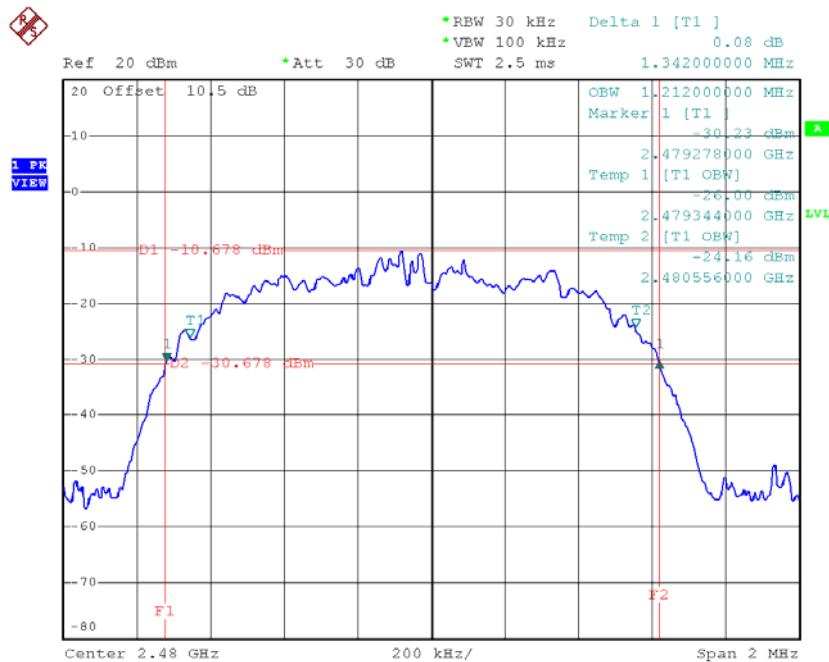


Date: 16.MAY.2016 13:53:00

**ATTACHMENT I - PEAK OUTPUT POWER**


Test Mode : TX Mode \_1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watt)	Max. Limit (dBm)	Max. Limit (Watt)	Test Result
2402	-2.19	0.0006	30.00	1.0000	Complies
2441	-2.55	0.0006	30.00	1.0000	Complies
2480	-3.41	0.0005	30.00	1.0000	Complies

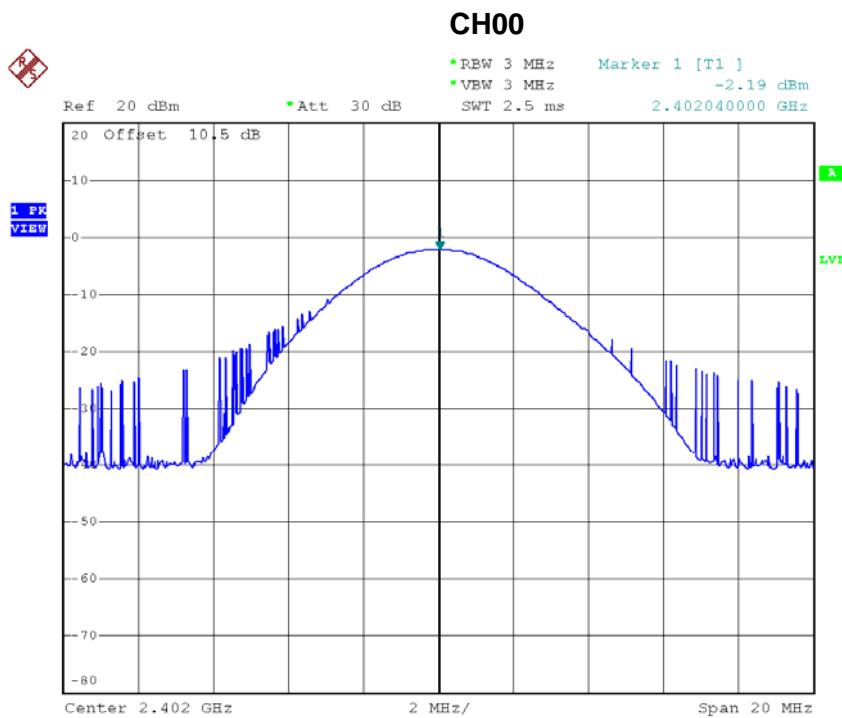


Date: 16.MAY.2016 11:55:31

## CH39

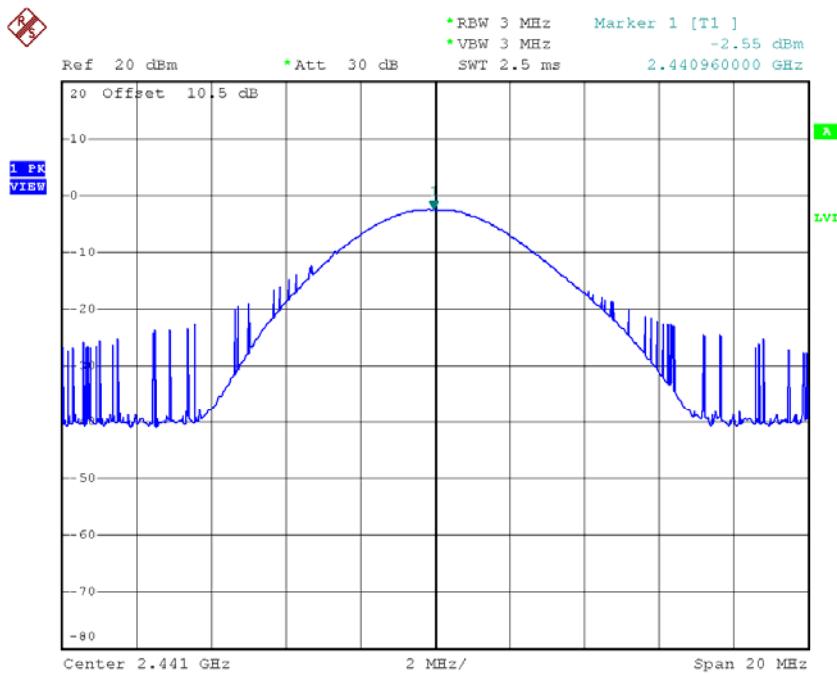

Date: 16.MAY.2016 11:56:38


## CH78

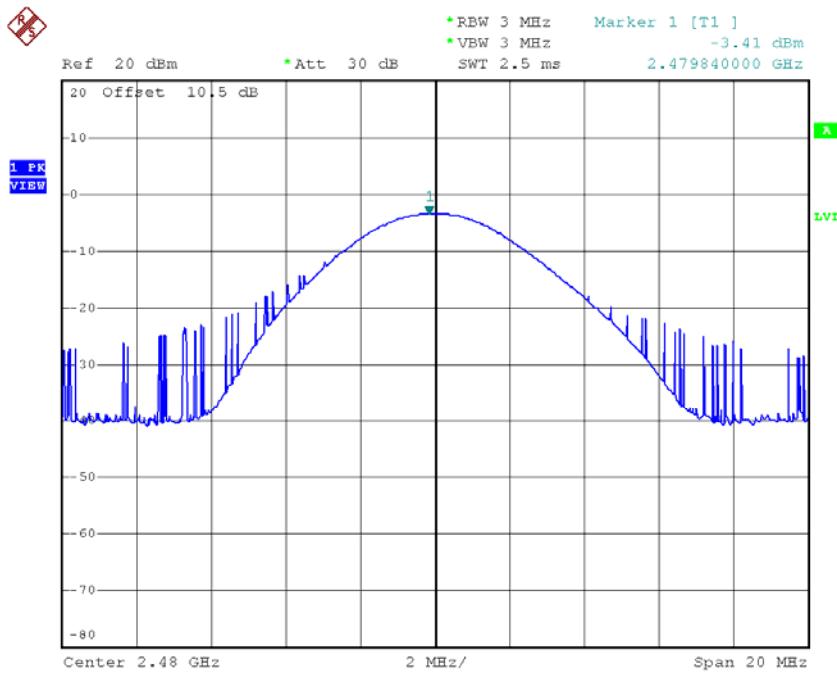

Date: 16.MAY.2016 11:58:12


Test Mode :	TX Mode _3Mbps
-------------	----------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watt)	Max. Limit (dBm)	Max. Limit (Watt)	Test Result
2402	-2.79	0.0005	30.00	1.0000	Complies
2441	-3.02	0.0005	30.00	1.0000	Complies
2480	-4.30	0.0004	30.00	1.0000	Complies

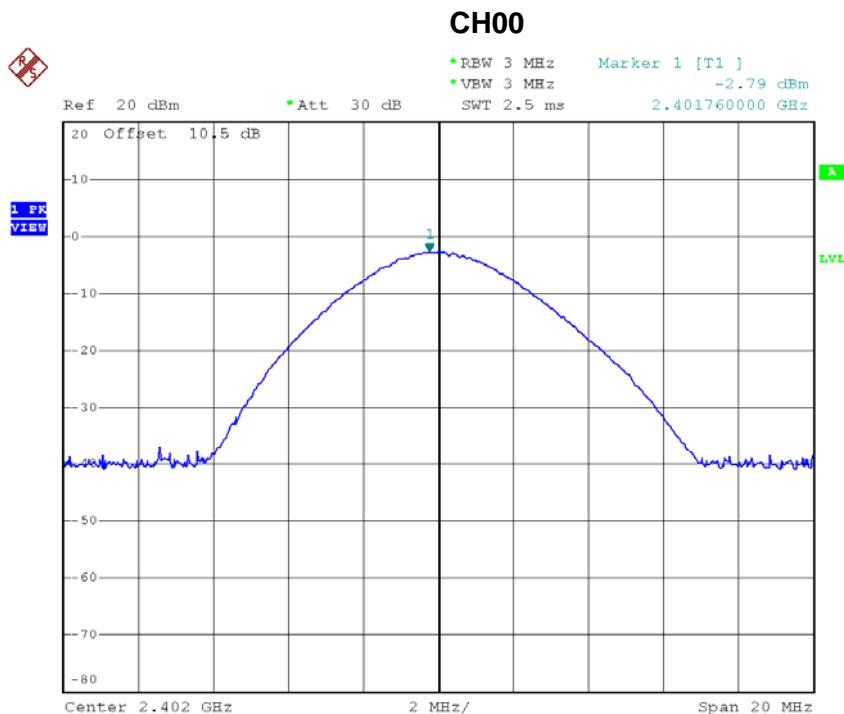


Date: 16.MAY.2016 13:48:35

## CH39

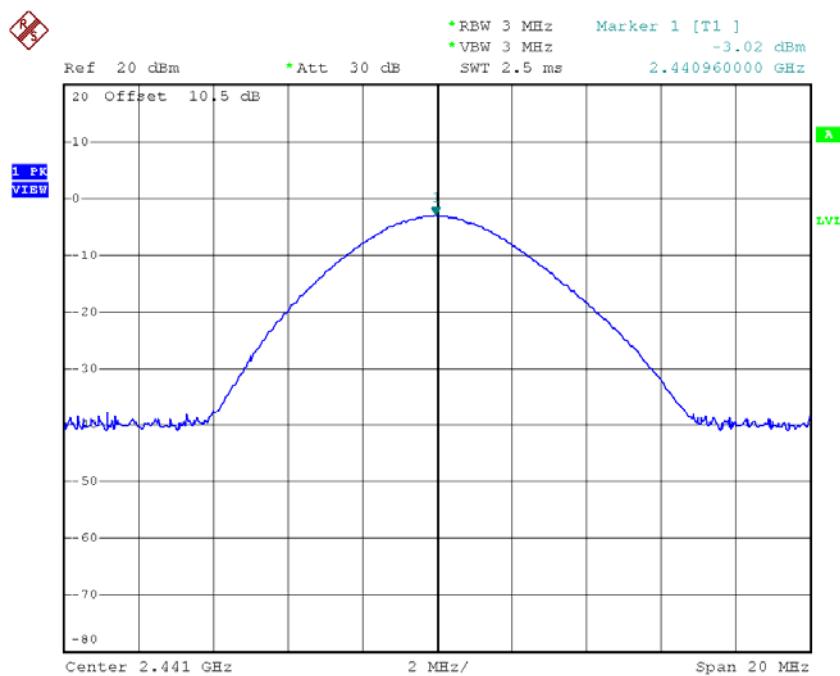


Date: 16.MAY.2016 13:52:04

## CH78

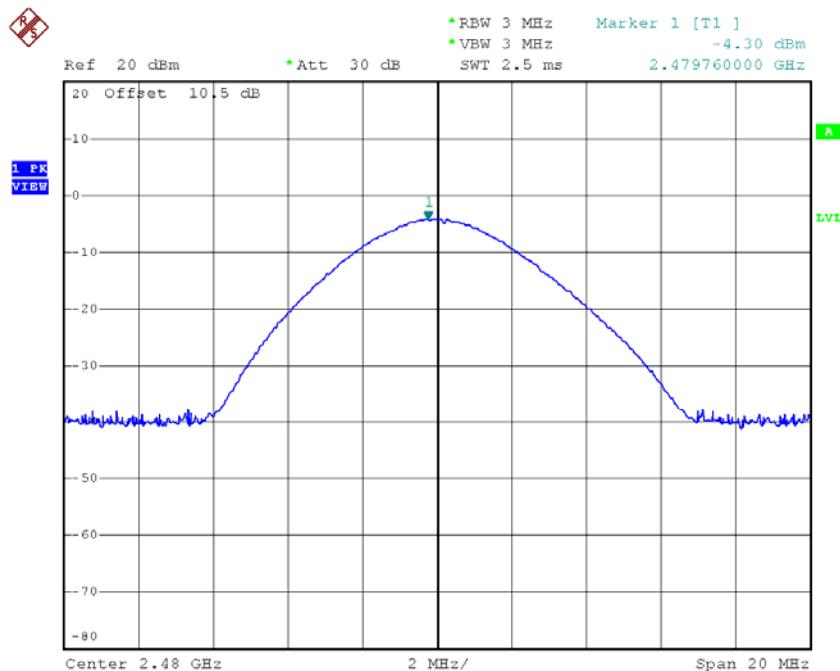


Date: 16.MAY.2016 13:53:18


**ATTACHMENT J - ANTENNA CONDUCTED SPURIOUS  
EMISSION**

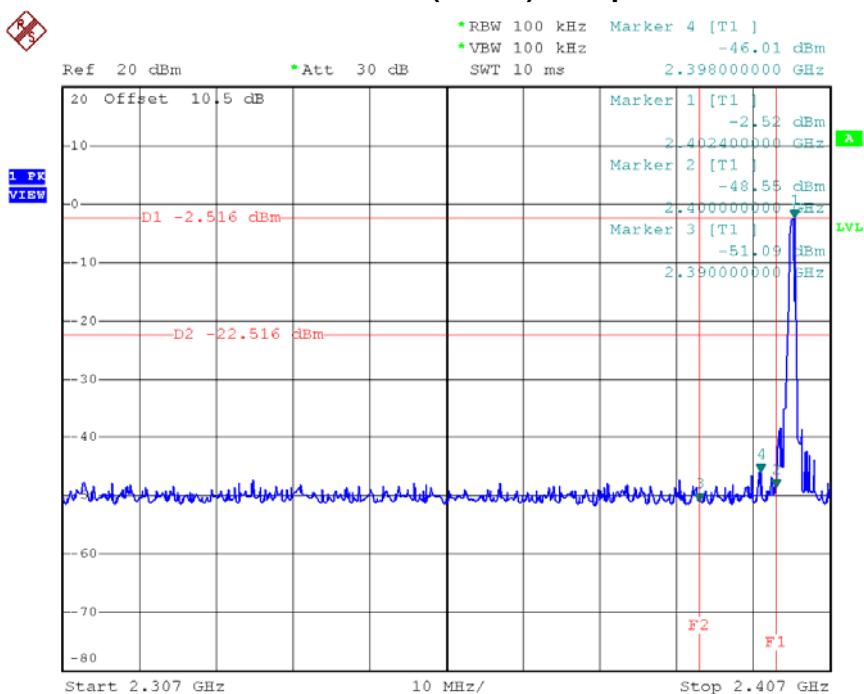**CH00 (Lower) \_1Mbps**


Date: 16.MAY.2016 11:54:38

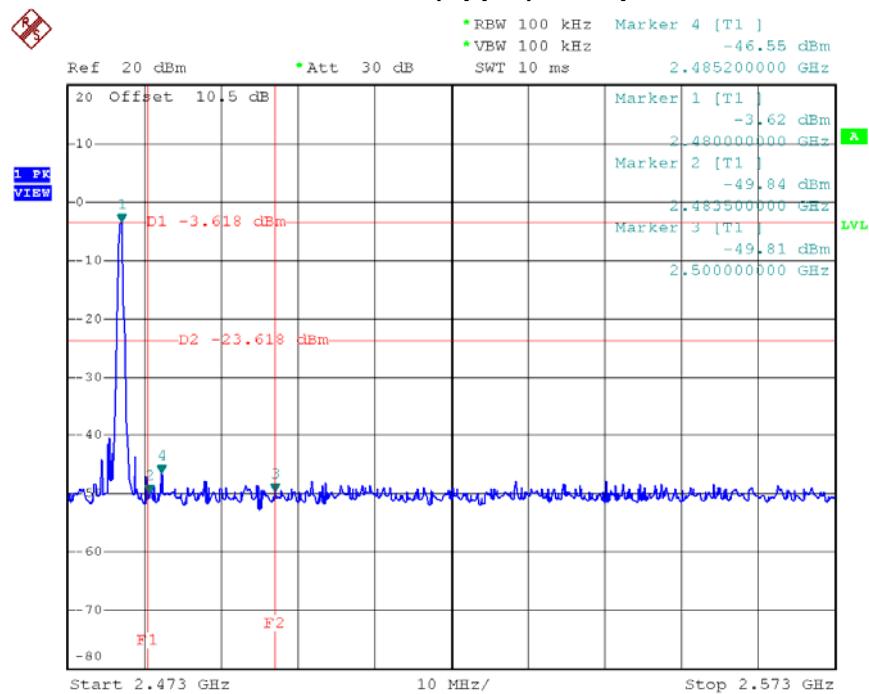**CH78 (Upper) \_1Mbps**


Date: 16.MAY.2016 11:57:17

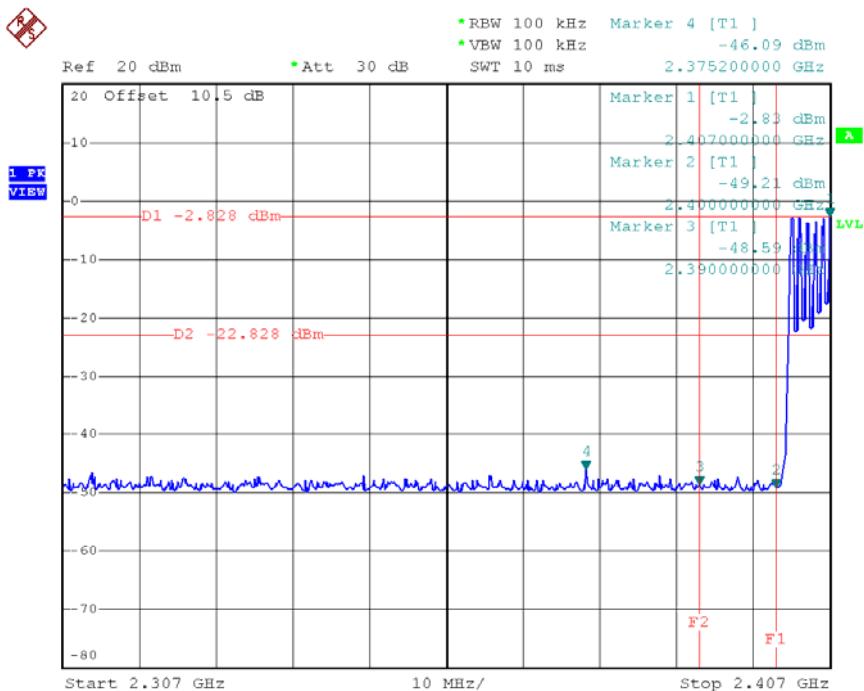**CH00 Hopping on mode (Lower)\_1Mbps**


Date: 16.MAY.2016 12:02:02

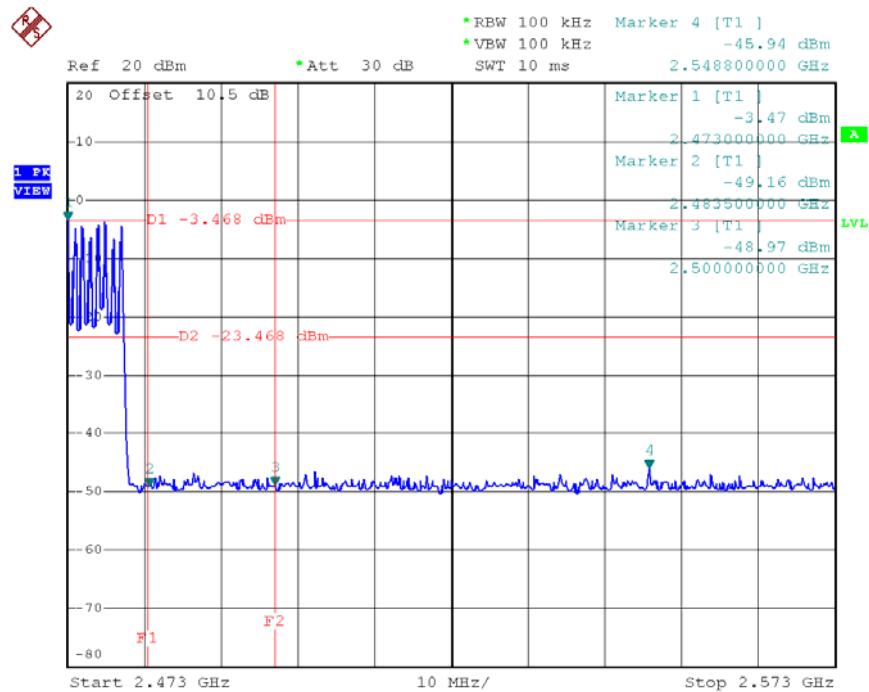**CH78 Hopping on mode (Upper)\_1Mbps**


Date: 16.MAY.2016 12:02:52

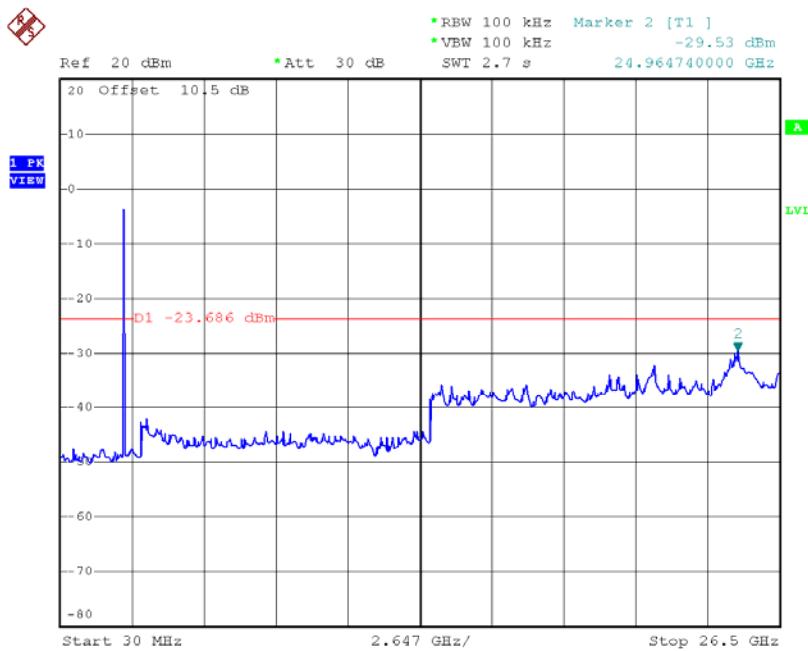**CH00 (10 Harmonic of the frequency) \_1Mbps**


Date: 16.MAY.2016 11:55:25

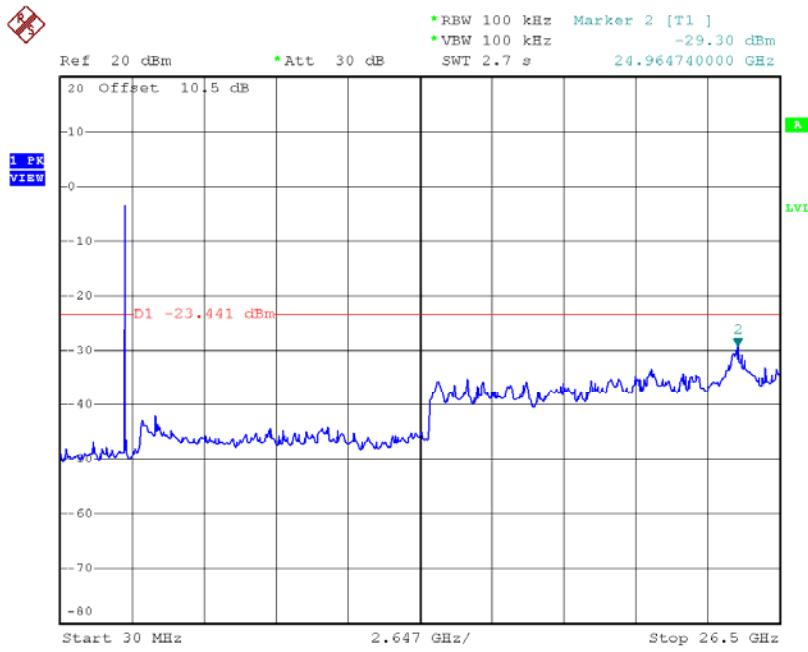**CH39 (10 Harmonic of the frequency) \_1Mbps**


Date: 16.MAY.2016 11:56:01

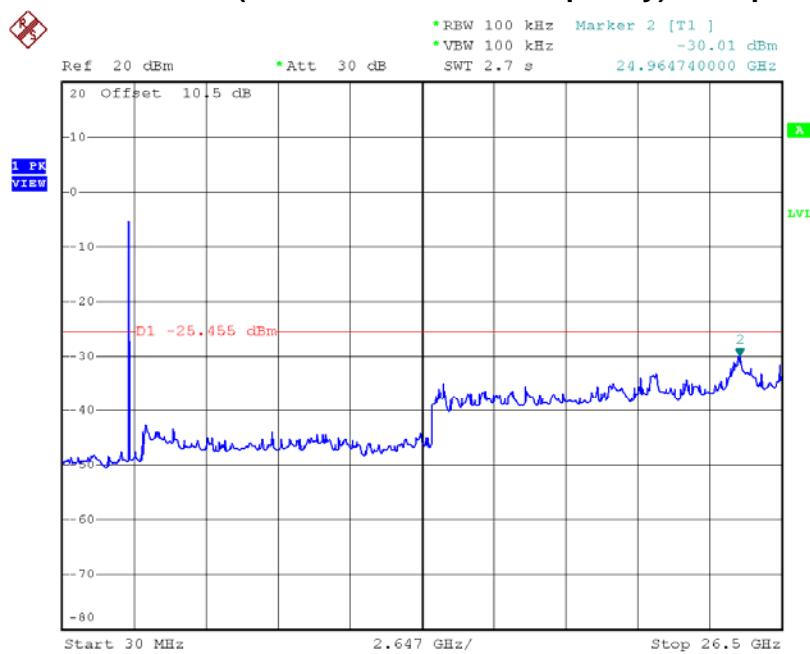**CH78 (10 Harmonic of the frequency) \_1Mbps**


Date: 16.MAY.2016 11:58:07

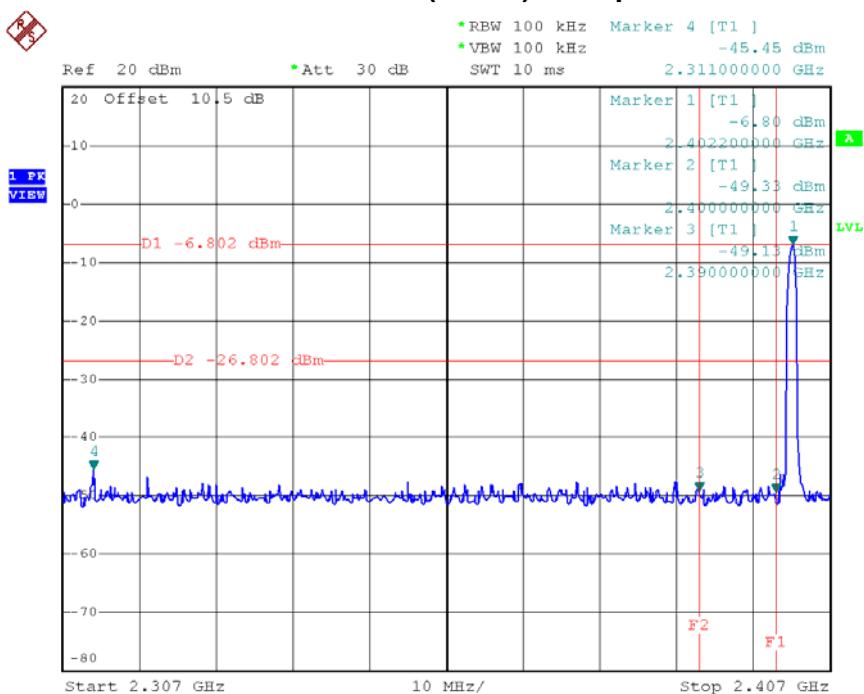**CH00 (Lower) \_3Mbps**


Date: 16.MAY.2016 13:47:52

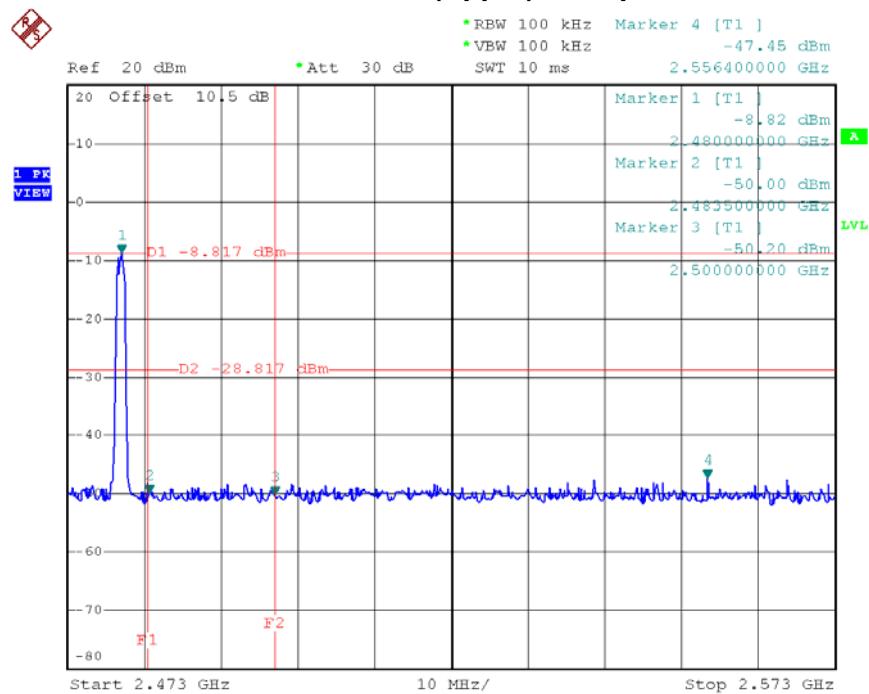**CH78 (Upper) \_3Mbps**


Date: 16.MAY.2016 13:52:39

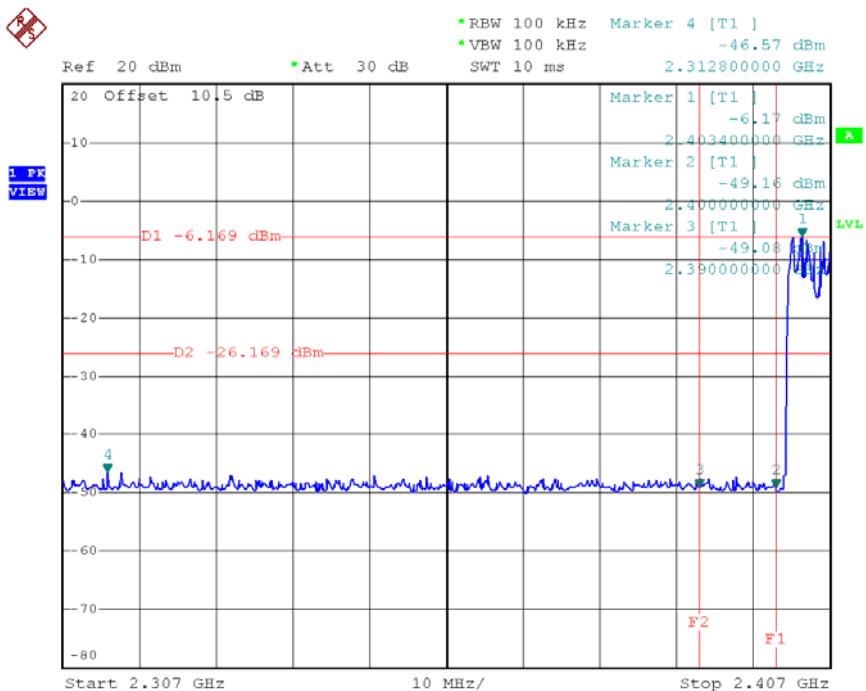**CH00 Hopping on mode (Lower) \_3Mbps**


Date: 16.MAY.2016 14:17:00

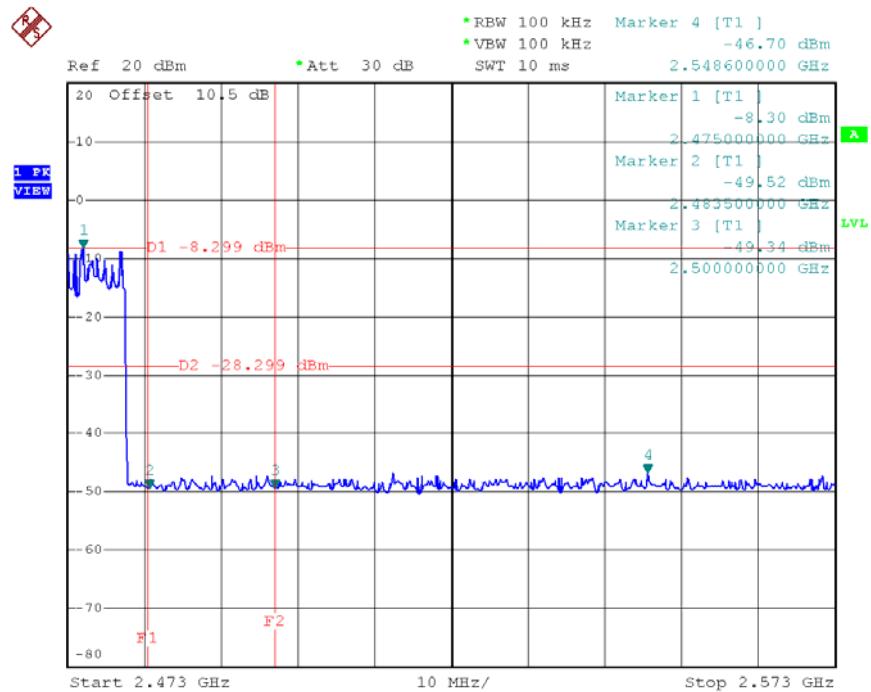**CH78 Hopping on mode (Upper) \_3Mbps**


Date: 16.MAY.2016 14:17:50

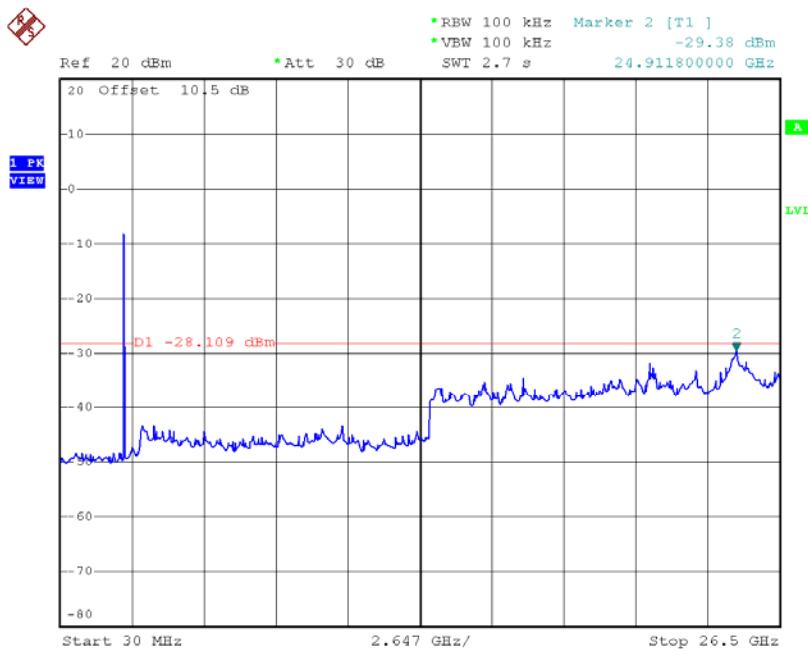**CH00 (10 Harmonic of the frequency) \_3Mbps**

Date: 16.MAY.2016 13:48:30

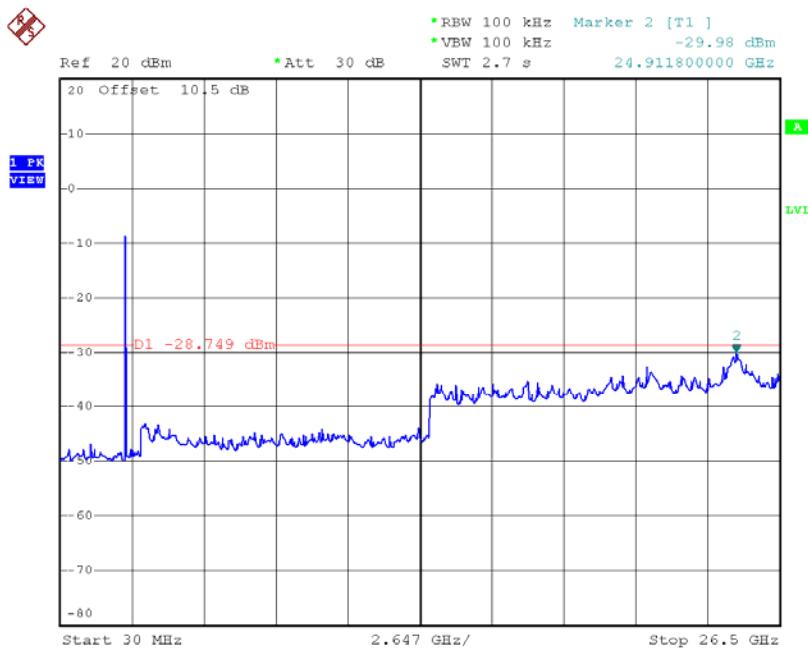**CH39 (10 Harmonic of the frequency) \_3Mbps**

Date: 16.MAY.2016 13:51:33

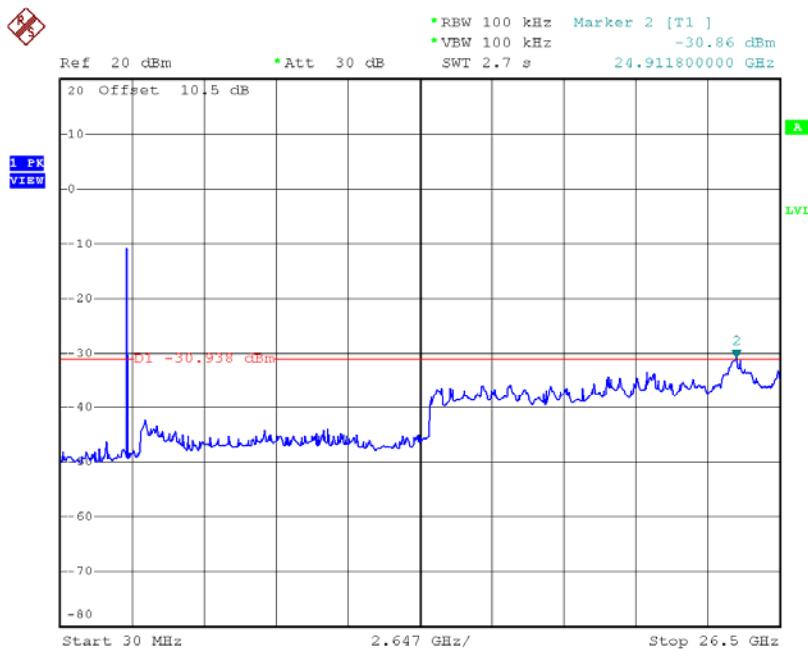**CH78 (10 Harmonic of the frequency) \_3Mbps**

Date: 16.MAY.2016 13:53:13