

FCC Radio Test Report

FCC ID: A4C-1000EA

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1705019
Equipment : SiriusXM Mount for OverDryve Pro
Test Model : SXMMT
Applicant : RM Acquisition, LLC
Address : 9855 Woods Drive Skokie, IL 60077 USA

Date of Receipt : May 09, 2017
Date of Test : May 09, 2017 ~ May 16, 2017
Issued Date : May 17, 2017
Tested by : BTL Inc.

Testing Engineer

: Rush Kao
(Rush Kao)

Technical Manager

: Jeff Yang
(Jeff Yang)

Authorized Signatory

: Andy Chiu
(Andy Chiu)

B T L I N C .

B1, No.37, Lane 365, Yang Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 RADIATED EMISSION LIMITS	14
4.2.3 TEST PROCEDURE	15
4.2.4 DEVIATION FROM TEST STANDARD	15
4.2.5 TEST SETUP	16
4.2.6 EUT OPERATING CONDITIONS	17
4.2.7 EUT TEST CONDITIONS	17
4.2.8 TEST RESULTS (9KHZ TO 30MHZ)	17
4.2.9 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)	17
4.2.10 TEST RESULTS (FIELD STRENGTH AND BAND EDGE EMISSION)	17
5 . BANDWIDTH TEST	18
5.1 APPLIED PROCEDURES / LIMIT	18
5.1.1 TEST PROCEDURE	18
5.1.2 DEVIATION FROM STANDARD	18
5.1.3 TEST SETUP	18
5.1.4 EUT OPERATION CONDITIONS	18
5.1.5 EUT TEST CONDITIONS	18
5.1.6 TEST RESULTS	18

Table of Contents	Page
6 . MEASUREMENT INSTRUMENTS LIST	19
7 . EUT TEST PHOTO	20
ATTACHMENT A - CONDUCTED EMISSION	23
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	28
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	41
ATTACHMENT D - RADIATED EMISSION (FIELD STRENGTH AND BAND EDGE EMISSION)	48
ATTACHMENT E - BANDWIDTH	55

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1705019	Original Issue.	May 17, 2017

1. CERTIFICATION

Equipment	: SiriusXM Mount for OverDryve Pro
Brand Name	: RAND McNALLY
Test Model	: SXMMT
Applicant	: RM Acquisition, LLC
Manufacturer	: RM Acquisition, LLC
Address	: 9855 Woods Drive Skokie, IL 60077 USA
Date of Test	: May 09, 2017 ~ May 16, 2017
Test Sample	: Engineering Sample
Standard(s)	: FCC Part15, Subpart C (15.239) / ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1705019) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.239) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
	15.207	Conducted Emission	PASS	
	15.209 15.239 (b) (c)	Radiated Emissions	PASS	
	15.239 (a)	20dB Bandwidth	PASS	

NOTE:

(1)" N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C05	CISPR	150 kHz ~ 30MHz	3.06

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.74

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.76
		30MHz ~ 200MHz	H	4.28
		200MHz ~ 1,000MHz	V	5.08
		200MHz ~ 1,000MHz	H	4.50

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	SiriusXM Mount for OverDryve Pro		
Brand Name	RAND McNALLY		
Test Model	SXMMT		
Model Difference	N/A		
EUT Power Rating	I/P: DC 5V		
Power Adapter Manufacturer	Chicony	Model	W12-010N3A
	DVE	Model	DDA-18A-05 053350
Power Adapter Power Rating	For W12-010N3A I/P: AC 100-240V 50/60Hz 0.3A O/P: DC 5V 2A		
	For DDA-18A-05 053350 I/P: DC 12/24V 2A O/P: DC 5.3V 3.5A		
Battery Pack Manufacturer	McNair New Power	Model	MLP4110172
Product Description	Operation Frequency		88-108 MHz
	Modulation Technology		FM
	Antenna Type		Dipole
	Channel Separation		200 KHz
	Field Strength		42.48 dBuV/m (AVG Max) 43.58 dBuV/m (Peak Max)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List

Channel	Frequency (MHz)
Low channel (L)	88.10
Middle channel (M)	98.10
High channel (H)	107.90

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (2)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (2)

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (2)

Note:

- (1) The measurements are performed at the high, middle, low available channels.
 - (2) The FM function is only supported when connected to Smart Mount.
- Both voltages DC12/24V are tested, only the worst cases are recorded in this report.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

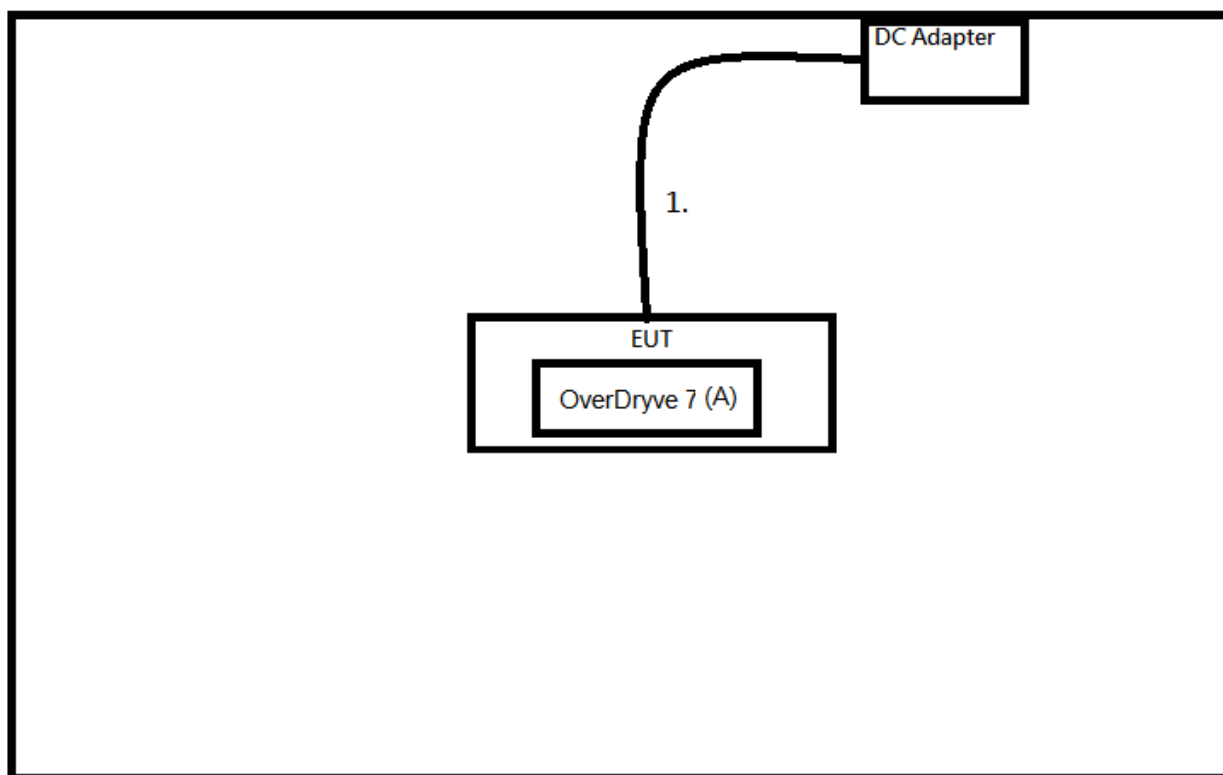

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	OverDryve 7	RAND McNALLY	OD7	A4C-10009A	00017F

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	2m	Power Cable

Note:

(1) The support equipment was authorized by Declaration of Conformity (DOC).

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.5 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

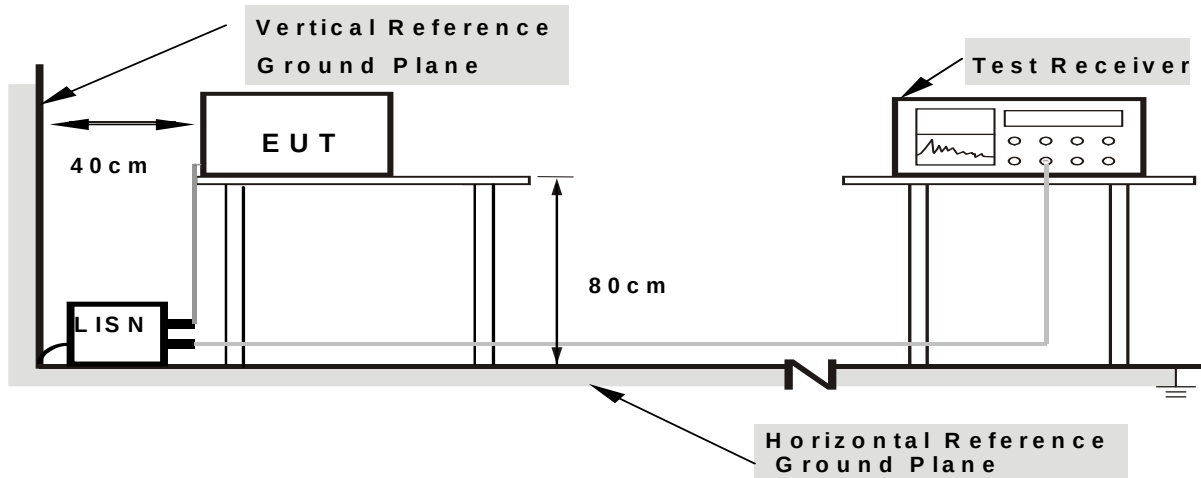

Note: 1.Support units were connected to second LISN .
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: DC 12/24V

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “ N/A ” denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (FCC 15.209)

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 RADIATED EMISSION LIMITS (FCC 15.239)

According to 15.239 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
88 to 108	67.96	47.96

Band edge emissions outside of the frequency bands shown in below table.

Outside Frequency Band Edge	Limit (dBuV/m) at 3m
Below 88 MHz	40.0 (QP)
Above 108 MHz	43.5 (QP)

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

Receiver Parameter	Setting
Center Frequency	Fundamental Frequency
RBW	120 KHz
Detector	AV or Peak

4.2.3 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

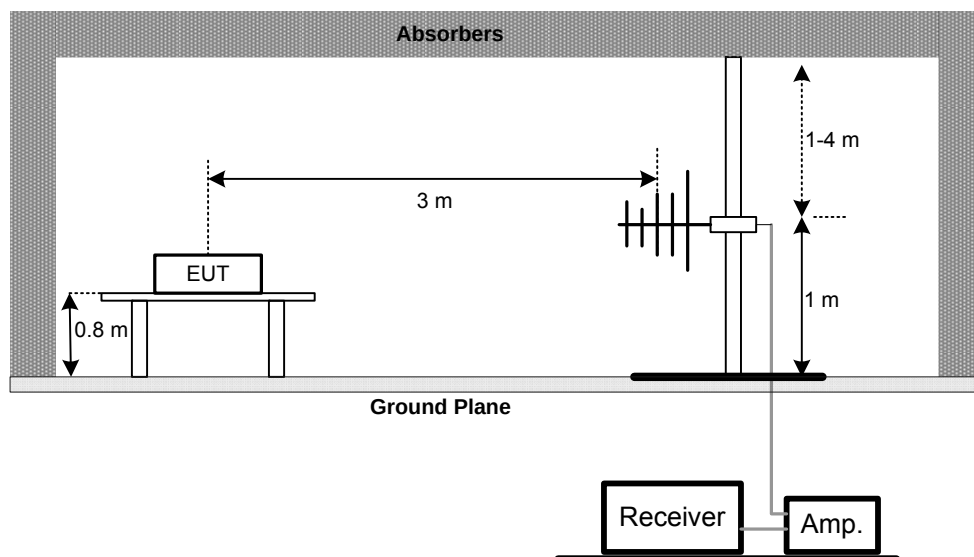

(B) For radiated emissions below 30MHz

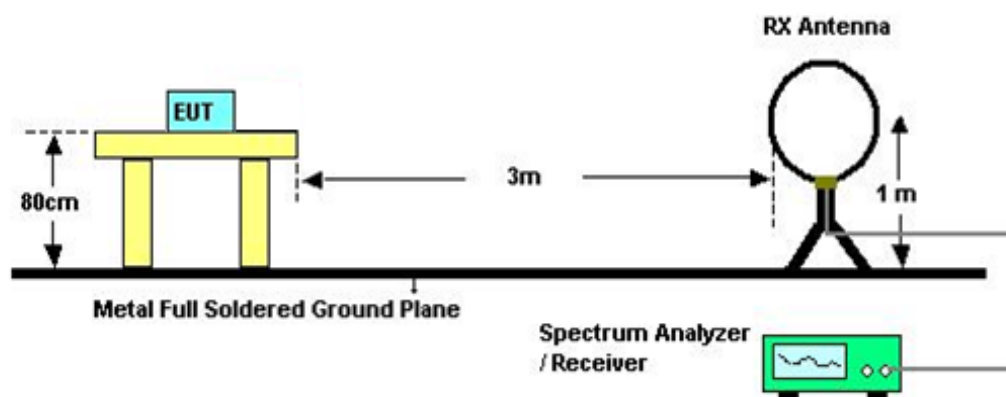

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5** unless otherwise a special operating condition is specified in the follows during the testing.

4.2.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 45%

Test Voltage: DC 12V

4.2.8 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.9 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.10 TEST RESULTS (FIELD STRENGTH AND BAND EDGE EMISSION)

Please refer to the Attachment C.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

5. BANDWIDTH TEST

5.1 Applied procedures / limit

FCC Part15 (15.239) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.239(b)	Bandwidth	Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.	88-108	PASS

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 10KHz, VBW=30KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 60%
 Test Voltage: DC 12V

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Feb. 08, 2018
2	Test Cable	TIMES	CFD300-NM-BM-6000	170241	Feb. 28, 2018
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 08, 2017
4	Measurement Software	Farad	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	EMC02325	980217	Dec.29,2017
2	Test Cable	EMCI	EMC104-SM-SM-8000	8m	Jan.04,2018
3	Test Cable	EMCI	EMC104-SM-SM-800	150207	Jan.04,2018
4	Test Cable	EMCI	EEMC104-SM-SM-3000	151205	Jan.04,2018
5	Loop Ant	EMCO	6502	42960	Nov.24,2017
6	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan.16,2018
7	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan.16,2018

20 dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jul. 27, 2017


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX_DC 12V


Line

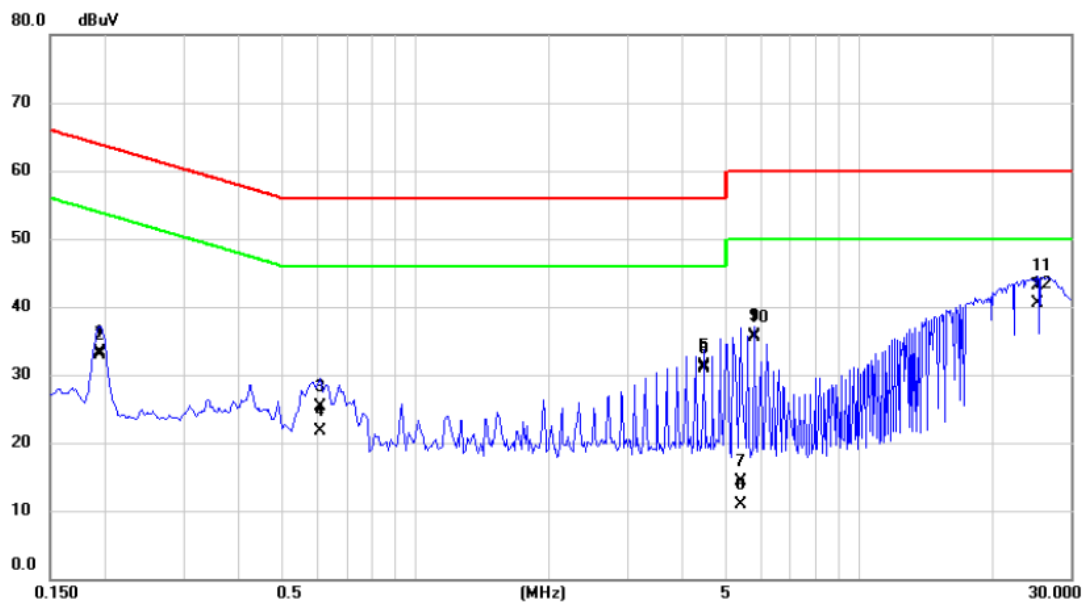

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1948	23.60	9.74	33.34	63.83	-30.49	QP	
2		0.1948	23.20	9.74	32.94	53.83	-20.89	AVG	
3		0.6080	15.50	9.77	25.27	56.00	-30.73	QP	
4		0.6080	12.00	9.77	21.77	46.00	-24.23	AVG	
5		4.4690	21.40	9.87	31.27	56.00	-24.73	QP	
6		4.4690	21.00	9.87	30.87	46.00	-15.13	AVG	
7		5.4000	4.40	9.90	14.30	60.00	-45.70	QP	
8		5.4000	1.10	9.90	11.00	50.00	-39.00	AVG	
9		5.8000	25.90	9.90	35.80	60.00	-24.20	QP	
10		5.8000	25.60	9.90	35.50	50.00	-14.50	AVG	
11		25.2500	33.20	9.94	43.14	60.00	-16.86	QP	
12	*	25.2500	30.60	9.94	40.54	50.00	-9.46	AVG	

Test Mode: TX_DC 12V


Neutral

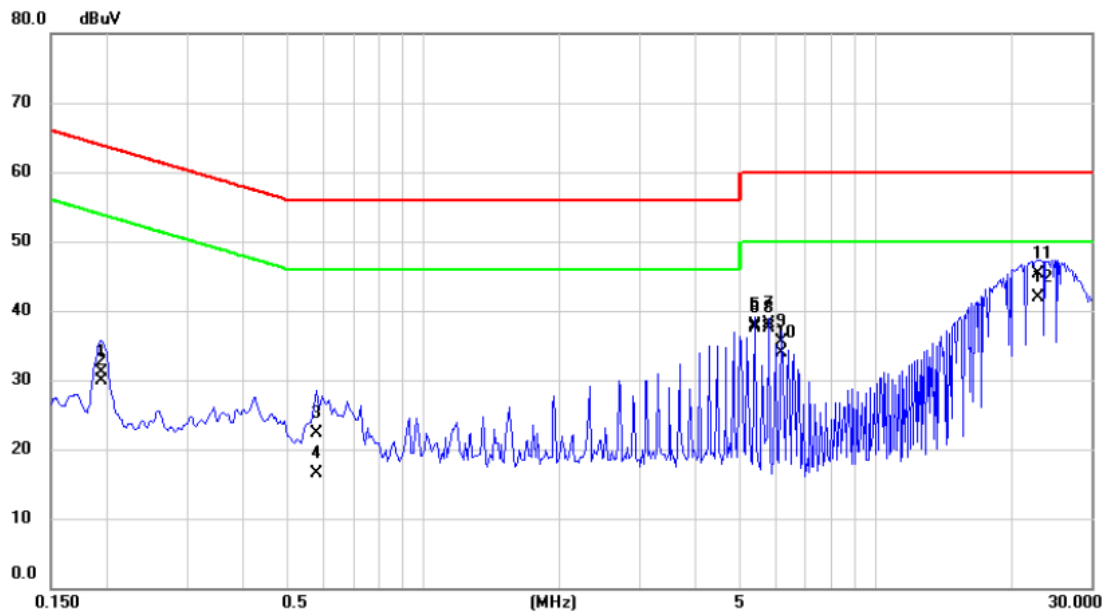

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1941	21.40	9.68	31.08	63.86	-32.78	QP	
2		0.1941	20.30	9.68	29.98	53.86	-23.88	AVG	
3		0.5810	12.60	9.71	22.31	56.00	-33.69	QP	
4		0.5810	6.80	9.71	16.51	46.00	-29.49	AVG	
5		5.4000	28.00	9.86	37.86	60.00	-22.14	QP	
6		5.4000	27.70	9.86	37.56	50.00	-12.44	AVG	
7		5.8000	28.30	9.87	38.17	60.00	-21.83	QP	
8		5.8000	27.60	9.87	37.47	50.00	-12.53	AVG	
9		6.2000	25.70	9.88	35.58	60.00	-24.42	QP	
10		6.2000	24.10	9.88	33.98	50.00	-16.02	AVG	
11		22.9000	35.30	10.03	45.33	60.00	-14.67	QP	
12	*	22.9000	31.80	10.03	41.83	50.00	-8.17	AVG	

Test Mode:	TX_DC 24V
------------	-----------


Line

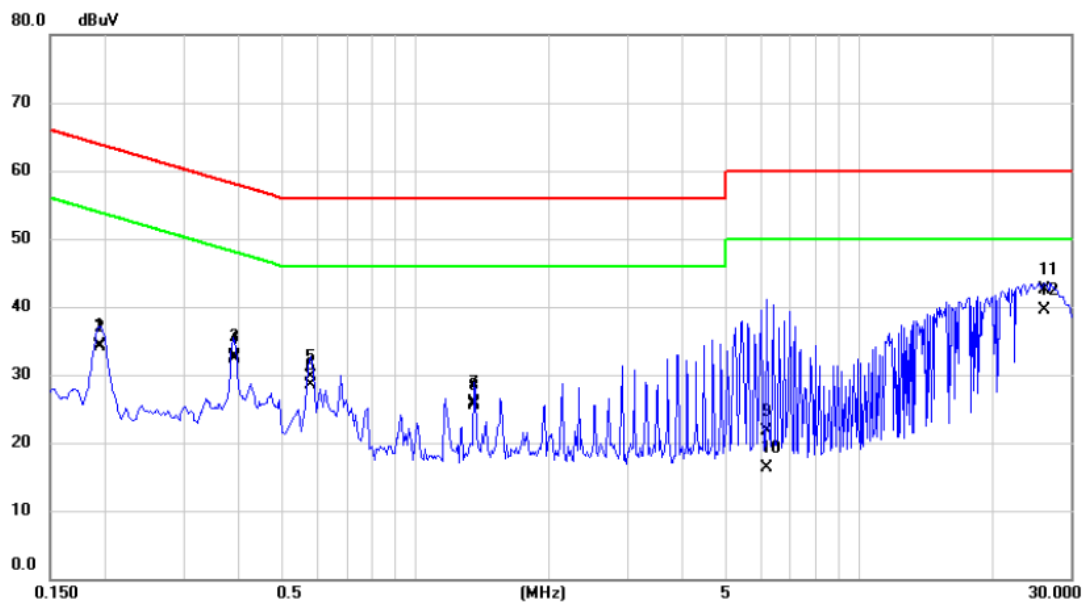

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1948	24.60	9.74	34.34	63.83	-29.49	QP	
2		0.1948	24.30	9.74	34.04	53.83	-19.79	AVG	
3		0.3894	22.90	9.75	32.65	58.08	-25.43	QP	
4		0.3894	22.60	9.75	32.35	48.08	-15.73	AVG	
5		0.5810	19.90	9.77	29.67	56.00	-26.33	QP	
6		0.5810	18.70	9.77	28.47	46.00	-17.53	AVG	
7		1.3550	16.00	9.81	25.81	56.00	-30.19	QP	
8		1.3550	15.70	9.81	25.51	46.00	-20.49	AVG	
9		6.2000	11.70	9.91	21.61	60.00	-38.39	QP	
10		6.2000	6.30	9.91	16.21	50.00	-33.79	AVG	
11		26.1000	32.50	9.92	42.42	60.00	-17.58	QP	
12	*	26.1000	29.60	9.92	39.52	50.00	-10.48	AVG	

Test Mode:	TX_DC 24V
------------	-----------

Neutral

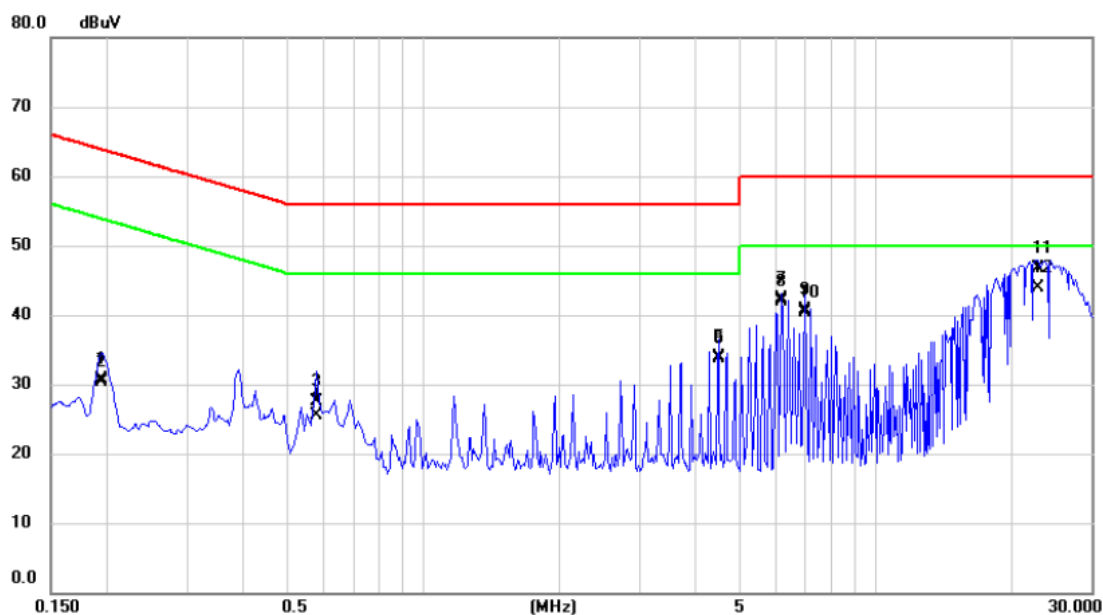


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1948	21.00	9.68	30.68	63.83	-33.15	QP	
2		0.1948	20.70	9.68	30.38	53.83	-23.45	AVG	
3		0.5810	17.70	9.71	27.41	56.00	-28.59	QP	
4		0.5810	15.80	9.71	25.51	46.00	-20.49	AVG	
5		4.4870	24.10	9.83	33.93	56.00	-22.07	QP	
6		4.4870	23.80	9.83	33.63	46.00	-12.37	AVG	
7		6.2000	32.40	9.88	42.28	60.00	-17.72	QP	
8		6.2000	32.10	9.88	41.98	50.00	-8.02	AVG	
9		7.0000	30.80	9.90	40.70	60.00	-19.30	QP	
10		7.0000	30.40	9.90	40.30	50.00	-9.70	AVG	
11		22.8500	36.60	10.03	46.63	60.00	-13.37	QP	
12	*	22.8500	33.80	10.03	43.83	50.00	-6.17	AVG	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX_FM 88.10 MHz
------------	-----------------

OPEN

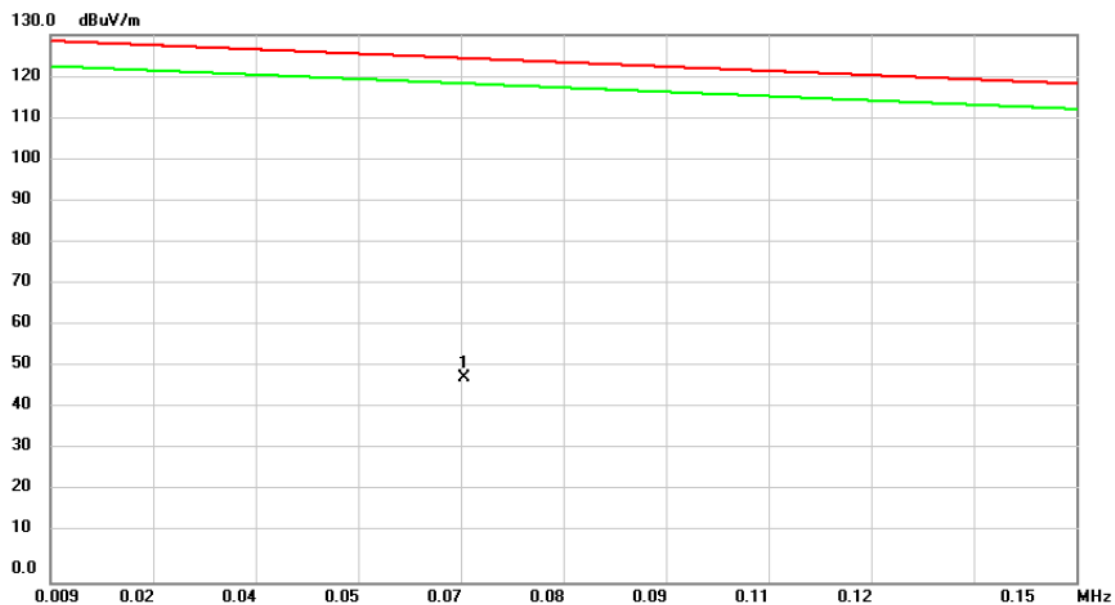

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0658	35.94	12.72	48.66	124.42	-75.76	peak	

Test Mode: TX_FM 88.10 MHz


OPEN



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2694	41.83	11.85	53.68	109.72	-56.04	peak	
2		0.9460	30.45	11.98	42.43	69.74	-27.31	peak	
3	*	1.3440	27.36	11.85	39.21	66.19	-26.98	peak	
4		2.6972	19.93	11.24	31.17	69.54	-38.37	peak	
5		4.5678	15.65	11.34	26.99	69.54	-42.55	peak	
6		9.5826	11.13	11.31	22.44	69.54	-47.10	peak	

Test Mode:	TX_FM 88.10 MHz
------------	-----------------

CLOSE

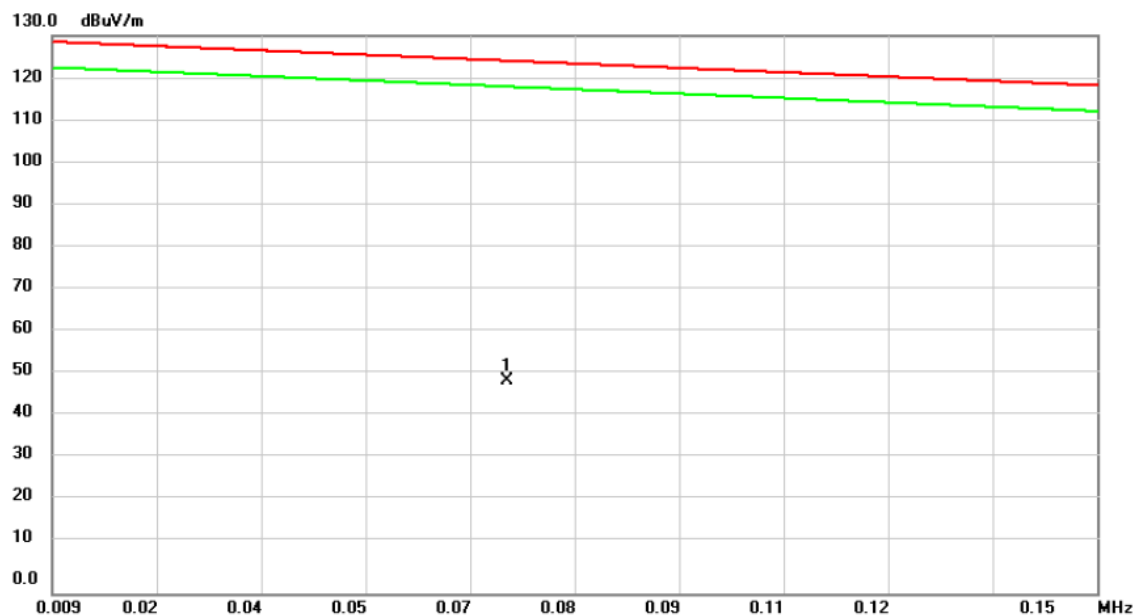

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0704	37.08	12.63	49.71	124.09	-74.38	peak	

Test Mode: TX_FM 88.10 MHz


CLOSE



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2694	42.03	11.85	53.88	109.72	-55.84	peak	
2	*	0.5878	35.34	11.84	47.18	72.93	-25.75	peak	
3		1.1450	27.95	11.93	39.88	67.96	-28.08	peak	
4		1.5430	25.61	11.76	37.37	64.41	-27.04	peak	
5		2.3390	21.25	11.40	32.65	69.54	-36.89	peak	
6		3.6922	17.26	11.20	28.46	69.54	-41.08	peak	

Test Mode:	TX_FM 98.10 MHz
------------	-----------------


OPEN

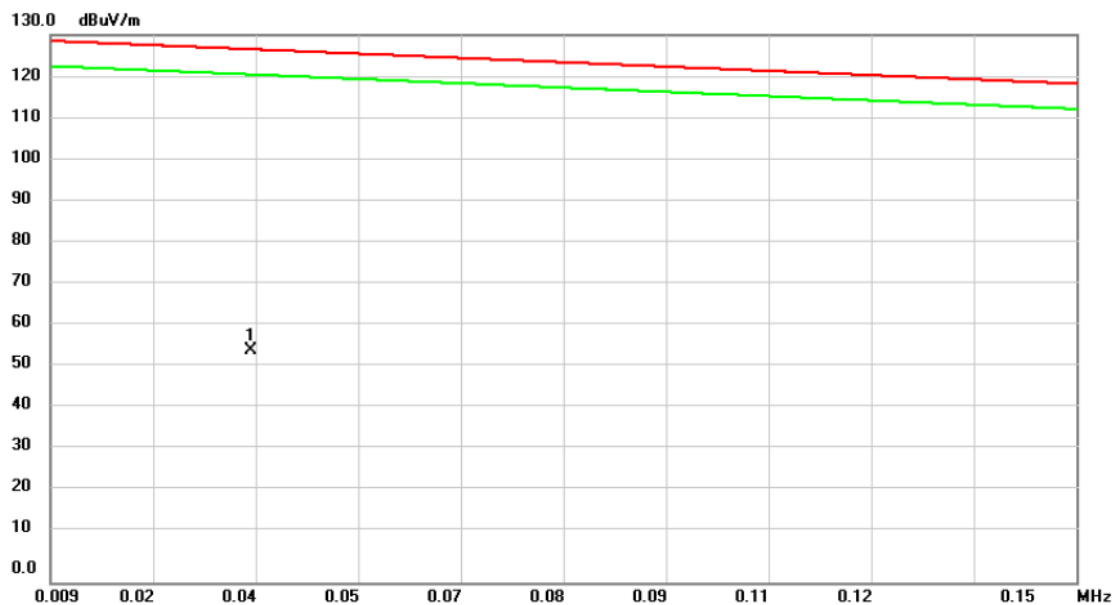

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0366	40.84	14.34	55.18	126.53	-71.35	peak	

Test Mode: TX_FM 98.10 MHz


OPEN

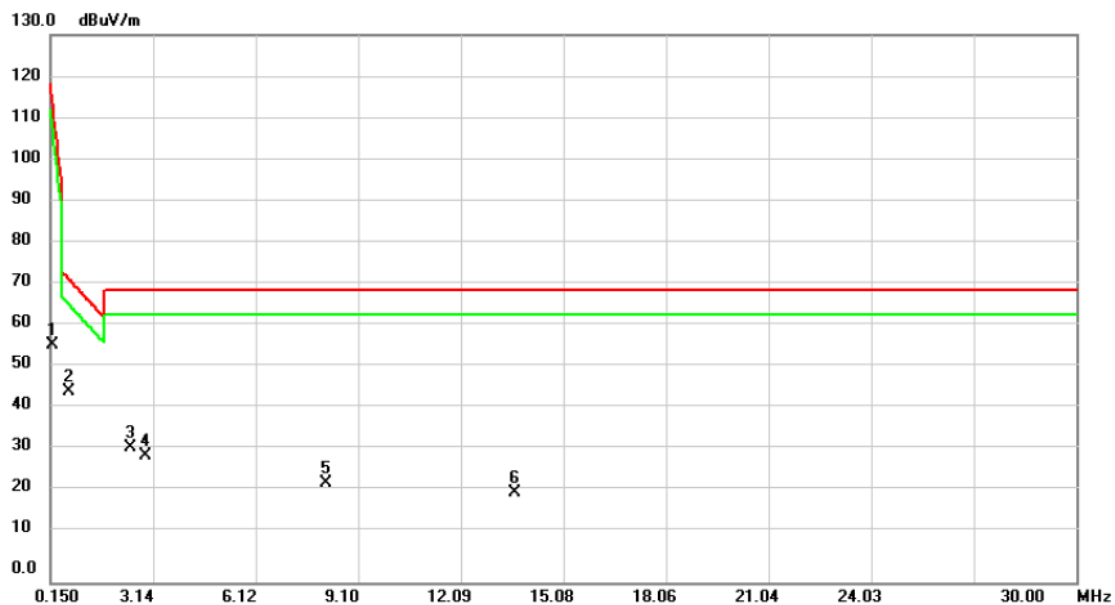

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1898	44.57	11.97	56.54	115.47	-58.93	peak	
2	*	0.6674	33.36	11.87	45.23	72.22	-26.99	peak	
3		2.4584	20.79	11.34	32.13	69.54	-37.41	peak	
4		2.8962	18.89	11.15	30.04	69.54	-39.50	peak	
5		8.1498	12.19	11.34	23.53	69.54	-46.01	peak	
6		13.6422	9.96	11.19	21.15	69.54	-48.39	peak	

Test Mode: TX_FM 98.10 MHz

CLOSE

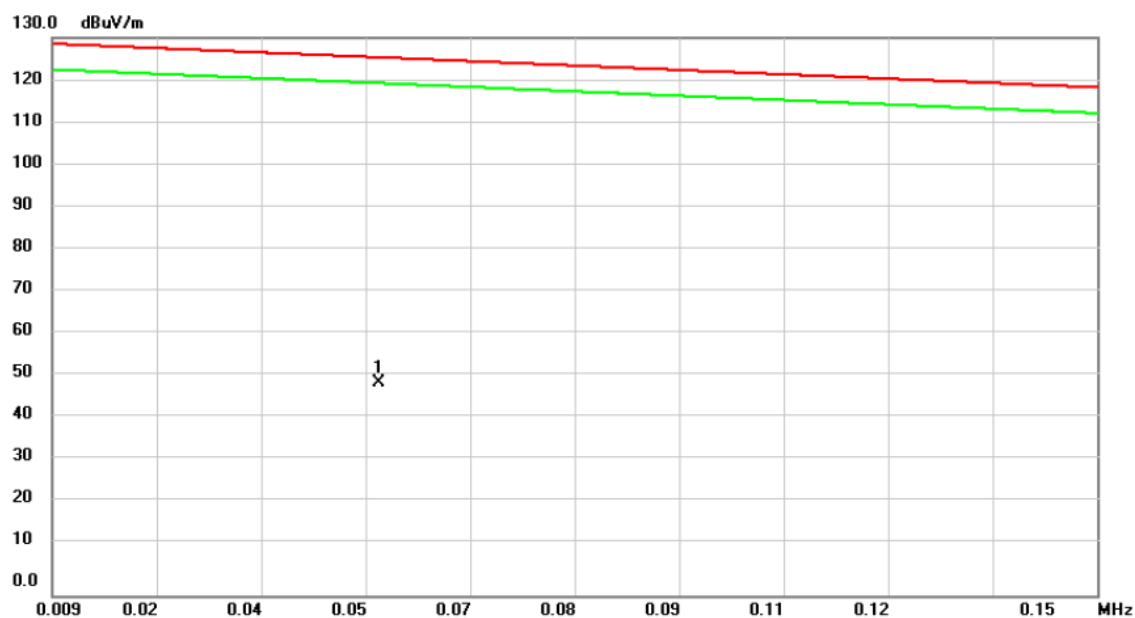

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0530	36.69	12.95	49.64	125.34	-75.70	peak	

Test Mode: TX_FM 98.10 MHz


CLOSE



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2694	42.03	11.85	53.88	109.72	-55.84	peak	
2	*	0.6674	33.71	11.87	45.58	72.22	-26.64	peak	
3		1.0256	29.13	11.99	41.12	69.03	-27.91	peak	
4		2.7370	20.08	11.22	31.30	69.54	-38.24	peak	
5		4.3687	16.25	11.31	27.56	69.54	-41.98	peak	
6		16.2690	8.64	11.11	19.75	69.54	-49.79	peak	

Test Mode: TX_FM 107.90 MHz


OPEN

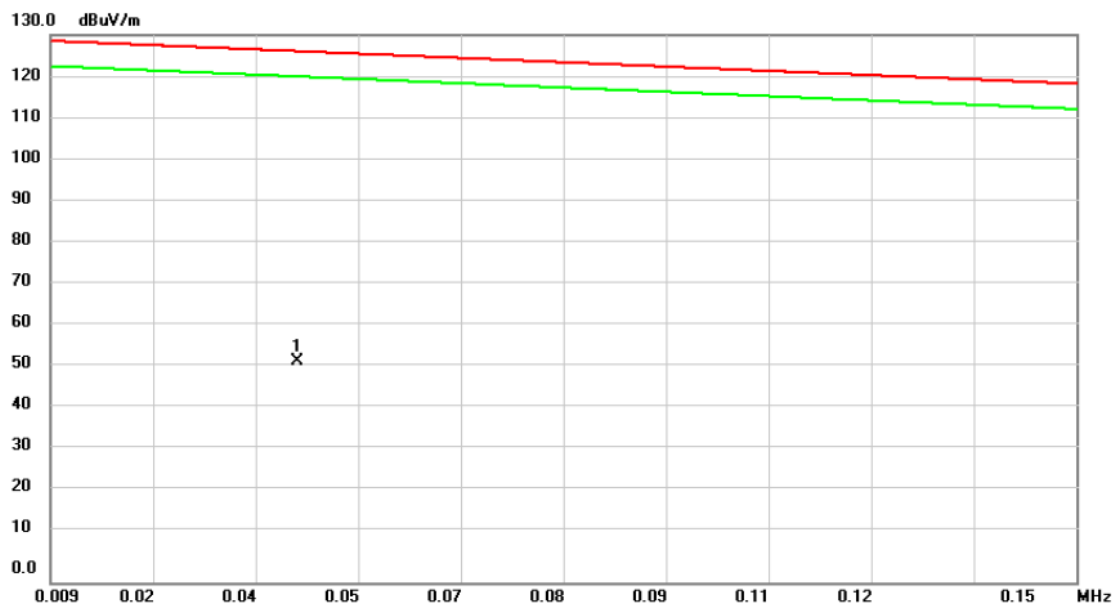

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0430	38.79	13.70	52.49	126.07	-73.58	peak	

Test Mode: TX_FM 107.90 MHz


OPEN

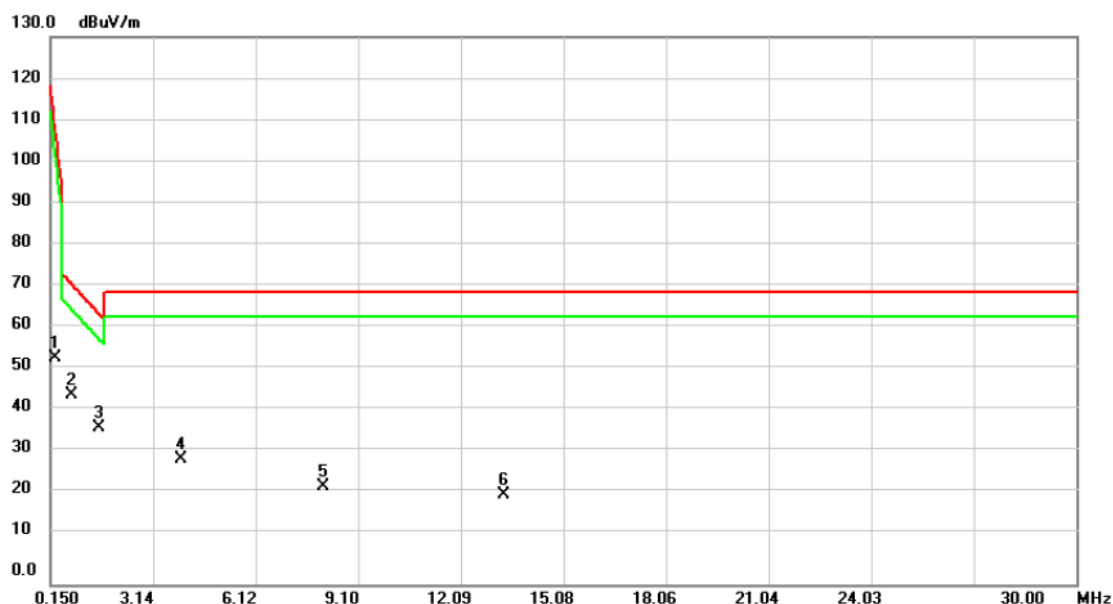

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2694	41.83	11.85	53.68	109.72	-56.04	peak	
2	*	0.7470	33.04	11.90	44.94	71.51	-26.57	peak	
3		1.5430	25.44	11.76	37.20	64.41	-27.21	peak	
4		3.9310	18.34	11.24	29.58	69.54	-39.96	peak	
5		8.0702	11.97	11.34	23.31	69.54	-46.23	peak	
6		13.3238	9.94	11.20	21.14	69.54	-48.40	peak	

Test Mode:	TX_FM 107.90 MHz
------------	------------------

CLOSE

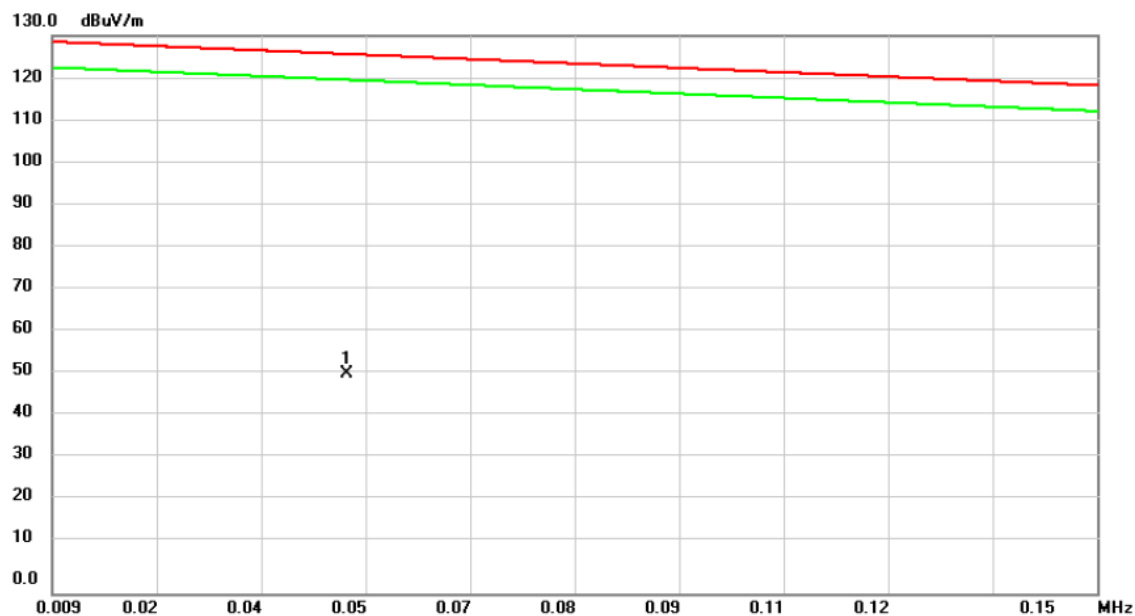

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0487	38.21	13.13	51.34	125.65	-74.31	peak	

Test Mode: TX_FM 107.90 MHz

CLOSE




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.3092	41.29	11.80	53.09	106.85	-53.76	peak	
2	*	1.1450	27.95	11.93	39.88	67.96	-28.08	peak	
3		2.7370	20.08	11.22	31.30	69.54	-38.24	peak	
4		5.8812	14.26	11.38	25.64	69.54	-43.90	peak	
5		10.8562	10.35	11.27	21.62	69.54	-47.92	peak	
6		19.4132	8.70	11.02	19.72	69.54	-49.82	peak	

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX_FM 88.10 MHz
------------	-----------------


Vertical

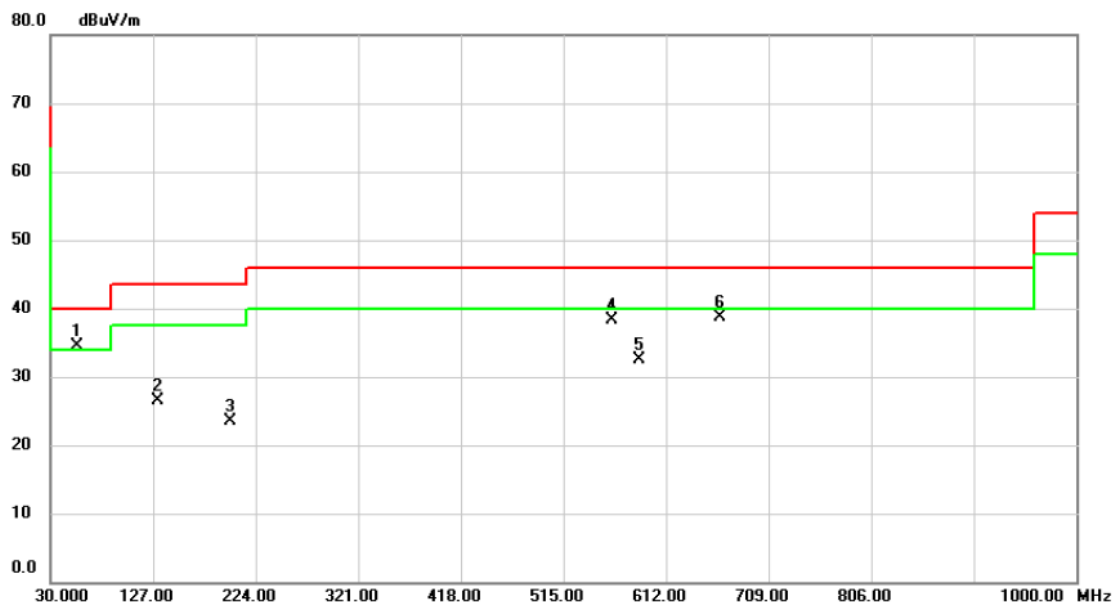

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	42.99	-8.45	34.54	40.00	-5.46	peak	
2		131.8500	36.09	-9.50	26.59	43.50	-16.91	peak	
3		199.7500	34.19	-10.64	23.55	43.50	-19.95	peak	
4		560.5900	39.81	-1.45	38.36	46.00	-7.64	peak	
5		586.7800	33.28	-0.77	32.51	46.00	-13.49	peak	
6		663.4100	38.43	0.21	38.64	46.00	-7.36	peak	

Test Mode: TX_FM 88.10 MHz


Horizontal

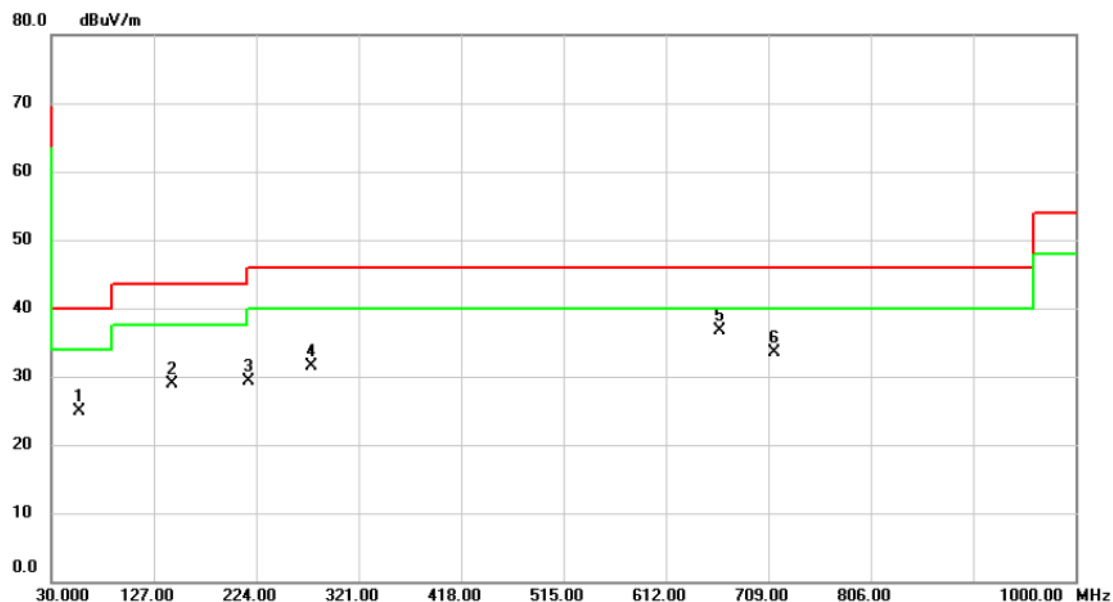

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		56.1900	33.47	-8.49	24.98	40.00	-15.02	peak	
2		144.4600	37.93	-9.07	28.86	43.50	-14.64	peak	
3		216.2400	40.11	-10.87	29.24	46.00	-16.76	peak	
4		276.3800	39.68	-8.18	31.50	46.00	-14.50	peak	
5	*	663.4100	36.42	0.21	36.63	46.00	-9.37	peak	
6		714.8200	32.38	1.17	33.55	46.00	-12.45	peak	

Test Mode: TX_FM 98.10 MHz


Vertical

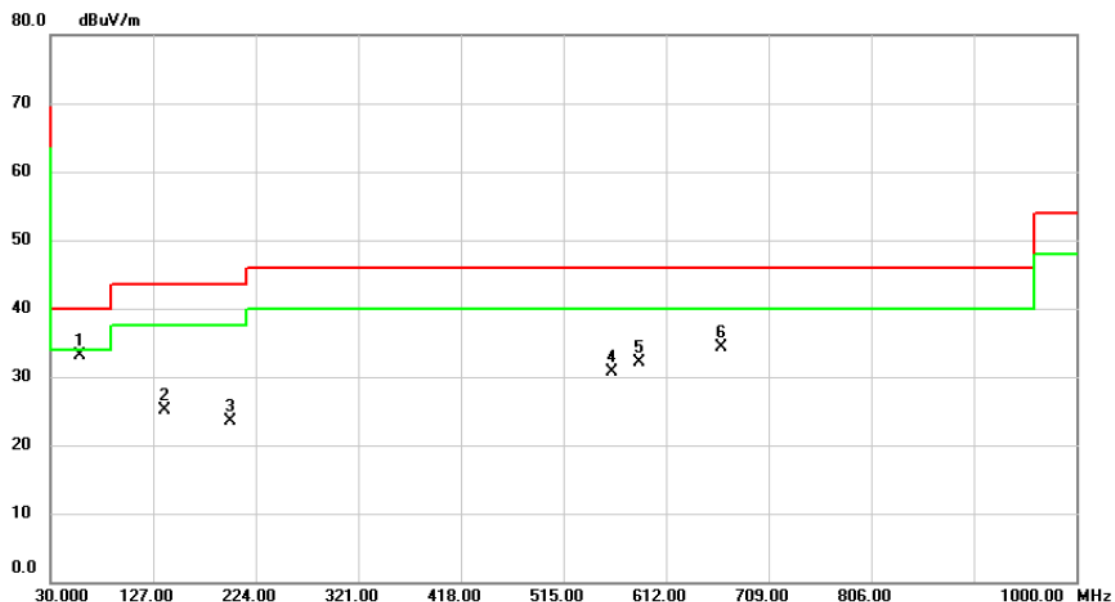

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	57.1600	41.71	-8.51	33.20	40.00	-6.80	peak	
2		137.6700	34.37	-9.25	25.12	43.50	-18.38	peak	
3		199.7500	34.07	-10.64	23.43	43.50	-20.07	peak	
4		560.5900	32.23	-1.45	30.78	46.00	-15.22	peak	
5		586.7800	32.96	-0.77	32.19	46.00	-13.81	peak	
6		664.3800	34.06	0.23	34.29	46.00	-11.71	peak	

Test Mode: TX_FM 98.10 MHz


Horizontal

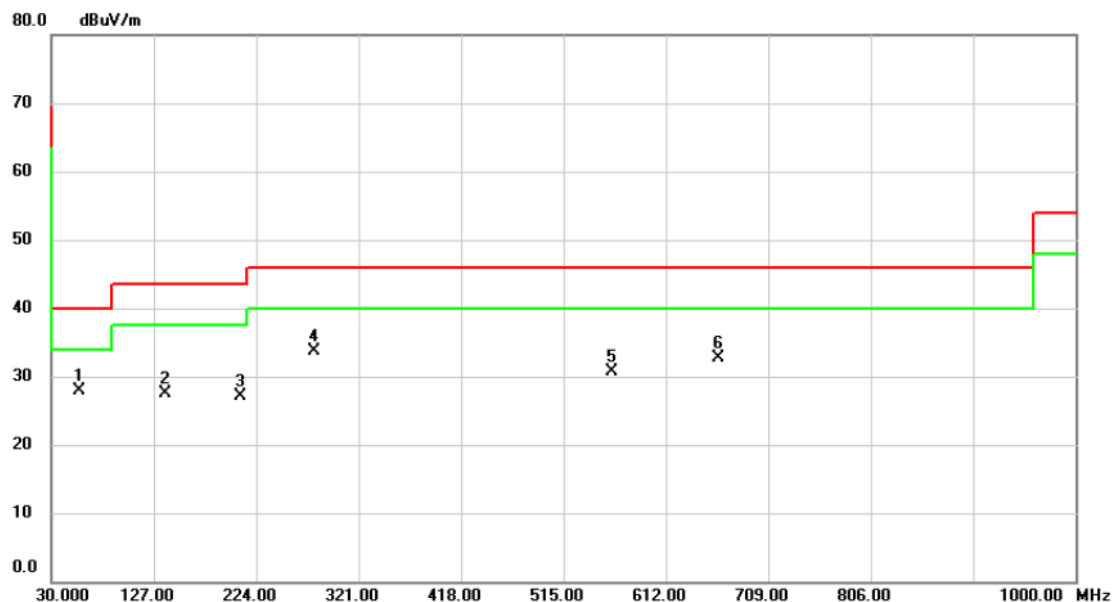

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	56.1900	36.37	-8.49	27.88	40.00	-12.12	peak	
2		137.6700	36.68	-9.25	27.43	43.50	-16.07	peak	
3		208.4800	37.95	-10.88	27.07	43.50	-16.43	peak	
4		278.3200	41.80	-8.10	33.70	46.00	-12.30	peak	
5		560.5900	32.10	-1.45	30.65	46.00	-15.35	peak	
6		661.4700	32.60	0.17	32.77	46.00	-13.23	peak	

Test Mode: TX_FM 107.90 MHz


Vertical

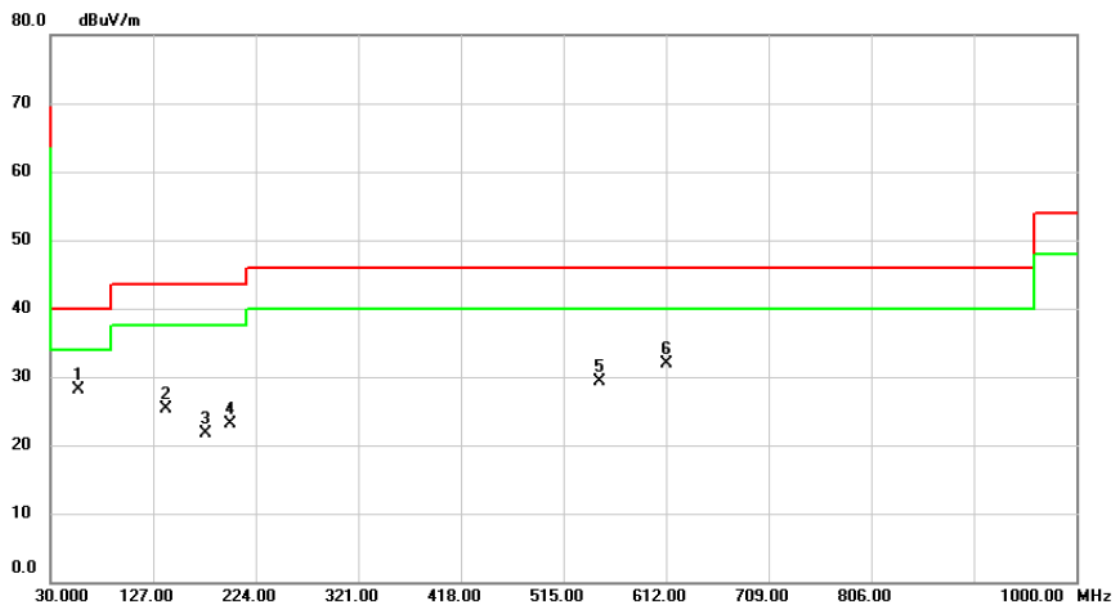

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.1900	36.63	-8.49	28.14	40.00	-11.86	peak	
2		139.6100	34.55	-9.19	25.36	43.50	-18.14	peak	
3		176.4700	30.94	-9.25	21.69	43.50	-21.81	peak	
4		199.7500	33.72	-10.64	23.08	43.50	-20.42	peak	
5		548.9500	30.99	-1.75	29.24	46.00	-16.76	peak	
6		612.0000	32.15	-0.33	31.82	46.00	-14.18	peak	

Test Mode: TX_FM 107.90 MHz

Horizontal

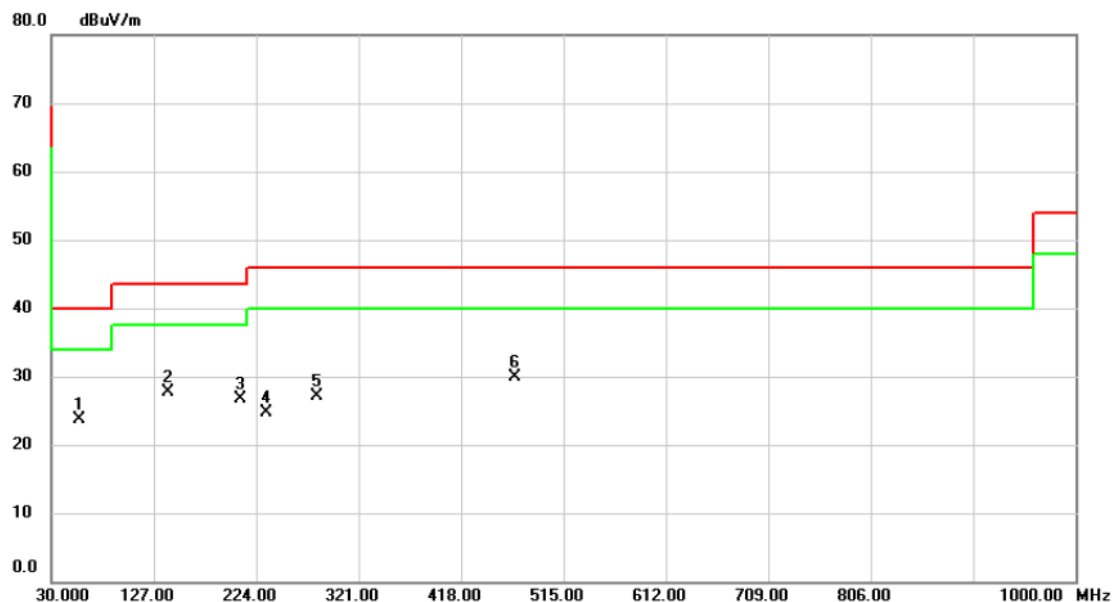

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		56.1900	32.27	-8.49	23.78	40.00	-16.22	peak	
2	*	140.5800	36.82	-9.15	27.67	43.50	-15.83	peak	
3		208.4800	37.55	-10.88	26.67	43.50	-16.83	peak	
4		233.7000	34.59	-9.84	24.75	46.00	-21.25	peak	
5		281.2300	35.07	-7.98	27.09	46.00	-18.91	peak	
6		468.4400	33.17	-3.25	29.92	46.00	-16.08	peak	

ATTACHMENT D - RADIATED EMISSION (FIELD STRENGTH AND BAND EDGE EMISSION)

Test Mode: TX_FM 88.10 MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		88.1000	45.22	-12.96	32.26	68.00	-35.74	peak	
2	*	88.1000	43.72	-12.96	30.76	48.00	-17.24	AVG	

Test Mode: TX_FM 88.10 MHz


Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		88.1000	50.47	-12.96	37.51	68.00	-30.49	peak	
2	*	88.1000	49.64	-12.96	36.68	48.00	-11.32	AVG	

Test Mode:	TX_FM 98.10 MHz
------------	-----------------

Vertical

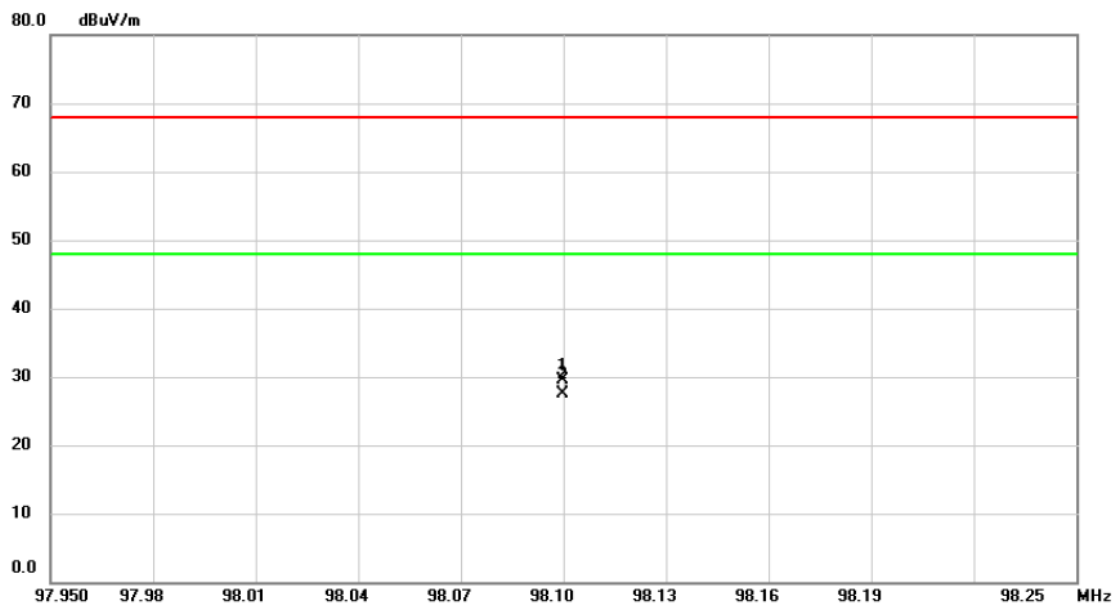

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		98.1000	42.06	-12.54	29.52	68.00	-38.48	peak	
2	*	98.1000	39.98	-12.54	27.44	48.00	-20.56	AVG	

Test Mode:	TX_FM 98.10 MHz
------------	-----------------


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		98.1000	56.12	-12.54	43.58	68.00	-24.42	peak	
2	*	98.1000	55.02	-12.54	42.48	48.00	-5.52	AVG	

Test Mode: TX_FM 107.90 MHz


Vertical

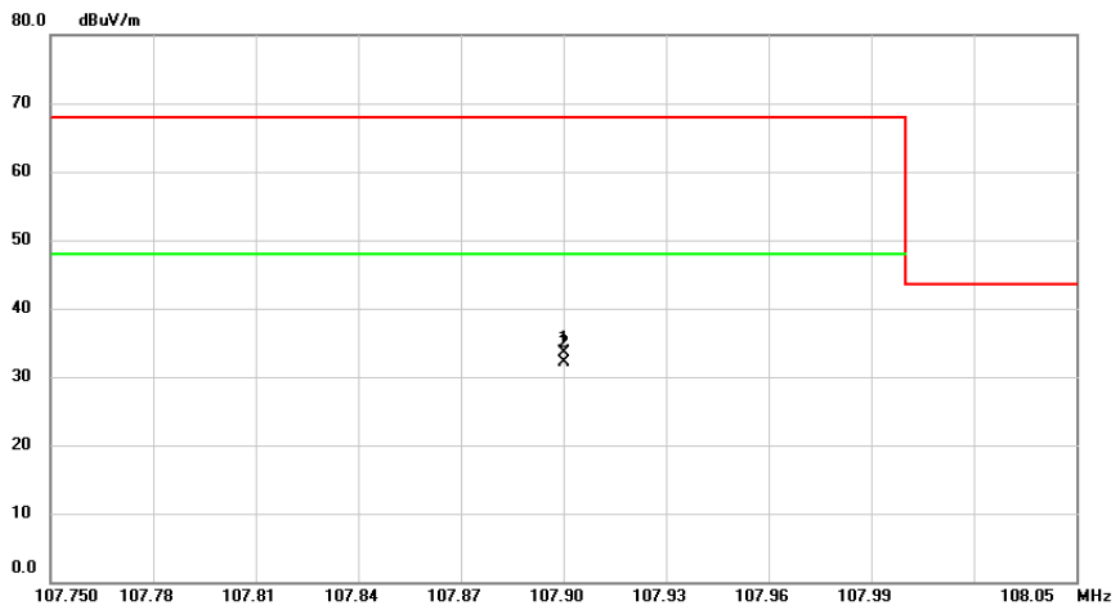

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		107.9000	44.72	-11.12	33.60	68.00	-34.40	peak	
2	*	107.9000	43.28	-11.12	32.16	48.00	-15.84	AVG	

Test Mode: TX_FM 107.90 MHz

Horizontal

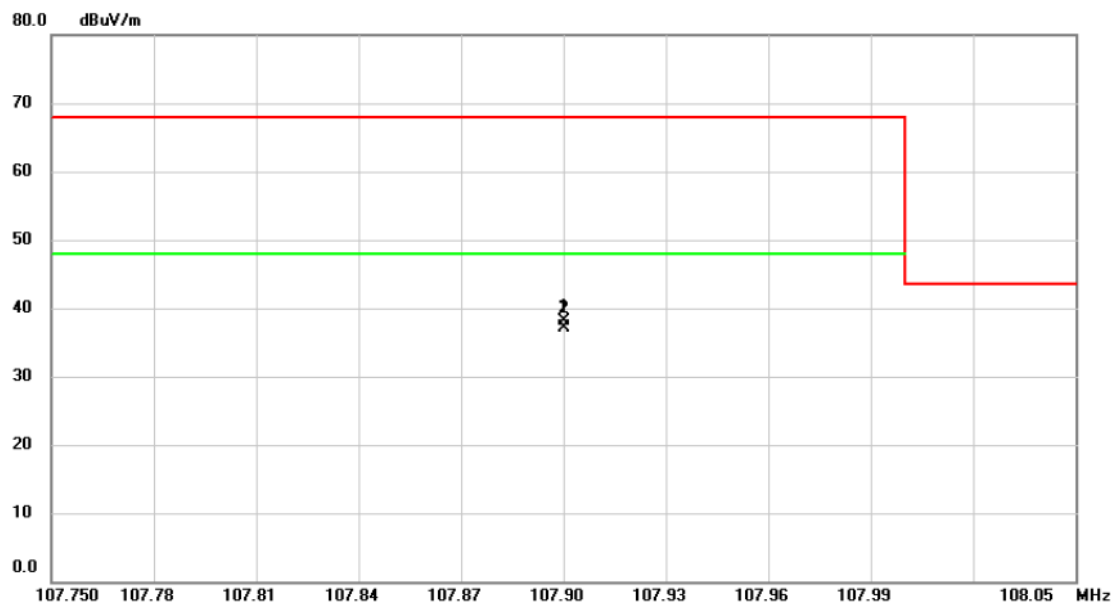


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		107.9000	49.15	-11.12	38.03	68.00	-29.97	peak	
2	*	107.9000	48.15	-11.12	37.03	48.00	-10.97	AVG	


ATTACHMENT E - BANDWIDTH

Frequency (MHz)	20dB Bandwidth (kHz)	99% Occupied BW	Frequency range MHz (20dB Down)	Frequency range MHz (20dB Down)	Limits kHz	Test Result
88.10	143.80	115.85	88.0254	-	200	Complies
98.10	153.00	122.05	-	-	200	Complies
107.90	149.20	120.63	-	107.9689	200	Complies

FM 88.10 MHz

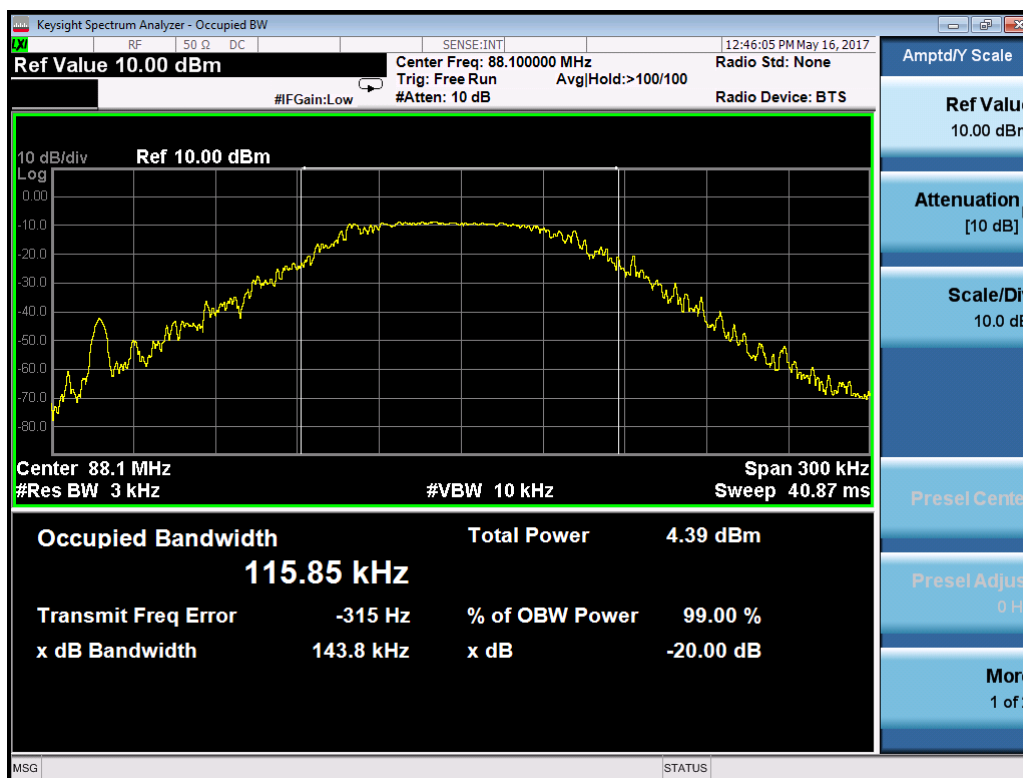

FM 98.10 MHz

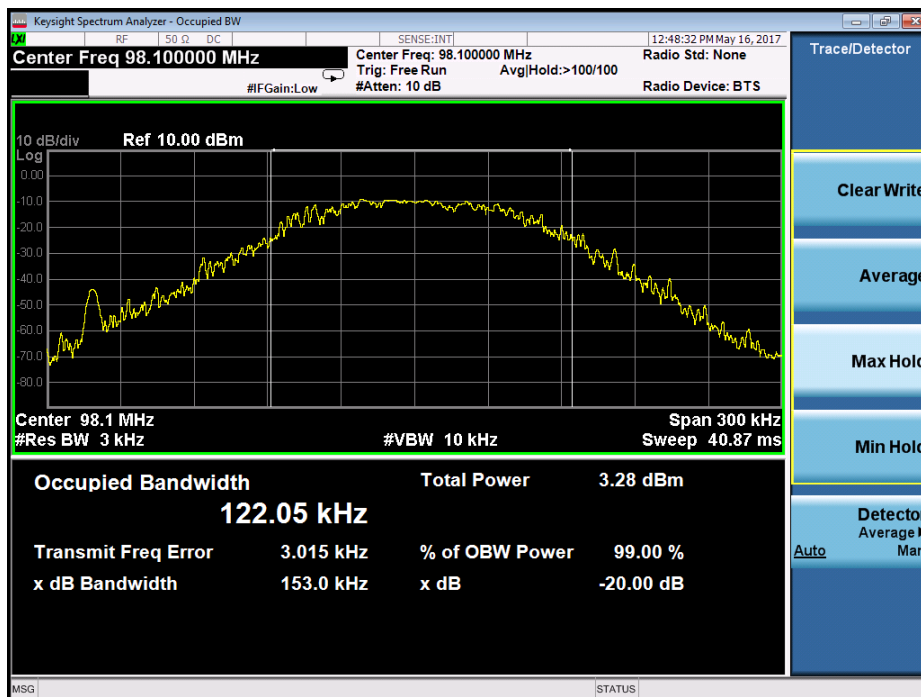

FM 107.90 MHz

