

## TEST REPORT

### FCC Rules Part 15.247

**Report Reference No.....: MTEB23060267-R3**

**FCC ID..... : A4C-10011B**

Compiled by

( position+printed name+signature)...: File administrators Alisa Luo



Supervised by

( position+printed name+signature)...: Test Engineer Sunny Deng



Approved by

( position+printed name+signature)...: Manager Yvette Zhou



Date of issue.....: **June 27,2023**

**Representative Laboratory Name .: Shenzhen Most Technology Service Co., Ltd.**

Address .....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.

**Applicant's name .....: RM ACQUISITIONS LLC**

Address .....: 8770 W. Bryn Mawr Avenue, Chicago, Illinois, United States, 60631

**Test specification/ Standard .....: FCC Rules Part 15.247**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description .....: GPS Device**

Trade Mark .....: **RAND McNALLY**

Manufacturer .....: **SHEN ZHEN APICAL TECHNOLOGY CO., LTD**

Model/Type reference.....: RandTab8

Listed Models .....: N/A

Modulation Type.....: GFSK,  $\pi/4$ DQPSK, 8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version.....: T1050-MT8176-MAIN-01B

Software Version .....: RandTab8\_mp

DC 3.7V (by Battery)

Rating .....: DC 5V (by USB Port)

DC 5V (by Car Charger)

Result.....: **PASS**

TEST REPORT

Equipment under Test : GPS Device

Model /Type : RandTab8

Listed Models : N/A

Remark : N/A.

Applicant : RM ACQUISITIONS LLC

Address : 8770 W. Bryn Mawr Avenue,Chicago,Illinois,United States,60631

Manufacturer : SHEN ZHEN APICAL TECHNOLOGY CO., LTD

Address : 9/F,B Building, Tinghua Unis Infoport, Langshan RD, North district, Hi-tech Industrial Park, Nanshan, Shenzhen

|              |      |
|--------------|------|
| Test Result: | PASS |
|--------------|------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                 |                                                     |                  |
|-----------------|-----------------------------------------------------|------------------|
| <b><u>1</u></b> | <b><u>REVISION HISTORY .....</u></b>                | <b><u>4</u></b>  |
| <b><u>2</u></b> | <b><u>TEST STANDARDS .....</u></b>                  | <b><u>5</u></b>  |
| <b><u>3</u></b> | <b><u>SUMMARY .....</u></b>                         | <b><u>6</u></b>  |
| 3.1             | General Remarks                                     | 6                |
| 3.2             | Product Description                                 | 6                |
| 3.3             | Equipment Under Test                                | 6                |
| 3.4             | Short description of the Equipment under Test (EUT) | 6                |
| 3.5             | EUT operation mode                                  | 7                |
| 3.6             | Block Diagram of Test Setup                         | 7                |
| 3.7             | Test Item (Equipment Under Test) Description*       | 7                |
| 3.8             | Auxiliary Equipment (AE) Description                | 7                |
| 3.9             | Antenna Information*                                | 7                |
| 3.10            | Related Submittal(s) / Grant (s)                    | 8                |
| 3.11            | Modifications                                       | 8                |
| 3.12            | EUT configuration                                   | 8                |
| <b><u>4</u></b> | <b><u>TEST ENVIRONMENT .....</u></b>                | <b><u>9</u></b>  |
| 4.1             | Address of the test laboratory                      | 9                |
| 4.2             | Environmental conditions                            | 9                |
| 4.3             | Summary of measurement results                      | 10               |
| 4.4             | Statement of the measurement uncertainty            | 10               |
| 4.5             | Equipments Used during the Test                     | 11               |
| <b><u>5</u></b> | <b><u>TEST CONDITIONS AND RESULTS .....</u></b>     | <b><u>12</u></b> |
| 5.1             | AC Power Conducted Emission                         | 12               |
| 5.2             | Radiated Emission                                   | 15               |
| 5.3             | Maximum Peak Output Power                           | 21               |
| 5.4             | 20dB Bandwidth                                      | 22               |
| 5.5             | Frequency Separation                                | 23               |
| 5.6             | Number of hopping frequency                         | 24               |
| 5.7             | Time of Occupancy (Dwell Time)                      | 25               |
| 5.8             | Spurious RF Conducted Emission                      | 26               |
| 5.9             | Pseudorandom Frequency Hopping Sequence             | 27               |
| 5.10            | Antenna Requirement                                 | 28               |
| <b><u>6</u></b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>    | <b><u>29</u></b> |
| <b><u>7</u></b> | <b><u>PHOTOS OF THE EUT .....</u></b>               | <b><u>30</u></b> |
|                 | APPENDIX I. Conducted Peak Output Power             | 31               |
|                 | APPENDIX II. 99% Bandwidth                          | 32               |
|                 | APPENDIX III. 20dB Bandwidth                        | 34               |
|                 | APPENDIX IV. Carrier Frequencies Separation         | 36               |
|                 | APPENDIX V. Conducted Out Of Band Emission          | 38               |
|                 | APPENDIX VI. Duty Cycle                             | 44               |
|                 | APPENDIX VII. Dwell Time                            | 49               |

APPENDIX VIII. Number Of Hopping Channel

1 Revision History

| Revision | Issue Date | Revisions     | Revised By |
|----------|------------|---------------|------------|
| 00       | 2023-06-27 | Initial Issue | Alisa Luo  |
|          |            |               |            |
|          |            |               |            |

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 3 SUMMARY

#### 3.1 General Remarks

|                                |   |            |
|--------------------------------|---|------------|
| Date of receipt of test sample | : | 2023.06.19 |
| Testing commenced on           | : | 2023.06.20 |
| Testing concluded on           | : | 2023.06.27 |

#### 3.2 Product Description

|                       |                                                                       |
|-----------------------|-----------------------------------------------------------------------|
| Product Name:         | GPS Device                                                            |
| Model/Type reference: | RandTab8                                                              |
| Power Supply:         | DC 3.7V (by Battery)<br>DC 5V (by USB Port)<br>DC 5V (by Car Charger) |
| Testing sample ID:    | MTYP01541                                                             |
| <b>Bluetooth :</b>    |                                                                       |
| Supported Type:       | Bluetooth BR/EDR                                                      |
| Modulation:           | GFSK, $\pi/4$ DQPSK, 8DPSK                                            |
| Operation frequency:  | 2402MHz~2480MHz                                                       |
| Channel number:       | 79                                                                    |
| Channel separation:   | 1MHz                                                                  |
| Antenna type:         | FPC Antenna                                                           |
| Antenna gain:         | 6.17dBi                                                               |

#### 3.3 Equipment Under Test

##### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 3.7V (by Battery)  
DC 5V (by USB Port)  
DC 5V (by Car Charger)

#### 3.4 Short description of the Equipment under Test (EUT)

This is a GPS Device For more details, refer to the user's manual of the EUT.


### 3.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

#### Operation Frequency:

| Channel | Frequency (MHz) |
|---------|-----------------|
| 00      | 2402            |
| 01      | 2403            |
| ⋮       | ⋮               |
| 38      | 2440            |
| 39      | 2441            |
| 40      | 2442            |
| ⋮       | ⋮               |
| 77      | 2479            |
| 78      | 2480            |

### 3.6 Block Diagram of Test Setup

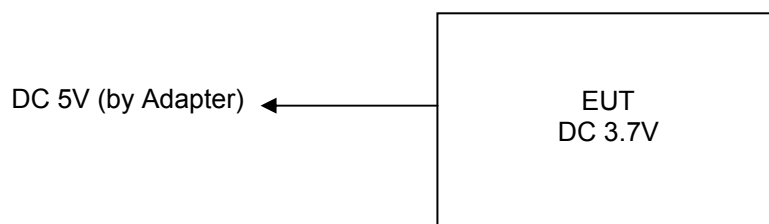

### 3.7 Test Item (Equipment Under Test) Description\*

| Short designation | EUT Name | EUT Description | Serial number | Hardware status | Software status |
|-------------------|----------|-----------------|---------------|-----------------|-----------------|
| EUT A             |          |                 |               |                 |                 |
| EUT B             |          |                 |               |                 |                 |
|                   |          |                 |               |                 |                 |

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

| AE short designation | EUT Name (if available) | EUT Description | Serial number (if available) | Software (if used) |
|----------------------|-------------------------|-----------------|------------------------------|--------------------|
| AE 1                 | Adapter                 | /               | MDY-08-EH                    |                    |
| AE 2                 | -                       |                 |                              |                    |

### 3.9 Antenna Information\*

| Short designation | Antenna Name | Antenna Type | Frequency Range | Serial number | Antenna Peak Gain |
|-------------------|--------------|--------------|-----------------|---------------|-------------------|
| Antenna 1         | ---          | FPC Antenna  | 2.4 – 2.5 GHz   | ---           | 6.17dBi           |
| Antenna 2         |              |              |                 |               |                   |
|                   |              |              |                 |               |                   |

\*: declared by the applicant.

### 3.10 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 3.11 Modifications

No modifications were implemented to meet testing criteria.

### 3.12 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

○ - supplied by the manufacturer

● - Supplied by the lab

|   |         |               |                               |
|---|---------|---------------|-------------------------------|
| ● | ADAPTER | M/N:          | MDY-08-EH                     |
|   |         | Manufacturer: | Xiaomi Communications Co.,Ltd |

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Designation No.: CN1315**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

#### Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 23 ° C       |
|                       |              |
| Humidity:             | 48 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

#### AC Main Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

#### Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

### 4.3 Summary of measurement results

| Test Specification clause | Test case                                         | Test Mode                 | Test Channel                                                                                                                            | Recorded In Report        |                                                                                                                                         | Test result |
|---------------------------|---------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------|
| §15.247(a)(1)             | Carrier Frequency separation                      | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Middle                                                                                              | Compliant   |
| §15.247(a)(1)             | Number of Hopping channels                        | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Full                                                                                                | GFSK<br>8DPSK             | <input checked="" type="checkbox"/> Full                                                                                                | Compliant   |
| §15.247(a)(1)             | Time of Occupancy (dwell time)                    | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Middle                                                                                              | Compliant   |
| §15.247(a)(1)             | Spectrum bandwidth of aFHSS system 20dB bandwidth | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.247(b)(1)             | Maximum output power                              | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.247(d)                | Band edge compliance conducted                    | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | Compliant   |
| §15.205                   | Band edge compliance radiated                     | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | GFSK                      | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | Compliant   |
| §15.247(d)                | TX spurious emissions conducted                   | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.247(d)                | TX spurious emissions radiated                    | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.209(a)                | TX spurious Emissions radiated Below 1GHz         | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Middle                                                                                              | Compliant   |
| §15.107(a)<br>§15.207     | Conducted Emissions 9KHz-30 MHz                   | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Middle                                                                                              | N/A         |

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

### 4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

| Test                           | Range      | Measurement Uncertainty | Notes |
|--------------------------------|------------|-------------------------|-------|
| Radiated Emission              | 30~1000MHz | 4.10 dB                 | (1)   |
| Radiated Emission              | 1~18GHz    | 4.32 dB                 | (1)   |
| Radiated Emission              | 18-40GHz   | 5.54 dB                 | (1)   |
| Conducted Disturbance          | 0.15~30MHz | 3.12 dB                 | (1)   |
| 20dB Bandwidth & 99% Bandwidth | /          | 5%                      | (1)   |
| Maximum Conducted Output Power | /          | 0.80dB                  | (1)   |

|                                |   |       |     |
|--------------------------------|---|-------|-----|
| Spurious RF Conducted Emission | / | 1.6dB | (1) |
|--------------------------------|---|-------|-----|

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5 Equipments Used during the Test


| Item | Equipment                            | Manufacturer     | Model No.    | Serial No. | Firmware versions | Last Cal.  | Cal. Interval |
|------|--------------------------------------|------------------|--------------|------------|-------------------|------------|---------------|
| 1.   | L.I.S.N.                             | R&S              | ENV216       | 100093     | /                 | 2023/03/17 | 1 Year        |
| 2    | Three-phase artificial power network | Schwarzback Mess | NNLK8129     | 8129178    | /                 | 2023/03/17 | 1 Year        |
| 3.   | Receiver                             | R&S              | ESCI         | 100492     | V3.0-10-2         | 2023/03/17 | 1 Year        |
| 4    | Receiver                             | R&S              | ESPI         | 101202     | V3.0-10-2         | 2023/03/17 | 1 Year        |
| 5    | Spectrum analyzer                    | Agilent          | 9020A        | MT-E306    | A14.16            | 2023/03/17 | 1 Year        |
| 6    | Bilong Antenna                       | Sunol Sciences   | JB3          | A121206    | /                 | 2023/03/17 | 1 Year        |
| 7    | Horn antenna                         | HF Antenna       | HF Antenna   | MT-E158    | /                 | 2023/03/17 | 1 Year        |
| 8    | Loop antenna                         | Beijing Daze     | ZN30900B     | /          | /                 | 2023/03/17 | 1 Year        |
| 9    | Horn antenna                         | R&S              | OBH100400    | 26999002   | /                 | 2023/03/17 | 1 Year        |
| 10   | Wireless Communication Test Set      | R&S              | CMW500       | /          | CMW-BASE-3.7.21   | 2023/03/17 | 1 Year        |
| 11   | Spectrum analyzer                    | R&S              | FSP          | 100019     | V4.40 SP2         | 2023/03/17 | 1 Year        |
| 12   | High gain antenna                    | Schwarzbeck      | LB-180400KF  | MT-E389    | /                 | 2023/03/17 | 1 Year        |
| 13   | Preamplifier                         | Schwarzbeck      | BBV 9743     | MT-E390    | /                 | 2023/03/17 | 1 Year        |
| 14   | Pre-amplifier                        | EMCI             | EMC051845S E | MT-E391    | /                 | 2023/03/17 | 1 Year        |
| 15   | Pre-amplifier                        | Agilent          | 83051A       | MT-E392    | /                 | 2023/03/17 | 1 Year        |
| 16   | High pass filter unit                | Tonscend         | JS0806-F     | MT-E393    | /                 | 2023/03/17 | 1 Year        |
| 17   | RF Cable(below1GHz)                  | Times            | 9kHz-1GHz    | MT-E394    | /                 | 2023/03/17 | 1 Year        |
| 18   | RF Cable(above 1GHz)                 | Times            | 1-40G        | MT-E395    | /                 | 2023/03/17 | 1 Year        |
| 19   | RF Cable (9KHz-40GHz)                | Tonscend         | 170660       | N/A        | /                 | 2023/03/17 | 1 Year        |

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

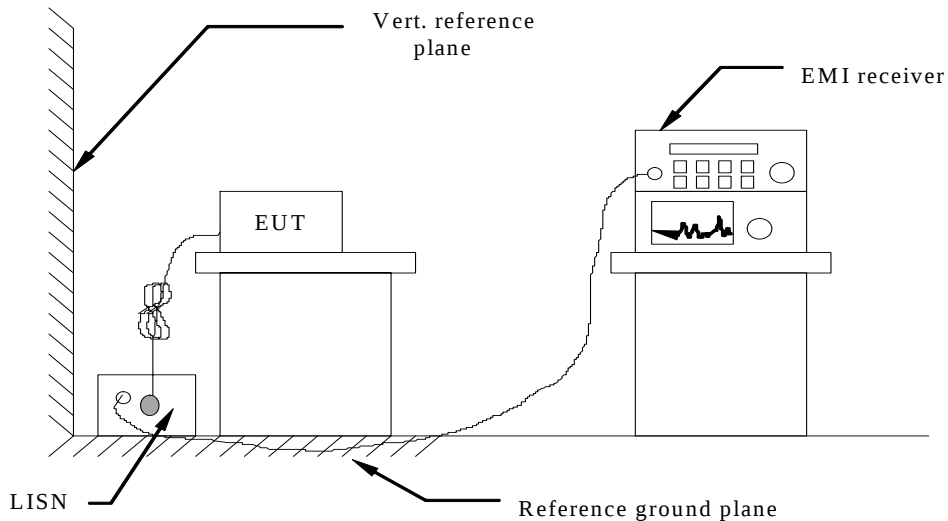

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :


| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |


\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Remark:

1. GFSK,  $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel; only the worst result of 8DPSK Middle Channel was reported as below:

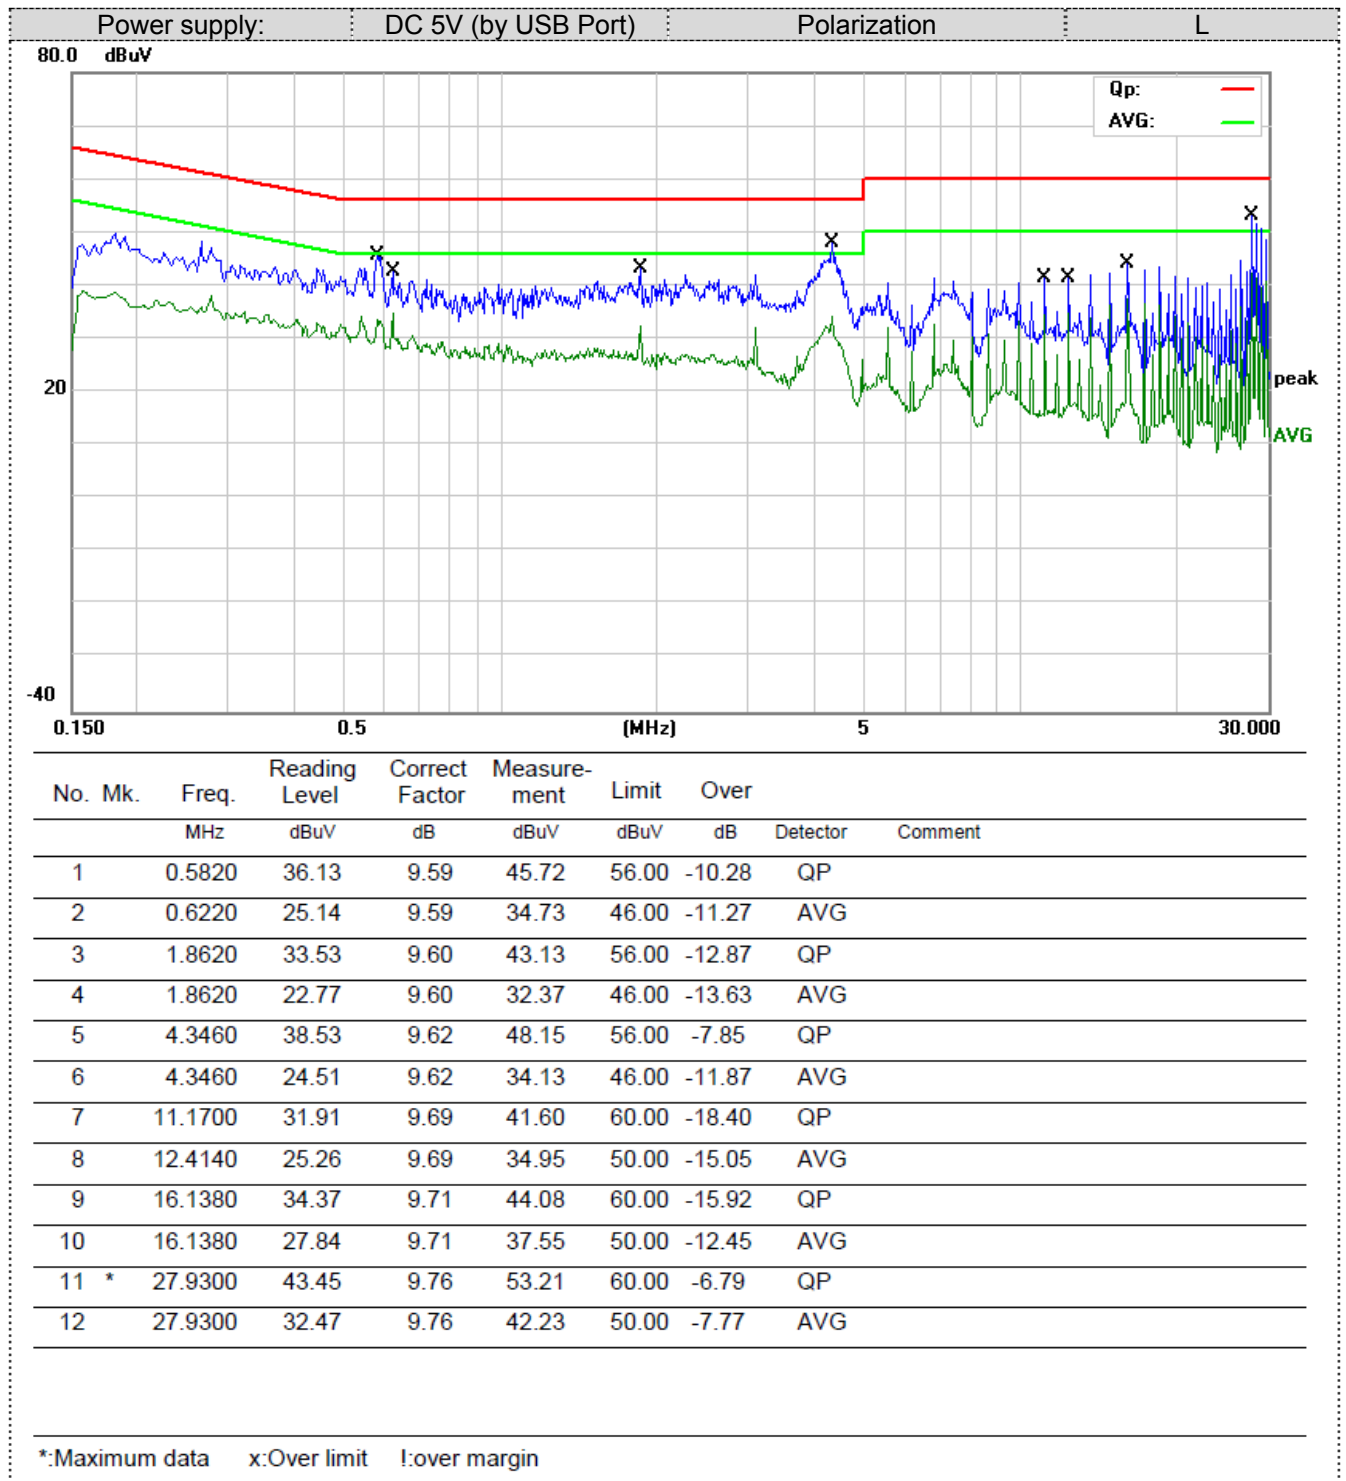


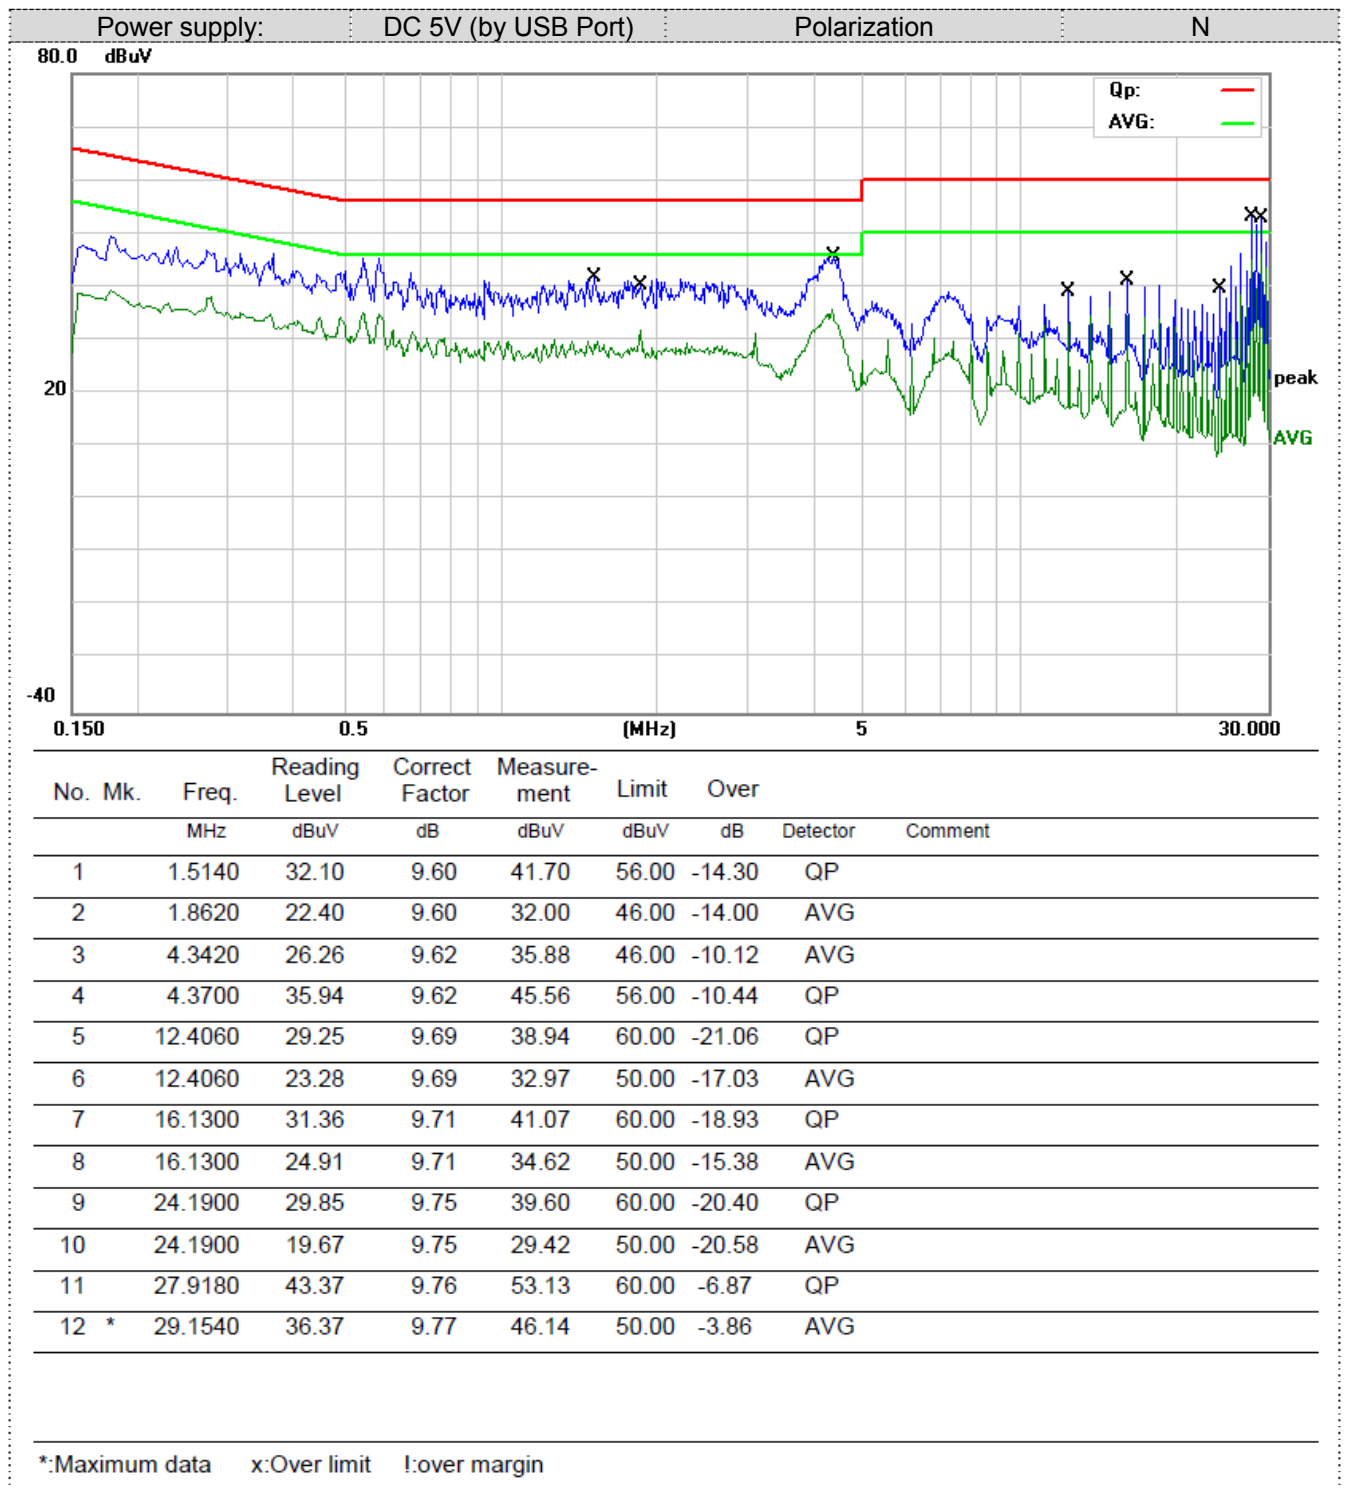


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

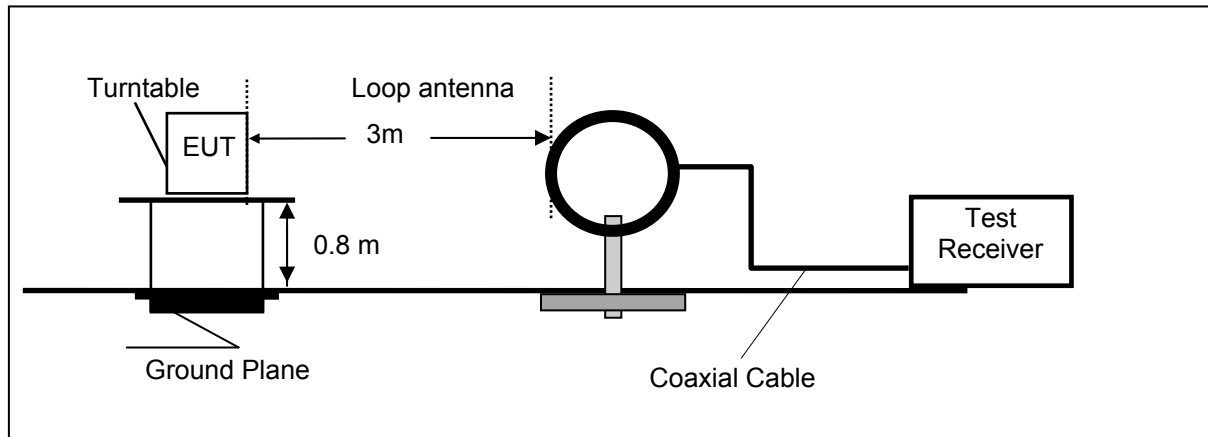

Frequency range 30MHz – 1000MHz

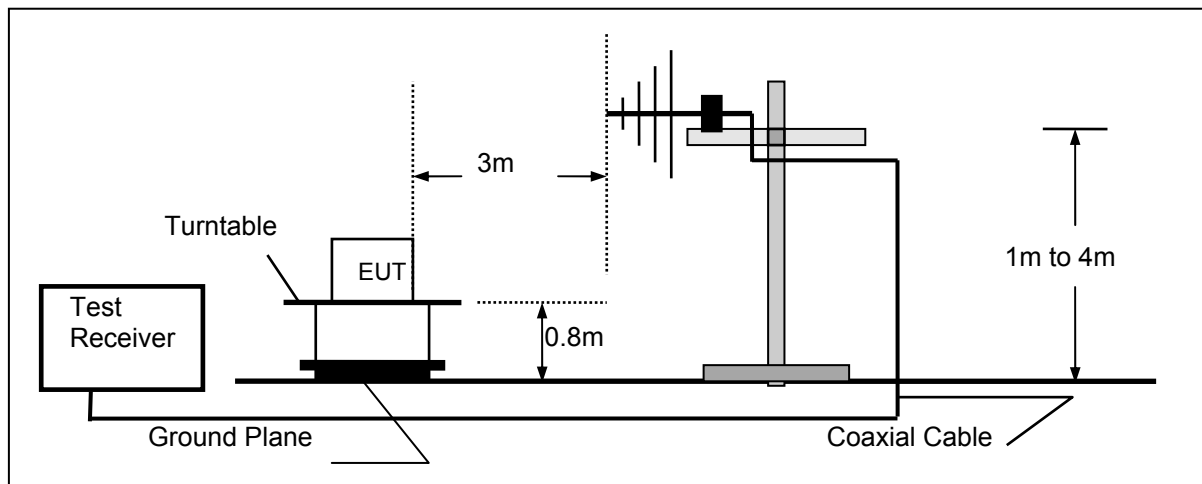

Frequency range above 1GHz-25GHz

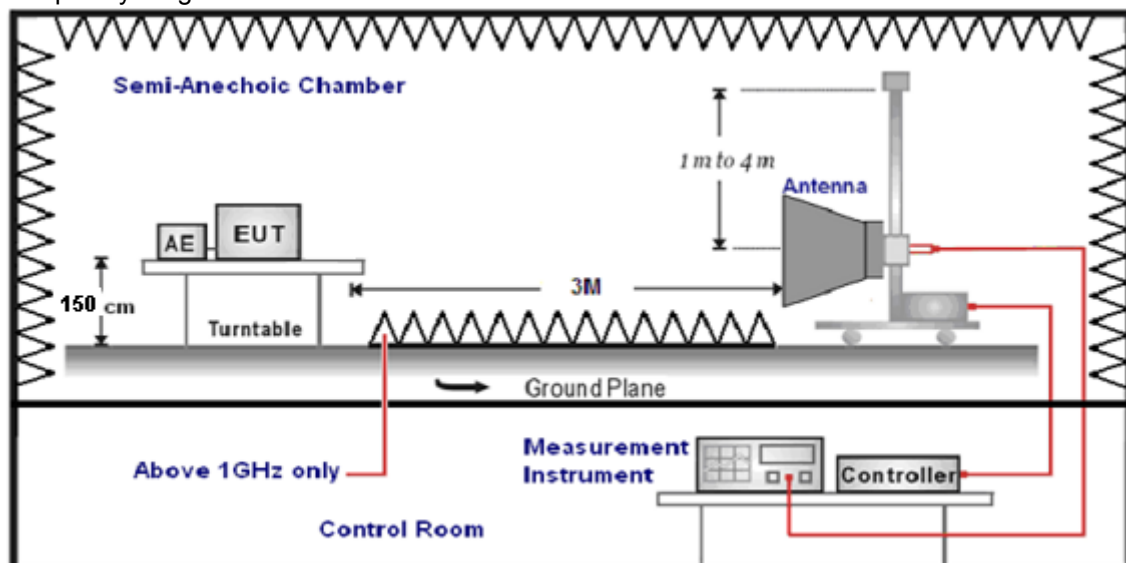

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz,Sweep time=Auto                                                                        | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz,Sweep time=Auto                                                                       | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz,Sweep time=Auto                                                                    | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                            | Radiated (μV/m)       |
|-----------------|-------------------|----------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz})) + 40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz})) + 40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30) + 40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                         | 100                   |
| 88-216          | 3                 | 43.5                                         | 150                   |
| 216-960         | 3                 | 46.0                                         | 200                   |
| Above 960       | 3                 | 54.0                                         | 500                   |

## TEST RESULTS

Remark:


1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

### For 30MHz-1GHz

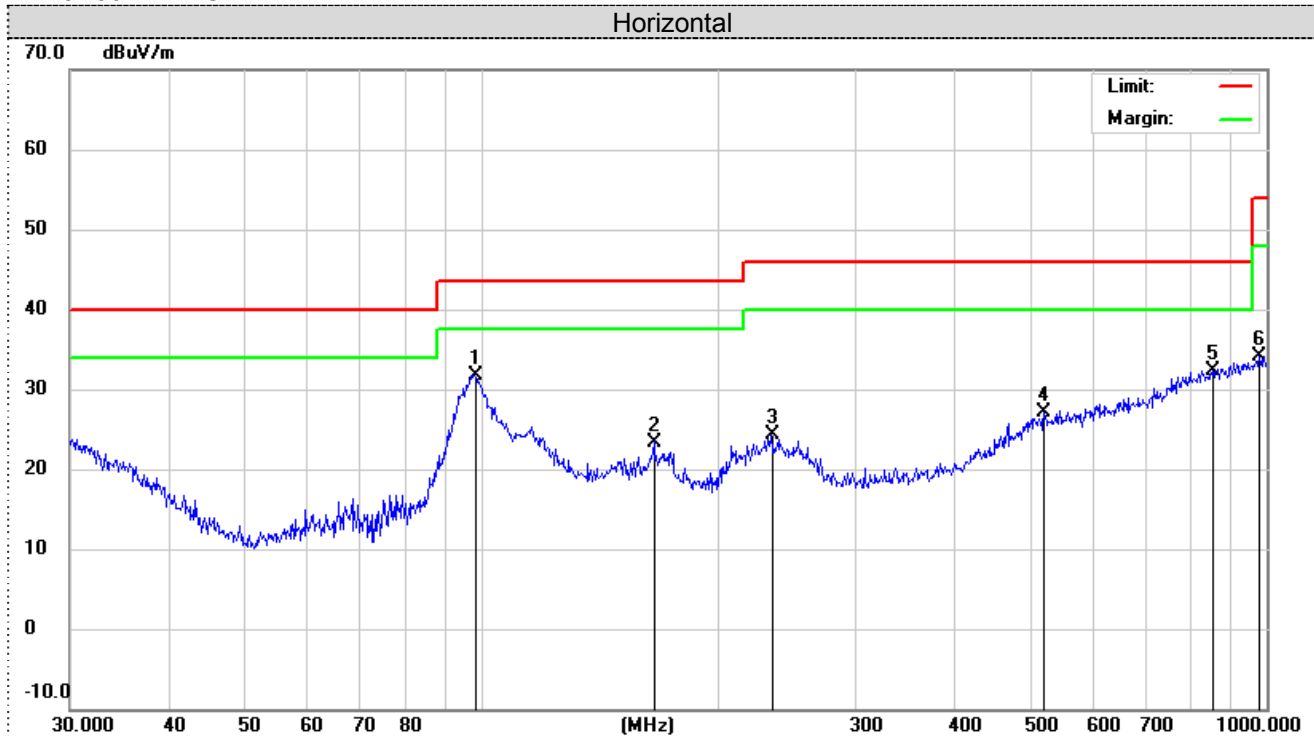

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | *   | 98.1419  | 18.80         | 12.91          | 31.71       | 43.50  | -11.79 | QP             | 200          | 258     |
| 2   |     | 166.0680 | 6.30          | 17.10          | 23.40       | 43.50  | -20.10 | QP             | 200          | 221     |
| 3   |     | 234.1684 | 10.04         | 14.24          | 24.28       | 46.00  | -21.72 | QP             | 200          | 325     |
| 4   |     | 520.8882 | 4.08          | 22.93          | 27.01       | 46.00  | -18.99 | QP             | 200          | 201     |
| 5   |     | 854.0247 | 3.88          | 28.49          | 32.37       | 46.00  | -13.63 | QP             | 200          | 104     |
| 6   |     | 979.1804 | 4.22          | 29.79          | 34.01       | 54.00  | -19.99 | QP             | 200          | 269     |

\*:Maximum data    x:Over limit    !:over margin

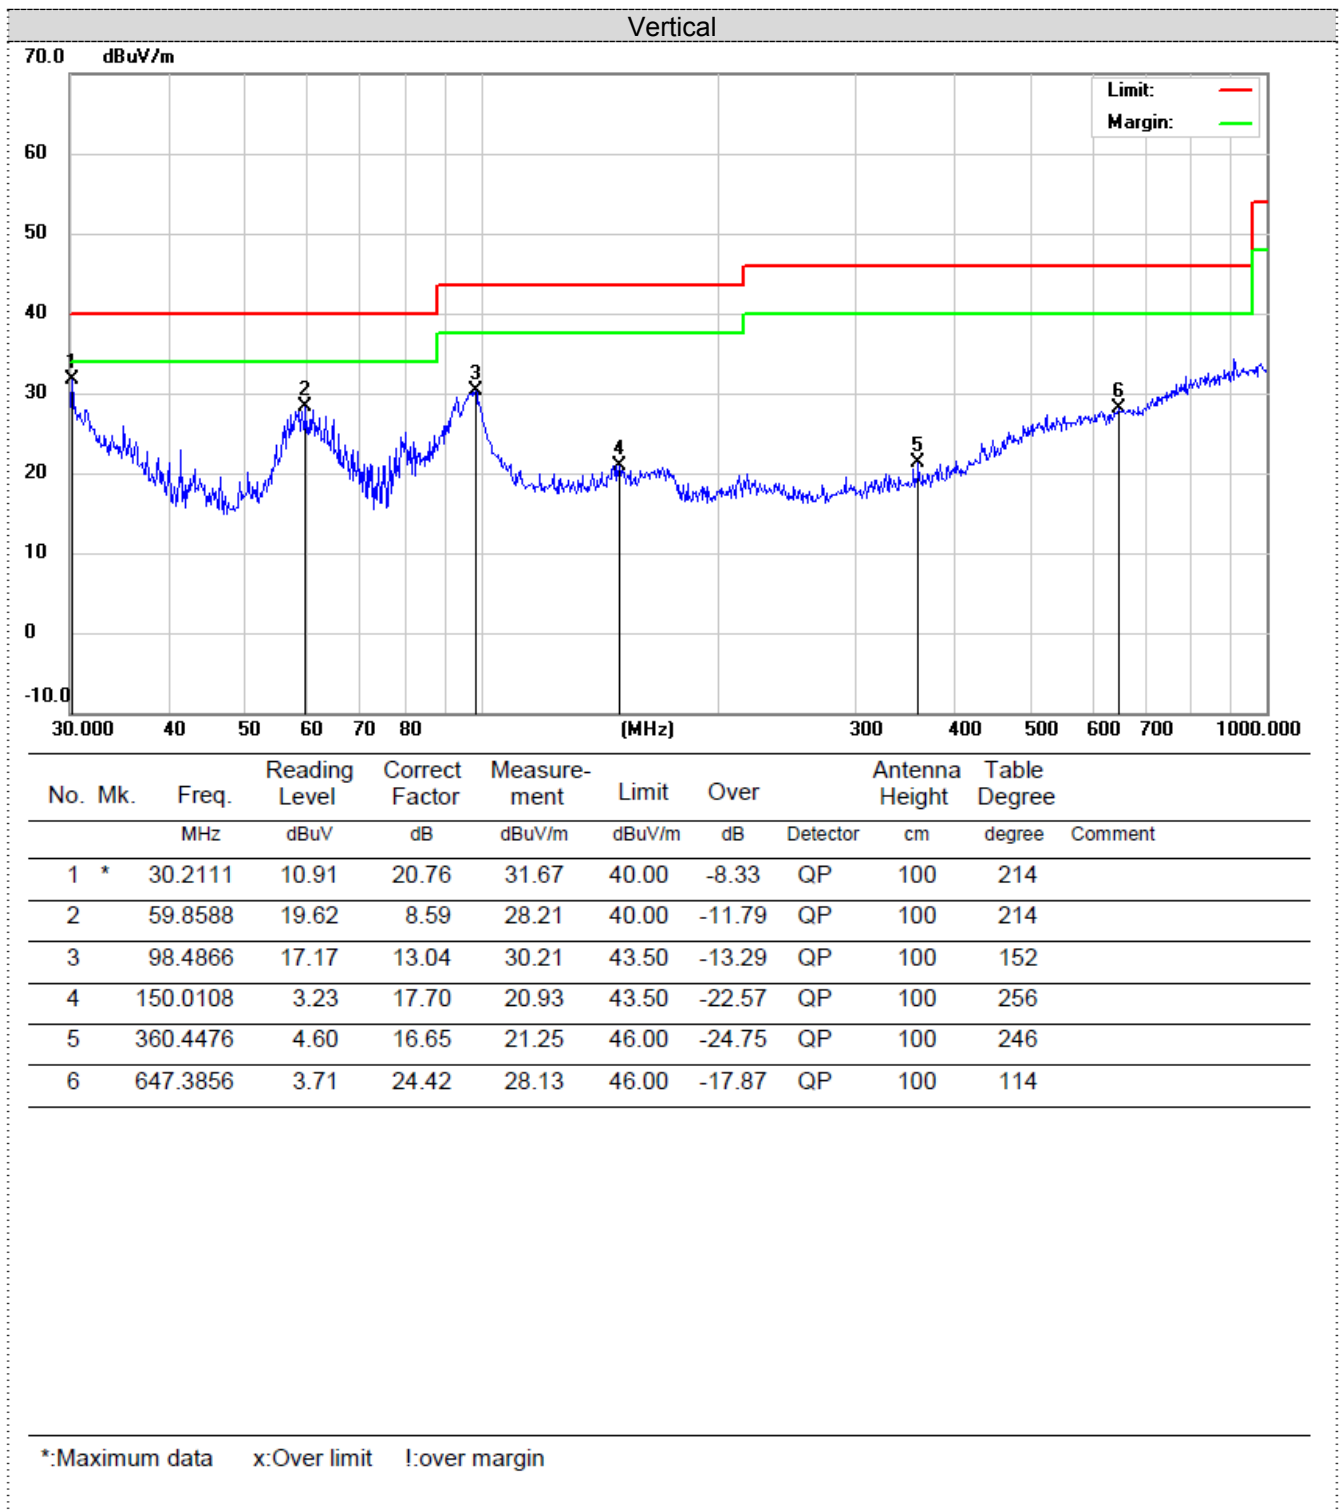

**For 1GHz to 25GHz**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK (above 1GHz)**

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4804            | 55.74                   | PK | 74             | 18.26       | 53.84            | 31.42                 | 6.98              | 36.5               | 1.9                      |
| 4804            | 44.96                   | AV | 54             | 9.04        | 43.06            | 31.42                 | 6.98              | 36.5               | 1.9                      |
| 7206            | 55.44                   | PK | 74             | 18.56       | 44.84            | 37.03                 | 8.87              | 35.3               | 10.6                     |
| 7206            | 42.63                   | AV | 54             | 11.37       | 32.03            | 37.03                 | 8.87              | 35.3               | 10.6                     |

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4804            | 54.38                   | PK | 74             | 19.62       | 52.48            | 31.42                 | 6.98              | 36.5               | 1.9                      |
| 4804            | 44.44                   | AV | 54             | 9.56        | 42.54            | 31.42                 | 6.98              | 36.5               | 1.9                      |
| 7206            | 52.19                   | PK | 74             | 21.81       | 41.59            | 37.03                 | 8.87              | 35.3               | 10.6                     |
| 7206            | 41.3                    | AV | 54             | 12.7        | 30.7             | 37.03                 | 8.87              | 35.3               | 10.6                     |

| Frequency(MHz): |                         |    | 2441           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4882            | 56.2                    | PK | 74             | 17.8        | 54.14            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 4882            | 44.78                   | AV | 54             | 9.22        | 42.72            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 7323            | 51.63                   | PK | 74             | 22.37       | 40.71            | 37.66                 | 8.56              | 35.3               | 10.92                    |
| 7323            | 41.66                   | AV | 54             | 12.34       | 30.74            | 37.66                 | 8.56              | 35.3               | 10.92                    |

| Frequency(MHz): |                         |    | 2441           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4882            | 57.58                   | PK | 74             | 16.42       | 55.52            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 4882            | 42.25                   | AV | 54             | 11.75       | 40.19            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 7323            | 54.1                    | PK | 74             | 19.9        | 43.18            | 37.66                 | 8.56              | 35.3               | 10.92                    |
| 7323            | 41.77                   | AV | 54             | 12.23       | 30.85            | 37.66                 | 8.56              | 35.3               | 10.92                    |

| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4960            | 54.73                   | PK | 74             | 19.27       | 51.66            | 31.47                 | 7.8               | 36.2               | 3.07                     |
| 4960            | 44.78                   | AV | 54             | 9.22        | 41.71            | 31.47                 | 7.8               | 36.2               | 3.07                     |
| 7440            | 51.96                   | PK | 74             | 22.04       | 40.22            | 38.32                 | 8.72              | 35.3               | 11.74                    |
| 7440            | 43.79                   | PK | 54             | 10.21       | 32.05            | 38.32                 | 8.72              | 35.3               | 11.74                    |

| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4960            | 53.8                    | PK | 74             | 20.2        | 50.73            | 31.47                 | 7.8               | 36.2               | 3.07                     |
| 4960            | 45.59                   | AV | 54             | 8.41        | 42.52            | 31.47                 | 7.8               | 36.2               | 3.07                     |
| 7440            | 54.13                   | PK | 74             | 19.87       | 42.39            | 38.32                 | 8.72              | 35.3               | 11.74                    |
| 7440            | 43.02                   | PK | 54             | 10.98       | 31.28            | 38.32                 | 8.72              | 35.3               | 11.74                    |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier

3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

**Results of Band Edges Test (Radiated)**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK**

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390            | 55.32                   | PK | 74             | 18.68       | 60.73            | 27.49                 | 3.32              | 36.22              | -5.41                    |
| 2390            | 40.61                   | AV | 54             | 13.39       | 46.02            | 27.49                 | 3.32              | 36.22              | -5.41                    |
| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390            | 54.69                   | PK | 74             | 19.31       | 60.1             | 27.49                 | 3.32              | 36.22              | -5.41                    |
| 2390            | 40.13                   | AV | 54             | 13.87       | 45.54            | 27.49                 | 3.32              | 36.22              | -5.41                    |
| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.5          | 55.23                   | PK | 74             | 18.77       | 60.74            | 27.45                 | 3.38              | 36.34              | -5.51                    |
| 2483.5          | 41.41                   | AV | 54             | 12.59       | 46.92            | 27.45                 | 3.38              | 36.34              | -5.51                    |
| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.5          | 58.07                   | PK | 74             | 15.93       | 63.58            | 27.45                 | 3.38              | 36.34              | -5.51                    |
| 2483.5          | 39.74                   | AV | 54             | 14.26       | 45.25            | 27.45                 | 3.38              | 36.34              | -5.51                    |

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.

### 5.3 Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

#### Test Configuration



#### Test Results

See Appendix I

## 5.4 20dB Bandwidth

### Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### Test Configuration



### Test Results

See Appendix III

## 5.5 Frequency Separation


### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

### TEST CONFIGURATION



### TEST RESULTS

See Appendix IV

## 5.6 Number of hopping frequency


### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

### Test Configuration



### Test Results

See Appendix VIII

## 5.7 Time of Occupancy (Dwell Time)


### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

### Test Configuration




### Test Results

See Appendix VII

## 5.8 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### Test Results

See Appendix V

## 5.9 Pseudorandom Frequency Hopping Sequence

### TEST APPLICABLE


#### **For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### **EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

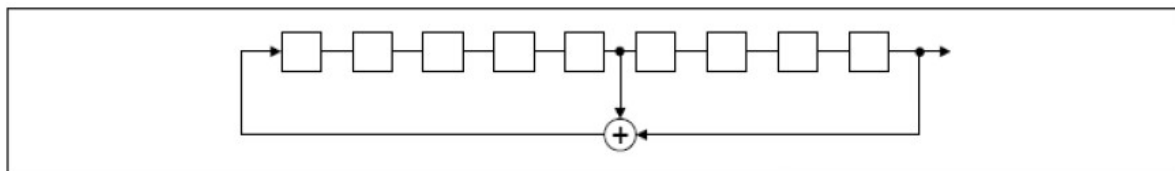

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

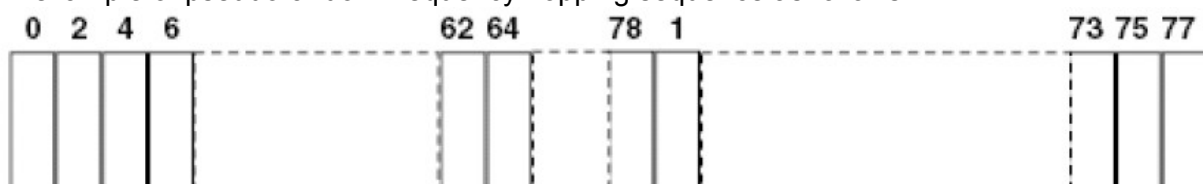

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## 5.10 Antenna Requirement

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The directional gains of antenna used for transmitting is 6.17dBi, and the antenna is an FPC Antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

## 6 Test Setup Photos of the EUT



## **7 Photos of the EUT**

See related photo report.

## APPENDIX I. Conducted Peak Output Power

### Test Result


| Modulation    | Packet Type | Channel | Peak Output Power (dBm) | Peak Output Power (mW) | Max. Avg. Power (dBm) | Limit (dBm) | Result |
|---------------|-------------|---------|-------------------------|------------------------|-----------------------|-------------|--------|
| GFSK          | DH5         | 0       | -1.394                  | 0.725                  | None                  | 30          | PASS   |
|               |             | 39      | -2.589                  | 0.551                  | None                  |             | PASS   |
|               |             | 78      | -2.496                  | 0.563                  | None                  |             | PASS   |
| $\pi/4$ DQPSK | 2-DH5       | 0       | 2.414                   | 1.743                  | None                  | 20.97       | PASS   |
|               |             | 39      | 2.940                   | 1.968                  | None                  |             | PASS   |
|               |             | 78      | 3.929                   | 2.471                  | None                  |             | PASS   |
| 8DPSK         | 3-DH5       | 0       | 2.808                   | 1.909                  | None                  |             | PASS   |
|               |             | 39      | 3.298                   | 2.137                  | None                  |             | PASS   |
|               |             | 78      | 4.321                   | 2.705                  | None                  |             | PASS   |

## APPENDIX II.99% Bandwidth

### Test Result


| Modulation    | Channel | 99% BW (MHz) |
|---------------|---------|--------------|
| GFSK          | 0       | 0.87650      |
|               | 39      | 0.84906      |
|               | 78      | 0.84406      |
| $\pi$ /4DQPSK | 0       | 1.1801       |
|               | 39      | 1.1852       |
|               | 78      | 1.1826       |
| 8DPSK         | 0       | 1.2009       |
|               | 39      | 1.1965       |
|               | 78      | 1.1969       |

### Test Graphs

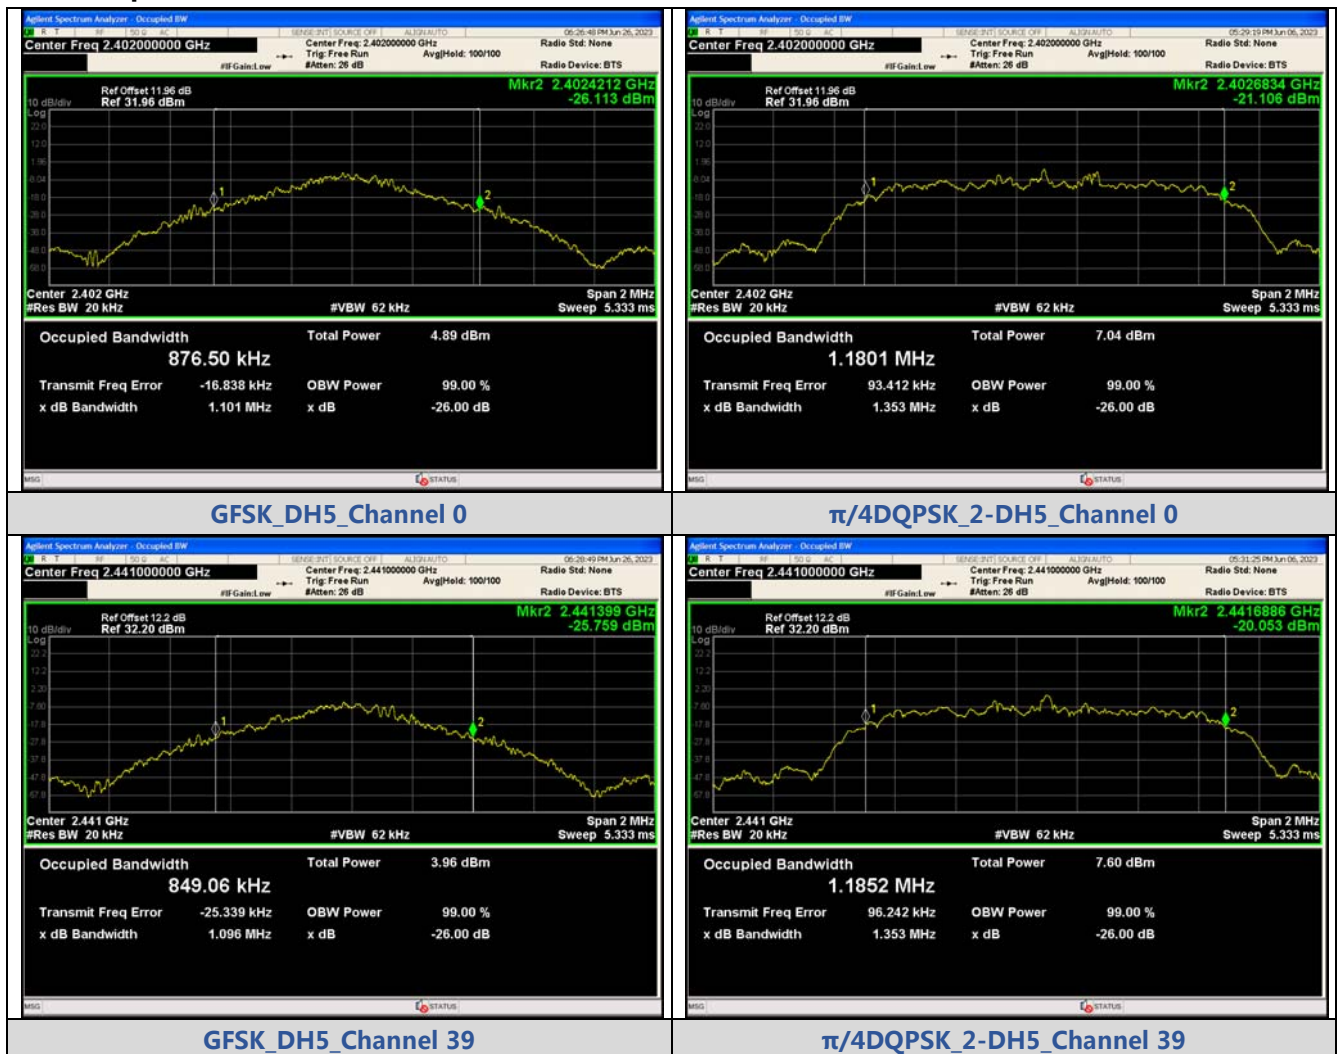



GFSK\_DH5\_Channel 78

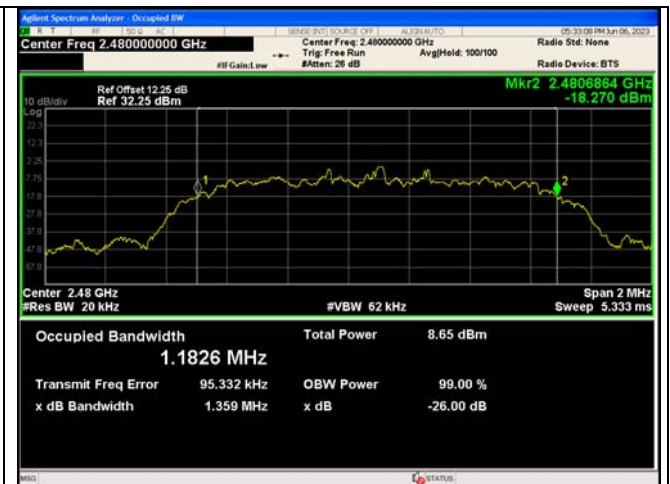 $\pi/4$ DQPSK\_2-DH5\_Channel 78

8DPSK\_3-DH5\_Channel 0



8DPSK\_3-DH5\_Channel 39



8DPSK\_3-DH5\_Channel 78

Void


## APPENDIX III.20dB Bandwidth

### Test Result


| Modulation    | Channel | Center Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------------|---------|------------------------|-----------------------|
| GFSK          | 0       | 2402 MHz               | 1.026                 |
|               | 39      | 2441 MHz               | 1.040                 |
|               | 78      | 2480 MHz               | 1.000                 |
| $\pi/4$ DQPSK | 0       | 2402 MHz               | 1.312                 |
|               | 39      | 2441 MHz               | 1.312                 |
|               | 78      | 2480 MHz               | 1.306                 |
| 8DPSK         | 0       | 2402 MHz               | 1.294                 |
|               | 39      | 2441 MHz               | 1.296                 |
|               | 78      | 2480 MHz               | 1.294                 |

### Test Graphs




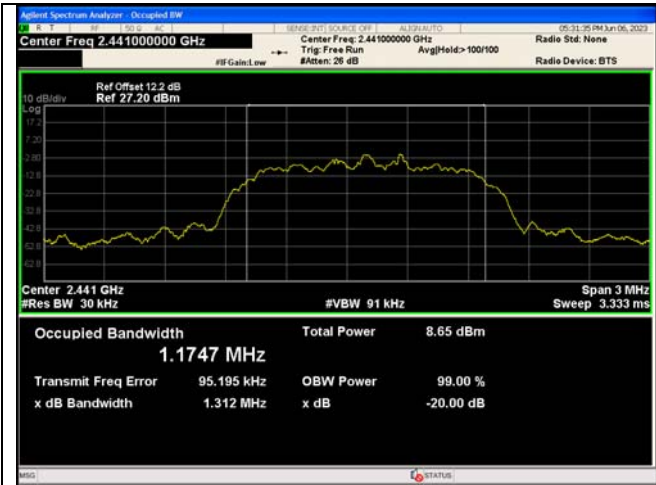


$\pi/4$ DQPSK\_2-DH5\_Channel 39

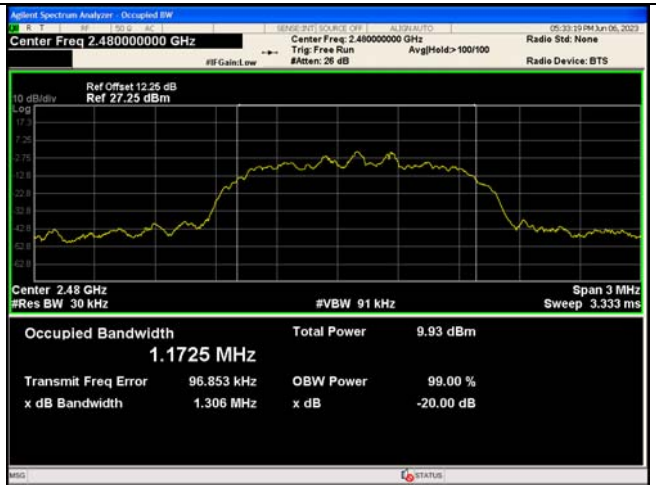


$\pi/4$ DQPSK\_2-DH5\_Channel 78

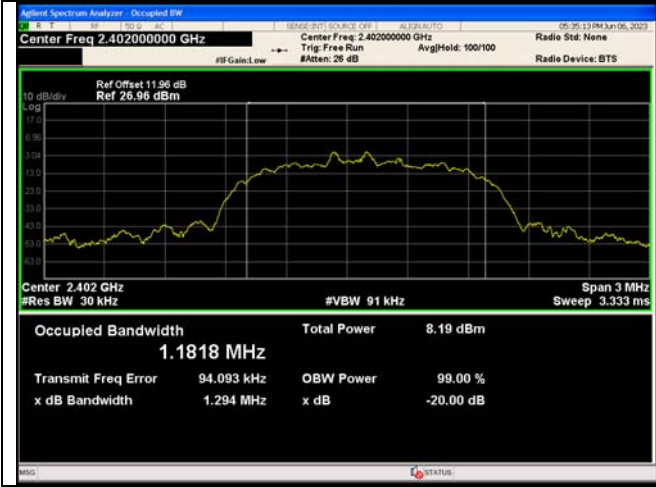

8DPSK\_3-DH5\_Channel 0

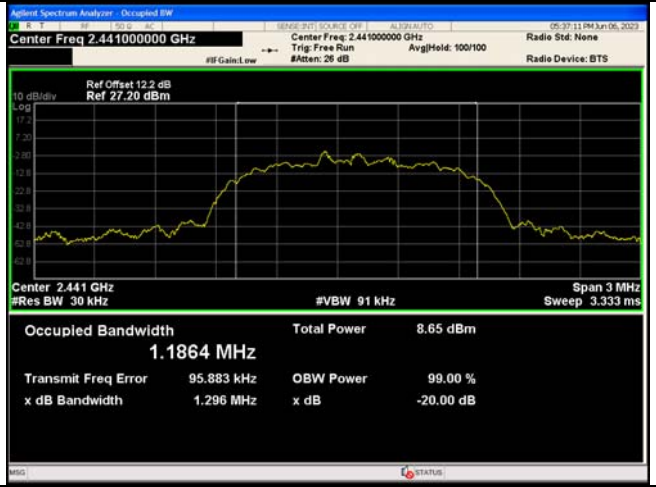

8DPSK\_3-DH5\_Channel 39

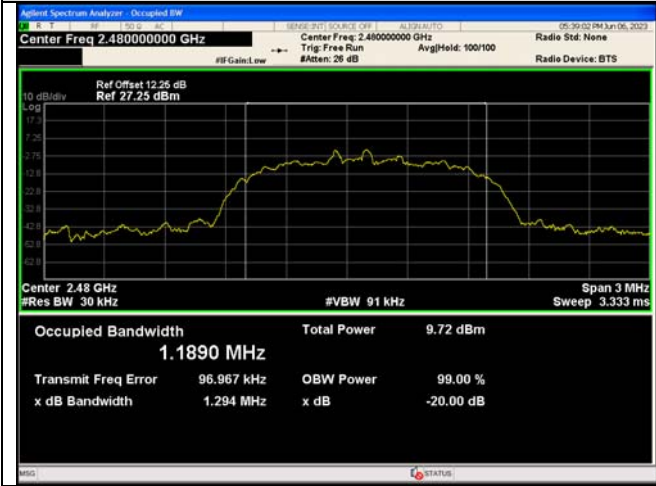

8DPSK\_3-DH5\_Channel 78


Void

## APPENDIX IV. Carrier Frequencies Separation

### Test Result

| Modulation    | Packet | Left Center frequency (MHz) | Right Center frequency (MHz) | Hopping Frequency Separation (MHz) | Limit (MHz) | Result |
|---------------|--------|-----------------------------|------------------------------|------------------------------------|-------------|--------|
| GFSK          | DH5    | 2439.8335                   | 2440.8338                    | 1.0003                             | 0.636       | PASS   |
| GFSK          | DH5    | 2439.8326                   | 2440.8323                    | 0.9997                             | 0.631       | PASS   |
| GFSK          | DH5    | 2439.8323                   | 2441.1512                    | 1.3189                             | 0.638       | PASS   |
| $\pi/4$ DQPSK | 2-DH5  | 2440.0024                   | 2441.1665                    | 1.1641                             | 0.875       | PASS   |
| $\pi/4$ DQPSK | 2-DH5  | 2439.9964                   | 2441.1617                    | 1.1653                             | 0.875       | PASS   |
| $\pi/4$ DQPSK | 2-DH5  | 2440.1629                   | 2441.159                     | 0.9961                             | 0.871       | PASS   |
| 8DPSK         | 3-DH5  | 2439.9829                   | 2440.9901                    | 1.0072                             | 0.863       | PASS   |
| 8DPSK         | 3-DH5  | 2440.1506                   | 2441.1599                    | 1.0093                             | 0.864       | PASS   |
| 8DPSK         | 3-DH5  | 2439.988                    | 2440.976                     | 0.9880                             | 0.863       | PASS   |

### Test Graphs

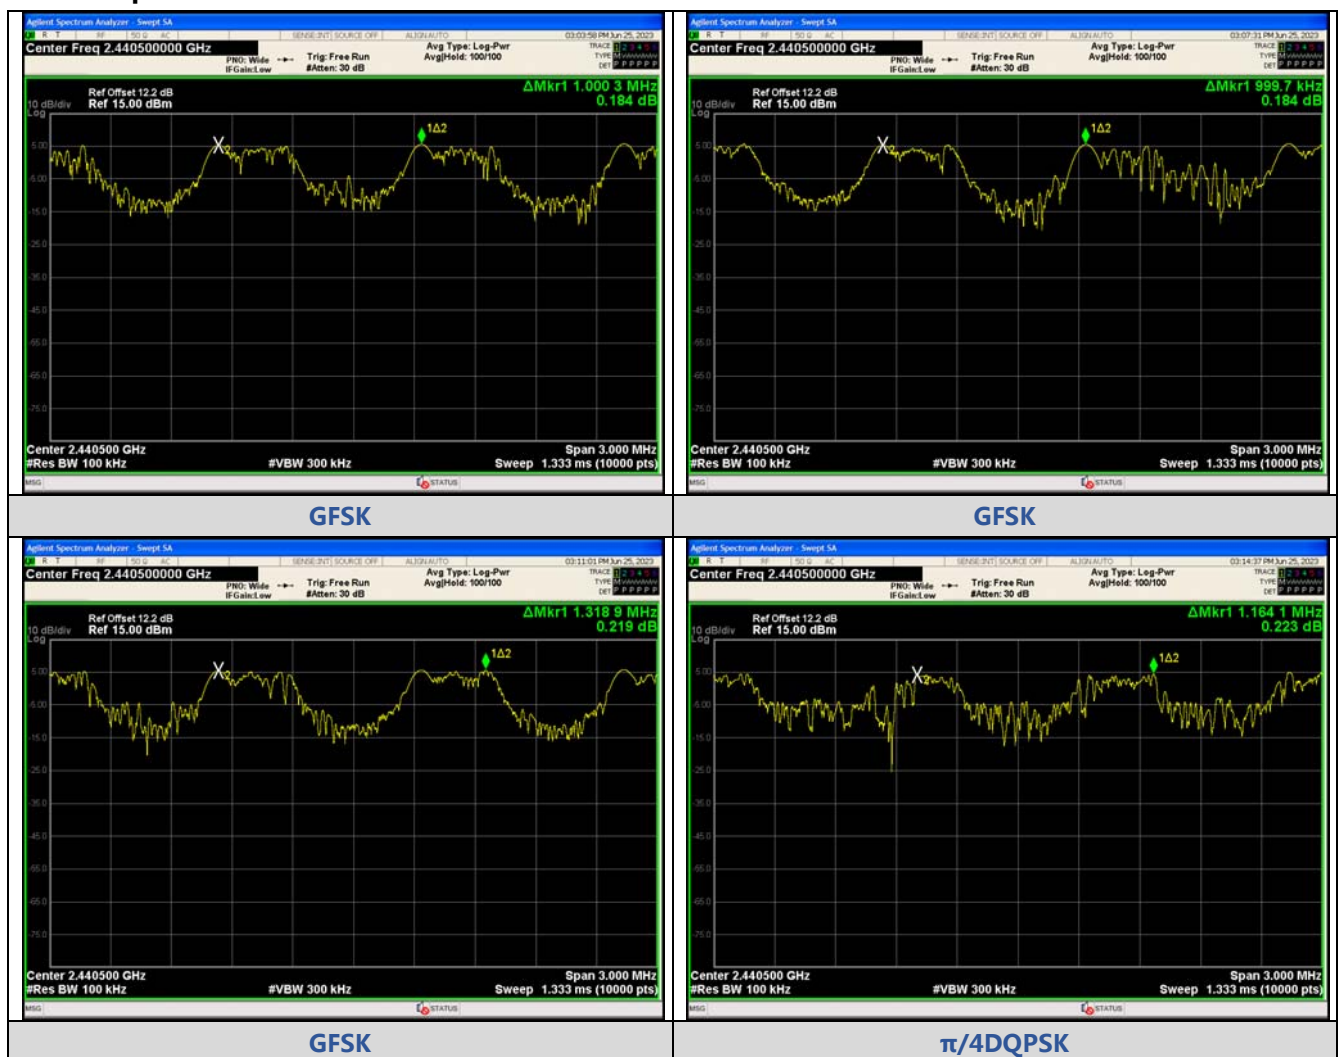



$\pi/4$ DQPSK



$\pi/4$ DQPSK



8DPSK



8DPSK



8DPSK

Void


## APPENDIX V. Conducted Out Of Band Emission

### Test Result


### Test Graphs




Out Of Band Emission  
GFSK\_DH5\_Channel 0

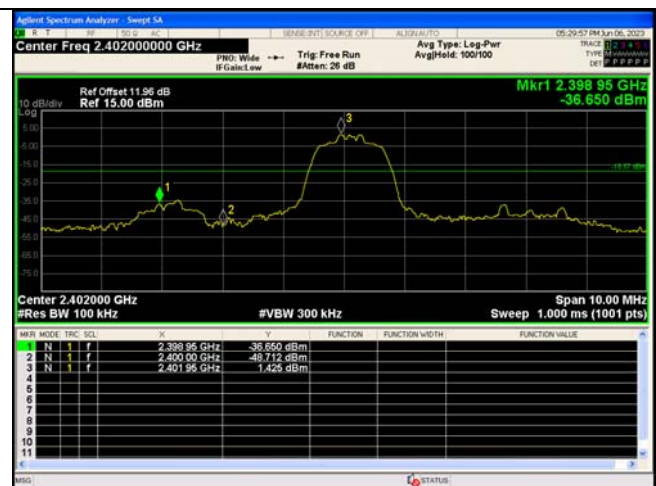



Out Of Band Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 0

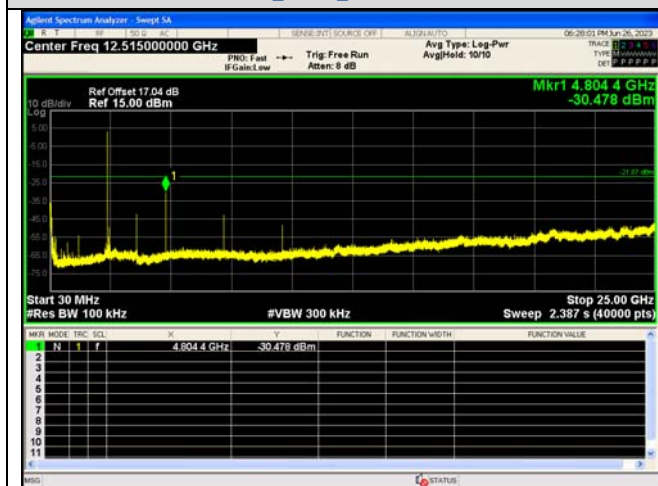


Spurious Emission  
GFSK\_DH5\_Channel 0

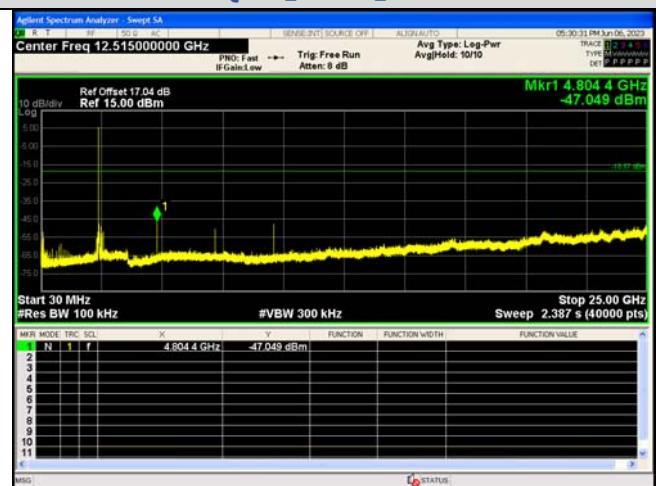


Spurious Emission  
 $\pi/4$ DQPSK\_2-DH5\_Channel 0

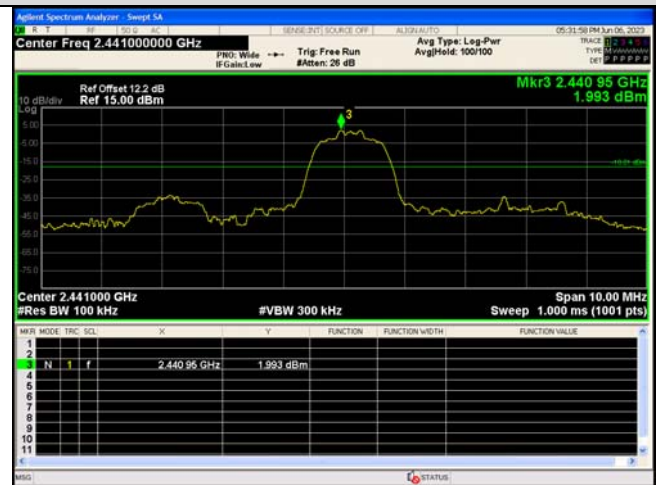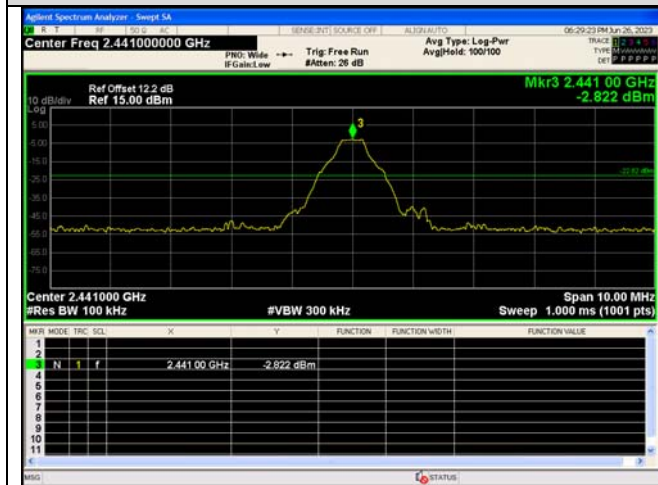


Out Of Band Emission  
GFSK\_DH5\_Channel 39

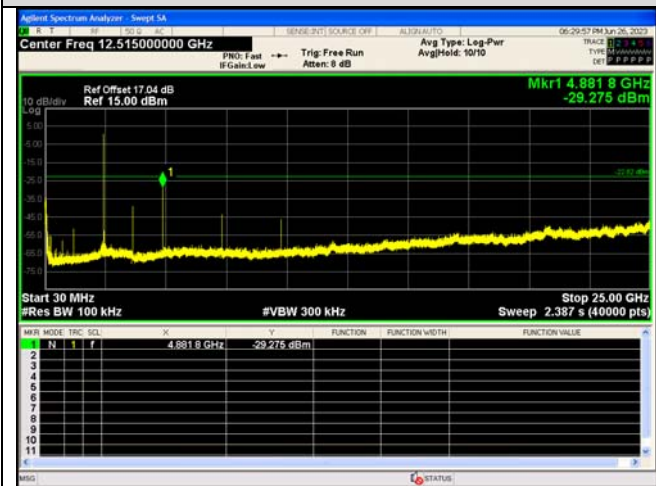

Out Of Band Emission  
 $\pi$ /4DQPSK\_2-DH5\_Channel 39

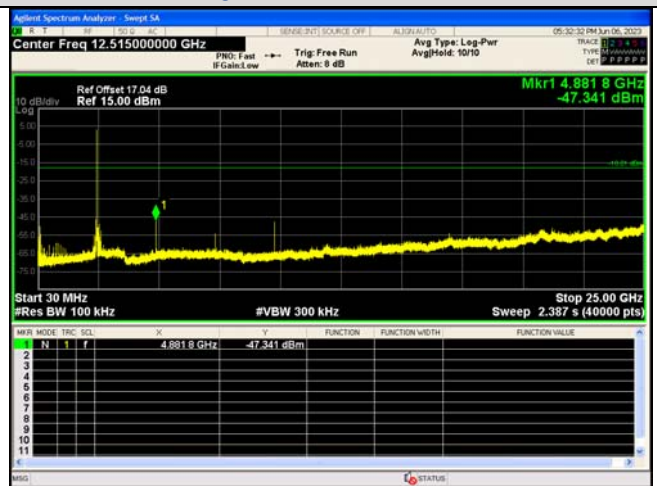


Spurious Emissions  
GFSK\_DH5\_Channel 39

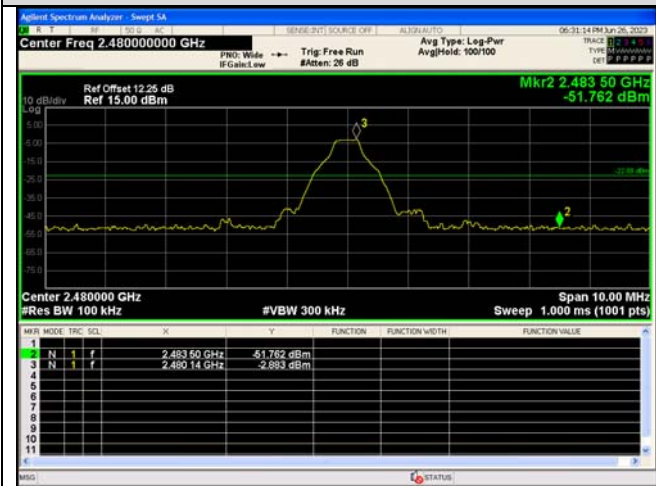


Spurious Emissions  
 $\pi$ /4DQPSK\_2-DH5\_Channel 39



Out Of Band Emission  
GFSK\_DH5\_Channel 78

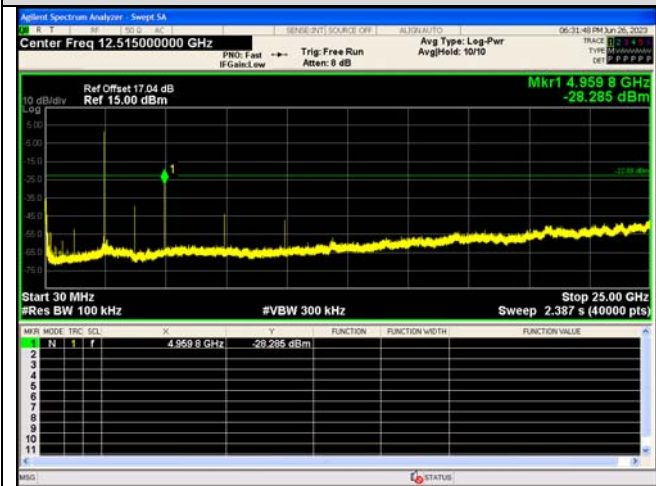


Out Of Band Emission  
 $\pi$ /4DQPSK\_2-DH5\_Channel 78

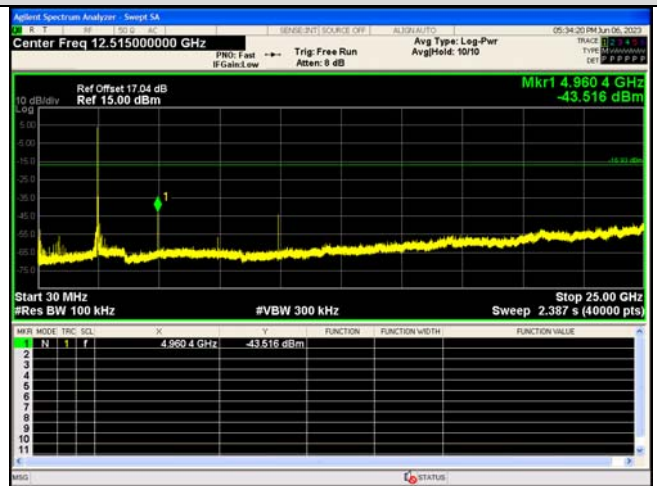


Spurious Emission  
GFSK\_DH5\_Channel 78


Spurious Emission  
 $\pi$ /4DQPSK\_2-DH5\_Channel 78

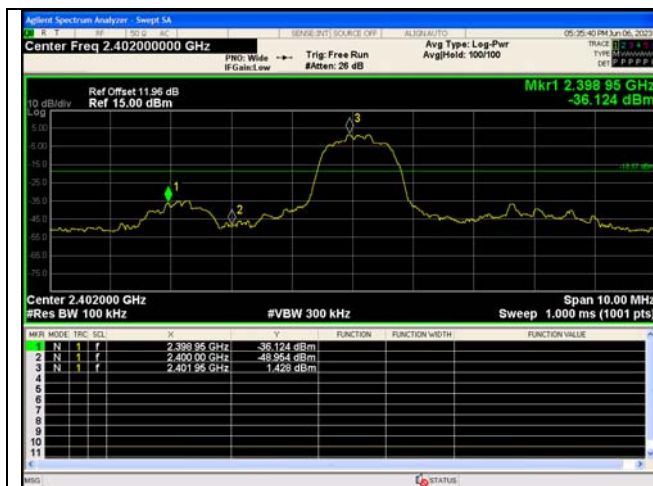


Out Of Band Emission  
8DPSK\_3-DH5\_Channel 0

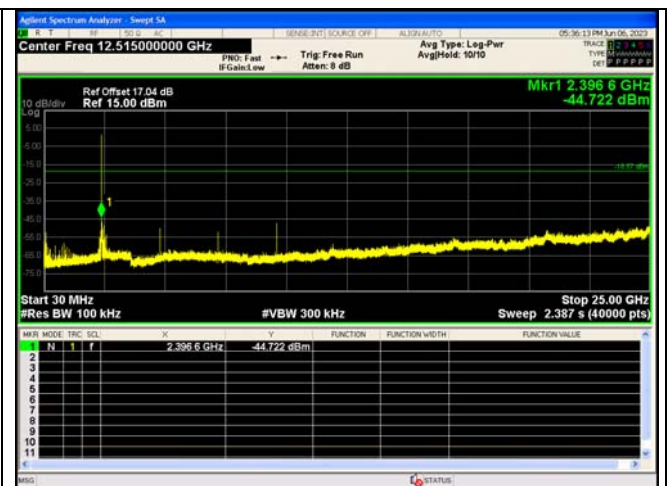


Spurious Emission  
8DPSK\_3-DH5\_Channel 0

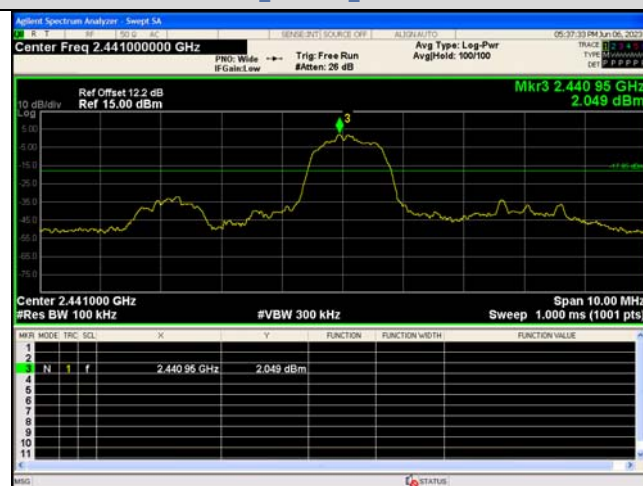


Out Of Band Emission  
8DPSK\_3-DH5\_Channel 39

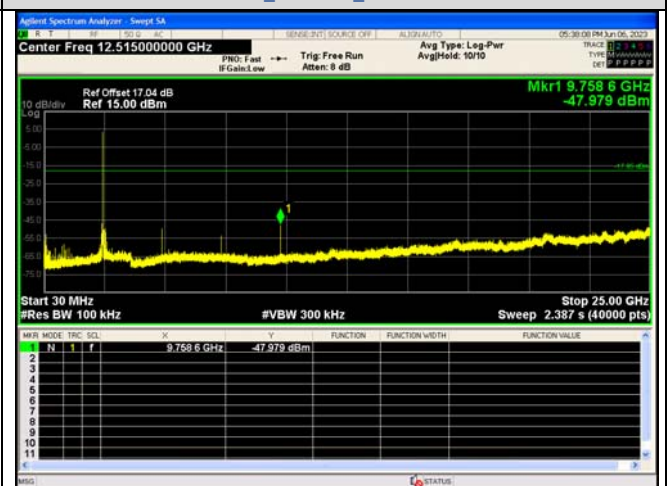


Spurious Emissions  
8DPSK\_3-DH5\_Channel 39

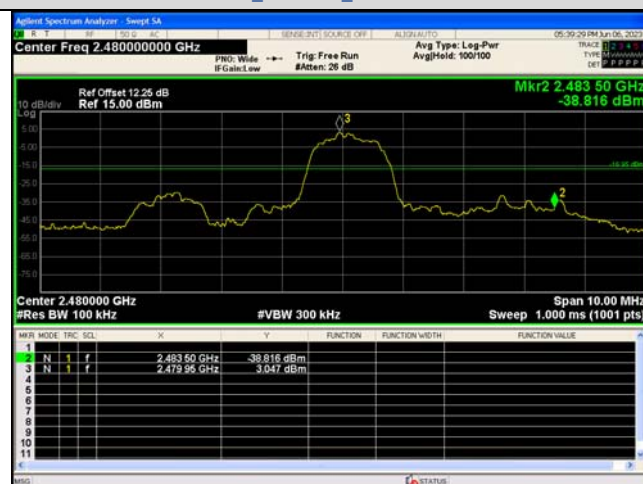

Out Of Band Emission  
8DPSK\_3-DH5\_Channel 78

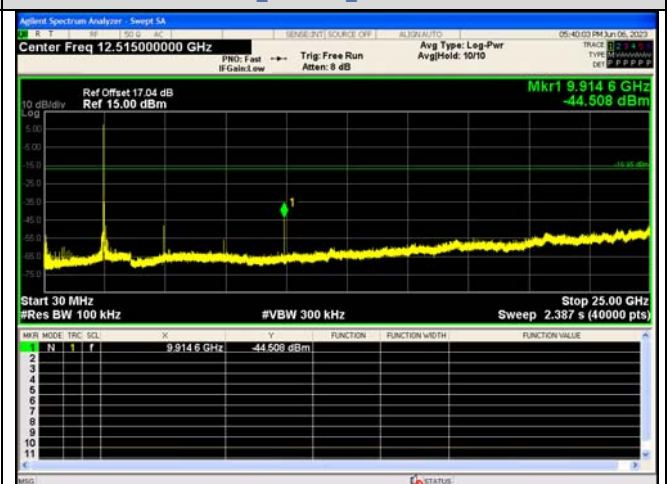

Spurious Emission  
8DPSK\_3-DH5\_Channel 78

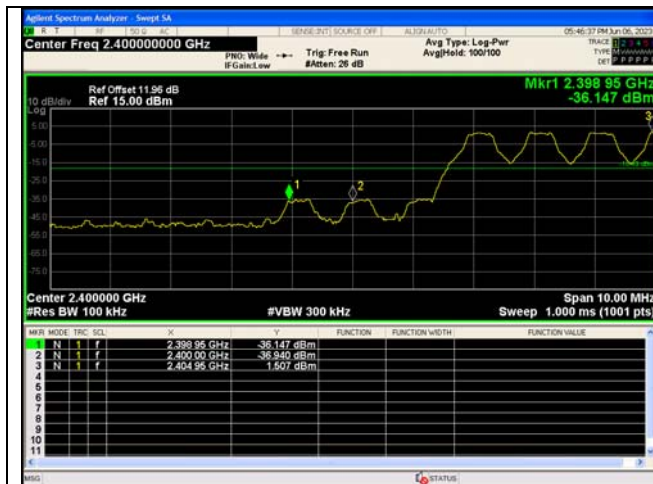

Out Of Band Emission(Left)  
GFSK\_DH5\_Channel Hopping




Out Of Band Emission(Left)  
 $\pi/4$ DQPSK\_2-DH5\_Channel Hopping



Out Of Band Emission(Right)  
GFSK\_DH5\_Channel Hopping



Out Of Band Emission(Right)  
 $\pi/4$ DQPSK\_2-DH5\_Channel Hopping

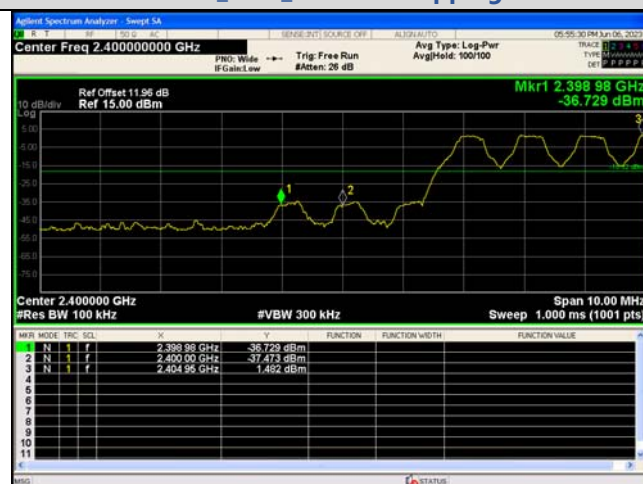

Out Of Band Emission(Left)  
GFSK\_DH5\_Channel Hopping




Out Of Band Emission(Left)  
 $\pi/4$ DQPSK\_2-DH5\_Channel Hopping




Out Of Band Emission(Right)  
GFSK\_DH5\_Channel Hopping



Out Of Band Emission(Right)  
 $\pi/4$ DQPSK\_2-DH5\_Channel Hopping

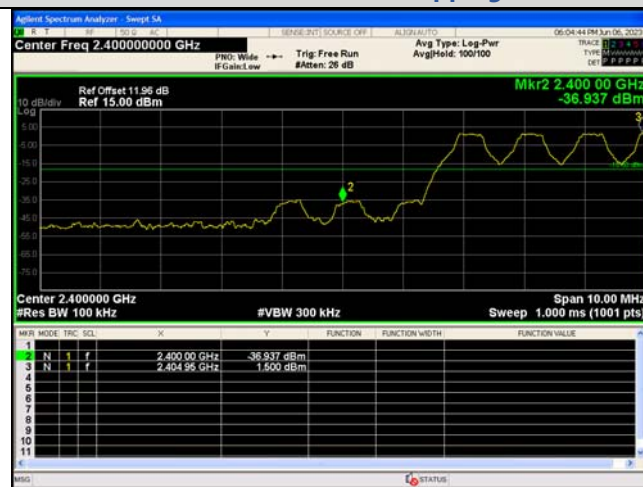

Out Of Band Emission(Left)  
GFSK\_DH5\_Channel Hopping

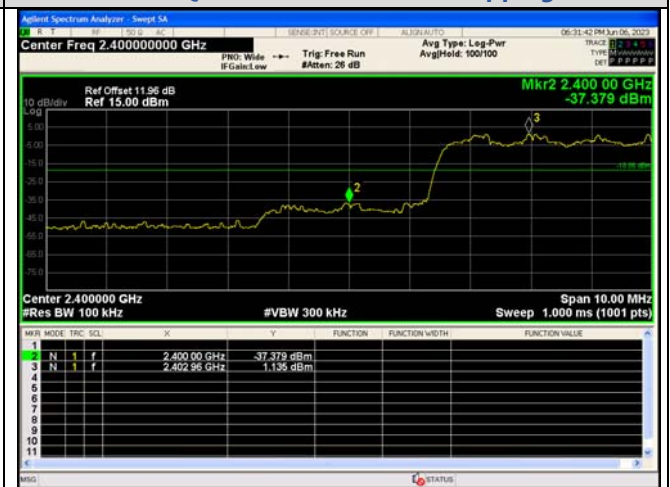

Out Of Band Emission(Left)  
 $\pi/4$ DQPSK\_2-DH5\_Channel Hopping



Out Of Band Emission(Right)  
GFSK\_DH5\_Channel Hopping




Out Of Band Emission(Right)  
 $\pi/4$ DQPSK\_2-DH5\_Channel Hopping



Out Of Band Emission(Left)  
8DPSK\_3-DH5\_Channel Hopping



Out Of Band Emission(Right)  
8DPSK\_3-DH5\_Channel Hopping

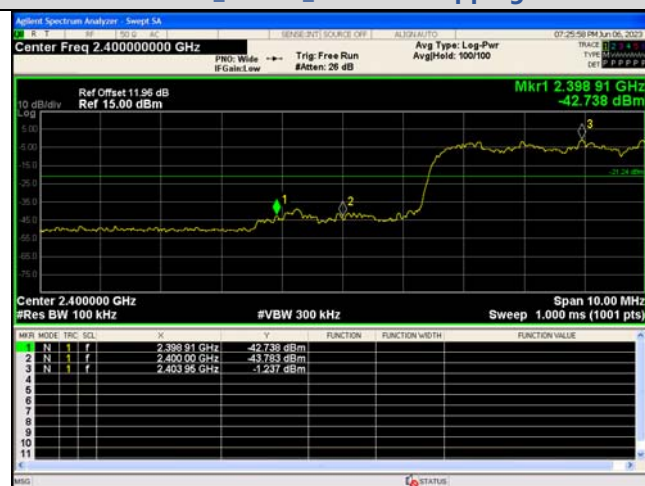

Out Of Band Emission(Left)  
8DPSK\_3-DH5\_Channel Hopping



Out Of Band Emission(Right)  
8DPSK\_3-DH5\_Channel Hopping



Out Of Band Emission(Left)  
8DPSK\_3-DH5\_Channel Hopping




Out Of Band Emission(Right)  
8DPSK\_3-DH5\_Channel Hopping


APPENDIX VI.Duty Cycle

Test Result


| Modulation    | Packets | Channel | On Time (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle (linear) | Duty Cycle Factor (dB) |
|---------------|---------|---------|--------------|-------------|----------------|---------------------|------------------------|
| GFSK          | DH5     | 0       | 2.888        | 5.000       | 57.76          | 0.5776              | 2.3837                 |
|               |         | 39      | 2.888        | 4.999       | 57.77          | 0.5777              | 2.383                  |
|               |         | 78      | 2.887        | 4.999       | 57.75          | 0.5775              | 2.3845                 |
| $\pi$ /4DQPSK | 2-DH5   | 0       | 2.879        | 3.735       | 77.09          | 0.7709              | 1.13                   |
|               |         | 39      | 2.879        | 3.735       | 77.09          | 0.7709              | 1.13                   |
|               |         | 78      | 2.879        | 3.735       | 77.09          | 0.7709              | 1.13                   |
| 8DPSK         | 3-DH5   | 0       | 2.889        | 3.745       | 77.15          | 0.7715              | 1.1266                 |
|               |         | 39      | 2.889        | 3.745       | 77.15          | 0.7715              | 1.1266                 |
|               |         | 78      | 2.879        | 3.735       | 77.09          | 0.7709              | 1.13                   |

Test Graphs

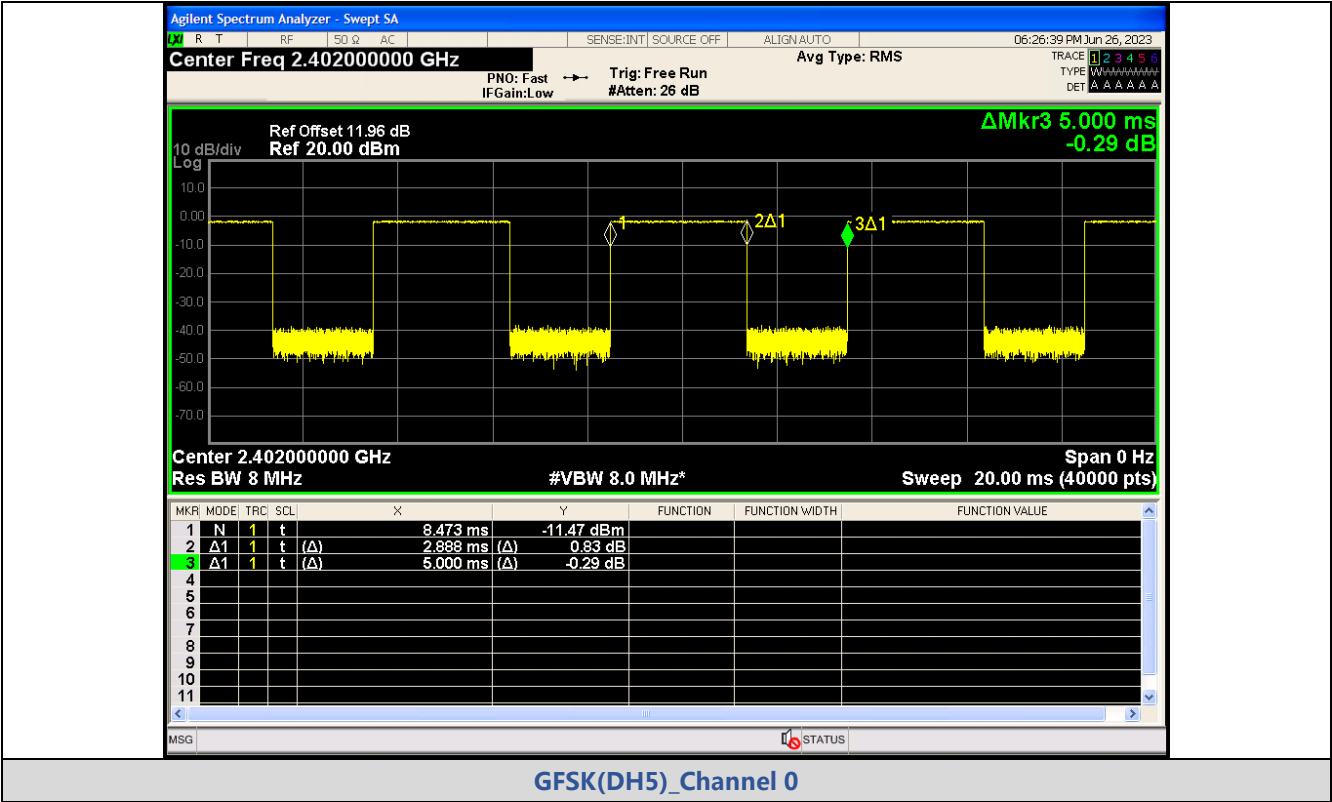


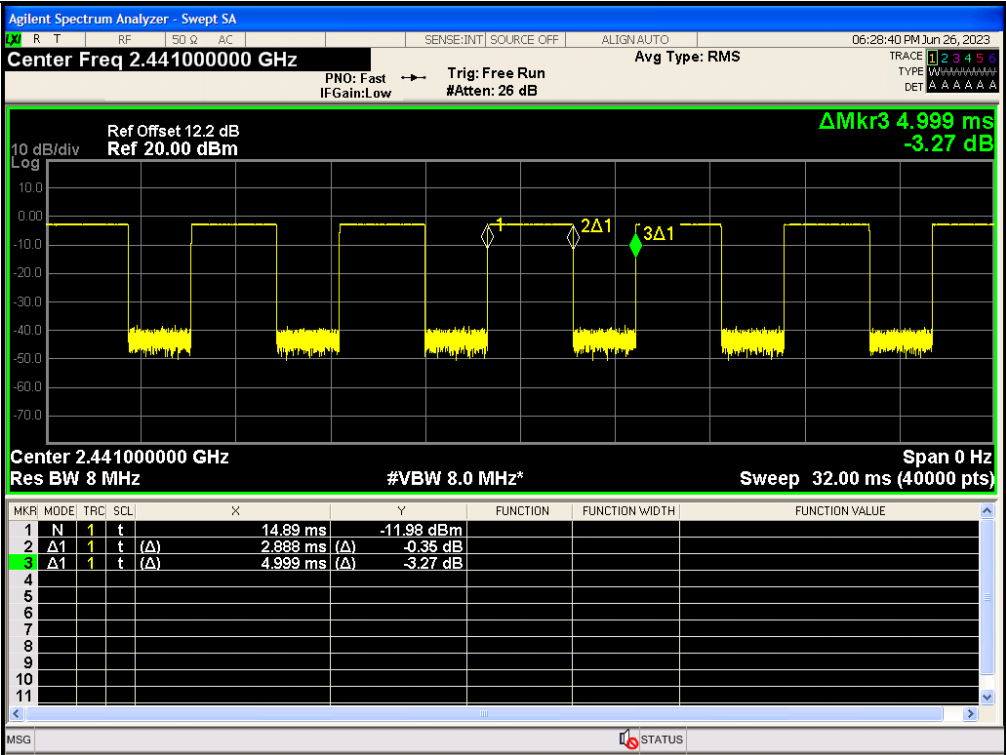


GFSK(DH5)\_Channel 39

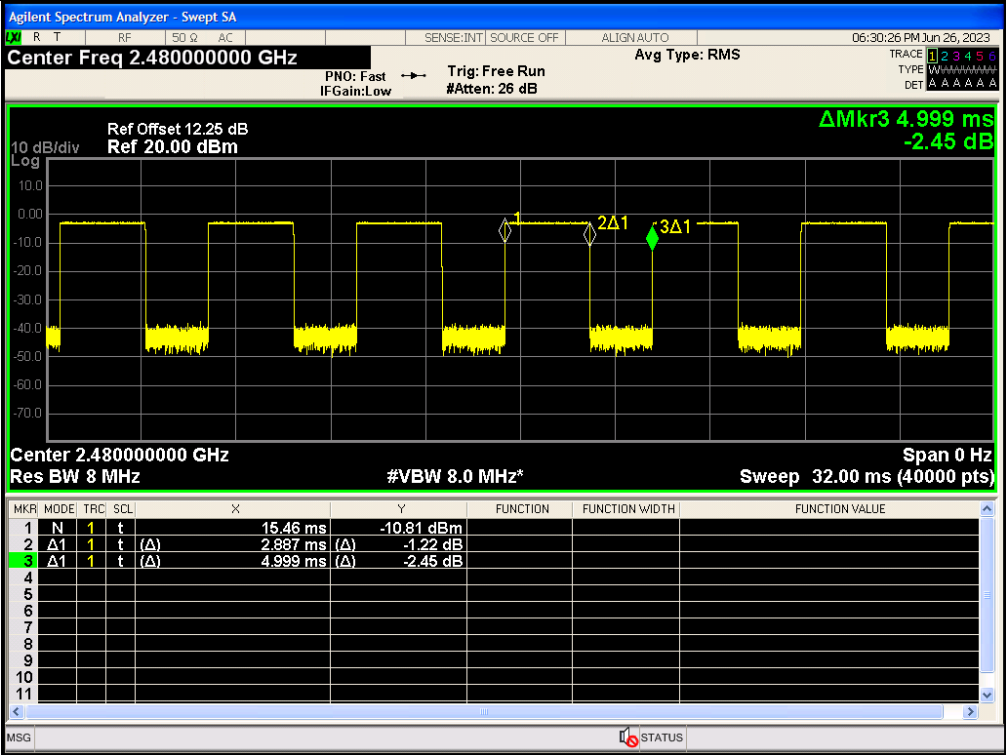


GFSK(DH5)\_Channel 78

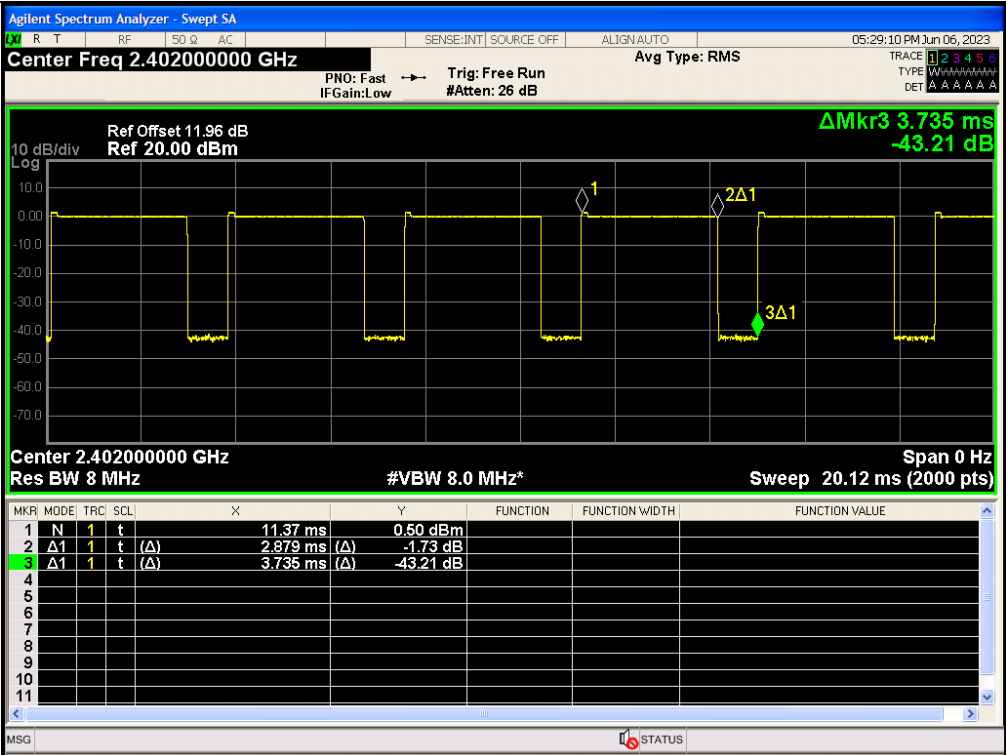


$\pi/4$ DQPSK(2-DH5)\_Channel 0

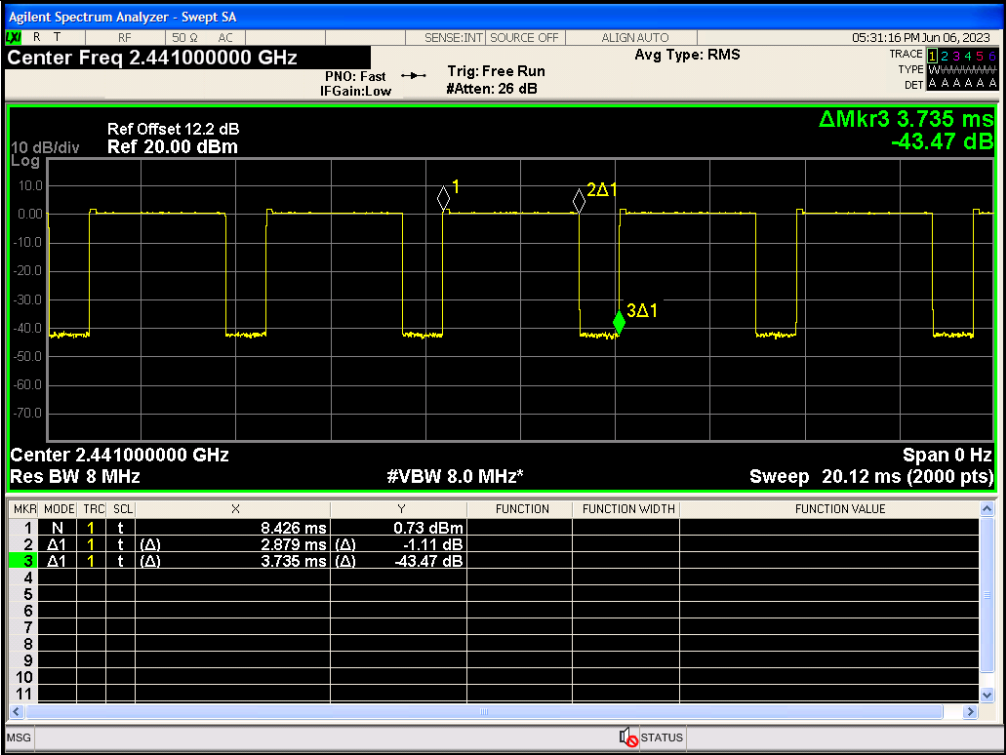


$\pi/4$ DQPSK(2-DH5)\_Channel 39

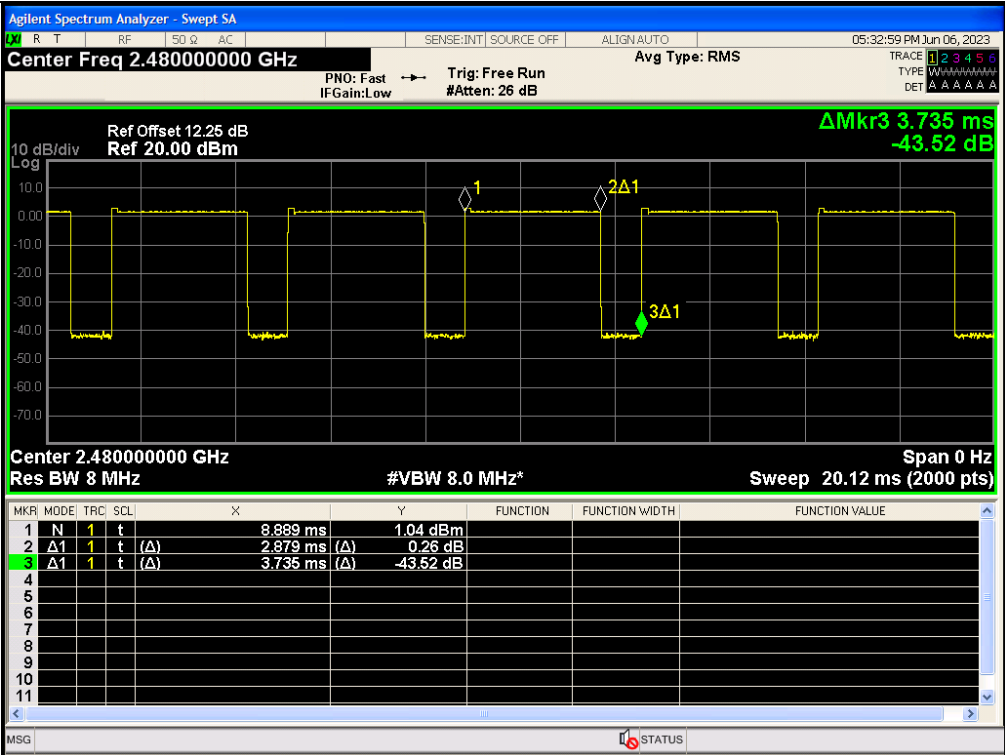


π/4DQPSK(2-DH5)\_Channel 78

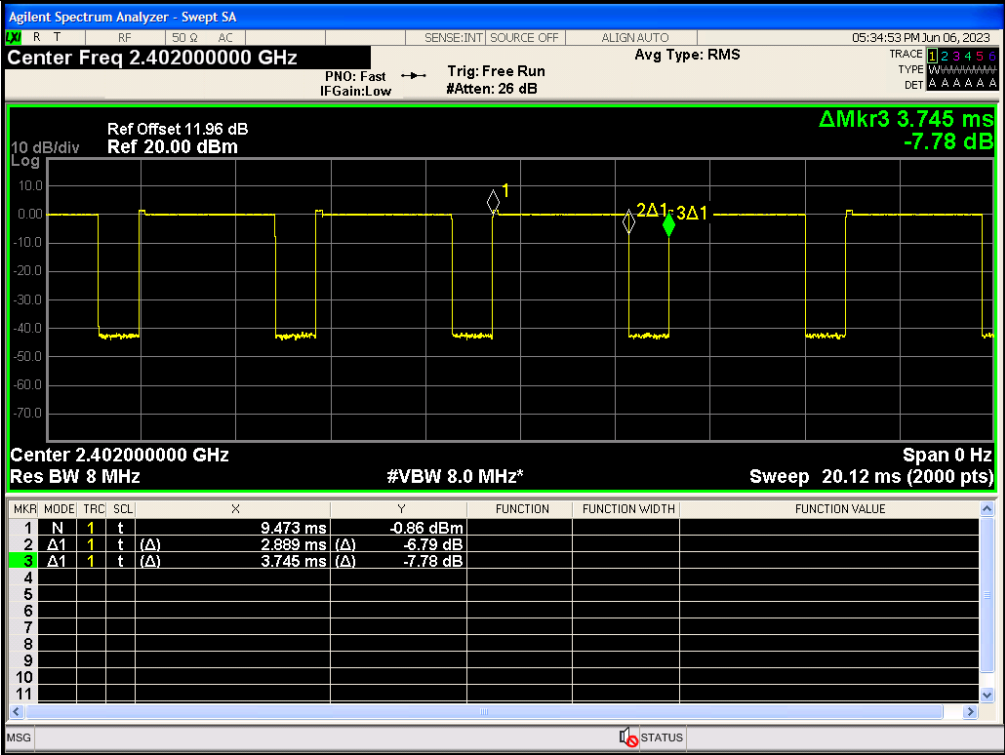

8DPSK(3-DH5)\_Channel 0

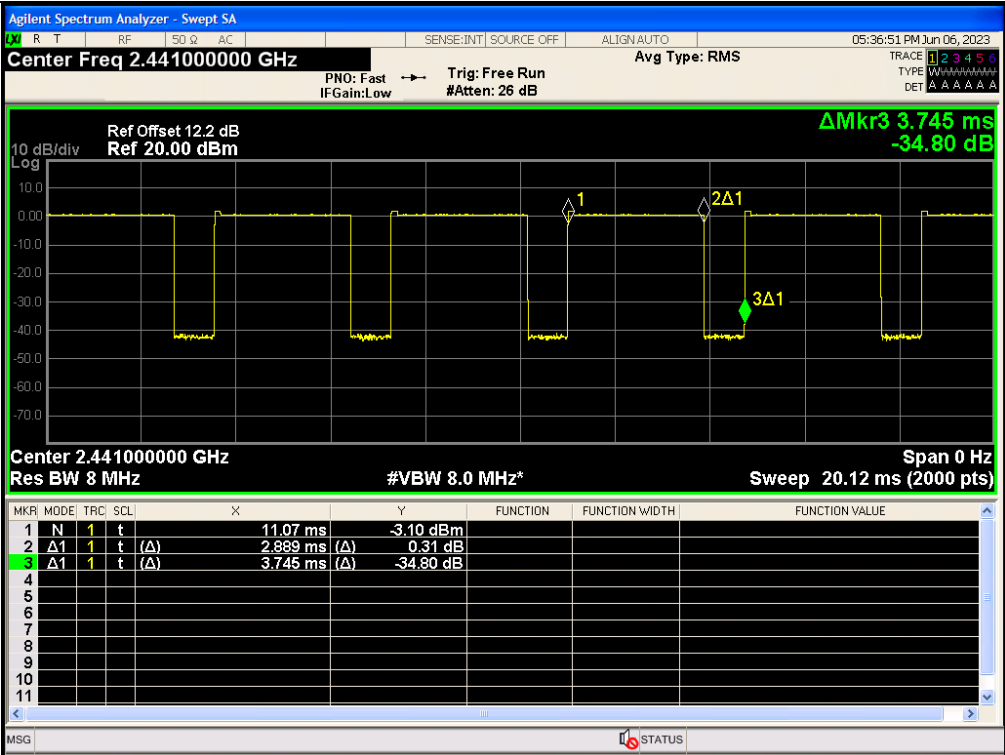

8DPSK(3-DH5)\_Channel 39

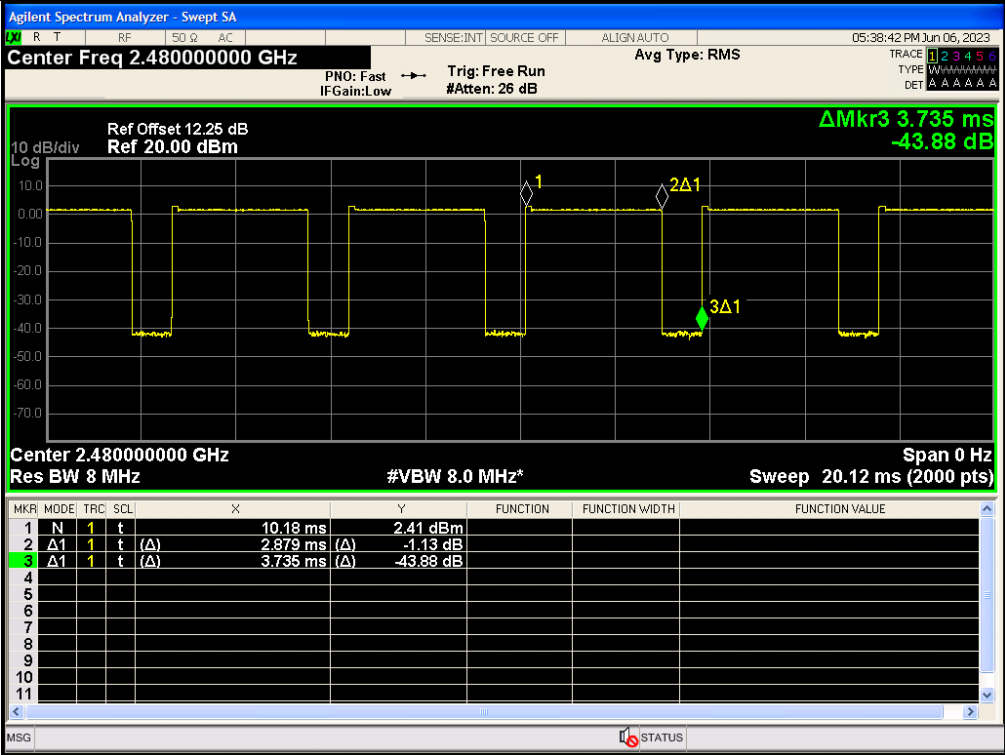

8DPSK(3-DH5)\_Channel 78


## APPENDIX VII.Dwell Time

### Test Result

### Test Result


| Modulation    | Packet | Channel           | Pulse Width (ms) | Number of Pulses in 31.6 seconds | Dwell Time (ms) | Limit (ms) | Result |
|---------------|--------|-------------------|------------------|----------------------------------|-----------------|------------|--------|
| GFSK          | DH1    | CH39<br>(2441MHz) | 0.3768           | 312                              | 117.56          | < 400      | PASS   |
|               | DH3    |                   | 1.632            | 157                              | 256.22          |            | PASS   |
|               | DH5    |                   | 2.880            | 113                              | 325.44          |            | PASS   |
| $\pi$ /4DQPSK | 2-DH1  |                   | 0.3828           | 311                              | 119.05          |            | PASS   |
|               | 2-DH3  |                   | 1.632            | 155                              | 252.96          |            | PASS   |
|               | 2-DH5  |                   | 2.880            | 113                              | 325.44          |            | PASS   |
| 8DPSK         | 3-DH1  |                   | 0.3840           | 310                              | 119.04          |            | PASS   |
|               | 3-DH3  |                   | 1.656            | 159                              | 263.3           |            | PASS   |
|               | 3-DH5  |                   | 2.880            | 114                              | 328.32          |            | PASS   |

### Test Graphs

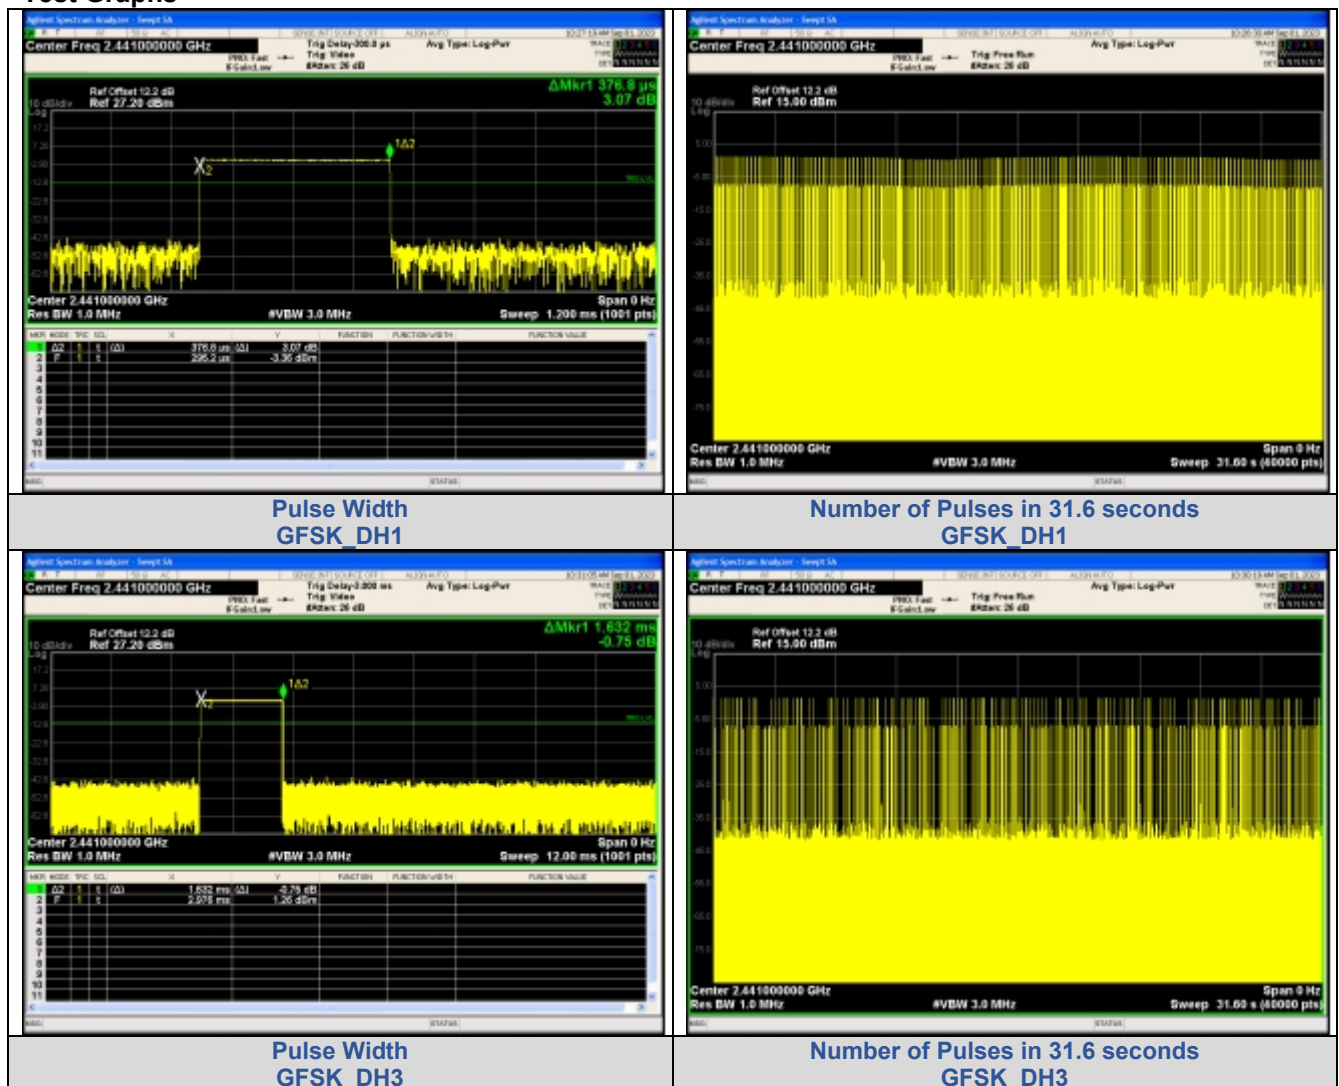




Pulse Width  
GFSK\_DH5

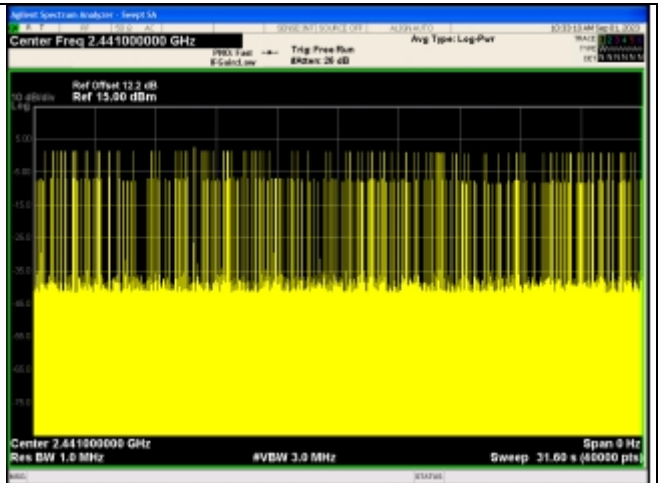


Number of Pulses in 31.6 seconds  
GFSK\_DH5




Pulse Width  
 $\pi/4$ DQPSK\_2-DH1

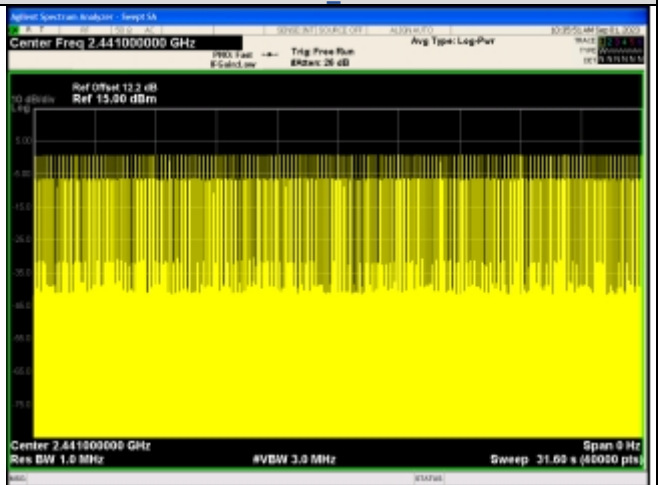

Number of Pulses in 31.6 seconds  
 $\pi/4$ DQPSK\_2-DH1

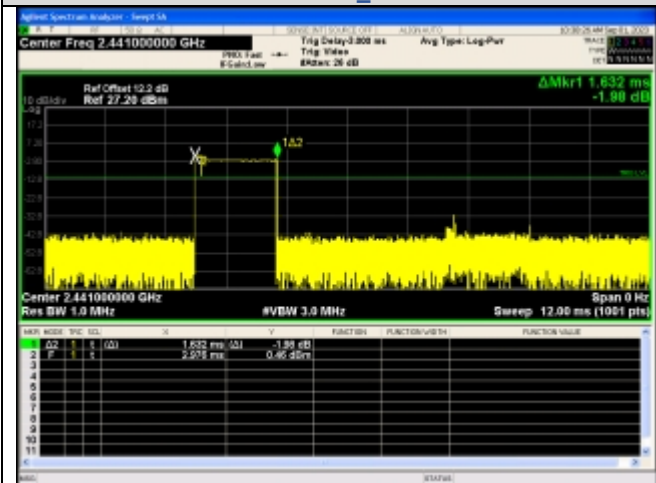


Pulse Width  
 $\pi/4$ DQPSK\_2-DH3

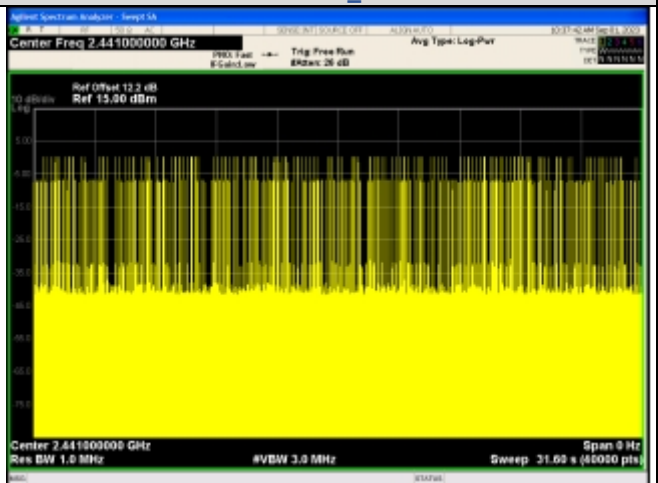


Number of Pulses in 31.6 seconds  
 $\pi/4$ DQPSK\_2-DH3




Pulse Width  
 $\pi$ /4DQPSK\_2-DH5

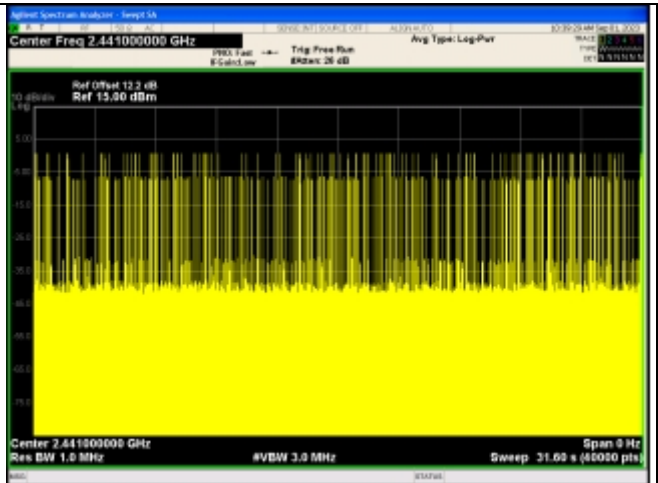


Number of Pulses in 31.6 seconds  
 $\pi$ /4DQPSK\_2-DH5

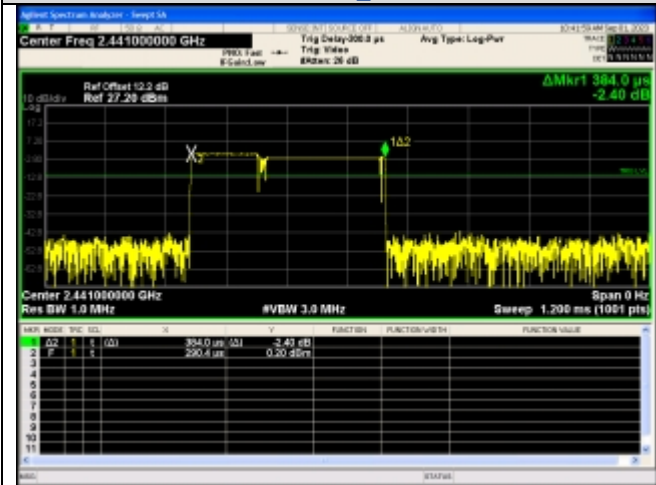


Pulse Width  
8DPSK\_3-DH1

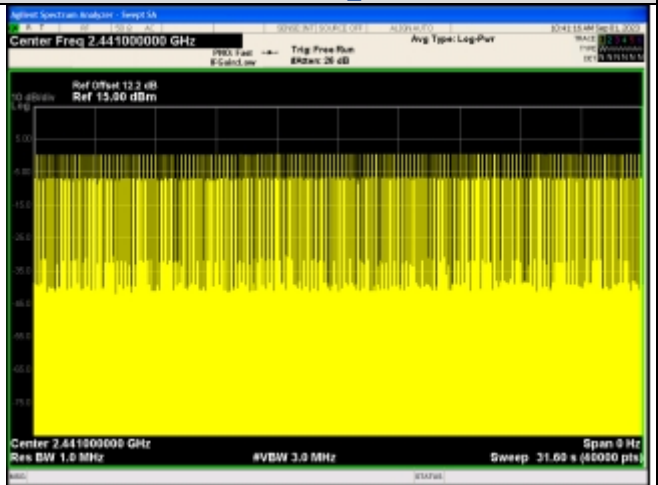


Number of Pulses in 31.6 seconds  
8DPSK\_3-DH1

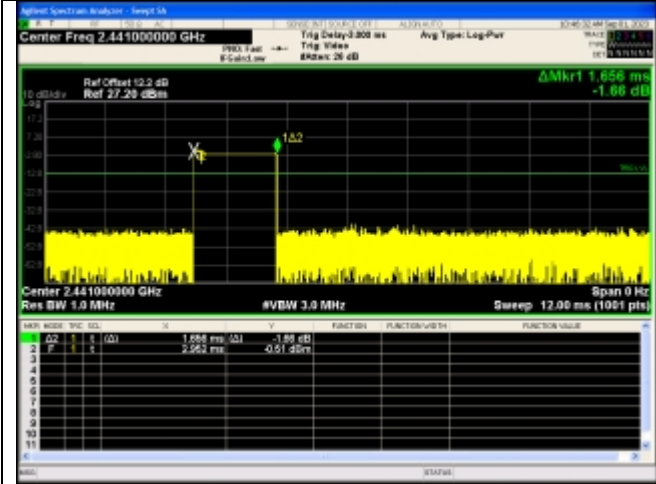


Pulse Width  
8DPSK\_3-DH3

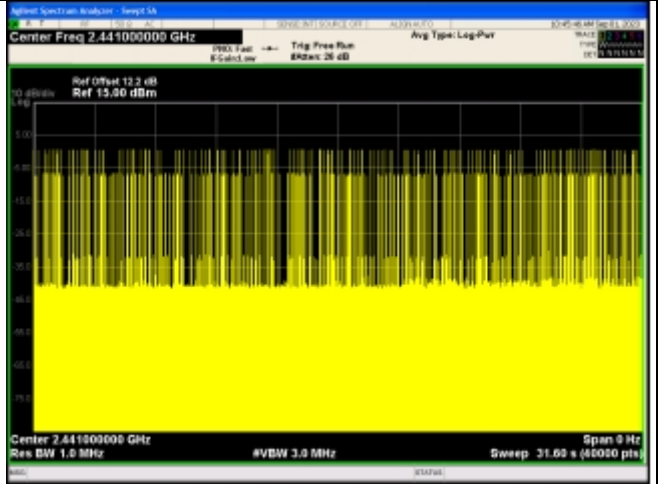

Number of Pulses in 31.6 seconds  
8DPSK\_3-DH3

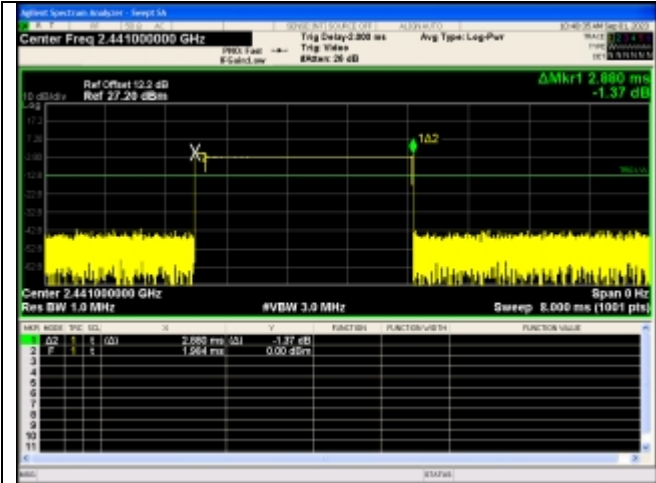

Pulse Width  
8DPSK\_3-DH5

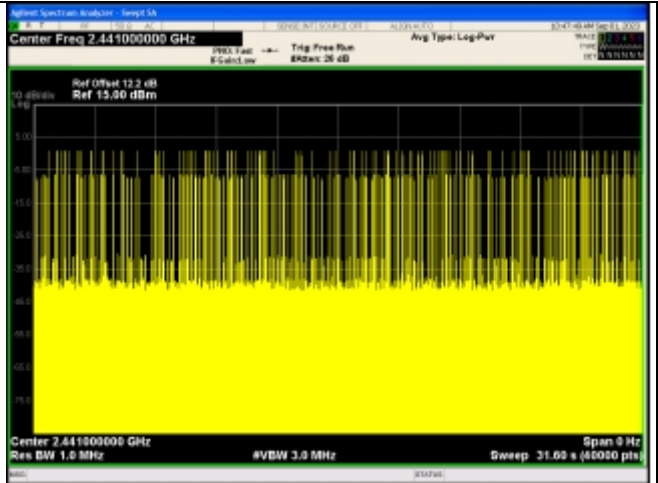


Number of Pulses in 31.6 seconds  
8DPSK\_3-DH5

## APPENDIX VIII. Number Of Hopping Channel

### Test Result


| Modulation    | Packet | Number of Hopping Channel | Limit | Result |
|---------------|--------|---------------------------|-------|--------|
| GFSK          | DH5    | 79                        | 15    | PASS   |
| GFSK          | DH5    | 79                        | 15    | PASS   |
| GFSK          | DH5    | 79                        | 15    | PASS   |
| $\pi/4$ DQPSK | 2-DH5  | 79                        | 15    | PASS   |
| $\pi/4$ DQPSK | 2-DH5  | 79                        | 15    | PASS   |
| $\pi/4$ DQPSK | 2-DH5  | 79                        | 15    | PASS   |
| 8DPSK         | 3-DH5  | 79                        | 15    | PASS   |
| 8DPSK         | 3-DH5  | 79                        | 15    | PASS   |
| 8DPSK         | 3-DH5  | 79                        | 15    | PASS   |

### Test Graphs

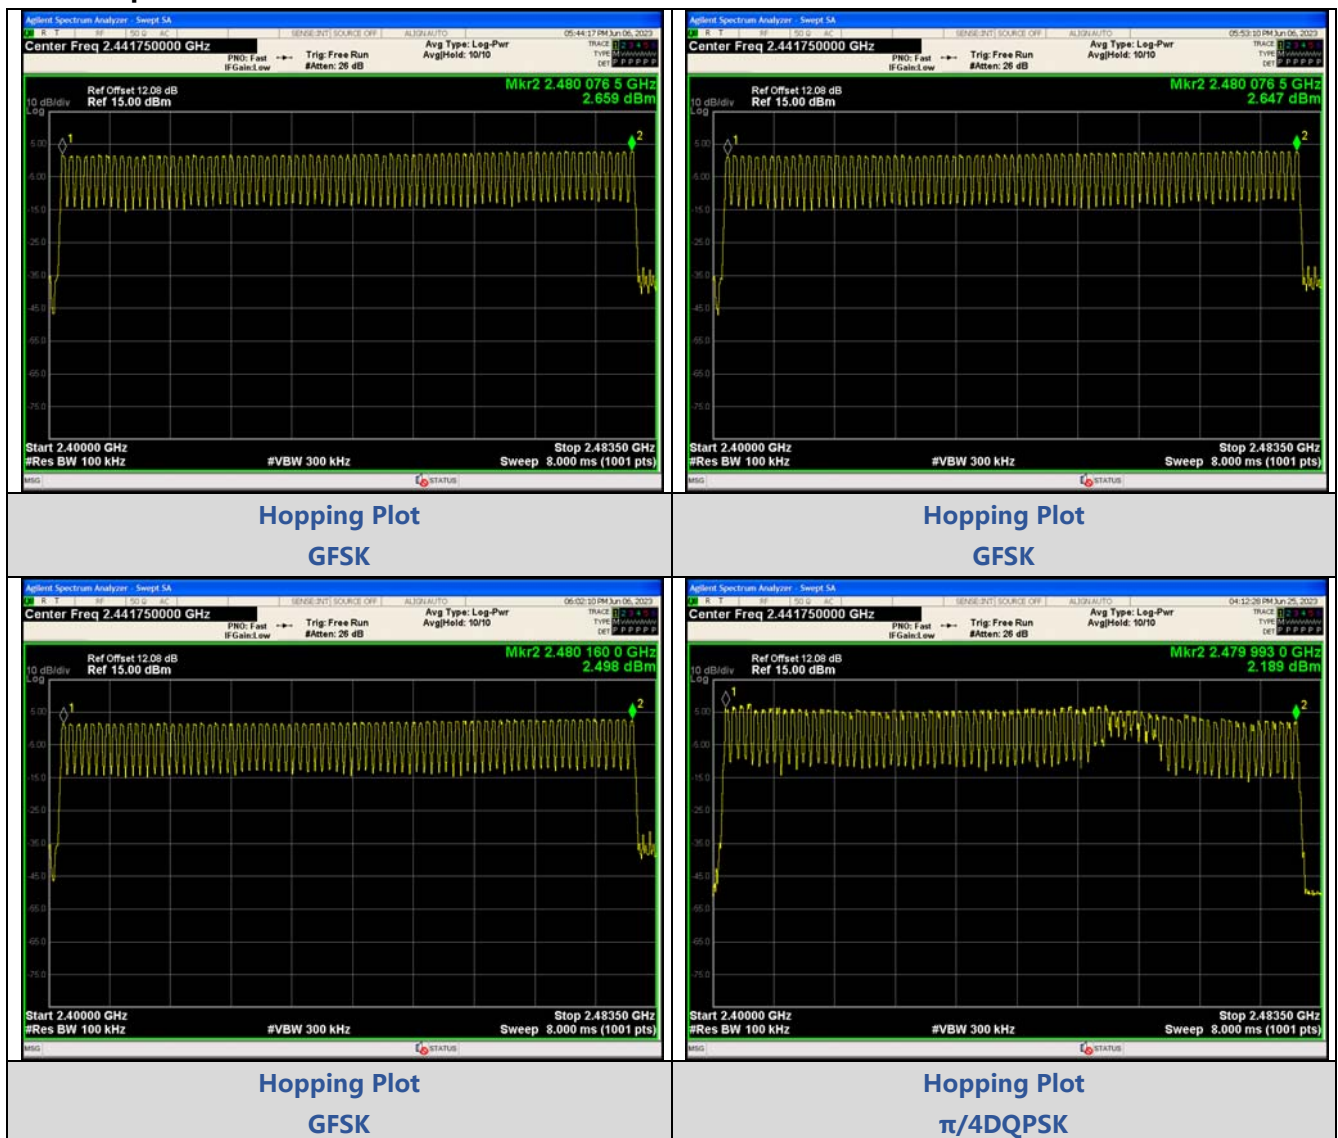





Hopping Plot  
 $\pi/4$ DQPSK

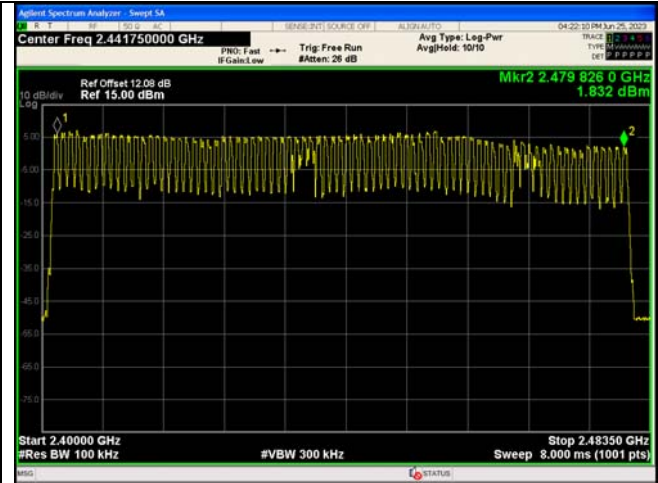

Hopping Plot  
 $\pi/4$ DQPSK

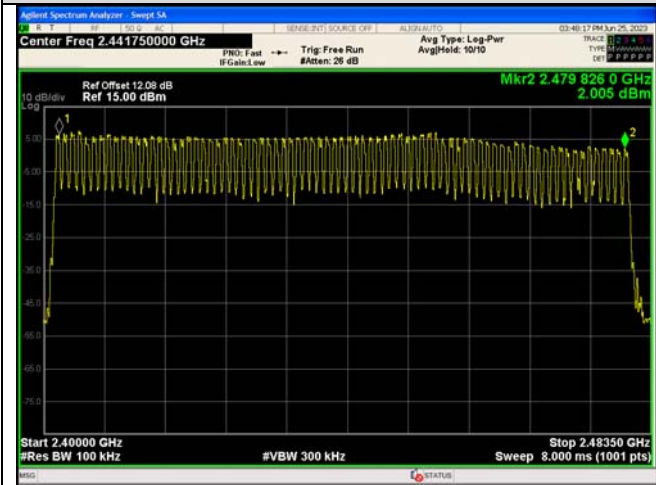

Hopping Plot  
8DPSK

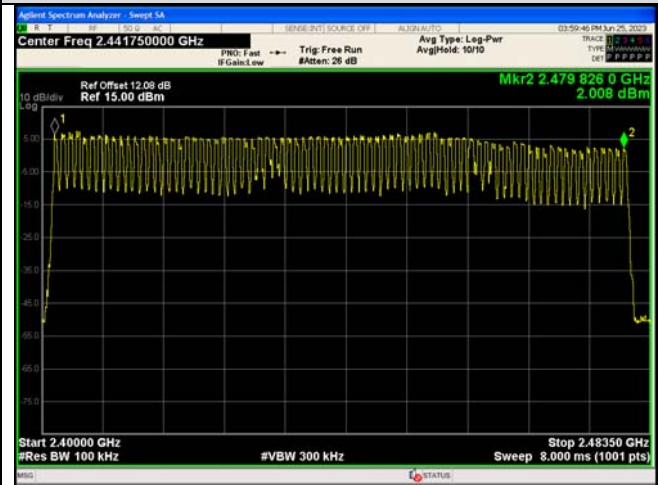

Hopping Plot  
8DPSK



Hopping Plot  
8DPSK

